

GENERAL CATALOGUE

# Solutions for Power, Control, Safety & Energy Efficiency



POWER  
SWITCHING



POWER  
MONITORING

2022

## When **energy** matters



When **energy** matters

**socomec**  
Innovative Power Solutions

# Contents

An independent manufacturer .....	p. 4	Expert in power conversion .....	p. 10
Your energy, our expertise .....	p. 6	A cutting-edge laboratory .....	p. 11
Experts at your service .....	p. 8	References list .....	p. 446



## Load break switches

Load break switches for machine control,  
power distribution and photovoltaic applications ... p. 13



**SIRCO M and  
SIRCO MV**  
p. 20



**SIRCO and  
SIRCO AC**  
p. 38



## Fuse protection

Fuses, fuse bases  
and fuse combination switches .....



**FUSERBLOC**  
p. 106



## Changeover switches

Changeover switches, control relays  
and configuration software .....



**COMO CS**  
p. 140



**SIRCOVER**  
p. 146



## Metering, monitoring & power quality

Energy meters, multifunction meters  
and supervision software .....



**DIRIS Digiware**  
p. 226



**TE, TR, iTR, TF**  
sensors  
p. 258



## Insulation monitoring

Insulation monitoring device  
and fault locator device .....



**ISOM Digiware D**



**ISOM Digiware L-60**



## Electronic protection

Differential protection, voltage surge protection,  
current protection .....



**RESYS M40**  
p. 366



## Mounting & cabling accessories

All the components to facilitate  
the use of your electrical equipment .....



Busbar supports  
p. 374



Distribution blocks  
p. 406



## Integrated products & solutions

Enclosed protection  
and switching devices .....



Enclosed  
switches  
p. 418




Safety enclosures  
p. 434



**SIRCO PV**  
p. 60



**INOSYS**  
p. 84



**ATyS M**  
p. 164



**ATyS S**  
p. 178



**ATyS**  
p. 186



ATS controller  
p. 216



**COUNTIS E**  
p. 274



**DIRIS A**  
p. 294



**DIRIS B**  
p. 316



Software suite  
p. 344



**ISOM**  
**Digiware F-60**



Fault-locating core  
balance transformers



**ISOM PS-62**



Enclosed  
transfer switches  
**ATyS** Bypass  
p. 436



Solutions for medical locations  
**MEDSYS**  
p. 440

# Ensuring the energy performance of electrical installations, wherever it is critical

When **energy** matters



**100** years  
OF SHARED ENERGY  
1922 — 2022



**SYDV 514**

**For almost 100 years, Socomec has continued to design and manufacture its core products in Europe. Notably solutions for its primary mission: the availability, control and safety of low voltage electrical networks.**

As an independent manufacturer, the group is committed to constant innovation to improve the energy performance of electrical installations in infrastructures as well as industrial and commercial sites. Throughout its history, Socomec has constantly anticipated market changes by developing cutting-edge technologies, providing solutions that are adapted to customer requirements and fully in keeping with international standards. "Optimising the performance of your system throughout its life cycle" - this is the commitment carried out every day by the Socomec teams around the world, wherever your business is located.

**1**  
**independent  
manufacturer**

**10 %  
of turnover invested in R&D**

Always at the cutting-edge of technology for innovative, high quality products

**3,500 m<sup>2</sup>  
of test platforms**

One of the leading independent power testing labs in Europe

**110,000  
on-site interventions per year**

Nearly 400 experts in commissioning, technical audit, consultancy and maintenance

# Your energy, our expertise



SITE 1105

## Power monitoring

### Improving energy performance and monitoring installations

Socomec solutions - from current sensors to power meters and from IOT to energy management software - are driven by experts in energy performance. They meet the requirements of facility managers and operators of commercial, industrial and critical buildings to enable and facilitate:

- the measurement of energy consumption, the identification of sources of excess consumption and the generation of awareness amongst occupants as to their impact,
- the utilisation of the best available tariffs, utility bill checks and the accurate distribution of energy billing between consumer entities,
- the limitation of reactive energy and avoidance of associated tariff penalties,
- capacity management and the evolution of the electrical installation,
- improvements to power availability by monitoring and detecting insulation faults.

## Power switching

### Managing power and protecting people, equipment and installations

Active in the industrial switching market since its foundation in 1922, Socomec is today an undisputed leader in the field of low voltage switchgear, providing expert solutions that ensure:

- isolation and on load breaking for the most demanding switching applications,
- continuity of the power supply to electrical facilities via manual remotely operated or automatic transfer switching equipment,
- protection of persons and assets via fusebased and other specialist solutions.



SITE 890



# Power conversion

## Ensuring the availability and storage of high quality power

With its wide range of continuously evolving products, solutions and services, Socomec are recognised experts in the cutting-edge technologies used for ensuring the highest availability of the electrical power supply to critical facilities and buildings, including:

- static uninterruptible power supplies (UPS) for high-quality power free of distortions and interruptions occurring on the primary power supply,
- changeover of static, high availability sources for transferring the supply to an operational back-up source,
- permanent monitoring of the electrical facilities to prevent failures and reduce operating losses,
- energy storage for ensuring the proper energy mix of buildings and for stabilisation of the power grid.

# Expert services

## Enabling available, safe and efficient energy

Socomec is committed to delivering a wide range of value-added services to ensure the reliability and optimisation of end-users' equipment:

- prevention and service operations to lower the risks and enhance the efficiency of operations, for high-quality power free of distortions and interruptions occurring on the primary power supply,
- measurement and analysis of a wide range of electrical parameters leading to recommendations for improving the site's power quality,
- optimisation of the total cost of ownership and support for a safe transition when migrating from an old to a new generation of equipment,
- consultancy, deployment and training from the project engineering stage through to final procurement,
- performance assessment of the electrical installation throughout the life cycle of the products via analysis of data transmitted by connected devices.





SITE 109

# Your partner in expert services

Socomec is committed to delivering a wide range of value-added services to ensure the reliability and optimisation of end-users' equipment during its life cycle

- Prevention and service operations to reduce risk and enhance equipment efficiency.
- Measurement and analysis of a wide range of electrical parameters leading to recommendations for power quality improvement.
- Consultancy, deployment and training from the project engineering stage to the final procurement stage.



## Specialists - at your service

Our Services team comprises qualified engineers whose mission is to ensure the correct operation of your equipment. We offer a comprehensive support service package which gives you complete peace of mind: commissioning, on-site testing, preventive maintenance visits, 24-hour call out and rapid on-site repairs, original spare parts, power quality and energy efficiency audits, consultancy, design and implementation of installation modifications and updates.

Our Services team is the most reliable partner when it comes to advising you on the maintenance of Socomec equipment and providing resolution to any problems in accordance with current environmental standards and procedures.



## Professional tools

Our Services team is provided with the latest essential equipment including:

- Personal Protective Equipment (protective goggles, helmet, insulated gloves, fireproof jacket, safety shoes, earplugs...),
- laptop embedded with all software required to optimise equipment performance,
- measuring equipment calibrated annually by our metrology department (multimeter, digital scope, current clamps, infra-red camera, power analyser).



## Reports

An exhaustive report is generated for each intervention (including commissioning, preventive maintenance and troubleshooting) which is then automatically sent to the customer and synchronised with our systems.



## Remote diagnostics

In case of any anomaly, an automatic notification is sent to a local call centre for proactive online troubleshooting.



## Availability of original spare parts

The various original parts and components that we stock guarantee that any faulty equipment can be rapidly brought back online, whilst maintaining its original performance and reliability.


## Key figures

Nearly 400 Socomec experts - supported by 200 engineers and technicians from across our distributor network - can provide the solutions to your specific needs.

Subsidiaries

Distributors

Contact us

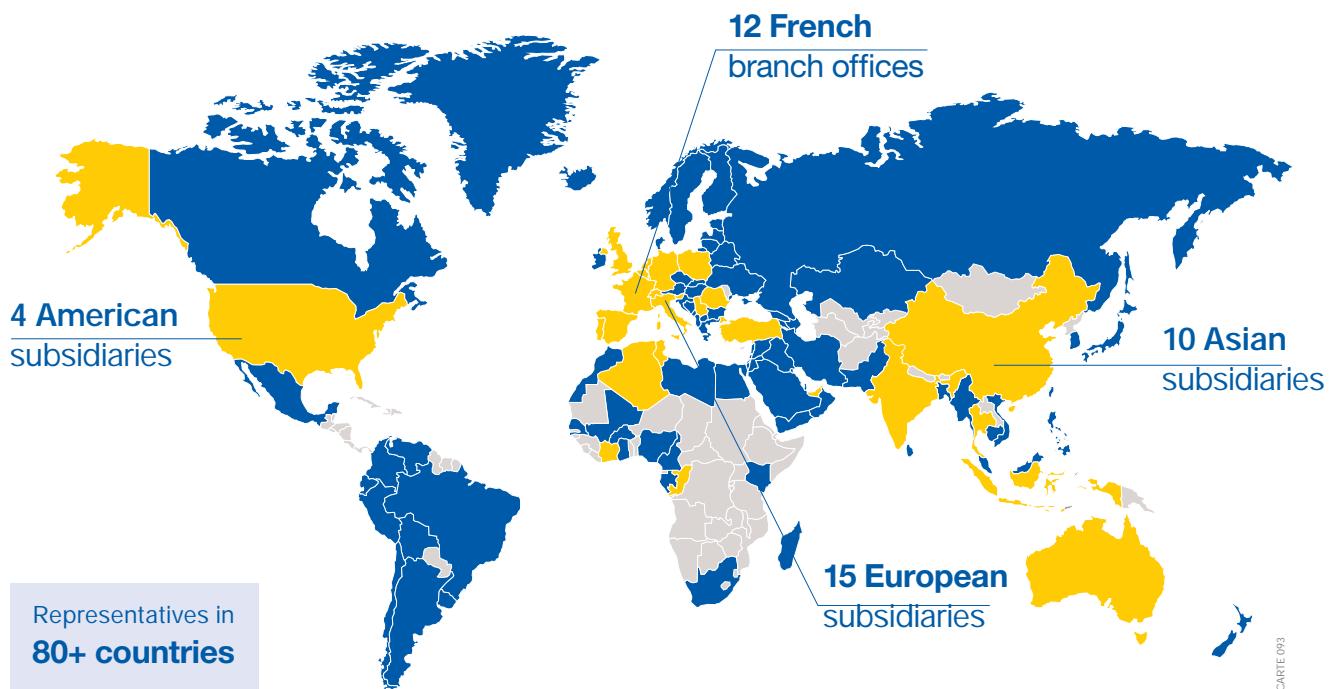

### On-site service management



**110,000**

service operations per year  
(mainly preventive visits)

**98 %**

Service Level Agreement  
compliance rate

### Technical hotline network



**25+**

languages spoken

**3**

advanced technical support centres

**110,000+**

incoming calls handled per year

### Certified expertise



**8,000**

hours of technical training  
undertaken every year  
(product, methodology and safety)

# Expert in power conversion

## maximising power quality and availability



### 3 levels of protection

according to your criticality

Prime | Superior | Ultimate

#### Socomec at the forefront of innovation

##### European design and production

Socomec's products are designed and developed by our talented team of in-house engineers with their real depth and wide knowledge in power electronics and digital controls. Our expertise in manufacturing - combined with the use of only the highest quality components in the most efficient production and testing processes – means that when it comes to reliability our products are unrivaled.

##### Socomec factories join the digital world

Since 2014, Socomec has been investing to bring its manufacturing facilities in line with industry 4.0 standards. Beyond lean manufacturing, the digitalisation of production means that we can ensure the delivery of a competitive offering with continuously improving service levels whilst also supporting the creation of more personalised products.

##### Factory Acceptance Test (FAT)

The FAT service is available to all customers who want to audit their order before it leaves the factory. With the support of Socomec Platform Engineers and dedicated infrastructure, several live product tests are available, including:

- standard tests to verify product performance,
- custom tests according to your precise requirements.

#### 3 levels of protection according to your criticality



##### PRIME

Trustworthy power

Reliable and cost effective protection to assure operational continuity



##### SUPERIOR

Unrivalled power performance

Best in class & certified performance to optimise usage and Total Cost of Ownership



##### ULTIMATE

Fault tolerant power without compromise


Fully redundant architecture for maximum availability, minimum MTTR and risk free maintenance

# A cutting-edge laboratory

the backing of an expert

Created in 1965, SOCOMEC's laboratory brings its expertise to guarantee the reliability and the conformity of our products and solutions.

Since 2015, the laboratory renamed Tesla Lab – Power Testing and Certification in 2015, offers its testing and certification services to all its customers.

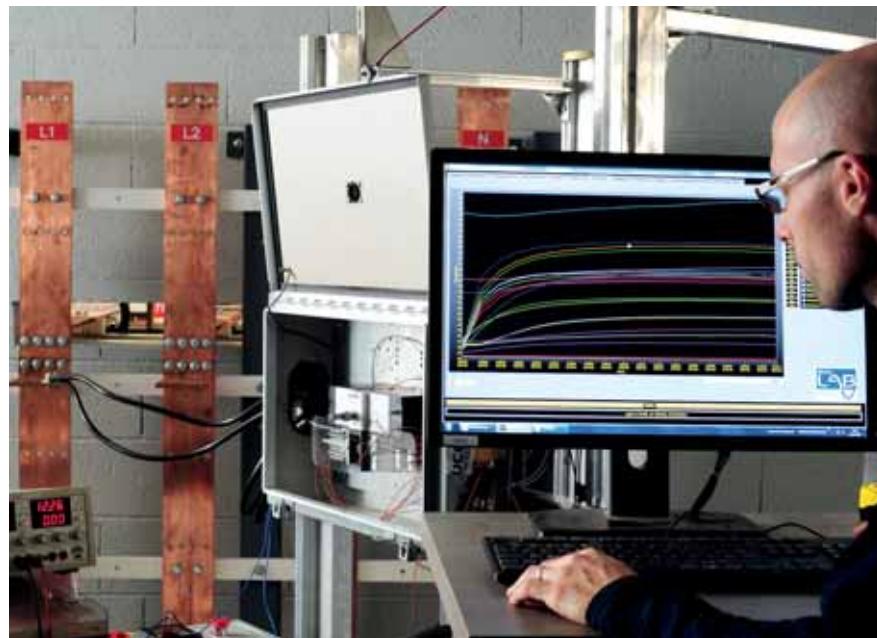

CORPO 441 A

## Proven expertise

Tesla Lab is an independent laboratory specialised in testing of LV switchgear, components and switchgear assemblies. 4 M€ has been invested since 2011 in this 2000 m<sup>2</sup> laboratory, where 30 experts guarantee the quality of the performed tests, making the Tesla Lab one of the most modern laboratories in Europe.

## Vast range of tests

The laboratory has a 100 MVA ( $I_{cc}$  100 kA rms 1 s) short-circuit platform, three 10 kA overload platforms and many other test facilities covering 2000 m<sup>2</sup> for:

- functional tests,
- mechanical tests: endurance,
- dielectric tests,
- environmental tests: vibration,
- Ingress Protection (IP),
- temperature rise tests up to 60 °C ambient.

## International partnership

The laboratory is recognised by the major certification bodies worldwide: member of ASEFA and LOVAG, it is accredited by COFRAC, UL (CTDP), CSA (shared certification) and DEKRA (WMT).

The partnership with many international certification bodies guarantees the quality and safety requirements in each country.

## Implementation of standard IEC/EN 61439

### Electrical switchgear manufacturers

IEC/EN 61439 standards define the requirements of "Low voltage switchgear assemblies" as well as the tests necessary to ensure the achievement of the specified levels of performance. The compliance with these standards gives a guarantee of safety and performance to the user of the equipment

### An original manufacturer according to IEC/EN 61439 standards

Socomec offers a wide range of original manufacturer solutions complying with IEC 61439 standards.

- FLEXY and CADRYS cabinet systems designed for distribution panel applications.
- Local switching and equipment cabinets covering requirements in power availability and safety.
- Components for integration.




### Tesla Lab accredited by COFRAC

With its world-class testing facilities, the Tesla Lab can perform all of the tests required by IEC/EN 61439 standards for switchgear assemblies

We can therefore help you to:

- define a verification program,
- perform conformity tests,
- issue test reports in order to get certification from third party certification bodies (ASEFA, LOVAG, DEKRA, UL, CSA, COFRAC, ASTA...).

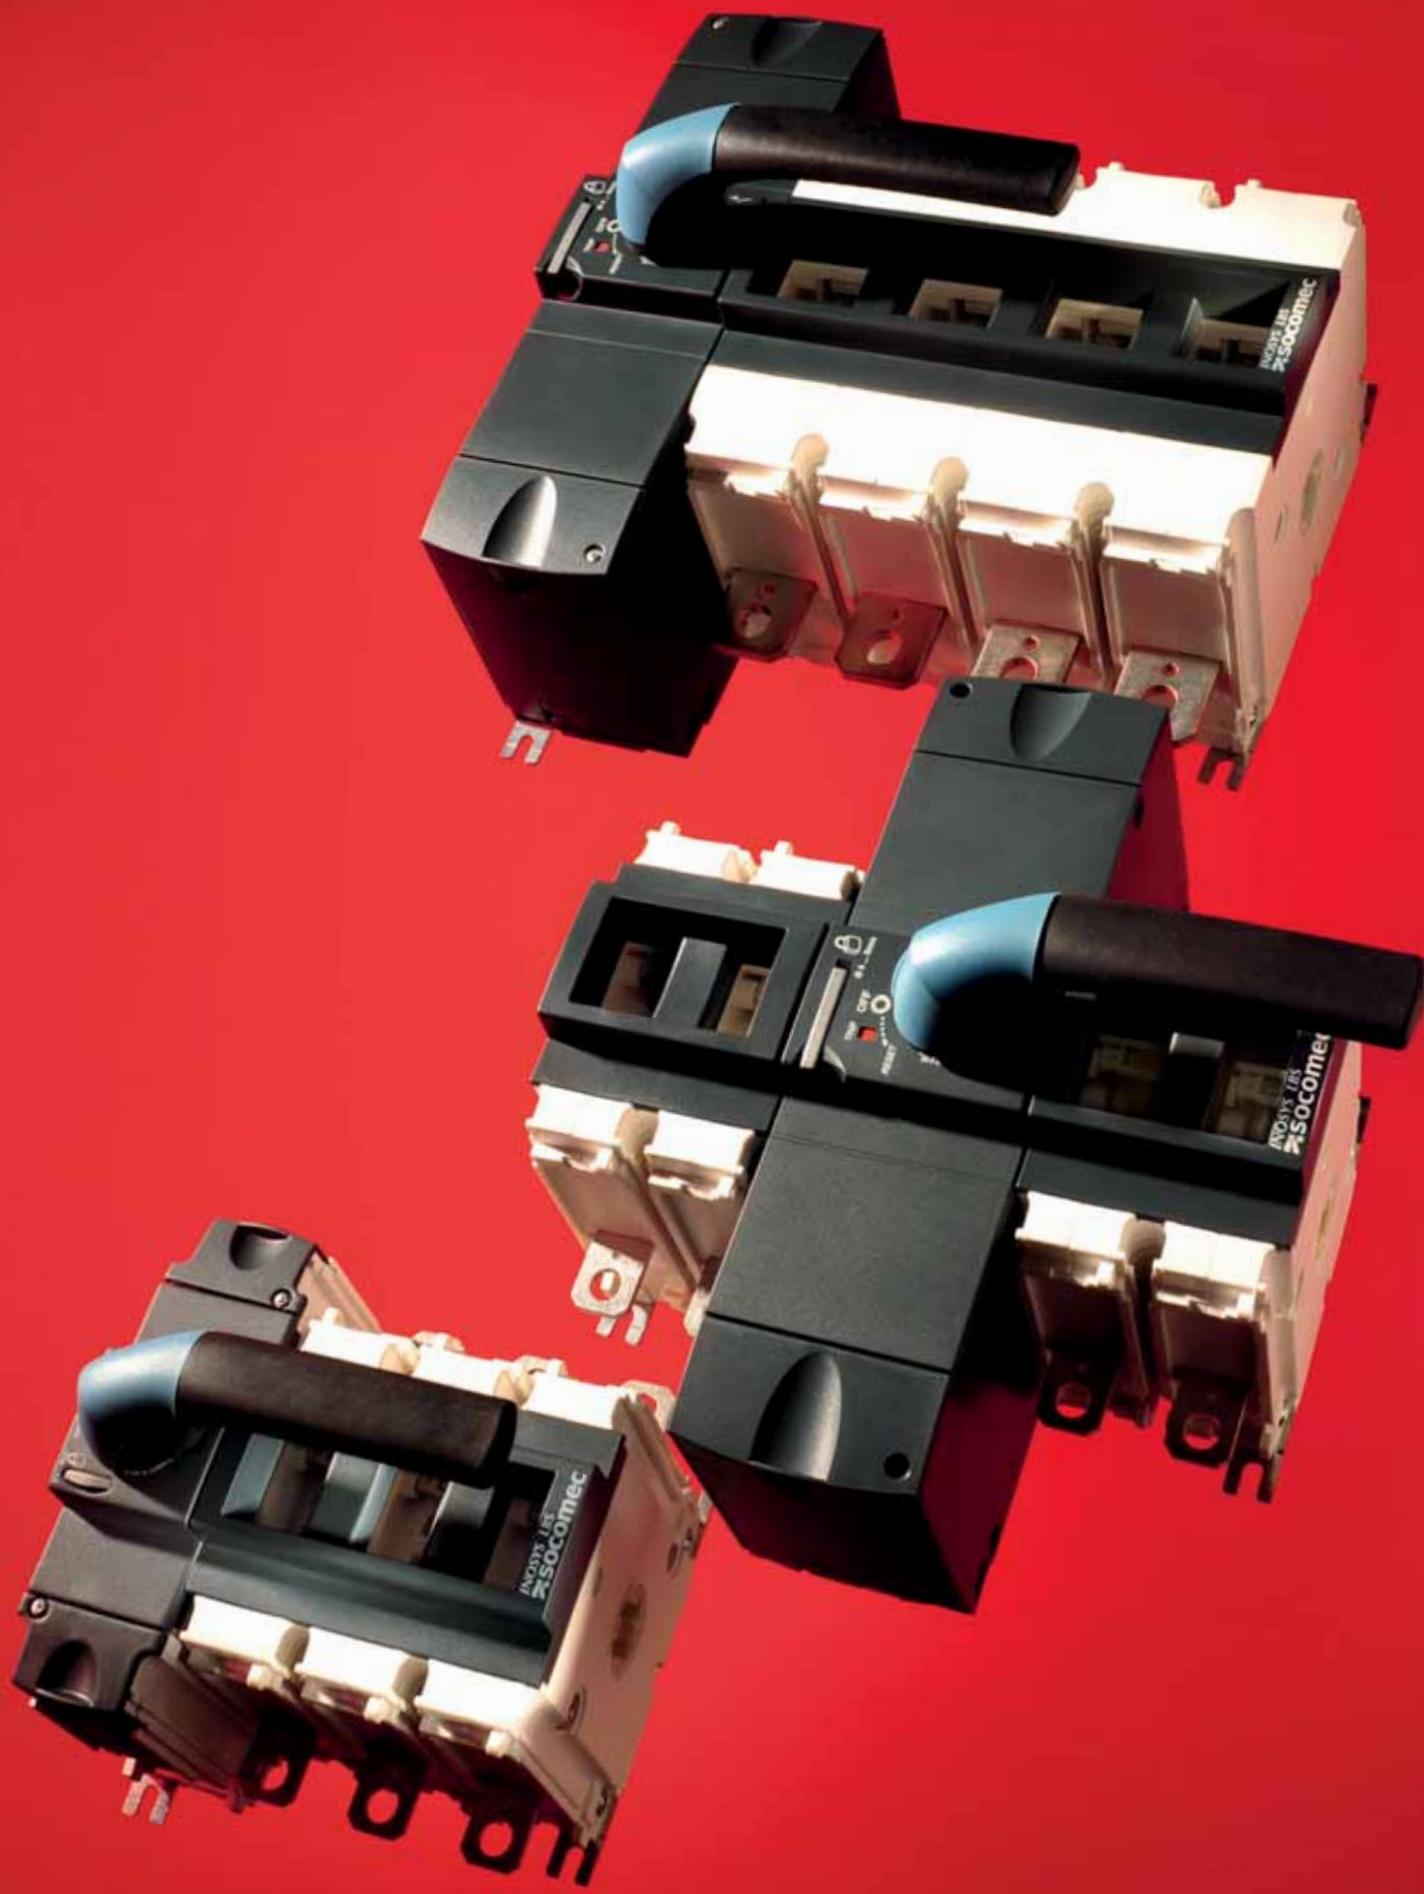

# Load break switches

Load break switches for all your applications .....	p. 14
Why choose a load break switch designed for photovoltaic applications? .....	p. 15
Load break switch selection guide .....	p. 16
Photovoltaic load break switches selection guide.....	p. 18

## Load break switches



**SIRCO M and  
SIRCO MV**  
16 to 160 A  
*p. 20*



**SIRCO  
SIRCO AC**  
125 to 5000 A  
*p. 38*



**INOSYS LBS**  
160 to 800 A  
*p. 84*

## Load break switches for DC and PV applications



**SIRCO PV**  
100 to 3200 A  
*p. 60*



**INOSYS LBS**  
160 to 630 A  
*p. 84*

## Specific applications

Load break switches:  
• with overrated neutral,  
• high short-circuit withstand,  
• multipolar,  
• for earthing,  
• for 1000 V network,  
• motorised models.



*p. 96*

## Find out more

### Enclosed devices

SOCOMECH offers a range of pre-assembled steel and polyester enclosures.



*p. 415*

### Special requests

SOCOMECH makes specific products.

We will help you to find the best solution for your application.

*Contact your local sales office.*

# Load break switches for all your applications

## Machine control, power distribution and photovoltaic installations

Operating in the electrical breaking technology market since 1922, SOCOMECH is both a global leader and unrivalled benchmark reference.

The SOCOMECH load break switches range is one of the largest on the market.

INOSYS LBS is the latest range of load break switches especially designed and tested for most demanding applications.

It completes the two lead product ranges in this category: SIRCO M and SIRCO.

If the three ranges INOSYS LBS, SIRCO and SIRCO M cover most needs, the complete range of SOCOMECH load break switches meets every application.

### A specific need?


We have developed many customised solutions: switches with overrated neutral, high short circuit withstand, multipolar switches, earthing switches, switches for 1000 V networks, special motorised switches, etc.

Whatever your application, you will find the right solution in the following pages!




Discover all our products in the selection guides in the following pages.

### SOCOMECH load break switches in power distribution and machine control applications

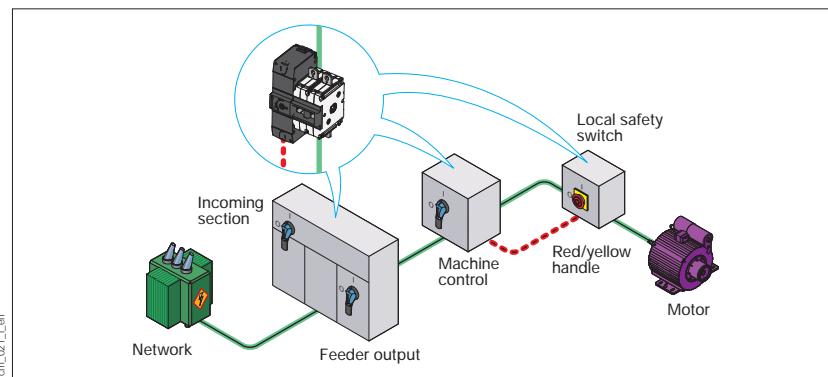

### SOCOMECH load break switches in photovoltaic applications

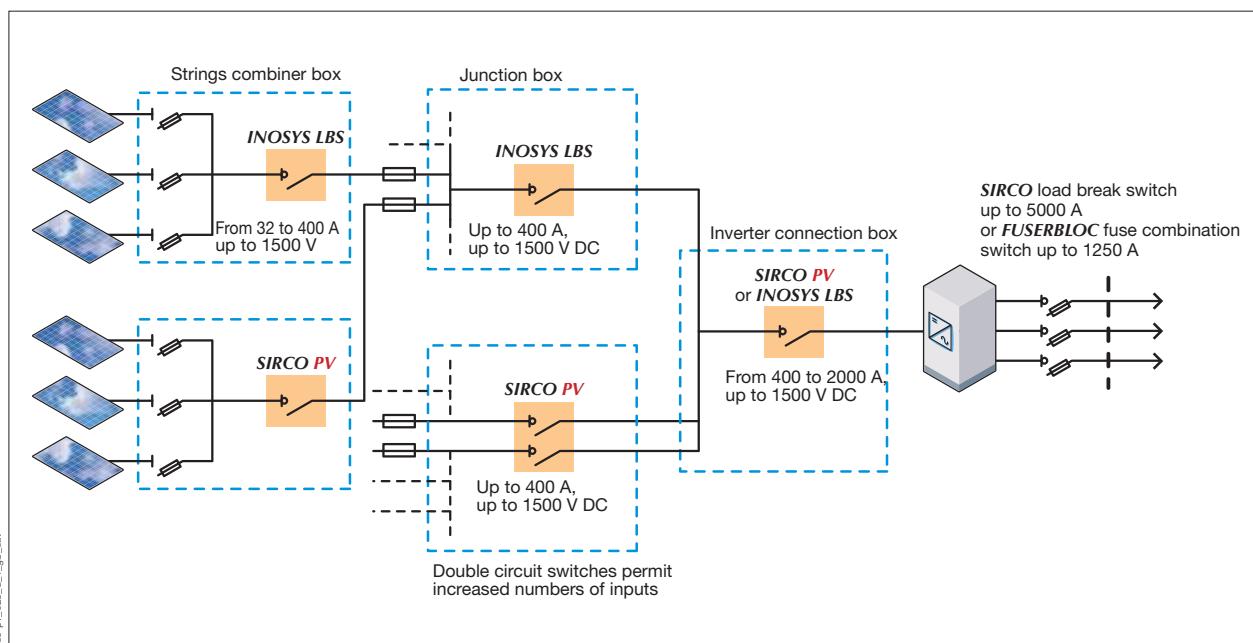

# Why choose a load break switch designed for photovoltaic applications?

gamme\_574



SIRCO MC PV, SIRCO PV and INOSYS LBS devices are available in IEC and UL versions.

## Safe operations

To ensure electrical isolation during maintenance operations, or for emergency breaking to prevent a risk of fire or electrical shock, it is essential that dedicated photovoltaic switches are used.

These devices must be installed at each functional level of the installation based on its architecture.

In order to disconnect a direct current photovoltaic string, generator or UPS, only INOSYS LBS, SIRCO PV or SIRCO MC PV devices can:

- Isolate the associated high DC voltages ,
- Guarantee safe on-load disconnection several thousand times across the full range of DC currents linked to daily fluctuations in sunlight, up to 1500 VDC.

## Devices designed for extreme conditions

Socomec load break switches have been designed for industrial use. They are extremely robust, with casings made from glass fibre-reinforced thermoset materials, bringing numerous benefits:

- Thermal stability, unlike some thermoplastics,
- Excellent resistance to high temperatures,
- Good electrical characteristics: Arc and insulation resistance,
- Good mechanical characteristics: Dimensional stability and rigidity over time.

These benefits are particularly important in photovoltaic installations, where the temperature may be below 0°C or above 50°C.

## Back-to-back design, an innovative solution

The SOCOME range of photovoltaic load break switches enables simultaneous on-load disconnection of two circuits using a single handle.

### Advantages

- **Space saving:** The overall width is the same as that of 3 or 4 pole devices. This enables significant savings, as compared to the use of two separate devices.
- **Simple connection** and integration.
- **Increasing the voltage:** Connecting the two devices in series allows on-load disconnection of voltages above 1000 VDC.
- **Doubling the rating:** By connecting the two devices in parallel.

## What are the standards that apply to photovoltaic installations?

### For installations

Photovoltaic installations are governed by international standards such as IEC and UL. These standards provide the guidelines for commissioning a photovoltaic installation.

- IEC 60364-7-712: Electrical installations of buildings — Requirements for special installations or locations — Solar photovoltaic (PV) power supply systems.
- IEC 62548: Installation and safety requirements for photovoltaic (PV) generators.

### For breaking devices

To date there is no specific IEC standard.

Manufacturers must therefore refer to standard IEC 60947-3. In the USA, the reference standard is UL98B. This standard, which is more stringent than IEC 60947-3, requires strict testing, in particular concerning temperatures and resistance to electrical arcing.

SIRCO PVs have been developed in compliance with both IEC 60947-3 and UL98B.



# Selection guide

## Load break switches

Which application?

Which function?

Machine control	
	
<b>SIRCO M</b> 16 to 125 A <i>p. 20</i>	<b>SIRCO MV</b> 100 to 160 A <i>p. 20</i>

### Applications

Main switchboard	•	•	
Distribution panel	•	•	
Emergency load break	•	•	
Genset output	•	•	
Network coupling	•	•	
Local safety load break	•	•	
Machine control	•	•	
Enclosed switches	•	•	

### Functions

3/4 pole load break switch	•	•	
6/8 pole load break switch	•		
3/4 pole transfer switch (I-O-II)	•		
3/4 pole transfer switch (I-I+II-II)	•		

### Characteristics

Operation	•	•	
Manual (rotating)	•	•	
Manual toggle	•		
Motorised			
Direct operation handle			
Front	•	•	
External operation handle			
Front	•	•	
Right side	•	•	
Left side	•	•	
Indication of breaking			
Positive break indication	•	•	
Visible contacts			•
Switch body			
Modular	•	•	

(1) Please consult us.

Which operation handle?

Which type of breaking?

Which switch body?

Power distribution		
		
<b>SIRCO</b> 125 to 5000 A <i>p. 38</i>	<b>SIRCO AC</b> 200 to 4000 A <i>p. 38</i>	
•	•	
•	•	
•	•	
•	•	
•	•	
•		
•	•	
See SIRCOVER	See SIRCOVER	
See SIRCOVER	See SIRCOVER	
•	•	
See SIRCO MOT AT	See SIRCO MOT AT	
•	•	
•	•	
•	•	
•	•	

# Selection guide

## Load break switches

### PV applications

Which application?

Which function?

	Photovoltaics	
		
	<b>SIRCO PV</b> IEC 100 to 2000 A	
		<i>p. 60</i>
<b>Applications</b>		
Emergency load break	•	
Photovoltaic load break	•	
Fitted enclosures	•	
<b>Functions</b>		
3/4 pole load break switch	•	
6/8 pole load break switch	•	
<b>Characteristics</b>		
<b>Operation</b>		
Manual (rotating)	•	
Direct operation handle		
Front	•	
Side		
External operation handle		
Front	•	
Left side		
<b>Indication of breaking</b>		
Positive break indication	•	
Visible contacts		
<b>Switch body</b>		
Modular		



## Which operation handle?



## Which type of breaking?



## Which switch body?

# SIRCO M and SIRCO MV

## Universal load break switches from 16 to 160 A



### Function

**SIRCO M** and **SIRCO MV** are manually operated modulable and modular multipolar load break switches.

They make and break under load conditions and provide safety isolation for any low voltage circuit, particularly for machine control circuits.

Through the use of accessories, SIRCO M can be transformed into multipolar load break or 3/4 pole changeover switches. SIRCO M changeover switches provide on load changeover switching between two sources or two low voltage power circuits, as well as their safety isolation.

### Advantages

#### Total integration

The SIRCO M and SIRCO MV fully integrate isolation, breaking and switching functions. Within a single product, SIRCO M offers front, right side or left side operation. Their highly functional design enables the product to be easily transformed from a load break switch to a changeover switch, offering a highly innovative modular solution for numerous applications.

#### A wide range of accessories

A single standard module, which can be complemented with a choice of accessories, offers a range of advantages:

- Simplicity when choosing the device.
- Flexibility to adapt to the most varied applications.
- Reduction in the cost of management and storage.

#### Upgradeability

Its wide range of accessories means that the SIRCO M can be upgraded even after it has been commissioned, enabling future requirements to be met.

#### Compliance with major certifications and approvals

The SIRCO M and SIRCO MV range of load break switches have been designed, qualified and tested according to the criteria defined by standards IEC 60947-3, UL508 and UL98. This process guarantees a high quality level for the product which is fully adapted to arduous operating environments.

#### General characteristics

- Double break per pole.
- Mounting options: DIN rail, panel or modular panel with 45 mm front cut out.
- IP20 accessories and device.
- Severe utilisation categories (AC-22 and AC-23).

#### Specific characteristics

##### SIRCO M:

- Positive break indication.
- Contact point technology.
- Product can be mounted directly on the door or panel side; see "Door mounting kit" in the accessory section.

##### SIRCO MV:

- Visible double breaking based on a sliding contact system (SIRCO type, see page "SIRCO").
- Positive break indication.

### The solution for

- Main incoming load break
- Distribution load break
- Machine control
- Local safety load break



### Strong points

- Total integration
- A wide range of accessories
- Upgradeability
- Compliance with major certifications and approvals
- Specific characteristics

### Conformity to standards

- IEC 60947-3



- Other standards available



\*See pages SIRCO UL and CSA range

### Approvals and certifications<sup>(1)</sup>



(1) Product reference on request.

### What you need to know

#### SIRCO M

- SIRCO M can be operated in 3 different ways:



Complete switch body for toggle operation



Direct front operation with handle



External operation  
front, left side or right side

sircm\_030.eps

- The SIRCO M is a **3 pole** load break switch which is available from **16 to 125 A**. It can be combined with a switched 4<sup>th</sup> pole, an unswitched neutral or PE pole and pre-break and signalling auxiliary contacts.
- From **16 to 125 A**, through the wide range of available accessories, it is possible to convert a 3 pole load break switch into a **4, 6 or 8 pole load break switch** or a **3/4 pole changeover switch**. Through use of its door mounting kit, SIRCO M load break switches can be mounted on the panel door.



Changeover switches I - O - II

sircm\_173.psd

#### SIRCO MV

- 3 operations are available:



Direct front operation



External right side operation



External front and left side operation

sircm\_033.eps

- SIRCO MV can be ordered in **3 or 4 pole** from **100 to 160 A**.
- Two types of auxiliary contacts are available:
  - U-type pre-break,
  - M-type for signalisation.

# SIRCO M and SIRCO MV

Universal load break switches

from 16 to 160 A

## References

### SIRCO M

SIRCO M - from 16 to 125 A									
Rating (A) / Frame size	No. of poles	Complete switch body toggle operation	Switch body	Direct handle	Door interlocked external front and right side handle <sup>(6)</sup>	External left side handle <sup>(6)</sup>	Front external handle for changeover switches <sup>(6)</sup>	Shaft for external front and side handle <sup>(6)</sup>	4 <sup>th</sup> pole
16 A / M1	3 P	2205 3000	2200 3000 <sup>(1)(2)(3)</sup>						2200 1000
20 A / M1	3 P	2205 3001	2200 3001 <sup>(1)(2)(3)</sup>						2200 1001
25 A / M1	3 P	2205 3002	2200 3002 <sup>(1)(2)(3)</sup>		S00 type I - 0	S00 type I - 0	S00 type I - 0 - II	3/4 P ≤ 125 A	2200 1002
32 A / M1	3 P	2205 3003	2200 3003 <sup>(1)(2)(3)</sup>	M00 type Blue 2299 5012 Red 2299 5013	Black IP55 1471 1111 <sup>(4)</sup> Black IP65 1473 1111 <sup>(4)</sup>	Black IP65 147A 5111	Black IP65 1473 1113 <sup>(4)</sup>	S0, S00 type	6/8 P & COS ≤ 80 A
40 A / M1	3 P	2205 3004	2200 3004 <sup>(1)(2)(3)</sup>		Red/Yellow IP65 147B 5111	I - I+II - II	150 mm 1407 0515	200 mm 1407 0520	2200 1003
63 A / M2	3 P	2205 3006	2200 3006 <sup>(1)(2)(3)</sup>					320 mm 1407 0532	2200 1004
80 A / M2	3 P	2205 3008	2200 3008 <sup>(1)(2)(3)</sup>					6/8 P & COS 100 ... 125 A	2200 1006
100 A / M3	3 P		2200 3010 <sup>(1)(2)(3)</sup>	M01 type Blue 2299 5032	S0 type I - 0 Black IP55 1481 1111 <sup>(4)</sup>	S0 type I - 0	S00 type I - 0 - II	150 mm 1409 0615	2200 1008
125 A / M3	3 P		2200 3011 <sup>(1)(2)(3)</sup>		Black IP65 1483 1111 <sup>(4)</sup>	Black IP65 148A 5111	Black IP65 1473 0113	200 mm 1409 0620	2200 1010
					Red/Yellow IP65 1484 1111 <sup>(4)</sup>	Red/Yellow IP65 148B 5111	I - I+II - II	320 mm 1409 0632	2200 1011

(1) Front and side operation.

(2) For a 6-pole device in direct operation, order 2 x 3 pole device + conversion kit (for external operation, add the shaft + the handle).

(3) For an 8-pole device in direct operation, order 2 x 3 pole device + 2 x 4th poles + conversion kit (for external operation, add the shaft + the handle).

(4) Defeatable handle.

(5) Top and bottom.

(6) Other handles & shafts are available. Please see accessory pages.

**SIRCO M**
**SIRCO M - from 16 to 125 A**

Rating (A) / Frame size	No. of poles	Complete switch body toggle operation	Switch body	Unswitched neutral pole	Unswitched protective earth module	Auxiliary contact	Terminal shrouds	Door mounting kit
16 A / M1	3 P	2205 3000	2200 3000 <sup>(1)(2)(3)</sup>	1 P 2200 5005	1 P 2200 9005	M type  1 module NO + NC 2299 0001	1 P 2294 1005 <sup>(4)</sup> 3 P 2294 3005 <sup>(4)</sup>	3/4 P Complete protection  IP2X 2299 3309 <sup>(5)</sup>  Compact design  2299 3409 <sup>(5)</sup>
20 A / M1	3 P	2205 3001	2200 3001 <sup>(1)(2)(3)</sup>					
25 A / M1	3 P	2205 3002	2200 3002 <sup>(1)(2)(3)</sup>					
32 A / M1	3 P	2205 3003	2200 3003 <sup>(1)(2)(3)</sup>					
40 A / M1	3 P	2205 3004	2200 3004 <sup>(1)(2)(3)</sup>					
63 A / M2	3 P	2205 3006	2200 3006 <sup>(1)(2)(3)</sup>					
80 A / M2	3 P	2205 3008	2200 3008 <sup>(1)(2)(3)</sup>					
100 A / M3	3 P		2200 3010 <sup>(1)(2)(3)</sup>					
125 A / M3	3 P		2200 3011 <sup>(1)(2)(3)</sup>					

(1) Front and side operation.

(2) For a 6-pole device in direct operation, order 2 x 3 pole device + conversion kit (for external operation, add the shaft + the handle).

(3) For an 8-pole device in direct operation, order 2 x 3 pole device + 2 x 4th poles + conversion kit (for external operation, add the shaft + the handle).

(4) Top and bottom.

(5) Delivered with a shaft.

**SIRCO MV**
**SIRCO MV - from 100 to 160 A**

Rating (A)	No. of poles	Switch body	Direct handle	Door interlocked external front and right side handle <sup>(4)</sup>	External left side handle <sup>(4)</sup>	Shaft for external front and side handle <sup>(4)</sup>	Auxiliary signal contact	Pre-break auxiliary contact	Terminal shrouds
100 A	3 P	2200 3110	M0b type Blue 2299 5042 <sup>(1)</sup>	S0 type I-0 Black IP55 1491 0111 <sup>(2)</sup>	S0 type I-0 Black IP65 149A 9111	S0 type 150 mm 1409 0615	M type  1 module NO + NC 2299 0001	U type  1 contact NO 3999 0701	3 P 2294 3016 <sup>(3)</sup>
	4 P	2200 4110							
125 A	3 P	2200 3012	M0 type Blue 2299 5022	Black IP65 1493 0111 <sup>(2)</sup>	Black IP65 149B 9111	200 mm 1409 0620	M type  1 module NO + NC 2299 0001	U type  1 contact NC 3999 0702	4 P 2294 4016 <sup>(3)</sup>
	4 P	2200 4012							
160 A	3 P	2200 3016		Red/Yellow IP65 1494 0111 <sup>(2)</sup>	Red/Yellow IP65 1409 0632	320 mm 149B 9111			
	4 P	2200 4016							

(1) Standard.

(2) Defeatable handle.

(3) Top and bottom.

(4) Other handles &amp; shafts are available. Please see accessory pages.

# SIRCO M and SIRCO MV

Universal load break switches

from 16 to 160 A

## Accessories

### Direct operation handle

#### For SIRCO M

Rating (A) / Frame size	Handle colour	Handle type	Reference
16 ... 80 / M1 ... M2	Blue	M00	2299 5012 <sup>(1)</sup>
16 ... 80 / M1 ... M2	Red	M00	2299 5013
100 ... 125 / M3	Blue	M01	2299 5032 <sup>(1)</sup>

(1) Standard.

#### For SIRCO MV

Rating (A)	Handle colour	Handle type	Reference
100 ... 160	Blue	M0b	2299 5042 <sup>(1)</sup>
100 ... 160	Blue	M0	2299 5022

(1) Standard.



### External handle operation - SIRCO M

#### S000 type handle

Rating (A) / Frame size	Type	No. of poles	Operation	Handle colour	External IP	Defeatable handle	Reference
16 ... 80 / M1 ... M2	Switch	3/4 P	Front and side operation	Black	IP65	no	1463 5111
	Switch	3/4 P	Front and side operation	Red/Yellow	IP65	no	1464 5111
16 ... 80 / M1 ... M2	Changeover switches I - 0 - II	3/4 P	Front	Black	IP65	no	1463 5113
	Changeover switches I - I+II - II	3/4 P	Front	Black	IP65	no	1463 5114



#### S00 type handle

Rating (A) / Frame size	Type	No. of poles	Operation	Handle colour	External IP	Defeatable handle	Reference
16 ... 80 / M1 ... M2	Switch	3/4 P <sup>(1)</sup>	Front and side operation	Black	IP55	yes	1471 1111
	Switch	3/4 P <sup>(1)</sup>	Front and side operation	Black	IP65	yes	1473 1111
	Switch	3/4 P <sup>(1)</sup>	Front and side operation	Red/Yellow	IP65	yes	1474 1111
	Switch	3/4 P	Left side	Black	IP65	no	147A 5111
	Switch	3/4 P	Left side	Red/Yellow	IP65	no	147B 5111
100 ... 125 / M3	Switch	6/8 P	Front	Black	IP55	yes	1471 0111
	Switch	6/8 P	Front	Black	IP65	yes	1473 0111
	Switch	6/8 P	Front	Red/Yellow	IP65	yes	1474 0111
16 ... 80 / M1 ... M2	Changeover switches I - 0 - II	3/4 P	Front	Black	IP65	yes	1473 1113
	Changeover switches I - I+II - II	3/4 P	Front	Black	IP65	yes	1473 1114
100 ... 125 / M3	Changeover switches I - 0 - II	3/4 P	Front	Black	IP65	yes	1473 0113
	Changeover switches I - I+II - II	3/4 P	Front	Black	IP65	yes	1473 0114



(1) Can also be used with 6 and 8 poles with front operation.

### External operation handle - SIRCO M (continued)

#### S0 type handle

Rating (A) / Frame size	Type	No. of poles	Operation	Handle colour	External IP	Defeatable handle	Reference
100 ... 125 / M3	Switch	3/4 P	Front and side operation	Black	IP55	yes	1481 1111
	Switch	3/4 P	Front and side operation	Black	IP65	yes	1483 1111
	Switch	3/4 P	Front and side operation	Red/Yellow	IP65	yes	1484 1111
	Switch	3/4 P	Left side	Black	IP65	no	148A 5111
	Switch	3/4 P	Left side	Red/Yellow	IP65	no	148B 5111



S0 handle

acces\_343.eps

#### S01 type handle

Rating (A) / Frame size	Type	No. of poles	Operation	Handle colour	External IP	Defeatable handle	Reference
16 ... 125 / M1 ... M3	Switch	3/4 P <sup>(2)</sup>	Front and side operation	Black	IP65	yes	1403 2111
	Switch	3/4 P <sup>(2)</sup>	Front and side operation	Red/Yellow	IP65	yes	1404 2111
16 ... 80 / M1 ... M2	Changeover switches I - 0 - II	3/4 P	Front	Black	IP65	yes	1403 2113
	Changeover switches I - 0 - II	3/4 P	Front	Black	IP65	yes	1403 2813 <sup>(1)</sup>
	Changeover switches I - I+II - II	3/4 P	Front	Black	IP65	yes	1403 2114
	Changeover switches I - I+II - II	3/4 P	Front	Black	IP65	yes	1403 2814 <sup>(1)</sup>



S01 handle

acces\_304.eps

(1) Padlockable in 3 positions.

(2) Can also be used with 6 and 8 pole devices from 16 to 40 A.

### External operation handle - SIRCO MV

#### S0 type handle

Rating (A)	Type	No. of poles	Operation	Handle colour	External IP	Defeatable handle	Reference
100 ... 160	Switch	3/4 P	Front and side operation	Black	IP55	yes	1491 0111
100 ... 160	Switch	3/4 P	Front and side operation	Black	IP65	yes	1493 0111
100 ... 160	Switch	3/4 P	Front and side operation	Red/Yellow	IP65	yes	1494 0111
100 ... 160	Switch	3/4 P	Left side	Black	IP65	no	149A 9111
100 ... 160	Switch	3/4 P	Left side	Red/Yellow	IP65	no	149B 9111



S0 handle

acces\_343.eps

#### S1 type handle

Rating (A)	Type	No. of poles	Operation	Handle colour	External IP	Defeatable handle	Reference
100 ... 160	Switch	3/4 P	Front	Black	IP55	yes	1411 2111
100 ... 160	Switch	3/4 P	Front	Black	IP65	yes	1413 2111
100 ... 160	Switch	3/4 P	Front	Red/Yellow	IP65	yes	1414 2111
100 ... 160	Switch	3/4 P	Right side	Black	IP55	no	1415 2111
100 ... 160	Switch	3/4 P	Right side	Black	IP65	no	1417 2111
100 ... 160	Switch	3/4 P	Right side	Red/Yellow	IP65	no	1418 2111
100 ... 160	Switch	3/4 P	Left side	Black	IP65	no	141A 2111
100 ... 160	Switch	3/4 P	Left side	Red/Yellow	IP65	no	141B 2111



S1 Handle

acces\_284.eps

# SIRCO M and SIRCO MV

Universal load break switches

from 16 to 160 A

## Accessories (continued)

### Shaft for external handle

#### SIRCO M 3/4 P

Rating (A) / Frame size	Handle type	Type	Length (mm)	Reference
16 ... 125 / M1...M3	S000 / S00 / S0	Switch	150 mm	1407 0515
	S000 / S00 / S0	Switch	200 mm	1407 0520
	S000 / S00 / S0	Switch	320 mm	1407 0532
	S01	Switch	200 mm	1404 0520
	S01	Switch	320 mm	1404 0532
	S01	Switch	400 mm	1404 0540



acces\_346.eps

#### SIRCO M 6/8 pole load break switch and 3/4 pole changeover switch

Rating (A)	Handle type	Type	Length (mm)	Reference
16 ... 80 / M1...M2	S000, S00	6/8 P and changeover switch	150 mm	1407 0515
	S000, S00	6/8 P and changeover switch	200 mm	1407 0520
	S000, S00	6/8 P and changeover switch	320 mm	1407 0532
100 ... 125 / M3	S00	6/8 P and changeover switch	150 mm	1409 0615
	S00	6/8 P and changeover switch	200 mm	1409 0620
	S00	6/8 P and changeover switch	320 mm	1409 0632
16 ... 40 / M1	S01	6/8 P	200 mm	1404 0520
	S01	6/8 P	320 mm	1404 0532
	S01	6/8 P	400 mm	1404 0540
16 ... 80 / M1 ... M2	S01	Changeover switch	200 mm	1404 0520
	S01	Changeover switch	320 mm	1404 0532
	S01	Changeover switch	400 mm	1404 0540

#### Use

Shaft lengths:

- 150 mm,
- 200 mm,
- 320 mm,
- 400 mm.

For 3/4 pole switches, shaft extensions are for external front and side operation.

For 6/8 pole switches and changeover switches, shaft extensions are for front operation only.

### For SIRCO MV

Rating (A)	Handle type	Type	Length (mm)	Reference
100 ... 160	S0	Switch	150 mm	1409 0615
100 ... 160	S0	Switch	200 mm	1409 0620
100 ... 160	S0	Switch	320 mm	1409 0632
100 ... 160	S1	Switch	200 mm	1401 0620
100 ... 160	S1	Switch	320 mm	1401 0632
100 ... 160	S1	Switch	400 mm	1401 0640

### Shaft guide for external operation

#### Use

To guide the shaft extension into the external handle.

This accessory enables the handle to engage the extension shaft with a misalignment of up to 15 mm.

Required for a shaft length over 320 mm.

Description	Handle type	To be ordered in multiples of	Reference
Shaft guide	S00 and S0 / S00	10 pieces	1419 0000
Shaft guide	S01 and S1	1 piece	1429 0000



acces\_260.eps

### Additional pole for SIRCO M

#### Switched fourth pole module

Rating (A) / Frame size	No. of poles	Type	Reference
16 / M1	1 P	switched	2200 1000
20 / M1	1 P	switched	2200 1001
25 / M1	1 P	switched	2200 1002
32 / M1	1 P	switched	2200 1003
40 / M1	1 P	switched	2200 1004
63 / M2	1 P	switched	2200 1006
80 / M2	1 P	switched	2200 1008
100 / M3	1 P	switched	2200 1010
125 / M3	1 P	switched	2200 1011

#### Use

Adds one or two poles and transforms:

- a 3 pole SIRCO M into a 4 pole load break switch,
- a 6 pole SIRCO M into a 8 pole load break switch,
- a 3 pole SIRCO M into a 4 pole changeover switch.



4<sup>th</sup> pole

Protective earth module


Neutral pole

#### Neutral pole

Rating (A) / Frame size	No. of poles	Type	Reference
16 ... 40 / M1	1 P	unswitched	2200 5005
63 ... 80 / M2	1 P	unswitched	2200 5009
100 ... 125 / M3	1 P	unswitched	2200 5011

#### Use

Transforms the 3-pole switch into a 3-pole + solid neutral.

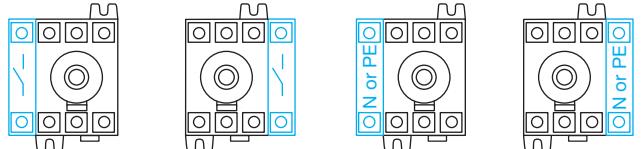


acces\_322.eps  
acces\_323.eps  
acces\_324.eps

#### Protective earth module

Rating (A) / Frame size	No. of poles	Type	Reference
16 ... 40 / M1	1 P	unswitched	2200 9005
63 ... 80 / M2	1 P	unswitched	2200 9009
100 ... 125 / M3	1 P	unswitched	2200 9011

#### Use

Adds 1 protective earth module pole to the switch-disconnector.

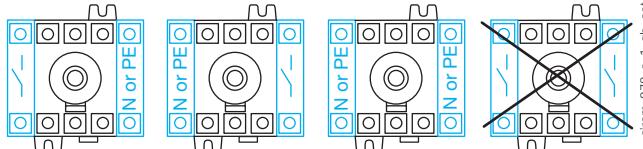

Additional pole configuration

sircm\_078\_a\_1\_gb\_cat

### Terminal shrouds

#### Use

Top and bottom protection against direct contact with the terminals or connection parts.

Available in 1 or 3 pole versions for SIRCO M and in 3 or 4 pole versions for SIRCO MV.

An opening on each terminal cover makes it possible to insert a temperature measurement probe.

#### For SIRCO M

Rating (A) / Frame size	No. of poles	Position	Reference
16 ... 40 / M1	1 P	top and bottom	2294 1005
16 ... 40 / M1	3 P	top and bottom	2294 3005
63 ... 80 / M2	1 P	top and bottom	2294 1009
63 ... 80 / M1	3 P	top and bottom	2294 3009
100 ... 125 / M3	1 P	top and bottom	2294 1011
100 ... 125 / M3	3 P	top and bottom	2294 3016

#### For SIRCO MV

Rating (A)	No. of poles	Position	Reference
100 ... 160	3 P	top and bottom	2294 3016
100 ... 160	4 P	top and bottom	2294 4016



acces\_328.eps



acces\_329.eps



acces\_337.eps



acces\_326.eps

# SIRCO M and SIRCO MV

Universal load break switches

from 16 to 160 A

## Accessories (continued)

### M type auxiliary contacts

#### Use

Pre-break and signalisation of positions 0 and I by NO+NC or 2 NO auxiliary contacts.

They allow to anticipate the switching of the main poles. They can be mounted on the left or on the right side of the device.


Max 4 auxiliary contacts (2 modules).

Pre-break is not guaranteed on the SIRCO MV.

#### Characteristics

NO+NC auxiliary contacts: IP2 with front operation.

#### M type

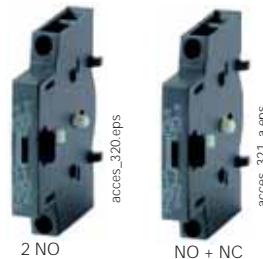

#### For SIRCO M

Rating (A) / Frame size	Number of AC	Type of AC	Reference
16 ... 125 / M1...M3	1 AC	NO + NC	2299 0001
	1 AC	2 NO	2299 0011


#### For SIRCO MV

Rating (A)	Number of AC	Type of AC	Reference
100 ... 160	1 AC	NO + NC	2299 0001
100 ... 160	1 AC	2 NO	2299 0011

#### Characteristics

Contact type	Nominal current (A)	Operating current I <sub>e</sub> (A)	
		230 VAC	AC-15
NO + NC	10	10	6


#### Auxiliary contact configurations for SIRCO MV



1. Maximum 2 "U" type auxiliary contacts.
2. Maximum 2 "M" type auxiliary contact modules.

sircm\_188\_a\_1\_cat

#### Auxiliary contacts configurations for SIRCO M

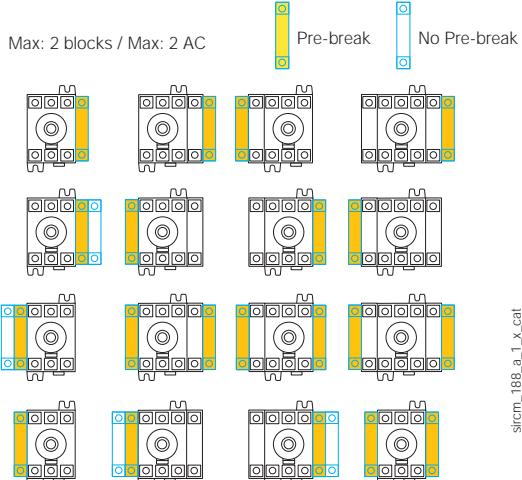

#### U type



sircm\_048.eps

#### For SIRCO MV

Rating (A)	Number of AC	Type of AC	Reference
100 ... 160	1 AC	NO	3999 0701
100 ... 160	1 AC	NC	3999 0702

#### Characteristics

Contact type	Nominal current (A)	Operating current I <sub>e</sub> (A)			
		250 VAC AC-15	400 VAC AC-15	24 VDC DC-13	48 VDC DC-13
NC	10	3	1.8	2.8	1.4
NO	10	3	1.8	2.8	1.4

## Conversion kit

#### Use

It must be ordered together with the handle for external control.

This accessory enables the assembly of two 3 pole switches (+ additional pole) in order to create :

- a 6 or 8 pole SIRCO M load break switch,
- a 3 or 4 pole SIRCO M changeover switch.

SIRCO M changeover switches provide on load changeover switching between two sources or two low voltage power circuits, as well as their safety isolation (I - 0 - II); transfer without interruption of the supply is also possible (I - I+II - II).

#### Load break switches 6/8 P

Rating (A) / Frame size	Type	Reference
16 ... 80 / M1 ... M2	6/8 P switch	2269 6009
100 ... 125 / M3	6/8 P switch	2269 6011

#### Changeover switches I - 0 - II

Rating (A) / Frame size	Type	Reference
16 ... 80 / M1 ... M2	Changeover switches I - 0 - II	2209 6009
100 ... 125 / M3	Changeover switches I - 0 - II	2209 6011

#### Changeover switches I - I+II - II

Rating (A) / Frame size	Type	Reference
16 ... 80 / M1 ... M2	Changeover switches I - I+II - II	2299 6009
100 ... 125 / M3	Changeover switches I - I+II - II	2299 6011



Conversion kit for 6 or 8 pole load break switches



Conversion kit for changeover switches I - 0 - II



Conversion kit for changeover switches I - I+II - II

## Door mounting kit<sup>(1)</sup>

### Use


This kit enables a direct mounting of the switch on the door panel, on the right or left side of the panel.

The connection clamps of the switch are always accessible.

The external handle is quick and easy to install with the supplied internal locking nut mounted on the inside of the enclosure.

3 kits are available:

- one for complete protection IP2X
- one with compact design
- one in steel for 6/8 P and 100/125 A.

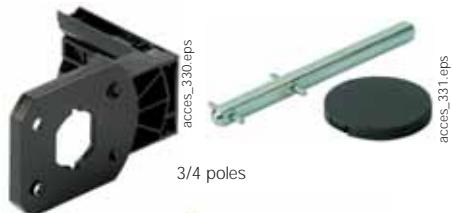

### For SIRCO M

(1) Kit compatible with S00 type handle only.

Rating (A) / Frame size	No. of poles	Description	Reference
16 ... 80 / M1 ...M2	3/4 P	Complete protection IP2X	2299 3309
	3/4 P	Compact version	2299 3409
	6/8 P	Metallic support	2299 3609
100 ... 125	3/4 P	Metallic support	2299 3609

## Cap for side operation mounting

### Use

This accessory enables the front face of the SIRCO M to be capped when the switch is side operated. 20 pieces supplied per pack.

This piece snaps into place directly on the front face of the switch.

### For SIRCO M

Rating (A) / Frame size	Pack	Reference
16 ... 125 / M1 ... M3	20 pieces	2299 9409




## 6/8 pole joining accessory

### Use

This accessory enables two 3/4 pole switches to be coupled in order to provide a 6 or 8 pole switch for external side operation. 40 pieces supplied per pack.

For multi-pole switches, please consult us.

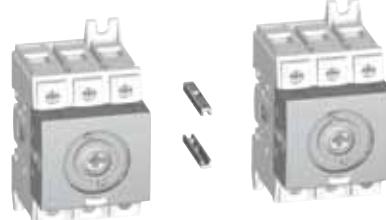

sircm\_134.eps

## DIN rail locking clip

### Use

This locking clip prevents the SIRCO MV from sliding when DIN rail mounted.

### For SIRCO MV

Rating (A)	Type	Reference
100 ... 160	Locking clip M4	5000 0041
100 ... 160	Locking clip M5	5000 0051



acces\_337.eps

## Voltage sensing and power supply tap

### Use

It allows connection of 2x  $\leq 1.5$  mm<sup>2</sup> voltage sensing or power cables.

This single-pole voltage sensing tap allows the connection of 2x  $\leq 1.5$  mm<sup>2</sup> voltage sensing or power cables to any SIRCO MV power terminal without reducing its connection capacity.



acces\_336.eps

### For SIRCO MV

Rating (A)	Pack	Reference
100 ... 160	2 pieces	1399 4006

# SIRCO M and SIRCO MV

Universal load break switches

from 16 to 160 A

## Characteristics

### Characteristics according to IEC 60947-3

	SIRCO M - from 16 to 125 A								
Thermal current $I_{th}$ (40 °C)	16 A	20 A	25 A	32 A	40 A	63 A	80 A	100 A	125 A
Frame size	M1	M1	M1	M1	M1	M2	M2	M3	M3
Rated insulation voltage $U_i$ (V)	800	800	800	800	800	800	800	800	800
Rated impulse withstand voltage $U_{imp}$ (kV)	8	8	8	8	8	8	8	8	8

### Rated operational currents $I_e$ (A)

Rated voltage	Utilisation category	A/B <sup>(1)</sup>								
415 VAC	AC-20 A / AC-20 B	16/16	20/20	25/25	32/32	40/40	63/63	80/80	100/100	125/125
415 VAC	AC-21 A / AC-21 B	16/16	20/20	25/25	32/32	40/40	63/63	80/80	100/100	125/125
415 VAC	AC-22 A / AC-22 B	16/16	20/20	25/25	32/32	40/40	63/63	80/80	100/100	125/125
415 VAC	AC-23 A / AC-23 B	16/16	20/20	25/25	32/32	40/40	63/63	80/80	100/100	125/125
500 VAC	AC-20 A / AC-20 B	16/16	20/20	25/25	32/32	40/40	63/63	80/80	100/100	125/125
500 VAC	AC-21 A / AC-21 B	16/16	20/20	25/25	32/32	40/40	63/63	80/80	100/100	125/125
500 VAC	AC-22 A / AC-22 B	16/16	20/20	25/25	32/32	40/40	63/63	80/80	100/100	125/125
500 VAC	AC-23 A / AC-23 B	16/16	20/20	25/25	25/25	25/25	63/63	63/63	80/80	100/100
690 VAC	AC-20 A / AC-20 B	16/16	20/20	25/25	32/32	40/40	63/63	80/80	100/100	125/125
690 VAC	AC-21 A / AC-21 B	16/16	20/20	25/25	32/32	40/40	63/63	80/80	100/100	125/125
690 VAC	AC-22 A / AC-22 B	16/16	20/20	25/25	32/32	32/40	40/63	63/80	80/100	100/125
690 VAC	AC-23 A / AC-23 B	16/16	20/20	25/25	25/25	25/25	40/40	40/40	63/63	63/63
110 VDC	DC-20 A / DC-20 B	16/16	20/20	25/25	32/32	40/40	63/63	80/80	100/100	125/125
110 VDC	DC-21 A / DC-21 B	16/16 <sup>(2)</sup>	20/20 <sup>(2)</sup>	25/25 <sup>(2)</sup>	32/32 <sup>(2)</sup>	40/40 <sup>(2)</sup>	63/63 <sup>(2)</sup>	80/80 <sup>(2)</sup>	100/100 <sup>(2)</sup>	125/125 <sup>(2)</sup>
250 VDC	DC-20 A / DC-20 B	16/16	20/20	25/25	32/32	40/40	63/63	80/80	100/100	125/125
250 VDC	DC-21 A / DC-21 B	16/16 <sup>(3)</sup>	20/20 <sup>(3)</sup>	25/25 <sup>(3)</sup>	32/32 <sup>(3)</sup>	40/40 <sup>(3)</sup>	63/63 <sup>(3)</sup>	80/80 <sup>(3)</sup>	100/100 <sup>(3)</sup>	125/125 <sup>(3)</sup>
400 VDC	DC-20 A / DC-20 B	16/16	20/20	25/25	32/32	40/40	63/63	80/80	100/100	125/125
400 VDC	DC-21 A / DC-21 B	16/16 <sup>(4)</sup>	20/20 <sup>(4)</sup>	25/25 <sup>(4)</sup>	25/25 <sup>(4)</sup>	25/25 <sup>(4)</sup>	40/40 <sup>(4)</sup>	40/40 <sup>(4)</sup>	63/63 <sup>(4)</sup>	63/63 <sup>(4)</sup>

### Operational power in AC-23 (kW)

400 VAC without pre-break AC (kW) <sup>(5)</sup>	7.5	9	11	15	18.5	30	37	45	55
500 VAC without pre-break AC (kW) <sup>(5)</sup>	7.5	9	11	15	18.5	30	37	45	55
690 VAC without pre-break AC (kW) <sup>(5)</sup>	7.5	11	15	15	15	30	37	45	55

### Fuse protected short-circuit withstand (kA rms prospective)<sup>(6)</sup>

Prospective short-circuit current (kA rms)	50	50	50	50	50	50	50	25	25
Associated fuse rating (A)	16	20	25	32	40	63	80	100	125

### Circuit breaker protected short-circuit withstand with any circuit breaker that ensures tripping in less than 0.3s

Rated short-time withstand current 0.3s. $I_{cw}$ (kA rms)	2.5	2.5	2.5	2.5	2.5	3	3	5	5
--	-----	-----	-----	-----	-----	---	---	---	---

### Short-circuit capacity (without protection)

Rated short-time withstand current 1s. $I_{cw}$ (kA rms)	1.26	1.26	1.26	1.26	1.26	1.5	1.5	2.75	2.75
Rated peak withstand current (kA peak) <sup>(6)</sup>	6	6	6	6	6	9	9	12	12

### Connection

Minimum Cu cable cross-section (mm <sup>2</sup> )	1.5	1.5	1.5	1.5	1.5	2.5	2.5	10	10
Maximum Cu cable cross-section (mm <sup>2</sup> )	16	16	16	16	16	35	35	70	70
Tightening torque min/max (Nm)	2 / 2.2	2 / 2.2	2 / 2.2	2 / 2.2	2 / 2.2	3.5 / 3.85	3.5 / 3.85	4/4.4	4/4.4

### Mechanical characteristics

Durability (number of operating cycles)	100 000	100 000	100 000	100 000	100 000	100 000	100 000	100 000	100 000
Operating effort - 3 pole device (Nm)	1	1	1	1	1	1.4	1.4	1.6	1.6
Operating effort - 4 pole device (Nm)	1.2	1.2	1.2	1.2	1.2	1.6	1.6	2	2
Weight of a 3 pole device (kg)	0.18	0.18	0.18	0.18	0.18	0.27	0.27	0.55	0.55
Weight of a 4 pole device (kg)	0.23	0.23	0.23	0.23	0.23	0.33	0.33	0.72	0.72
Weight of a 6 pole device (kg)	0.40	0.40	0.40	0.40	0.40	0.59	0.59	1.30	1.30
Weight of a 8 pole device (kg)	0.50	0.50	0.50	0.50	0.50	0.69	0.69	1.65	1.65
Weight of a 3 pole device (kg)	0.40	0.40	0.40	0.40	0.40	0.59	0.59	1.30	1.30
Weight of a 4 pole device (kg)	0.50	0.50	0.50	0.50	0.50	0.69	0.69	1.65	1.65

(1) Category with index A = frequent operation -

(4) 4-pole device with 2 poles in series per polarity.

Category with index B = infrequent operation.

(5) The power value is given for information only, the current values vary from one manufacturer to another.

(2) One pole per polarity.

(6) For a rated operational voltage  $U_e = 415$  VAC.

## Characteristics

### Characteristics according to IEC 60947-3

		SIRCO MV - from 100 to 160 A		
Thermal current $I_{th}$ (40 °C)		100 A	125 A	160 A
Rated insulation voltage $U_i$ (V)		800	800	800
Rated impulse withstand voltage $U_{imp}$ (kV)		8	8	8
<b>Rated operational currents <math>I_e</math> (A)</b>				
Rated voltage	Utilisation category	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>
415 VAC	AC-20 A / AC-20 B	100/100	125/125	160/160
415 VAC	AC-21 A / AC-21 B	100/100	125/125	160/160
415 VAC	AC-22 A / AC-22 B	100/100	125/125	160/160
415 VAC	AC-23 A / AC-23 B	100/100	125/125	125/160
500 VAC	AC-20 A / AC-20 B	100/100	125/125	160/160
500 VAC	AC-21 A / AC-21 B	100/100	125/125	160/160
500 VAC	AC-22 A / AC-22 B	100/100	125/125	125/160
500 VAC	AC-23 A / AC-23 B	80/80	100/100	100/100
690 VAC	AC-20 A / AC-20 B	100/100	125/125	160/160
690 VAC	AC-21 A / AC-21 B	100/100	125/125	160/160
690 VAC	AC-22 A / AC-22 B	63/80	80/100	100/125
690 VAC	AC-23 A / AC-23 B	63/63	80/80	80/80
110 VDC	DC-20 A / DC-20 B	100/100	125/125	160/160
110 VDC	DC-21 A / DC-21 B	100/100 <sup>(2)</sup>	125/125 <sup>(2)</sup>	160/160 <sup>(2)</sup>
250 VDC	DC-20 A / DC-20 B	100/100	125/125	160/160
250 VDC	DC-21 A / DC-21 B	100/100 <sup>(3)</sup>	125/125 <sup>(3)</sup>	160/160 <sup>(3)</sup>
400 VDC	DC-20 A / DC-20 B	100/100	125/125	160/160
400 VDC	DC-21 A / DC-21 B	100/100 <sup>(4)</sup>	125/125 <sup>(4)</sup>	160/160 <sup>(4)</sup>
<b>Operational power in AC-23 (kW)</b>				
400 VAC without pre-break AC (kW) <sup>(5)</sup>		45	55	75
500 VAC without pre-break AC (kW) <sup>(5)</sup>		45	55	75
690 VAC without pre-break AC (kW) <sup>(5)</sup>		45	75	75
<b>Fuse protected short-circuit withstand (kA rms prospective)<sup>(6)</sup></b>				
Prospective short-circuit current (kA rms)		100	65	50
Associated fuse rating (A)		100	125	160
<b>Circuit breaker protected short-circuit withstand with any circuit breaker that ensures tripping in less than 0.3s</b>				
Rated short-time withstand current 0.3s. $I_{cw}$ (kA rms)		7	7	7
<b>Short-circuit capacity (without protection)</b>				
Rated short-time withstand current 1s. $I_{cw}$ (kA rms)		4	4	4
Rated peak withstand current (kA peak) <sup>(6)</sup>		12	12	12
<b>Connection</b>				
Minimum Cu cable cross-section (mm <sup>2</sup> )		10	10	10
Maximum Cu cable cross-section (mm <sup>2</sup> )		70	70	70
Tightening torque min/max (Nm)		4 / 4.4	4 / 4.4	4 / 4.4
<b>Mechanical characteristics</b>				
Durability (number of operating cycles)		50 000	50 000	50 000
Operating effort - 3 pole device (Nm)		4	4	4
Operating effort - 4 pole device (Nm)		4.2	4.2	4.2
Weight of a 3 pole device (kg)		0.68	0.68	0.68
Weight of a 4 pole device (kg)		0.85	0.85	0.85

(1) Category with index A = frequent operation - Category with index B = infrequent operation.

(2) One pole per polarity.

(3) 2 poles in series for the "+" and 1 pole for the "-".

(4) 2 poles in series per polarity.

(5) The power value is given for information only, the current values vary from one manufacturer to another.

(6) For a rated operational voltage  $U_e$  = 415 VAC.

# SIRCO M and SIRCO MV


Universal load break switches

from 16 to 160 A

## Dimensions

### SIRCO M1 and M2 16 to 80 A

Toggle operation

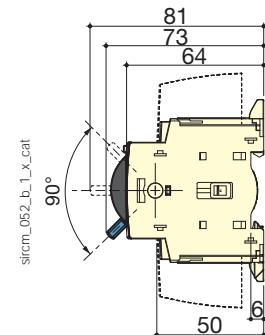


- Location for: 1 switched fourth pole module (1 per device max.) or 1 unswitched neutral pole or 1 protective earth module or 1 auxiliary contact.

- Position for 1 auxiliary contact module only.

Note: max 2 additional blocks.

Direct operation with handle

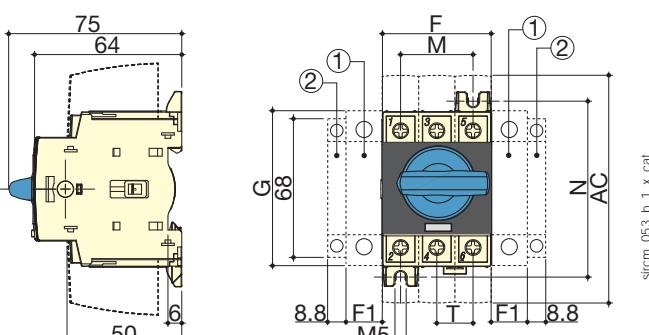


- Location for: 1 switched fourth pole module (1 per device max.) or 1 unswitched neutral pole or 1 protective earth module or 1 auxiliary contact.

- Position for 1 auxiliary contact module only.

Note: max 2 additional blocks.

External front operation

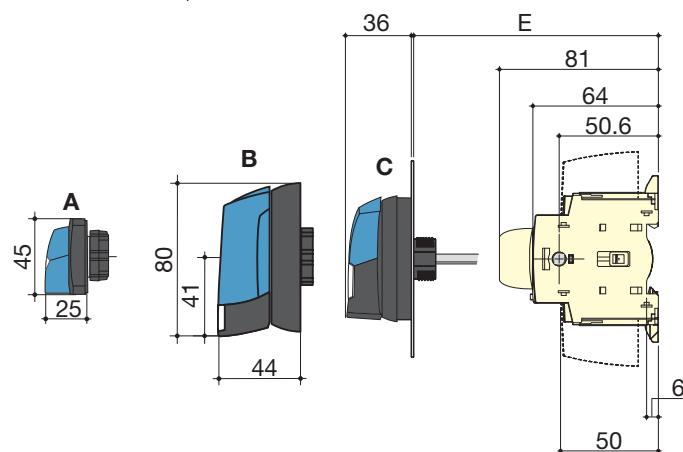


- Location for: 1 switched fourth pole module (1 per device max.) or 1 unswitched neutral pole or 1 protective earth module or 1 auxiliary contact.

- Position for 1 auxiliary contact module only.

Note: max 2 additional blocks.

External side operation

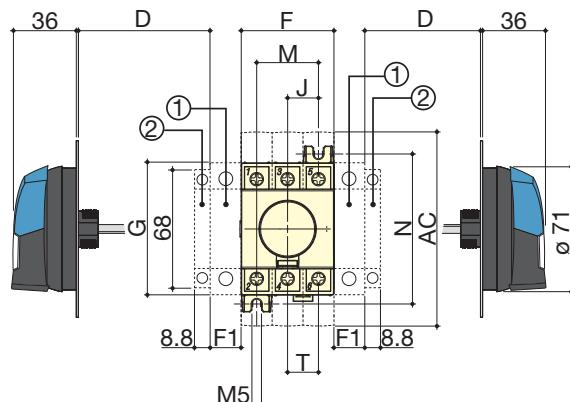

A. S000 Handle


B. S01 Handle

C. S00 Handle.


Rating (A) / Frame size	Overall dimensions				Terminal shrouds	Switch body				Switch mounting		Connection	
	D min	D max	E min	E max		AC	F	F1	G	J	M	N	T
16 ... 40 / M1	30	235	100	372	110	45	15	68	15	30	75	15	15
63 ... 80 / M2	30	235	100	372	110	52.5	17.5	76	17.5	35	85	17.5	17.5

### SIRCO M1 and M2 16 to 80 A (continued)

Direct front operation for  
6/8-pole load break switches or 3/4-pole changeover switches

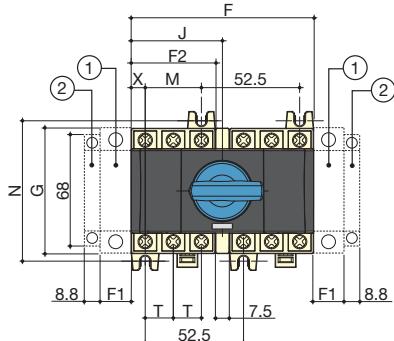

External front operation for 6/8-pole load break switches or  
3/4-pole changeover switches

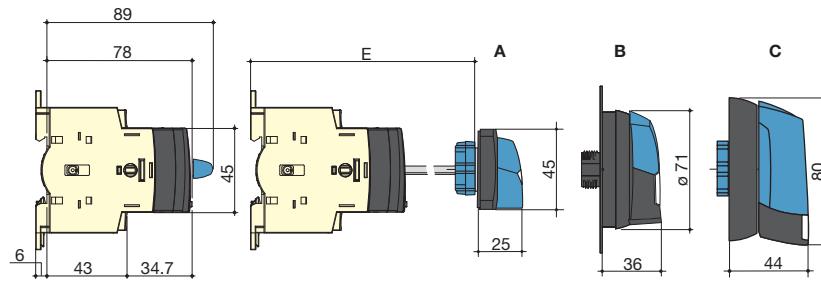

sircm\_182\_d\_1x\_cat

- Location for: 1 switched fourth pole module (1 per device max.) **or** 1 unswitched neutral pole **or** 1 protective earth module **or** 1 auxiliary contact.


- Position for 1 auxiliary contact module only.

Note: **max 2 additional blocks.**

Rating (A) / Frame size	Overall dimensions		Switch body				Switch mounting		Connection		
	E min	E max	F	F1	F2	G	J	M	N	T	X
16 ... 40 / M1	105	372	97.5	15	45	68	48.75	30	75	15	7.5
63 ... 80 / M2	105	372	105	17.5	52.5	76	52.5	35	85	17.5	8.75

### SIRCO M3 100 to 125 A

Direct operation with handle

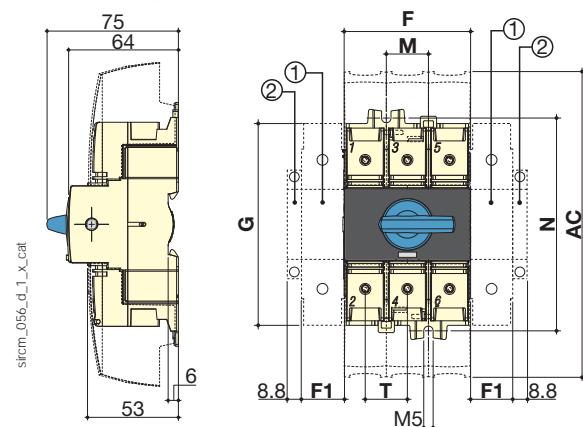


External front operation

- Location for: 1 switched fourth pole module (1 per device max.) **or** 1 unswitched neutral pole **or** 1 protective earth module **or** 1 auxiliary contact.

- Position for 1 auxiliary contact module only.

Note: **max 2 additional blocks.**

External side operation

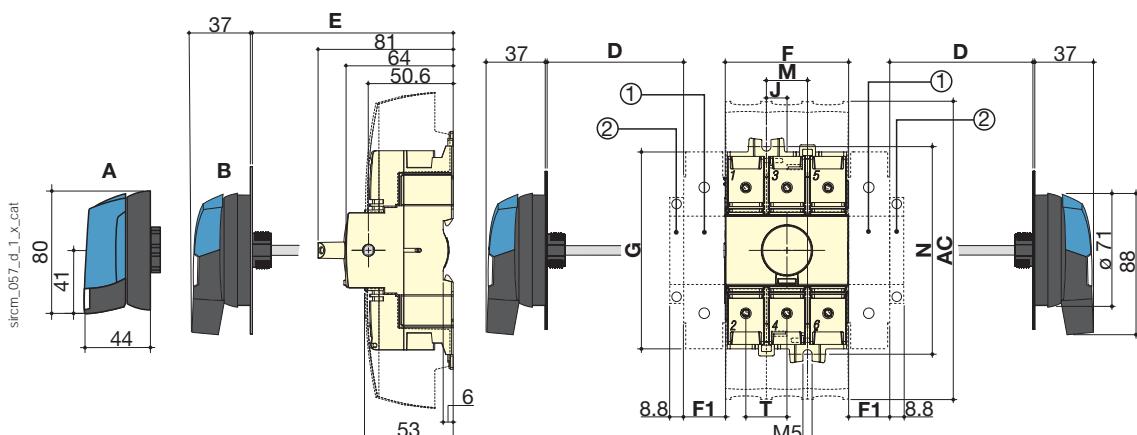

- Location for: 1 switched fourth pole module (1 per device max.) **or** 1 unswitched neutral pole **or** 1 protective earth module **or** 1 auxiliary contact.

- Position for 1 auxiliary contact module only.

Note: **max 2 additional blocks.**

A. S01 handle  
B. S00 handle

Rating (A) / Frame size	D min	D max	E min	E max	Terminal shrouds	F	F1	G	J	Switch mounting	Connection
					AC					M	N
100 ... 125 / M3	30	201	100	372	189	78	26	124.6	13	26	131.4
										T	
										26	

# SIRCO M and SIRCO MV


Universal load break switches

from 16 to 160 A


## Dimensions (continued)

### SIRCO M3 6/8 P and changeover switch M3 100 to 125 A

Direct front operation for 3/4 pole changeover switches

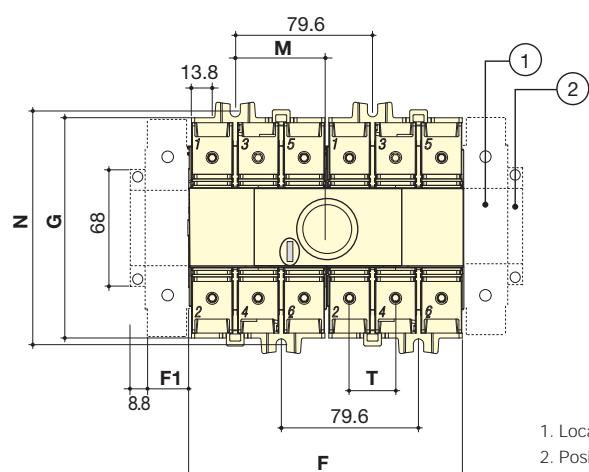

External front operation for 3/4 pole changeover switches

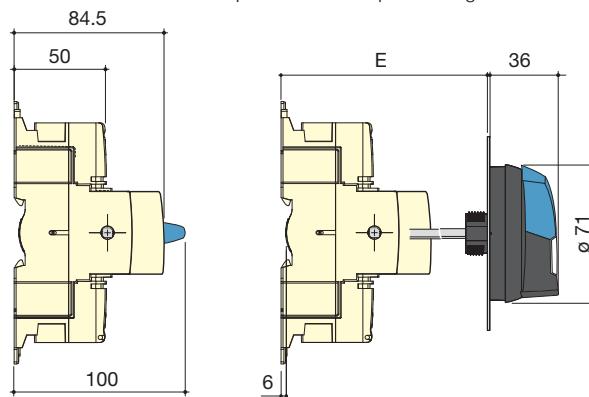

sircm\_183\_e\_1\_x\_cat

1. Location for: 1 main pole or 1 auxiliary contact (See accessory pages)


2. Position for 1 auxiliary contact module only.

Note: max 2 additional blocks.

Rating (A) / Frame size	Overall dimensions		Switch body		Switch mounting		Connection
	E min	E max	F	F1	G	M	
100 ... 125 / M3	105	372	159	26	124.5	52.8	131.5
							26


### SIRCO MV 100 to 160 A

Direct front operation

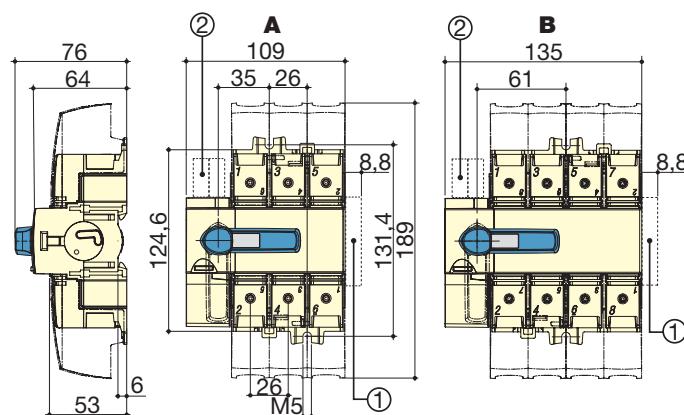

A. 3 poles

B. 4 poles

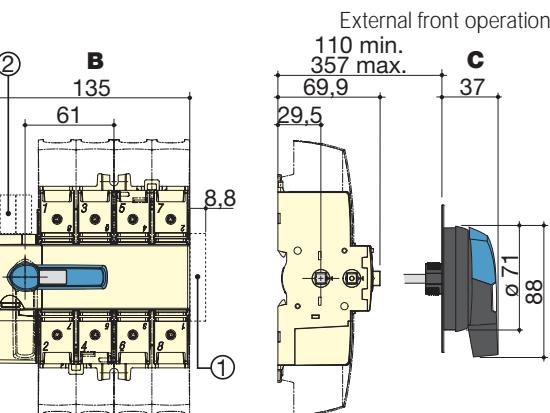

C. S0 type handle


D. S1 type handle

1. Maximum 4 "M" type auxiliary contacts

2. Maximum 2 "U" type auxiliary contacts

sircm\_058\_c\_1\_x\_cat


External side operation

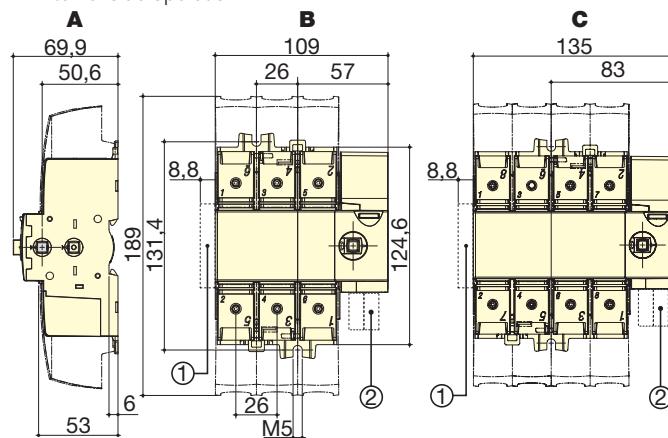

A. Right side operation

B. 3 poles

C. 4 poles

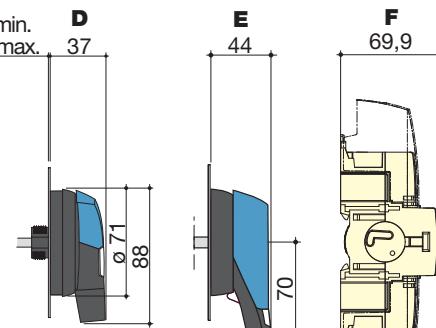

D. S0 type handle

E. S1 type handle

1. Maximum 4 "M" type auxiliary contacts

2. Maximum 2 "U" type auxiliary contacts

sircm\_059\_d\_1\_x\_cat

## Dimensions for external handles

## SIRCO M1 and M2

Handle type	Front operation		Side operation		Door drilling
	Direction of operation	Direction of operation	Direction of operation	Door drilling	
<b>S000 type</b> Load break switches				With 4 fixing screws 	With fixing nut 
<b>S000 type</b> Transfer switches I-0-II and I - I+II - II				With 4 fixing screws 	With fixing nut 
<b>S00 type</b> Load break switches				IP55 with 2 fixing clips 	IP65 with 4 fixing screws 
<b>S00 type</b> Transfer switches I-0-II and I - I+II - II				IP55 with 2 fixing clips 	IP65 with 4 fixing screws 






# SIRCO M and SIRCO MV

Universal load break switches










from 16 to 160 A

## Dimensions for external handles

SIRCO M1 and M2 - 3/4 P and 6/8 P

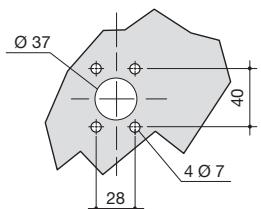Handle type	Front operation		Side operation Direction of operation	Door drilling
	Direction of operation	Right side operation		
<b>S01 type</b> Load break switches			IP65 with 4 fixing screws	
<b>S01 type</b> Transfer switches I-0-II and I - I+II - II			IP65 with 4 fixing screws	

SIRCO M3

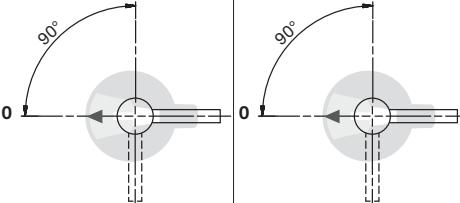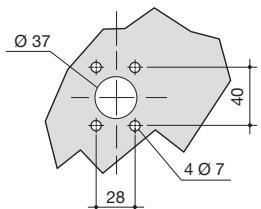Handle type	Front operation		Side operation Direction of operation	Door drilling
	Direction of operation	Right side operation		
<b>S0 type</b> Load break switches			IP55 with 2 fixing clips	
			IP65 with 4 fixing screws	
			With fixing nut	
Handle type	Front operation		Side operation Direction of operation	Door drilling
	Direction of operation	Right side operation		
<b>S01 type</b> Load break switches			IP65 with 4 fixing screws	







poign\_018\_a\_1\_gb\_cat






poign\_019\_b\_1\_gb\_cat

poign\_026\_a\_1\_gb\_cat

poign\_018\_a\_1\_gb\_cat

## SIRCO MV

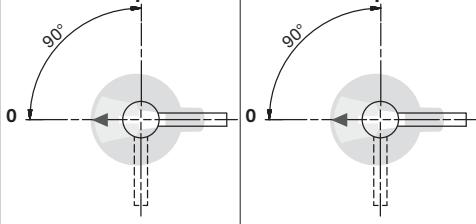Handle type	Front operation		Side operation		Door drilling
	Direction of operation	Direction of operation	Direction of operation	Door drilling	
<b>S0 type</b> Load break switches				 	


Handle type	Front operation		Side operation		Door drilling
	Direction of operation	Direction of operation	Direction of operation	Door drilling	
<b>S1 type</b> Load break switches				 	

poign\_026\_a\_1\_gb\_cat

poign\_027\_a\_1\_gb\_cat

# SIRCO

## Load break switches for power distribution from 125 to 5000 A

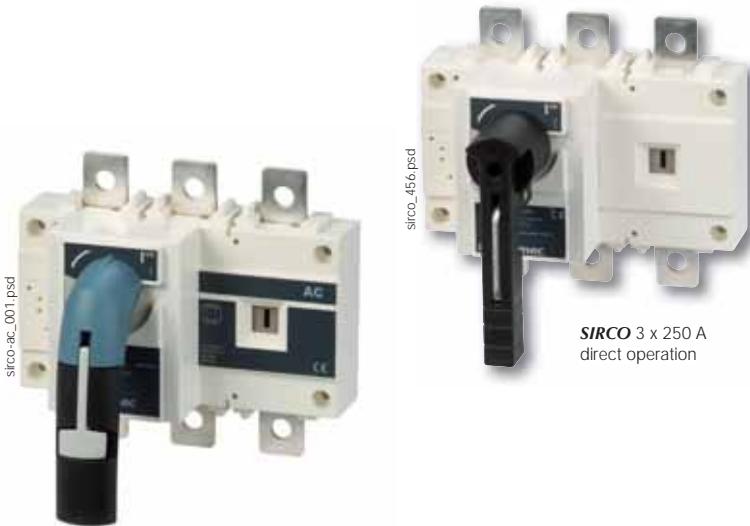

### Function

**SIRCO** and **SIRCO AC** are manually or remotely operated multipolar load break switches. They make and break under load conditions and provide safe isolation. **SIRCO** are designed for 415 VAC and DC low voltage electrical circuits. **SIRCO AC** are designed for heavy duty applications up to 1000 VAC - AC 23.

### General characteristics

- Double positive break indication given through a position indication window, located directly on the product, and by the operating handle.
- Severe load duty categories (AC-22 and AC-23).
- High resistance to damp heat (supplied "tropicalised").

### Advantages

#### Reliability and performance

The double breaking per pole, achieved through its sliding bar contact system, is a proven design that offers very high durability and short-circuit withstand. Improved breaking performance with quick opening and rapid closure.

#### Safety of property and personnel

The position indicator is located directly on the sliding bar contact mechanism, ensuring it can be seen in all circumstances.

The use of glass fibre reinforced polyester gives the **SIRCO** and **SIRCO AC** both high mechanical and thermal resistance.

#### Simplicity

The standardisation of the **SIRCO** and **SIRCO AC** range and its wide choice of common accessories enable:

- Simple mounting.
- Reduced stock management and storage costs.

#### Easy to install

The outdoors ranges are easy to install thanks to:

- A good centre-to-centre distance (up to 120 mm).
- Connection up to 6 x 185 mm<sup>2</sup>.
- Connection accessories which facilitate both flat and edgewise connections.

### The solution for

- > Main switchboard
- > Distribution panel
- > Emergency breaking
- > Network coupling
- > Local safety breaking



### Strong points

- > Reliability and performance
- > Safety of property and personnel
- > Simplicity
- > Easy to install

### Compliance with standards

- > IEC 60947-3



### Approvals and certifications<sup>(1)</sup>



(1) Product reference on request.


### Enclosures

- > The **SIRCO** and **SIRCO AC** range can be easily fitted in our enclosures and cabinets designed for electrical distribution.



## What you need to know

- In front **direct** or **external** operation, SIRCO is available in 3 and 4-pole versions from 125 to 5000 A.
- It can be ordered in 6 or 8-pole versions from 125 to 1600 A.
- SIRCO is available in a polyester or sheet metal enclosure from 125 to 1250 A.

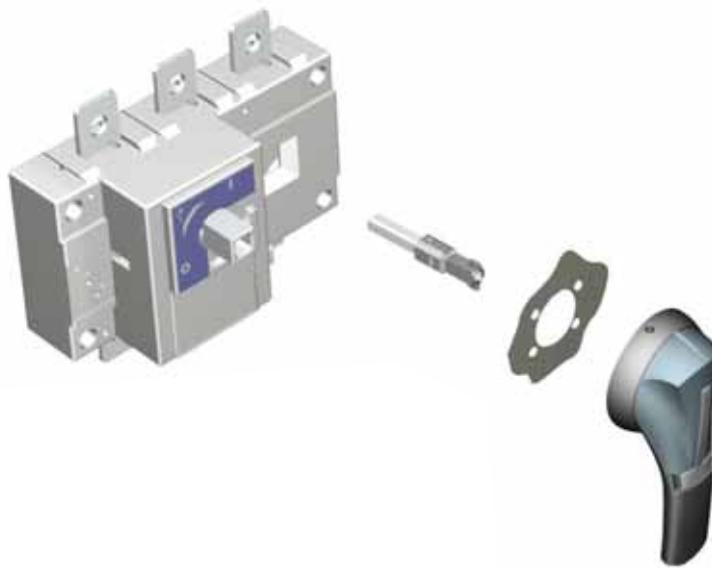

sirco\_372.eps


For ratings 2000, 2500 and 3200A, a copper **bar connection kit** enables the connection between the two power terminals of one pole.

**Flat connection**  
top or bottom



acces\_220.eps

**Edgewise connection**  
top or bottom

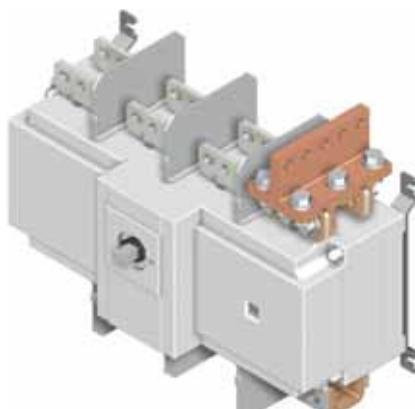

acces\_223\_b\_2\_cat.eps

## SIRCO - References

### Standard applications - Front operation - 3 & 4-pole

Rating (A) / Frame size	No. of poles	Switch body <sup>(1)</sup>	Direct handle	External handle	Shaft for external handle	Auxiliary contact	Terminal shrouds	Terminal screens
125 A / B3	3 P	2600 3014	J0 type Black 1102 1111 <sup>(2)</sup>				3 P 2694 3014 <sup>(3)</sup>	3 P 2698 3012 <sup>(3)</sup>
	4 P	2600 4014					4 P 2694 4014 <sup>(3)</sup>	4 P 2698 4012 <sup>(3)</sup>
160 A / B3	3 P	2600 3017	Red 1103 1111				3 P 2694 3021 <sup>(3)</sup>	3 P 2698 3020 <sup>(3)</sup>
	4 P	2600 4017					4 P 2694 4021 <sup>(3)</sup>	4 P 2698 4020 <sup>(3)</sup>
200 A / B4	3 P	2600 3021			200 mm 1400 1020		3 P 2694 3051 <sup>(3)</sup>	3 P 2698 3050 <sup>(3)</sup>
	4 P	2600 4021			320 mm 1400 1032 <sup>(2)</sup>		4 P 2694 4051 <sup>(3)</sup>	4 P 2698 4050 <sup>(3)</sup>
250 A / B4	3 P	2600 3026			500 mm 1400 1050		3 P 2694 3051 <sup>(3)</sup>	3 P 2698 3050 <sup>(3)</sup>
	4 P	2600 4026					4 P 2694 4051 <sup>(3)</sup>	4 P 2698 4050 <sup>(3)</sup>
315 A / B5	3 P	2600 3032	J1 type Black 1112 1111			1 <sup>st</sup> NO/NC contact 2699 0031	3 P 2698 3080 <sup>(3)</sup>	3 P 2698 4080 <sup>(3)</sup>
	4 P	2600 4032				2 <sup>nd</sup> NO/NC contact 2699 0032		
400 A / B5	3 P	2600 3041	Red 1113 1111		200 mm 1401 1520		3 P 2698 3120 <sup>(3)</sup>	3 P 2698 4120 <sup>(3)</sup>
	4 P	2600 4041			320 mm 1401 1532 <sup>(2)</sup>			
500 A / B5	3 P	2600 3051			400 mm 1401 1540		3 P 2698 3120 <sup>(3)</sup>	3 P 2698 4120 <sup>(3)</sup>
	4 P	2600 4051						
630 A / B5	3 P	2600 3064				1 <sup>st</sup> /2 <sup>nd</sup> NO/NC contact included	3 P 2698 3200 <sup>(3)</sup>	3 P 2698 4200 <sup>(3)</sup>
	4 P	2600 4064						
800 A / B6	3 P	2600 3081			200 mm 2799 3015		3 P 2698 3200 <sup>(3)</sup>	3 P 2698 4200 <sup>(3)</sup>
	4 P	2600 4081			320 mm 2799 3018 <sup>(2)</sup>			
1000 A / B6	3 P	2600 3099	J4 type Blue 1142 1111 <sup>(2)</sup>		450 mm 2799 3019		3 P 2698 3200 <sup>(3)</sup>	3 P 2698 4200 <sup>(3)</sup>
	4 P	2600 4099						
CD 1250 A / B6	3 P	2600 3119	Red 1143 1111				3 P 2698 3200 <sup>(3)</sup>	3 P 2698 4200 <sup>(3)</sup>
	4 P	2600 4119						
1250 A / B7	3 P	2600 3121					3 P 2698 3200 <sup>(3)</sup>	3 P 2698 4200 <sup>(3)</sup>
	4 P	2600 4121						
1600 A / B7	3 P	2600 3161					3 P 2698 3200 <sup>(3)</sup>	3 P 2698 4200 <sup>(3)</sup>
	4 P	2600 4161						
1800 A / B7	3 P	2600 3181					3 P 2698 3200 <sup>(3)</sup>	3 P 2698 4200 <sup>(3)</sup>
	4 P	2600 4181						
2000 A / B8	3 P	2600 3200	S5 type Black 2799 7042 <sup>(2)</sup>		200 mm 2799 7136 <sup>(2)</sup>		3 P 2698 3200 <sup>(3)</sup>	3 P 2698 4200 <sup>(3)</sup>
	4 P	2600 4200			Red IP65 2799 7134			
2500 A / B8	3 P	2600 3250			320 mm 2799 3015		3 P 2698 3200 <sup>(3)</sup>	3 P 2698 4200 <sup>(3)</sup>
	4 P	2600 4250			450 mm 2799 3018 <sup>(2)</sup>			
3200 A / B8	3 P	2600 3320			450 mm 2799 3019		3 P 2698 3200 <sup>(3)</sup>	3 P 2698 4200 <sup>(3)</sup>
	4 P	2600 4320						
4000 A / B9	3 P	2600 3401	V0 type Black 2799 7072 <sup>(2)</sup>		450 mm 2799 7155 <sup>(2)</sup>	1 <sup>st</sup> /2 <sup>nd</sup> NO/NC contact included	3 P 2698 3200 <sup>(3)</sup>	3 P 2698 4200 <sup>(3)</sup>
	4 P	2600 4401						
5000 A / B9	3 P	2600 3500					3 P 2698 3200 <sup>(3)</sup>	3 P 2698 4200 <sup>(3)</sup>
	4 P	2600 4500						

(1) Device available enclosed, see "Enclosed load break switches" pages.

(2) Standard.

(3) Top or bottom.

**SIRCO AC** - References

## Heavy duty applications - Front operation 3 &amp; 4 pole

Rating (A) / Frame size	No. of poles	Switch body	Direct handle	External handle	Shaft for external handle	Auxiliary contact	Terminal shrouds	Terminal screens
200 A / B4	3 P	26AC 3020					3P 2694 3021 <sup>(2)(3)</sup> 4 P 2694 4021 <sup>(2)(3)</sup>	3P 2698 3020 <sup>(3)</sup> 4 P 2698 4020 <sup>(3)</sup>
	4 P	26AC 4020						
250 A / B4	3 P	26AC 3025		J1 type Black IP55 1112 1111 <sup>(1)</sup>	200 mm 1400 1020 320 mm 1400 1032 <sup>(1)</sup> 500 mm 1400 1050		3P 2694 3021 <sup>(2)(3)</sup> 4 P 2694 4021 <sup>(2)(3)</sup>	3P 2698 3020 <sup>(3)</sup> 4 P 2698 4020 <sup>(3)</sup>
	4 P	26AC 4025						
315 A / B4	3 P	26AC 3031		J1 type Black IP55 1112 1111 <sup>(1)</sup>	200 mm 1400 1020 320 mm 1400 1032 <sup>(1)</sup> 500 mm 1400 1050		3P 2694 3021 <sup>(2)(3)</sup> 4 P 2694 4021 <sup>(2)(3)</sup>	3P 2698 3020 <sup>(3)</sup> 4 P 2698 4020 <sup>(3)</sup>
	4 P	26AC 4031						
400 A / B5	3 P	26AC 3040		J1 type Red IP65 1113 1111	200 mm 1400 1020 320 mm 1400 1032 <sup>(1)</sup> 500 mm 1400 1050		3P 2694 3051 <sup>(2)(3)</sup> 4 P 2694 4051 <sup>(2)(3)</sup>	3P 2698 3050 <sup>(3)</sup> 4 P 2698 4050 <sup>(3)</sup>
	4 P	26AC 4040						
500 A / B5	3 P	26AC 3050		J1 type Black IP55 1112 1111 <sup>(1)</sup>	200 mm 1400 1020 320 mm 1400 1032 <sup>(1)</sup> 500 mm 1400 1050		3P 2694 3051 <sup>(2)(3)</sup> 4 P 2694 4051 <sup>(2)(3)</sup>	3P 2698 3050 <sup>(3)</sup> 4 P 2698 4050 <sup>(3)</sup>
	4 P	26AC 4050						
CD 630 A / B5	3 P	26AC 3063		J1 type Black IP55 1112 1111 <sup>(1)</sup>	200 mm 1400 1020 320 mm 1400 1032 <sup>(1)</sup> 500 mm 1400 1050		3P 2694 3051 <sup>(2)(3)</sup> 4 P 2694 4051 <sup>(2)(3)</sup>	3P 2698 3050 <sup>(3)</sup> 4 P 2698 4050 <sup>(3)</sup>
	4 P	26AC 4063						
630 A / B6	3 P	26AC 3064		J1 type Black IP55 1112 1111 <sup>(1)</sup>	200 mm 1400 1020 320 mm 1400 1032 <sup>(1)</sup> 500 mm 1400 1050	1 <sup>st</sup> contact NO/NC 2699 0031 2 <sup>nd</sup> contact NO/NC 2699 0032		3P 2698 3080 <sup>(2)(3)</sup> 4 P 2698 4080 <sup>(2)(3)</sup>
	4 P	26AC 4064						
800 A / B6	3 P	26AC 3080		J4 type Blue IP65 1142 1111 <sup>(1)</sup>	200 mm 1401 1520 320 mm 1401 1532 <sup>(1)</sup> 400 mm 1401 1540		3P 2698 3080 <sup>(2)(3)</sup> 4 P 2698 4080 <sup>(2)(3)</sup>	3P 2698 3080 <sup>(2)(3)</sup> 4 P 2698 4080 <sup>(2)(3)</sup>
	4 P	26AC 4080						
1000 A / B6	3 P	26AC 3100		J4 type Blue IP65 1142 1111 <sup>(1)</sup>	200 mm 1401 1520 320 mm 1401 1532 <sup>(1)</sup> 400 mm 1401 1540		3P 2698 3120 <sup>(2)(3)</sup> 4 P 2698 4120 <sup>(2)(3)</sup>	3P 2698 3120 <sup>(2)(3)</sup> 4 P 2698 4120 <sup>(2)(3)</sup>
	4 P	26AC 4100						
CD 1250 A / B6	3 P	26AC 3120		J4 type Red IP65 1143 1111	200 mm 1401 1520 320 mm 1401 1532 <sup>(1)</sup> 400 mm 1401 1540		3P 2698 3120 <sup>(2)(3)</sup> 4 P 2698 4120 <sup>(2)(3)</sup>	3P 2698 3120 <sup>(2)(3)</sup> 4 P 2698 4120 <sup>(2)(3)</sup>
	4 P	26AC 4120						
1250 A / B7	3 P	26AC 3121		J4 type Blue IP65 1142 1111 <sup>(1)</sup>	200 mm 1401 1520 320 mm 1401 1532 <sup>(1)</sup> 400 mm 1401 1540		3P 2698 3120 <sup>(2)(3)</sup> 4 P 2698 4120 <sup>(2)(3)</sup>	3P 2698 3120 <sup>(2)(3)</sup> 4 P 2698 4120 <sup>(2)(3)</sup>
	4 P	26AC 4121						
1600 A / B7	3 P	26AC 3160		S5 type Black IP65 2799 7042 <sup>(1)</sup>	200 mm 2799 3015 320 mm 2799 3018 <sup>(1)</sup>		3P 2698 3200 <sup>(2)(3)</sup> 4 P 2698 4200 <sup>(2)(3)</sup>	3P 2698 3200 <sup>(2)(3)</sup> 4 P 2698 4200 <sup>(2)(3)</sup>
	4 P	26AC 4160						
2000 A / B8	3 P	26AC 3200		S5 type Black IP65 2799 7042 <sup>(1)</sup>	200 mm 2799 3015 320 mm 2799 3018 <sup>(1)</sup>		3P 2698 3200 <sup>(2)(3)</sup> 4 P 2698 4200 <sup>(2)(3)</sup>	3P 2698 3200 <sup>(2)(3)</sup> 4 P 2698 4200 <sup>(2)(3)</sup>
	4 P	26AC 4200						
4000 A / B9	3 P	26AC 3200	V0 type Black 2799 7072 <sup>(1)</sup>	V0 type Black 2799 7155 <sup>(1)</sup>	450 mm 2799 3019	1 <sup>st</sup> / 2 <sup>nd</sup> included		3/4P 1509 4200 <sup>(4)</sup>
	4 P	26AC 4200						

(1) Standard.

(2) Mandatory for voltage greater than 415 VAC.

(3) Top or bottom.

(4) Top and bottom.

## SIRCO - References

### Standard applications - Front operation - 6 & 8-pole

Rating (A) / Frame size	No. of poles	Switch body	Direct handle	External handle	Shaft for external handle	Auxiliary contact	Terminal shrouds	Terminal screens
125 A / B3 <sub>DS</sub>	6 P	2601 6013	J2 type Black 1122 1111 <sup>(1)</sup> Red 1123 1111	S2 type Black IP55 1421 2111 <sup>(1)</sup> Red IP65 1424 2111	200 mm 1400 1020 320 mm 1400 1032 <sup>(1)</sup>		6 P 2694 3014 <sup>(2)(3)</sup> 8 P 2694 4014 <sup>(2)(3)</sup>	6 P 1509 3012 <sup>(4)</sup> 8 P 1509 4012 <sup>(4)</sup>
	8 P	2601 8013						
160 A / B3 <sub>DS</sub>	6 P	2601 6016					6 P 2694 3021 <sup>(2)(3)</sup> 8 P 2694 4021 <sup>(2)(3)</sup>	6 P 1509 3025 <sup>(4)</sup> 8 P 1509 4025 <sup>(4)</sup>
	8 P	2601 8016						
250 A / B4 <sub>DS</sub>	6 P	2601 6025					6 P 2694 3021 <sup>(2)(3)</sup> 8 P 2694 4021 <sup>(2)(3)</sup>	6 P 1509 3025 <sup>(4)</sup> 8 P 1509 4025 <sup>(4)</sup>
	8 P	2601 8025						
400 A / B5 <sub>DS</sub>	6 P	2601 6040	J3 type Black 1132 1111 <sup>(1)</sup> Red 1133 1111	Type S4 Black IP65 1443 3111 <sup>(1)</sup> Red IP65 1444 3111	200 mm 1401 1520 320 mm 1401 1532 <sup>(1)</sup>	1 <sup>st</sup> NO/NC contact 2699 0061 2 <sup>nd</sup> NO/NC contact 2699 0062	6 P 2694 3051 <sup>(2)(3)</sup> 8 P 2694 4051 <sup>(2)(3)</sup>	6 P 1509 3063 <sup>(4)</sup> 8 P 1509 4063 <sup>(4)</sup>
	8 P	2601 8040						
630 A / B5 <sub>DS</sub>	6 P	2601 6063						
	8 P	2601 8063						
800 A / B6 <sub>DS</sub>	6 P	2601 6080						
	8 P	2601 8080						
1000 A / B6 <sub>DS</sub>	6 P	2601 6100	J4 type Blue 1142 1111 <sup>(2)</sup> Red 1143 1111	Type V1 Black IP65 2799 7145 <sup>(1)</sup>	320 mm 2799 3018 <sup>(1)</sup>		6 P 1509 3080 <sup>(4)</sup> 8 P 1509 4080 <sup>(4)</sup>	
	8 P	2601 8100						
1250 A / B7 <sub>DS</sub>	6 P	2601 6120						
	8 P	2601 8120						
1600 A / B7 <sub>DS</sub>	6 P	2601 6160					6 P 1509 3160 <sup>(4)</sup> 8 P 1509 4160 <sup>(4)</sup>	
	8 P	2601 8160						

(1) Standard.

(2) Top or bottom on the front or rear of the device.

(3) Select 2 sets for front or rear.

(4) Top or bottom at the front of the device.

## Accessories

### Direct operation handle

SIRCO direct operation handle				
Rating (A) / Frame size	No. of poles	Handle type	Handle colour	Reference
125 ... 160 / B3	3/4 P	J0	Black	1102 1111 <sup>(1)</sup>
125 ... 160 / B3	3/4 P	J0	Red	1103 1111
125 ... 160 / B3 <sub>DS</sub>	6/8 P	J2	Black	1122 1111 <sup>(1)</sup>
125 ... 160 / B3 <sub>DS</sub>	6/8 P	J2	Red	1123 1111
200 ... 630 / B4-B5	3/4 P	J1	Black	1112 1111 <sup>(1)</sup>
200 ... 630 / B4-B5	3/4 P	J1	Red	1113 1111
250 ... 630 / B4 <sub>DS</sub> -B5 <sub>DS</sub>	6/8 P	J3	Black	1132 1111 <sup>(1)</sup>
250 ... 630 / B4 <sub>DS</sub> -B5 <sub>DS</sub>	6/8 P	J3	Red	1133 1111
800 ... 1800 / B6...B7	3/4 P	J4	Blue	1142 1111 <sup>(1)</sup>
800 ... 1800 / B6...B7	3/4 P	J4	Red	1143 1111
800 ... 1600 / B6 <sub>DS</sub> -B7 <sub>DS</sub>	6/8 P	J4	Blue	1142 1111 <sup>(1)</sup>
800 ... 1600 / B6 <sub>DS</sub> -B7 <sub>DS</sub>	6/8 P	J4	Red	1143 1111
1800 ... 3200 / B8	3/4 P	S5	Black	2799 7042 <sup>(1)</sup>
1800 ... 3200 / B8	3/4 P	S5	Red	2799 7043
4000 ... 5000 / B9	3/4 P	V0	Black	2799 7072 <sup>(1)</sup>

(1) Standard.



### SIRCO AC direct operation handle

Rating (A) / Frame size	No. of poles	Handle type	Handle colour	Reference
200 ... CD 630 / B4 ... B5	3/4 P	J1	Black	1112 1111 <sup>(1)</sup>
200 ... CD 630 / B4 ... B5	3/4 P	J1	Red	1113 1111
630 ... 1600 / B6 ... B7	3/4 P	J4	Blue	1142 1111 <sup>(1)</sup>
630 ... 1600 / B6 ... B7	3/4 P	J4	Red	1143 1111
2000 / B8	3/4 P	S5	Black	2799 7042 <sup>(1)</sup>
2000 / B8	3/4 P	S5	Red	2799 7043
4000 / B9	3/4 P	V0	Black	2799 7072 <sup>(1)</sup>

(1) Standard.

### Door interlocked external operation handle

SIRCO and SIRCO AC external front operation handle							
Rating (A) / Frame size		No. of poles	Handle type	Handle colour	External IP <sup>(1)</sup>	Reference	
SIRCO	SIRCO AC	3/4 P	S2	Black	IP55	1421 2111 <sup>(2)</sup>	
				Black	IP65	1423 2111	
				Red	IP65	1424 2111	
		6/8 P		Black	IP55	1421 2111 <sup>(2)</sup>	
				Black	IP65	1423 2111	
				Red	IP65	1424 2111	
250 ... 630 / B4 <sub>DS</sub> -B5 <sub>DS</sub>	-	6/8 P	S4	Black	IP65	1443 3111	
				Red	IP65	1444 3111	
		6/8 P		Black	IP65	2799 7145 <sup>(2)</sup>	
				Red	IP65	2799 7136 <sup>(2)</sup>	
800 ... 1600 / B6 <sub>DS</sub> -B7 <sub>DS</sub>	-	6/8 P	V2	Black	IP65	1443 3111 <sup>(2)</sup>	
				Red	IP65	1444 3111	
		3/4 P		Black	IP65	2799 7134	
				Red	IP65	1453 8111	
2000 ... 3200 / B8	2000 / B8	3/4 P	S5	Black	IP65	1454 8111	
				Red	IP65	2799 7155 <sup>(2)</sup>	
4000 ... 5000 / B9	4000 / B9	3/4 P	V0	Black	IP65	2799 7155 <sup>(2)</sup>	

(1) IP: protection degree according to IEC 60529 standard.

(2) Standard.

### Use

Door interlocked external operation handles include an escutcheon, are padlockable and must be utilised with an extension shaft.



## Accessories (continued)

### Shaft for external operation

#### For 3/4 pole SIRCO and SIRCO AC

Rating (A) / Frame size		Dimension X (mm)	Length (mm)	Reference
125 ... 160 / B3	SIRCO AC	125 ... 250	200	1400 1020
		125 ... 300	250	1400 1025
		125 ... 370	320	1400 1032
		125 ... 550	500	1400 1050
		125 ... 850	750	1400 1075
200 ... 250 / B4	200 ... 315 / B4	135 ... 265	200	1400 1020
		135 ... 315	250	1400 1025
		135 ... 385	320	1400 1032
		135 ... 565	500	1400 1050
		135 ... 880	750	1400 1075
315 ... 630 / B5	400 ... CD 630 / B5	165 ... 295	200	1400 1020
		165 ... 345	250	1400 1025
		165 ... 415	320	1400 1032
		165 ... 595	500	1400 1050
		165 ... 940	750	1400 1075
800 ... 1800 / B6...B7	630 ... 1600 / B6 ... B7	221 ... 343	200	1401 1520
		221 ... 463	320	1401 1532
		221 ... 543	400	1401 1540
2000 ... 3200 / B8	2000 / B8	415 ... 570	200	2799 3015
		415 ... 690	320	2799 3018
		415 ... 820	450	2799 3019
4000 ... 5000 / B9	4000 / B9	550 ... 680	200	2799 3015
		651 ... 921	320	2799 3018

#### Use


Standard lengths:

- 200 mm
- 250 mm
- 300 mm
- 400 mm
- 500 mm
- 750 mm

Other lengths available:  
- please consult us.




acces\_368.eps

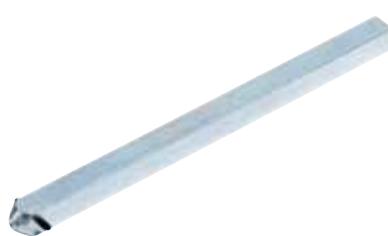

acces\_144.eps

#### For 6/8-pole SIRCO

Rating (A) / Frame size	Dimension X (mm)	Length (mm)	Reference
125 ... 160 / B3 <sub>DS</sub>	270 ... 436	200	1400 1020
125 ... 160 / B3 <sub>DS</sub>	270 ... 556	320	1400 1032
250 ... 630 / B4 <sub>DS</sub> -B5 <sub>DS</sub>	221 ... 308	200	1401 1520
250 ... 630 / B4 <sub>DS</sub> -B5 <sub>DS</sub>	221 ... 428	320	1401 1532
250 ... 630 / B4 <sub>DS</sub> -B5 <sub>DS</sub>	221 ... 508	400	1401 1540

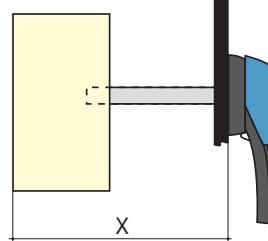

acces\_202\_a\_1\_X\_cat

### Alternative handle cover colours

#### Use

For S type handles.

Handle colour	To be ordered in multiples of	Handle type	Reference
Light grey	50	S2, S3	1401 0001
Dark grey	50	S2, S3	1401 0011
Light grey	50	S4	1401 0031
Dark grey	50	S4	1401 0041



acces\_198.eps

### S type handle adapter

#### Use

Adds 12 mm to the depth of the handle.

Handle colour	To be ordered in multiples of	External IP <sup>(1)</sup>	Reference
Black	1	IP65	1493 0000

(1) IP: protection degree according to IEC 60529 standard.



acces\_187.eps

## Shaft guide for external operation

**Use**

For use with S-type handles, to guide the shaft extension into the external handle. This accessory enables the handle to engage the extension shaft with a misalignment of up to 15 mm.  
Recommended for shaft lengths over 320 mm.



acces\_260.eps

Description	Reference
Shaft guide	1429 0000

## Auxiliary contact

**Use**

- Pre-break and signalling of positions 0 and I:  
- 1 to 2 NO/NC auxiliary contacts.  
- 1 to 4 NO+NC auxiliary contacts.  
- 1 to 2 low level NO/NC auxiliary contacts.

**Characteristics**

NO/NC A/C: IP2 with front operation.

**Connection to the control circuit**

6.35 mm fast-on terminal.

**Electrical characteristics**

30 000 operations.



acces\_065.eps

## NO/NC contact for 3/4 pole SIRCO and SIRCO AC

Rating (A) / Frame size	Position A/C	Reference
125 ... 3200 / B3 ... B8	1 <sup>st</sup>	2699 0031
125 ... 3200 / B3 ... B8	2 <sup>nd</sup>	2699 0032
4000 ... 5000 /B9	1 <sup>st</sup> /2 <sup>nd</sup>	included

## NO/NC contact for 6/8 pole SIRCO

Rating (A) / Frame size	Position A/C	Reference
125 ... 1600 / B3 <sub>DS</sub> ... B7 <sub>DS</sub>	1 <sup>st</sup>	2699 0061
125 ... 1600 / B3 <sub>DS</sub> ... B7 <sub>DS</sub>	2 <sup>nd</sup>	2699 0062

## NO+NC contact for 3/4 pole SIRCO and SIRCO AC

Rating (A) / Frame size	Position A/C	Reference
125 ... 3200 / B3 ... B8	1 <sup>st</sup>	2699 0141
125 ... 3200 / B3 ... B8	2 <sup>nd</sup> /3 <sup>rd</sup> /4 <sup>th</sup>	2699 0142

## NO/NC low level contact for 3/4 pole SIRCO and SIRCO AC

Rating (A) / Frame size	Position A/C	Reference
125 ... 3200 / B3 ... B8	1 <sup>st</sup>	2699 0301
125 ... 3200 / B3 ... B8	2 <sup>nd</sup>	2699 0302

**Characteristics**

Rating (A) / Frame size	Contact type	Current nominal (A)	Operating current I <sub>e</sub> (A)						
			230 VAC		400 VAC		24 VDC		48 VDC
AC-12	AC-13/15	AC-12	AC-13/15	DC-12	DC-13	DC-14	DC-12	DC-13	DC-14
125 ... 3200 / B3 ... B8	NO/NC	16	16	4	12	3	2.5	2.5	1
125 ... 3200 / B3 ... B8	NO + NC	16	16	4	16	3	16	5	1

## Inter-phase barrier

**Use**

Safe isolation between the terminals, essential for use at 690 VAC or in a polluted or dusty atmosphere.



acces\_036.eps

## For 3/4 poles SIRCO and SIRCO AC

Rating (A) / Frame size	SIRCO	SIRCO AC	No. of poles	Reference
125 ... 160 / B3			3 P	2998 0033
125 ... 160 / B3			4 P	2998 0034
200 ... 250 / B4	200 ... 315 / B4		3 P	2998 0023
200 ... 250 / B4	200 ... 315 / B4		4 P	2998 0024
315 ... 630 / B5	315 ... CD 630 / B5		3 P	2998 0013
315 ... 630 / B5	315 ... CD 630 / B5		4 P	2998 0014
800 ... 5000 / B6 ... B9	630 ... 4000 / B6 ... B9		3 P	included
800 ... 5000 / B6 ... B9	630 ... 4000 / B6 ... B9		4 P	included

## Accessories (continued)

### Terminal shrouds

#### Use

Top or bottom protection against direct contact with terminals or connection parts.

#### Advantage

Perforations allow remote thermographic inspection without the need to remove the shrouds. The terminal shrouds also provide phase separation for SIRCO and SIRCO AC from 125 to 630 A.



acces\_077.eps

### For 3/4 poles SIRCO and SIRCO AC

Rating (A) / Frame size		No. of poles	Position	Reference
125 ... 160 / B3		3 P	top or bottom	2694 3014 <sup>(1)</sup>
125 ... 160 / B3		4 P	top or bottom	2694 4014 <sup>(2)</sup>
200 ... 250 / B4	200 ... 315 / B4	3 P	top or bottom	2694 3021 <sup>(1)</sup>
200 ... 250 / B4	200 ... 315 / B4	4 P	top or bottom	2694 4021 <sup>(2)</sup>
315 ... 630 / B5	400 ... CD 630 / B5	3 P	top or bottom	2694 3051 <sup>(1)</sup>
315 ... 630 / B5	400 ... CD 630 / B5	4 P	top or bottom	2694 4051 <sup>(2)</sup>

(1) Reference includes 3 parts for top or bottom protection.

(2) Reference includes 4 parts for top or bottom protection.

### For 6/8-pole SIRCO

Rating (A) / Frame size		No. of poles	Position	Reference
125 ... 160 / B3 <sub>DS</sub>		6 P	Top or bottom	2694 3014 <sup>(1)(3)</sup>
125 ... 160 / B3 <sub>DS</sub>		8 P	Top or bottom	2694 4014 <sup>(2)(3)</sup>
250 / B4 <sub>DS</sub>		6 P	Top or bottom	2694 3021 <sup>(1)(3)</sup>
250 / B4 <sub>DS</sub>		8 P	Top or bottom	2694 4021 <sup>(2)(3)</sup>
400 ... 630 / B5 <sub>DS</sub>		6 P	Top or bottom	2694 3051 <sup>(1)(3)</sup>
400 ... 630 / B5 <sub>DS</sub>		8 P	Top or bottom	2694 4051 <sup>(2)(3)</sup>

(1) Reference includes 3 parts for top or bottom protection on the front or rear of the device.

(2) Reference includes 4 parts for top or bottom protection on the front or rear of the device.

(3) Select 2 sets for front or rear.

## Distribution block

#### Use

Easy connection of multiple cables, bottom of the SIRCO.

### For 3/4-pole SIRCO


Rating (A) / Frame size	No. of poles	No. of feeders per section (mm <sup>2</sup> )	I <sub>cc</sub> (kA rms) <sup>(1)</sup>	Reference
160 / B3	3 P	1x95 + 8x25	10	5411 3016
160 / B3	4 P	1x95 + 8x25	10	5411 4016
250 / B4	3 P	1x150 + 8x50	15	5411 3025
250 / B4	4 P	1x150 + 8x50	15	5411 4025
400 / B5	3 P	1x240 + 8x95	21	5411 3040
400 / B5	4 P	1x240 + 8x95	21	5411 4040
630 / B5	3 P	1x300 + 8x150	21	5411 3063
630 / B5	4 P	1x300 + 8x150	21	5411 4063

#### Dimensions

Rating (A) / Frame size	No. of poles	A	B	T	H	K	P	R	T	Y
160 / B3	3 P	154	286	73	46.5	261.5	36	20	4	54
160 / B3	4 P	190	286	73	46.5	261.5	36	20	4	54
250 / B4	3 P	210	307	83	57.5	279	50	25	4	56
250 / B4	4 P	260	307	83	57.5	279	50	25	4	56
400 / B5	3 P	281	375	116	82.5	340	65	32	5	82
400 / B5	4 P	346	375	116	82.5	340	65	32	5	82
630 / B5	3 P	271	438	117	90.5	410.5	65	40	6	83
630 / B5	4 P	346	438	117	90.5	410.5	65	40	6	83



repar\_020.psd

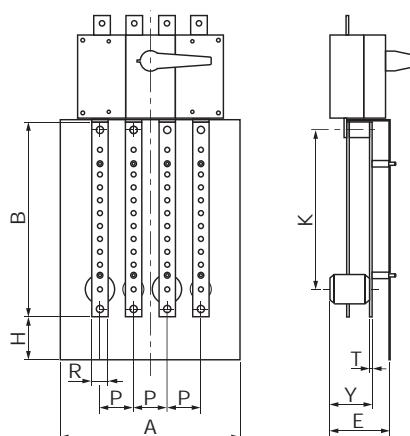

repar\_003\_d\_1.x\_cad.ai

## Terminal screens

### Use

Top or bottom protection from direct contact with terminals or connection parts.



access\_079.eps

### For 3/4 poles SIRCO and SIRCO AC

Rating (A) / Frame size		No. of poles	Position	Reference
SIRCO	SIRCO AC			
125 ... 160 / B3		3 P	top or bottom	2698 3012
125 ... 160 / B3		4 P	top or bottom	2698 4012
200 ... 250 / B4	200 ... 315 / B4	3 P	top or bottom	2698 3020
200 ... 250 / B4	200 ... 315 / B4	4 P	top or bottom	2698 4020
315 ... 630 / B5	400 ... CD 630 / B5	3 P	top or bottom	2698 3050
315 ... 630 / B5	400 ... CD 630 / B5	4 P	top or bottom	2698 4050
800 ... CD 1250 / B6	630 ... CD 1250 / B6	3 P	top or bottom	2698 3080
800 ... CD 1250 / B6	630 ... CD 1250 / B6	4 P	top or bottom	2698 4080
1250 ... 1800 / B7	1250 ... 1600 / B7	3 P	top or bottom	2698 3120
1250 ... 1800 / B7	1250 ... 1600 / B7	4 P	top or bottom	2698 4120
2000 ... 3200 / B8	2000 / B8	3 P	top or bottom	2698 3200
2000 ... 3200 / B8	2000 / B8	4 P	top or bottom	2698 4200
4000 ... 5000 / B9	4000 / B9	3/4 P	top or bottom	1509 4200

### For 6/8-pole SIRCO

Rating (A) / Frame size	No. of poles	Position	Reference
125 ... 160 / B3 <sub>DS</sub>	6 P	Top or bottom	1509 3012
125 ... 160 / B3 <sub>DS</sub>	8 P	Top or bottom	1509 4012
250 / B4 <sub>DS</sub>	6 P	Top or bottom	1509 3025
250 / B4 <sub>DS</sub>	8 P	Top or bottom	1509 4025
400 ... 630 / B5 <sub>DS</sub>	6 P	Top or bottom	1509 3063
400 ... 630 / B5 <sub>DS</sub>	8 P	Top or bottom	1509 4063
800 ... 1250 / B6 <sub>DS</sub> -B7 <sub>DS</sub>	6 P	Top or bottom	1509 3080
800 ... 1250 / B6 <sub>DS</sub> -B7 <sub>DS</sub>	8 P	Top or bottom	1509 4080
1600 / B7 <sub>DS</sub>	6 P	Top or bottom	1509 3160
1600 / B7 <sub>DS</sub>	8 P	Top or bottom	1509 4160

## Cage terminals

### Use

They enable a direct terminal-free connection to rigid copper and aluminium conductors with integration under the IP2X protective cover.


Material: tin-plated aluminium

### Dimensions

Rating (A) / Frame size	A	A1	C	R	ØX	X1	Z
125 ... 160 / B3	47.5	22.5	25	20	8.5	M12	10
200 ... 250 / B4	62	31.5	31.5	25	10.5	M16	14
315 ... 400 / B5	71.5	32	38	32	10.5	M20	15
500 ... 630 / B5	76.5	37	38	40	12.5	M20	15

### References

Rating (A) / Frame size	Tightening capacity (mm <sup>2</sup> )	No. of poles	Tightening torque (Nm)	Flexible bar width (mm)	Reference
125 ... 160 / B3	16 ... 95	3 P	14	13	5400 3016
125 ... 160 / B3	16 ... 95	4 P	14	13	5400 4016
200 ... 250 / B4	16 ... 185	3 P	25	18	5400 3025
200 ... 250 / B4	16 ... 185	4 P	25	18	5400 4025
315 ... 400 / B5	50 ... 240	3 P	45	20	5400 3040
315 ... 400 / B5	50 ... 240	4 P	45	20	5400 4040
500 ... 630 / B5	70 ... 300	3 P	45	24	5400 3063
500 ... 630 / B5	70 ... 300	4 P	45	24	5400 4063

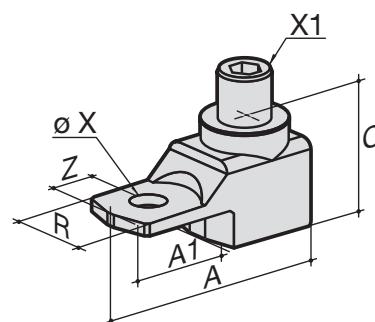

bom\_019\_a\_1\_X\_cat

## Accessories (continued)

### Copper bar connection kits

#### Use

To allow connection between the two power terminals of the same pole for 2000 to 3200 A ratings (Fig. 1 and Fig 2).

For 3200 A rating, the connection pieces (part A) are delivered bridged as standard.


Bolt sets must be ordered separately.

Further details for these specific accessories are available in the user guide downloadable from [www.socomec.com](http://www.socomec.com).

#### Top or bottom flat connection - Fig. 1

Rating (A) / Frame size	Part	Quantity to order per pole <sup>(1)</sup>	Reference
2000 ... 2500 / B8	Connection - part A	1	2619 1200
2000 ... 2500 / B8	Bolt set - part B	1	2699 1200
3200 / B8	Connection - part A		included
3200 / B8	Bolt set - part B	1	2699 1200
4000 ... 5000 / B9	Standard connection		


Fig. 1

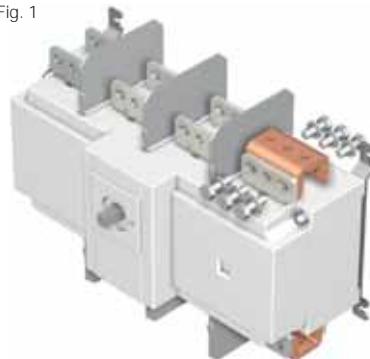

acces\_220.eps

(1) Example for 3-pole device equipped top only: order 3 times the indicated quantity.

Fig. 1

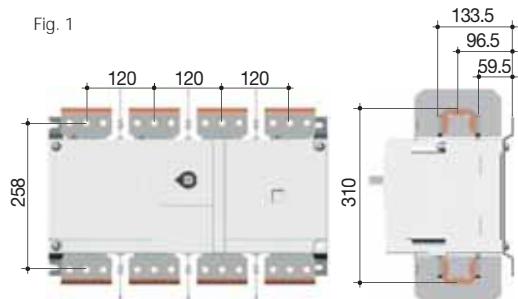


acces\_224\_a\_1\_cat

#### Top or bottom edgewise connection - Fig. 2

Rating (A) / Frame size	Part	Quantity to order per pole <sup>(1)</sup>	Reference
2000 ... 2500 / B8	Connection - part A	1	2619 1200
2000 ... 2500 / B8	T piece - part C	1	2629 1200 <sup>(2)</sup>
2000 ... 2500 / B8	Bracket - part D	1	2639 1200 <sup>(2)</sup>
3200 / B8	Connection - part A		included
3200 / B8	T piece - part C	1	2629 1200
3200 / B8	Bracket - part D	1	2639 1200
4000 ... 5000 / B9	Standard connection		

Fig. 2




acces\_222.eps

(1) Example for 3-pole device equipped top only: order 3 times the indicated quantity.

(2) Bolt set is provided with the accessories.

Fig. 2

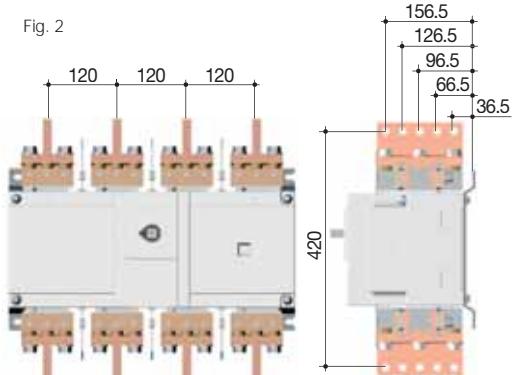

acces\_225\_a\_1\_cat

## Key handle interlocking system

### Use

- Locking in position 0 of the front or side operation handle:  
 - using a lock (not supplied)  
 - using a padlock (not supplied) and standard padlocking function of the handle. From 125 to 1800 A, padlocking the external front operation handle provides door interlocking,

- using a lock (not supplied):  
see diagrams opposite,
- using an undervoltage coil: the SIRCO can only be closed if the coil is energised.

For 6 / 8-pole, please consult us.

### For SIRCO

#### Locking using RONIS EL11AP lock (not supplied)

Rating (A) / Frame size	No. of poles	Operation	Figure	Reference
125 ... 630 / B3 ... B5	3/4 P	Front direct	1	2699 6008 <sup>(1)</sup>
125 ... 1800 / B3 ... B7	3/4 P	External front	3	1499 7701
800 ... 3200 / B6 ... B8	3/4 P	Front direct	2	2699 6027
1250 ... 5000 / B7 ... B9	3/4 P	External front	4	2799 7002

(1) Front operation handle included.

Fig. 1




Fig. 2




Fig. 3





Fig. 4



acces\_001\_a\_1\_x\_cat  
acces\_005\_a\_1\_x\_cat

acces\_158\_a\_1\_x\_cat  
acces\_004\_c\_1\_x\_cat

### For SIRCO AC

#### Locking using RONIS EL11AP lock (not supplied)

Rating (A) / Frame size	No. of poles	Operation	Figure	Reference
200 ... CD 630 / B4 ... B5	3/4 P	Front direct	1	2699 6008 <sup>(1)</sup>
630 ... 1600 / B6 ... B7	3/4 P	Front direct	2	2699 6027

(1) The locking system is directly mounted on the device.

### For SIRCO

#### Locking using 230 VAC undervoltage coil

(For other voltages, please contact us)

Rating (A) / Frame size	No. of poles	Operation	Reference
125 ... 630 / B3 ... B5	3/4 P	External front	2699 9063 <sup>(1)</sup>
800 ... 3200 / B6 ... B8	3/4 P	Front direct	2699 9315 <sup>(1)</sup>

(1) The locking system is directly mounted on the device.

#### Locking using CASTELL lock (not supplied)

Rating (A) / Frame size	No. of poles	Handle type	Lock type	Operation	Figure	Reference
125 ... 160 / B3	6/8 P	S2	K	External front	2	4109 8507
125 ... 1800 / B3 ... B8	3/4 P	S2, S4	FS	External front	3	1499 7703
125 ... 1800 / B3 ... B8	3/4 P	S2, S4	K	External front	3	1499 7702
250 ... 630 / B4 ... B5	6/8 P	S4	K	External front	2	2999 8707
800 ... 1600 / B6 ... B7	6/8 P	S5	K	External front	2	2799 7003
1250 ... 4000 / B7 ... B9	3/4 P	S5, S0	K	External front	2	2799 7003

## Other specific accessories

bd.03\_01\_01



- Mechanical coupling device for making switches with "n" poles of the same or different ratings
- Mechanical interlocking device

### SIRCO characteristics according to IEC 60947-3

#### 125 to 800 A

Thermal current $I_{th}$ at 40°C	125 A	160 A	200 A	250 A	315 A	400 A	500 A	630 A	800 A
Frame size	B3	B3	B4	B4	B5	B5	B5	B5	B6
Rated insulation voltage $U_i$ (V)	800	800	800	800	1000	1000	1000	1000	1000
Rated impulse withstand voltage $U_{imp}$ (kV)	8	8	8	8	12	12	12	12	12

#### Rated operational currents $I_e$ (A)

Rated voltage	Utilisation category	A / B <sup>(1)</sup>								
415 VAC	AC-20 A / AC-20 B	125 / 125	160 / 160	200 / 200	250 / 250	315 / 315	400 / 400	500 / 500	630 / 630	800 / 800
415 VAC	AC-21 A / AC-21 B	125 / 125	160 / 160	200 / 200	250 / 250	315 / 315	400 / 400	500 / 500	630 / 630	800 / 800
415 VAC	AC-22 A / AC-22 B	125 / 125	160 / 160	200 / 200	250 / 250	315 / 315	400 / 400	500 / 500	630 / 630	800 / 800
415 VAC	AC-23 A / AC-23 B	125 / 125	160 / 160	200 / 200	250 / 250	315 / 315	400 / 400	500 / 500	500 / 500	800 / 800
220 VDC	DC-20 A / DC-20 B	125 / 125	160 / 160	200 / 200	250 / 250	315 / 315	400 / 400	500 / 500	630 / 630	800 / 800
220 VDC	DC-21 A / DC-21 B	125 / 125	160 / 160	160 / 200	250 / 250	315 / 315	400 / 400	500 / 500	630 / 630	800 / 800
220 VDC	DC-22 A / DC-22 B	125 / 125	160 / 160	160 / 200	250 / 250	315 / 315	400 / 400	400 / 500	500 / 500	800 / 800
220 VDC	DC-23 A / DC-23 B	125 / 125	125 / 125	160 / 160	200 / 200	315 / 315	400 / 400	400 / 400	500 / 500	800 / 800
440 VDC	DC-20 A / DC-20 B	125 / 125	160 / 160	200 / 200	250 / 250	315 / 315	400 / 400	500 / 500	630 / 630	800 / 800
440 VDC	DC-21 A / DC-21 B	125 <sup>(2)</sup> / 125 <sup>(2)</sup>	160 <sup>(2)</sup> / 160 <sup>(2)</sup>	160 <sup>(2)</sup> / 200 <sup>(2)</sup>	200 <sup>(2)</sup> / 200 <sup>(2)</sup>	315 <sup>(2)</sup> / 315 <sup>(2)</sup>	400 <sup>(2)</sup> / 400 <sup>(2)</sup>	400 <sup>(2)</sup> / 400 <sup>(2)</sup>	500 <sup>(2)</sup> / 500 <sup>(2)</sup>	800 <sup>(3)</sup> / 800 <sup>(3)</sup>
440 VDC	DC-22 A / DC-22 B	125 <sup>(2)</sup> / 125 <sup>(2)</sup>	125 <sup>(2)</sup> / 125 <sup>(2)</sup>	160 <sup>(2)</sup> / 160 <sup>(2)</sup>	200 <sup>(2)</sup> / 200 <sup>(2)</sup>	315 <sup>(2)</sup> / 315 <sup>(2)</sup>	400 <sup>(2)</sup> / 400 <sup>(2)</sup>	400 <sup>(2)</sup> / 400 <sup>(2)</sup>	500 <sup>(2)</sup> / 500 <sup>(2)</sup>	800 <sup>(3)</sup> / 800 <sup>(3)</sup>
440 VDC	DC-23 A / DC-23 B	125 <sup>(3)</sup> / 125 <sup>(3)</sup>	125 <sup>(3)</sup> / 125 <sup>(3)</sup>	160 <sup>(3)</sup> / 160 <sup>(3)</sup>	200 <sup>(3)</sup> / 200 <sup>(3)</sup>	315 <sup>(3)</sup> / 315 <sup>(3)</sup>	400 <sup>(3)</sup> / 400 <sup>(3)</sup>	400 <sup>(3)</sup> / 400 <sup>(3)</sup>	500 / 500	800 <sup>(3)</sup> / 800 <sup>(3)</sup>
500 VDC	DC-20 A / DC-20 B	125 / 125	160 / 160	200 / 200	250 / 250	315 / 315	400 / 400	500 / 500	630 / 630	800 / 800
500 VDC	DC-21 A / DC-21 B	125 <sup>(2)</sup> / 125 <sup>(2)</sup>	125 <sup>(2)</sup> / 125 <sup>(2)</sup>	160 <sup>(2)</sup> / 200 <sup>(2)</sup>	200 <sup>(2)</sup> / 200 <sup>(2)</sup>	315 <sup>(2)</sup> / 315 <sup>(2)</sup>	400 <sup>(2)</sup> / 400 <sup>(2)</sup>	400 <sup>(2)</sup> / 400 <sup>(2)</sup>	500 <sup>(2)</sup> / 500 <sup>(2)</sup>	800 <sup>(3)</sup> / 800 <sup>(3)</sup>
500 VDC	DC-22 A / DC-22 B	125 <sup>(3)</sup> / 125 <sup>(3)</sup>	125 <sup>(3)</sup> / 125 <sup>(3)</sup>	160 <sup>(3)</sup> / 160 <sup>(3)</sup>	200 <sup>(3)</sup> / 200 <sup>(3)</sup>	315 <sup>(3)</sup> / 315 <sup>(3)</sup>	315 <sup>(3)</sup> / 400 <sup>(3)</sup>	315 <sup>(3)</sup> / 400 <sup>(3)</sup>	500 <sup>(3)</sup> / 500 <sup>(3)</sup>	800 <sup>(3)</sup> / 800 <sup>(3)</sup>
500 VDC	DC-23 A / DC-23 B	125 <sup>(3)</sup> / 125 <sup>(3)</sup>	125 <sup>(3)</sup> / 125 <sup>(3)</sup>	160 <sup>(3)</sup> / 160 <sup>(3)</sup>	200 <sup>(3)</sup> / 200 <sup>(3)</sup>	315 <sup>(3)</sup> / 315 <sup>(3)</sup>	315 <sup>(3)</sup> / 400 <sup>(3)</sup>	315 <sup>(3)</sup> / 400 <sup>(3)</sup>	500 <sup>(3)</sup> / 500 <sup>(3)</sup>	800 <sup>(3)</sup> / 800 <sup>(3)</sup>

#### Operational power in AC-23 (kW)<sup>(1)(4)</sup>

At 415 VAC without AC pre-break <sup>(1)</sup>	63 / 63	80 / 80	100 / 100	132 / 132	160 / 160	220 / 220	280 / 280	280 / 280	450 / 450
--	---------	---------	-----------	-----------	-----------	-----------	-----------	-----------	-----------

#### Reactive power (kvar)

At 400 VAC (kvar) <sup>(4)</sup>	55	75	90	115	145	185	230	290	365
----------------------------------	----	----	----	-----	-----	-----	-----	-----	-----

#### gG DIN fuse protected short-circuit withstand (kA rms prospective)<sup>(5)</sup>

Prospective short-circuit current (kA rms)	100	100	80	50	100	100	100	70	50
Associated fuse rating (A)	125	160	200	250	315	400	500	630	800

#### Circuit breaker protected short-circuit withstand with any circuit breaker that ensures tripping in less than 0.3s

Rated short-time withstand current 0.3s. $I_{cw}$ (kA rms)	15	15	17	17	25	25	25	25	50
--	----	----	----	----	----	----	----	----	----

#### Short-circuit operation (switch only)

Rated short-time withstand current 1s (kA rms)	7	7	9	9	13	13	13	13	26
Rated peak withstand current in $I_{cc}$ (kA peak) <sup>(5)(6)</sup>	20	20	30	30	45	45	45	45	55

#### Connection

Minimum Cu cable cross-section (mm <sup>2</sup> )	35	50	70	95	150	185	240	2 x 150	2 x 185
Minimum Cu busbar cross-section (mm <sup>2</sup> )								2 x 30 x 5	2 x 40 x 5
Maximum Cu cable cross-section (mm <sup>2</sup> )	50	95	95	150	240	240	240	2 x 300	2 x 300
Maximum Cu busbar width (mm)	25	25	32	32	40	40	40	50	63
Tightening torque min/max (Nm)	9 / -	9 / -	20 / -	20 / -	20 / -	20 / -	20 / -	40 / 45	40 / 45

#### Mechanical characteristics

Durability (number of operating cycles)	10 000	10 000	10 000	10 000	10 000	10 000	10 000	10 000	3000
Operating effort (Nm)	6.5	6.5	10	10	14.5	14.5	14.5	14.5	37
Weight of a 3-pole device (kg)	1	1.5	2	2	3.5	3.5	3.5	3.5	8
Weight of a 4-pole device (kg)	1.5	1.5	2	2	4	4	4.5	4.5	10

(1) Category with index A = frequent operation - Category with index B = infrequent operation.

(2) 3-pole device with 2 poles in series for the '+' and 1 pole for the '-'.

(3) 4-pole device with 2 poles in series per polarity.

(4) The power value is given for information only, the current values vary from one manufacturer to another.

(5) For a rated operational voltage  $U_o = 415$  VAC.

(6) Coordination tables with circuit breaker: please consult us.

**SIRCO** characteristics according to IEC 60947-3

1000 to 5000 A

Thermal current $I_{th}$ at 40°C	1000 A	CD 1250 A	1250 A	1600 A	1800 A	2000 A	2500 A	3200 A	4000 A	5000 A
Frame size	B6	B6	B7	B7	B7	B8	B8	B8	B9	B9
Rated insulation voltage $U_i$ (V)	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
Rated impulse withstand voltage $U_{imp}$ (kV)	12	12	12	12	12	12	12	12	12	12

Rated operational currents  $I_e$  (A)

Rated voltage	Utilisation category	A/B <sup>(1)</sup>									
415 VAC	AC-20 A / AC-20 B	1000 / 1000	1250 / 1250	1250 / 1250	1600 / 1600	1800 / 1800	2000 / 2000	2500 / 2500	3200 / 3200	4000 / 4000	5000 / 5000
415 VAC	AC-21 A / AC-21 B	1000 / 1000	1250 / 1250	1250 / 1250	1600 / 1600	1800 / 1800	2000 / 2000	2500 / 2500	3200 / 3200	4000 / 4000	5000 / 5000
415 VAC	AC-22 A / AC-22 B	1000 / 1000	1250 / 1250	1250 / 1250	1600 / 1600	1800 / 1800	2000 / 2000	2500 / 2500	3200 / 3200	2500 / 3200	2500 / 3200
415 VAC	AC-23 A / AC-23 B	1000 / 1000	1250 / 1250	1250 / 1250	1250 / 1250	1250 / 1250	1600 / 1600	1600 / 1600	1800 / 2000	1800 / 2000	1800 / 2000
220 VDC	DC-20 A / DC-20 B	1000 / 1000	1250 / 1250	1250 / 1250	1600 / 1600	1800 / 1800	2000 / 2000	2500 / 2500	3200 / 3200	4000 / 4000	5000 / 5000
220 VDC	DC-21 A / DC-21 B	1000 / 1000	1250 / 1250	1250 / 1250	1250 / 1600	1250 / 1600	2000 / 2000	2000 / 2500	2000 / 2500	2500 / 3200	2500 / 3200
220 VDC	DC-22 A / DC-22 B	1000 / 1000	1250 / 1250	1250 / 1250	1250 / 1250	1250 / 1600	1250 / 1600	1250 / 1600	1250 / 1600	1800 / 2000	1800 / 2000
220 VDC	DC-23 A / DC-23 B	1000 / 1000	1250 / 1250	1250 / 1250	1250 / 1250	1250 / 1250	1250 / 1250	1250 / 1250	1250 / 1250	1250 / 1600	1250 / 1600
440 VDC	DC-20 A / DC-20 B	1000 / 1000	1250 / 1250	1250 / 1250	1600 / 1600	1800 / 1800	2000 / 2000	2500 / 2500	3200 / 3200	4000 / 4000	5000 / 5000
440 VDC	DC-21 A / DC-21 B	1000 <sup>(2)</sup> / 1000 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1600 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1600 <sup>(2)</sup>	2000 <sup>(2)</sup> / 2000 <sup>(2)</sup>	2000 <sup>(2)</sup> / 2500 <sup>(2)</sup>	2500 <sup>(2)</sup> / 3200 <sup>(2)</sup>	3200 <sup>(2)</sup> / 4000 <sup>(2)</sup>	3200 <sup>(2)</sup> / 5000 <sup>(2)</sup>
440 VDC	DC-22 A / DC-22 B	1000 <sup>(2)</sup> / 1000 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1600 <sup>(2)</sup> / 1800 <sup>(2)</sup>	1600 <sup>(2)</sup> / 1800 <sup>(2)</sup>						
440 VDC	DC-23 A / DC-23 B	1000 <sup>(2)</sup> / 1000 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>								
500 VDC	DC-20 A / DC-20 B	1000 / 1000	1250 / 1250	1250 / 1250	1600 / 1600	1800 / 1800	2000 / 2000	2500 / 2500	3250 / 3250	4000 / 4000	5000 / 5000
500 VDC	DC-21 A / DC-21 B	1000 <sup>(2)</sup> / 1000 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1600 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1600 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1600 <sup>(2)</sup> / 1800 <sup>(2)</sup>	1600 <sup>(2)</sup> / 1800 <sup>(2)</sup>
500 VDC	DC-22 A / DC-22 B	1000 <sup>(2)</sup> / 1000 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1600 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1600 <sup>(2)</sup>						
500 VDC	DC-23 A / DC-23 B	1000 <sup>(2)</sup> / 1000 <sup>(2)</sup>	1250 <sup>(2)</sup> / 1250 <sup>(2)</sup>	1000 <sup>(2)</sup> / 1000 <sup>(2)</sup>							

Operational power in AC-23 (kW)<sup>(1)(3)</sup>

At 415 VAC without AC pre-break <sup>(1)</sup>	560 / 560	710 / 710	710 / 710	710 / 710	710 / 710	710 / 710	710 / 710	710 / 710	710 / 710	710 / 710
--	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------

## Reactive power (kvar)

At 400 VAC (kvar) <sup>(3)</sup>	460									
----------------------------------	-----	--	--	--	--	--	--	--	--	--

gG DIN fuse protected short-circuit withstand (kA rms prospective)<sup>(4)</sup>

Prospective short-circuit current (kA rms)	100	100	100	100	100	100	100			
Associated fuse rating (A)	1000	1250	1250	2 x 800	2 x 800	2 x 1000	2 x 1250			

## Circuit breaker protected short-circuit withstand with any circuit breaker that ensures tripping in less than 0.3s

Rated short-time withstand current 0.3s. $I_{cw}$ (kA rms)	65	65	100	100	100	100	100	100		
--	----	----	-----	-----	-----	-----	-----	-----	--	--

## Short-circuit operation (switch only)

Rated short-time withstand current $I_{cw\ 1s}$ (kA rms)	35	35	50	50	50	50	50	50	75	75
Rated peak withstand current in $I_{cc}$ (kA peak) <sup>(4)(5)</sup>	80	80	110	110	110	110	110	120	165	165

## Connection

Minimum Cu cable cross-section (mm <sup>2</sup> )	2 x 240									
Minimum Cu busbar cross-section (mm <sup>2</sup> )	2 x 50 x 5	2 x 60 x 5	2 x 60 x 5	2 x 80 x 5	3 x 100 x 5	3 x 100 x 5	4 x 100 x 5	4 x 100 x 5	2 x 200 x 10	2 x 200 x 10
Maximum Cu cable cross-section (mm <sup>2</sup> )	4 x 185	4 x 185	4 x 185	6 x 185	6 x 185					
Maximum Cu busbar width (mm)	63	63	100	100	100	100	100	100		
Tightening torque min/max (Nm)	40/45	40/45	40/45	40/45	40/45	40/45	40/-	40/-	40/-	40/-

## Mechanical characteristics

Durability (number of operating cycles)	3000	3000	4000	4000	4000	3000	3000	3000	2000	2000
Operating effort (Nm)	37	37	56	56	56	75	75	75	105	105
Weight of a 3-pole device (kg)	8	8	12	12	12	22	22	22	45	45
Weight of a 4-pole device (kg)	10	10	15	15	15	25	25	25	50	50

(1) Category with index A = frequent operation - Category with index B = infrequent operation..

(2) 4-pole device with 2 poles in series per polarity.

(3) The power value is given for information only, the current values vary from one manufacturer to another.

(4) For a rated operational voltage  $U_e = 415$  VAC.

(5) Coordination tables with circuit breaker: please consult us.

## SIRCO AC characteristics according to IEC 60947-3

200 to 630 A

Thermal current $I_{th}$ at 40°C	200 A	250 A	315 A	400 A	500 A	CD 630 A	630 A
Rated insulation voltage $U_i$ (V)	1000	1000	1000	1000	1000	1000	1000
Rated impulse withstand voltage $U_{imp}$ (kV)	12	12	12	12	12	12	12
Rated operational currents $I_e$ (A)							
Rated voltage	Utilisation category	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>
500 VAC	AC-20 A / AC-20 B	200/200	250/250	315/315	400/400	500/500	630/630
500 VAC	AC-21 A / AC-21 B	200/200	250/250	315/315	400/400	500/500	630/630
500 VAC	AC-22 A / AC-22 B	200/200	250/250	315/315	400/400	500/500	630/630
500 VAC	AC-23 A / AC-23 B	200/200	250/250	315/315	400/400	500/500	630/630
690 VAC	AC-20 A / AC-20 B	200/200	250/250	315/315	400/400	500/500	630/630
690 VAC	AC-21 A / AC-21 B	200/200	250/250	315/315	400 <sup>(2)</sup> /400 <sup>(2)</sup>	500 <sup>(2)</sup> /500 <sup>(2)</sup>	630 <sup>(2)</sup> /630 <sup>(2)</sup>
690 VAC	AC-22 A / AC-22 B	200/200	250/250	315/315	400 <sup>(2)</sup> /400 <sup>(2)</sup>	500 <sup>(2)</sup> /500 <sup>(2)</sup>	630 <sup>(2)</sup> /630 <sup>(2)</sup>
690 VAC	AC-23 A / AC-23 B	200/200	250/250	315/315	400 <sup>(2)</sup> /400 <sup>(2)</sup>	500 <sup>(2)</sup> /500 <sup>(2)</sup>	630 <sup>(2)</sup> /630 <sup>(2)</sup>
Operational power in AC-23 A (kW) <sup>(3)</sup>							
At 690 VAC without pre-break AC	160	220	250	400	500	500	630
Reactive power (kvar)							
At 690 VAC (kvar)	160	190	250	325	400	400	450
Fuse protected short-circuit withstand (kA rms prospective) at 690 VAC <sup>(4)</sup>							
Prospective short-circuit current (kA rms)	50	50	50	50	50	50	50
Associated fuse rating (A)	200	250	315	400	500	630	630
Circuit breaker protected short-circuit withstand with any circuit breaker that ensures tripping in less than 0.3s at 690 VAC							
Rated short-time withstand current 0.3s. $I_{cw}$ (kA rms)	15	15	15	15	15	15	28
Short-circuit capacity (without protection)							
Rated short-time withstand current 1s. $I_{cw}$ (kA rms)	8	8	8	11	11	11	20
Rated short-circuit making capacity without fuses $I_{cm}$ (prospective kA peak)	22	22	22	22	22	22	40
Connection							
Minimum Cu cable cross-section (mm <sup>2</sup> )	70	70	70	185	240	2 x 150	2 x 185
Minimum Cu busbar cross-section (mm <sup>2</sup> )						2 x 30 x 5	2 x 40 x 5
Maximum Cu cable cross-section (mm <sup>2</sup> )	95	95	95	240	240	2 x 300	2 x 300
Maximum Cu busbar width (mm)	32	32	32	40	40	63	63
Tightening torque min/max (Nm)	20/-	20/-	20/-	20/-	20/-	20/-	40/45
Mechanical characteristics							
Durability (number of operating cycles)	10000	10000	10000	5000	5000	5000	4000
Operating effort (Nm)	10	10	10	14.5	14.5	14.5	48
Weight of a 3 pole device (kg)	2	2	2	3.5	3.5	3.5	8
Weight of a 4 pole device (kg)	2	2	2	4	4	4	10

(1) Category with index A = frequent operation - Category with index B = infrequent operation.

(2) With terminal shrouds or phase barrier.

(3) The power value is given for information only, the current values vary from one manufacturer to another.

(4) For a rated operational voltage  $U_e = 690$  VAC.

**SIRCO AC** characteristics according to IEC 60947-3

800 to 4000 A

Thermal current $I_{th}$ at 40°C	800 A	1000A	CD 1250 A	1250 A	1600 A	2000 A	4000 A
Rated insulation voltage $U_i$ (V)	1000	1000	1000	1000	1000	1000	1000
Rated impulse withstand voltage $U_{imp}$ (kV)	12	12	12	12	12	12	12
Rated operational currents $I_e$ (A)							
Rated voltage	Utilisation category	A/B <sup>(1)</sup>					
500 VAC	AC-20 A / AC-20 B	800/800	1000/1000	1250/1250	1250/1250	1600/1600	2000/2000
500 VAC	AC-21 A / AC-21 B	800/800	1000/1000	1250/1250	1250/1250	1600/1600	2000/2000
500 VAC	AC-22 A / AC-22 B	800/800	1000/1000	1250/1250	1250/1250	1600/1600	2000/2000
500 VAC	AC-23 A / AC-23 B	800/800	1000/1000	1250/1250	1250/1250	1600/1600	-
690 VAC	AC-20 A / AC-20 B	800/800	1000/1000	1250/1250	1250/1250	1600/1600	2000/2000
690 VAC	AC-21 A / AC-21 B	800/800	1000/1000	1250/1250	1250/1250	1600/1600	2000/2000
690 VAC	AC-22 A / AC-22 B	800/800	1000/1000	1250/1250	1250/1250	1600/1600	2000/2000
690 VAC	AC-23 A / AC-23 B	800/800	1000/1000	1250/1250	1250/1250	1600/1600	-/-
Operational power in AC-23 A (kW) <sup>(3)</sup>							
At 690 VAC without pre-break AC	900	900	-	-	-	-	-
Reactive power (kvar)							
At 690 VAC (kvar)	550	750	950	950	-	-	-
Fuse protected short-circuit withstand (kA rms prospective) at 690 VAC <sup>(4)</sup>							
Prospective short-circuit current (kA rms)	50	50	50	50	50	-	-
Associated fuse rating (A)	800	800	2 x 500	1250	2 x 800	-	-
Circuit breaker protected short-circuit withstand with any circuit breaker that ensures tripping in less than 0.3s at 690 VAC							
Rated short-time withstand current 0.3s. $I_{cw}$ (kA rms)	28	55	55	53	53	53	53
Short-circuit capacity (without protection) at 690 VDC							
Rated short-time withstand current 1s. $I_{cw}$ (kA rms)	20	30	30	35	35	35	35
Rated short-circuit making capacity without fuses $I_{cm}$ (prospective kA peak)	40	80	80	75	75	75	75
Connection							
Minimum Cu cable cross-section (mm <sup>2</sup> )	2 x 185	2 x 240					
Minimum Cu busbar cross-section (mm <sup>2</sup> )	2 x 40 x 5	2 x 50 x 5	2 x 60 x 5	2 x 60 x 5	2 x 80 x 5	3 x 100 x 5	1 x 100 x 5
Maximum Cu cable cross-section (mm <sup>2</sup> )	2 x 300	4 x 185	4 x 185	4 x 185	6 x 185		
Maximum Cu busbar width (mm)	63	63	63	100	100	100	
Tightening torque min/max (Nm)	40/45	40/45	40/45	40	40	40	40
Mechanical characteristics							
Durability (number of operating cycles)	4000	4000	3000	4000	4000	3000	2000
Operating effort (Nm)	48	48	48	55	55	75	100
Weight of a 3 pole device (kg)	8	8	8	12	12	22	45
Weight of a 4 pole device (kg)	10	10	10	15	15	25	50

(1) Category with index A = frequent operation - Category with index B = infrequent operation.

(2) With terminal shrouds or phase barrier.


(3) The power value is given for information only, the current values vary from one manufacturer to another.

(4) For a rated operational voltage  $U_e = 690$  VAC.

## Dimensions - Front operation


### SIRCO 125 to 630 A and SIRCO AC 200 to CD 630 A - B3 to B5

Direct front operation

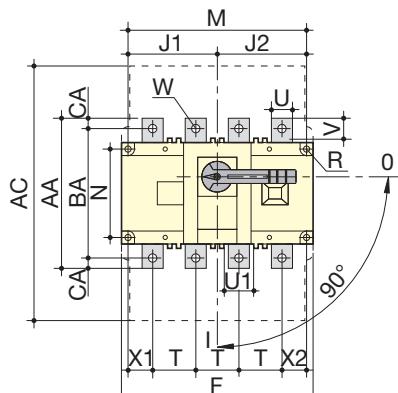

1. Terminal shrouds

External front operation

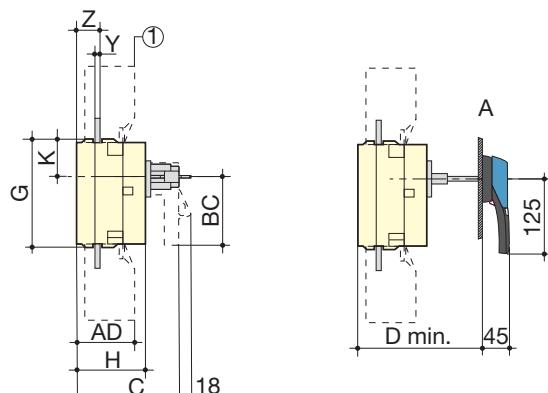


A. S2 type handle

sirco\_198\_i.1\_x.cat

Rating (A) / Frame size	SIRCO	Overall dimensions		Terminal shrouds						Switch body						Switch mounting				Connection											
		C	D min	AC	AD	F 3p.	F 4p.	G	H	J1 3p.	J1 4p.	J2	K	BC	M 3p.	M 4p.	N	R	T	U	U1	V	W	X1 3p.	X1 4p.	X2	Y	Z	AA	BA	CA
125...160/ B3	SIRCO	235	50	140	170	93	65	45	75	75	31.5	80	120	150	65	5.5	36	20	20.5	25	9	28	22	20	3.5	20.5	135	115	10		
200...250 / B4	SIRCO AC	115	125	280	60	180	230	108	75	55	105	105	34	115	160	210	80	5.5	50	25	25.5	21.5	11	33	33	27	3.5	22.5	170	130	15
315 / B4																															
315...400/ B5	400...500 / B5	160	165	401	89	230	290	170	110	75	135	135	55	115	210	270	140	7	65	32	45.5	29	11	42.5	37.5	37.5	5	36	235	205	15
500 / B5	-																														
630 / B5	CD 630 / B5																														


### SIRCO 800 to 1800 A and SIRCO AC 630 to 1600 A - B6 to B7

Direct front operation

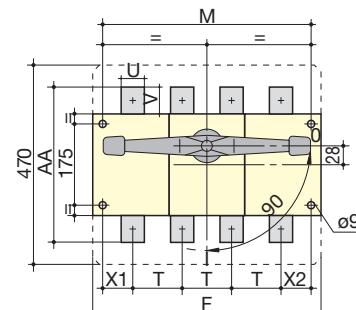

1. Terminal screens

External front operation

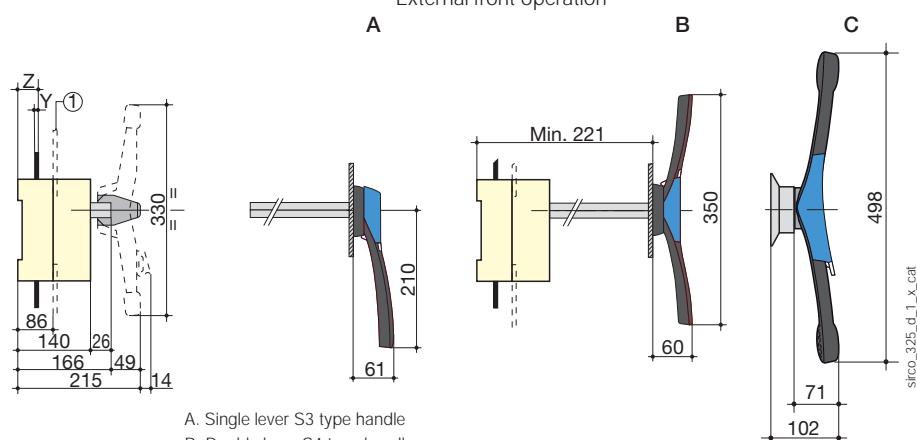

A. Single lever S3 type handle

B. Double lever S4 type handle


C. Double lever S5 type handle

sirco\_325\_d.1\_x.cat

Rating (A) / Frame size	SIRCO	Switch body		Switch mounting		Connection							
		F 3p.	F 4p.	M 3p.	M 4p.	T	U	V	Y	X1	X2	Z	AA
800 ... 1000 / B6	630 ... 1000 / B6	280	360	255	335	80		50	60.5		7	47.5	47.5
CD 1250 / B6	CD 1250/B6						60	65		44	8	53.5	53.5
1250 ... 1800 / B7	1250 ... 1600 / B7	372	492	347	467	120	90	44	8	53.5	53.5	47.5	288



## SIRCO 2000 to 3200 A and SIRCO AC 2000 A - B8

Direct front operation

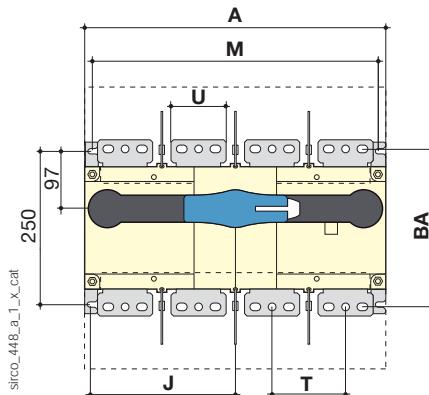

1. Double lever S5 type handle



External front operation

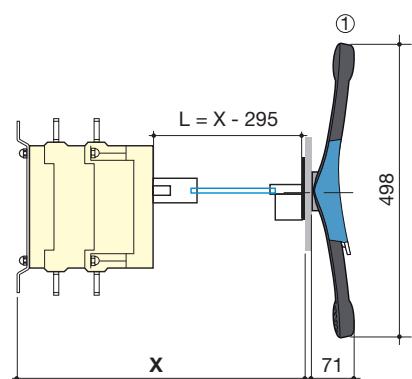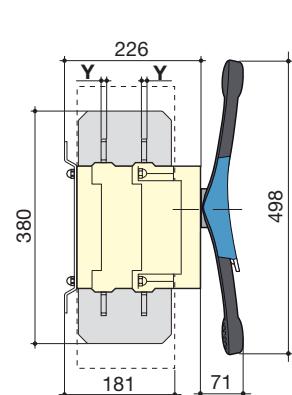


Rating (A) / Frame size		Overall dimensions		Switch body		Switch mounting		Connection			
SIRCO	SIRCO AC	A 3p.	A 4p.	J 3p.	J 4p.	M 3p.	M 4p.	T	U	Y	BA
2000 ... 3200 / B8	2000 / B8	372	492	173.5	233.5	347	367	120	90	8	258

## SIRCO 4000 to 5000 A and SIRCO AC 4000 A - B9

Direct front operation

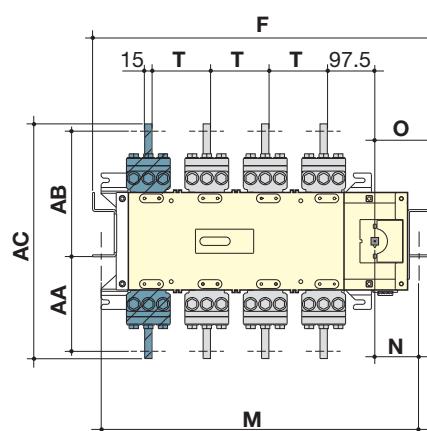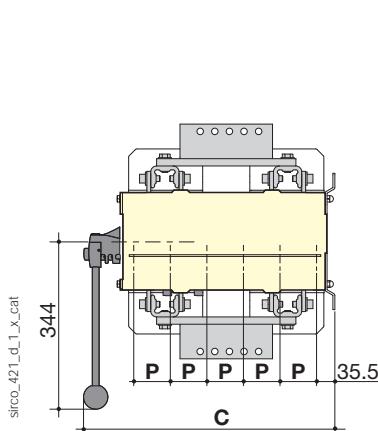









External front operation

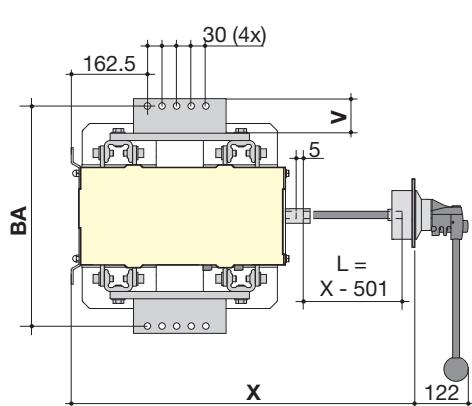





Rating (A) / Frame size		Overall dimensions		Switch body		Switch mounting				Connection					
SIRCO	SIRCO AC	C	F 3p.	F 4p.	M 3p.	M 4p.	N	O	P	T	V	AA	AB	AC	BA
4000 ... 5000 / B9	4000 / B9	514	695	695	660	660	98	115.5	75	120	86	160	292	482	452

## Dimensions for external handles

### B3 to B5

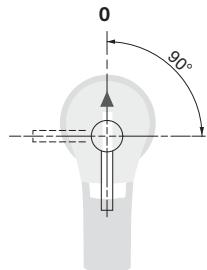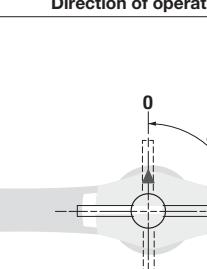Handle type	Front operation Direction of operation	Door drilling
<b>S2 type</b>  Ø78	 0 → 90°	 With lock RONIS EL11AP Ø 26 4 Ø 5.5 Ø 37 4 Ø 7 4 Ø 14 20 20 28 40 Ø 37 4 Ø 7 28 73.5
<b>S2 type</b>  Ø78	 Right side operation 0 → 90°	 With lock RONIS EL11AP Ø 26 4 Ø 5.5 Ø 37 4 Ø 7 4 Ø 14 20 20 28 40 Ø 37 4 Ø 7 28 73.5
<b>S4 type</b>  Ø78	 0 → 90°	 With lock RONIS EL11AP Ø 26 4 Ø 5.5 Ø 37 4 Ø 7 4 Ø 14 20 20 28 40 Ø 37 4 Ø 7 28 73.5
<b>S3 type</b>  Ø78	 Right side operation 0 → 90°	 With lock RONIS EL11AP Ø 26 4 Ø 5.5 Ø 37 4 Ø 7 4 Ø 14 20 20 28 40 Ø 37 4 Ø 7 28 73.5

### B6 - B7

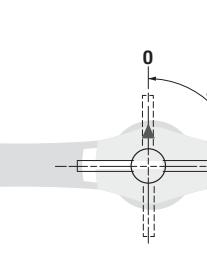Handle type	Front operation Direction of operation	Door drilling
<b>S4 type</b>  Ø78	 0 → 90°	 With lock RONIS EL11AP Ø 26 4 Ø 5.5 Ø 37 4 Ø 7 4 Ø 14 20 20 28 40 Ø 37 4 Ø 7 28 73.5
<b>S3 type</b>  Ø78	 Right side operation 0 → 90°	 With lock RONIS EL11AP Ø 26 4 Ø 5.5 Ø 37 4 Ø 7 4 Ø 14 20 20 28 40 Ø 37 4 Ø 7 28 73.5

## B7 - B8



Handle type	Front operation Direction of operation	Door drilling
<b>V2 Type</b>  poign_055_a_1_gb_cat	<b>Front operation</b> Direction of operation	<b>Door drilling</b>
<b>S5 type with V Escutcheon</b>  poign_020_a_1_gb_cat	<b>Front operation</b> Direction of operation	<b>Door drilling</b>

## B9

Handle type	Front operation Direction of operation	Door drilling
<b>V0 type</b>  poign_009_a_1_gb_cat	<b>Front operation</b> Direction of operation	<b>Door drilling</b>



## Connection terminal

SIRCO 125 to 630 A and SIRCO AC 200 to CD 630 A

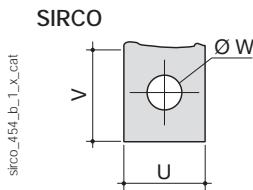



Rating (A)			U	V	W
SIRCO	SIRCO AC				
125 ... 160	200 ... 250		20	25	9
200 ... 250	315		25	35	21.5
315 ... 400	400 ... 500		35	32	11
500			32	29	
630	CD 630		45	41.5	13

SIRCO 800 to 1000 A and SIRCO AC 630 to 1000 A

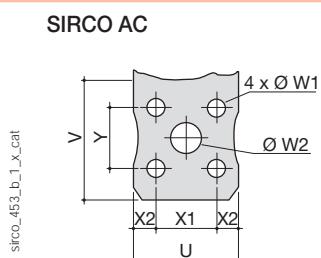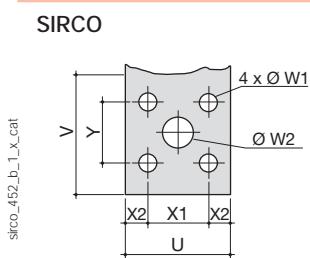


Rating (A)			U	V	W1	W2	X1	X2	Y
SIRCO	SIRCO AC								
800 ... 1000	630 ... 1000		50	60.5	9	15	33	8.5	33

SIRCO and SIRCO AC CD 1250 A

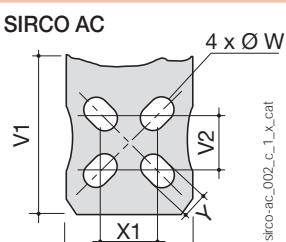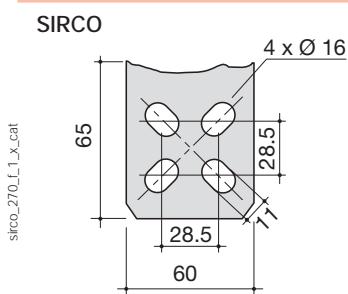


Rating (A)			U	V1	V2	W	X1	Y
SIRCO	SIRCO AC							
CD 1250 A	CD 1250 A		60	65	28.5	16	28.5	11

SIRCO 1250 to 3200 A and SIRCO AC 1250 to 1600 A

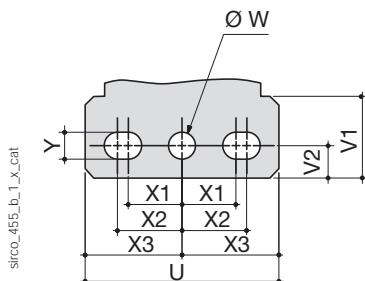

Rating (A)		SIRCO	SIRCO AC	U	V1	V2	W	X1	X2	X3	Y
1250 ... 3200	1250 ... 1600	90	35.8	15	12.5	25	25	30	45	45	12.5

SIRCO 4000 to 5000 A and SIRCO AC 4000 A

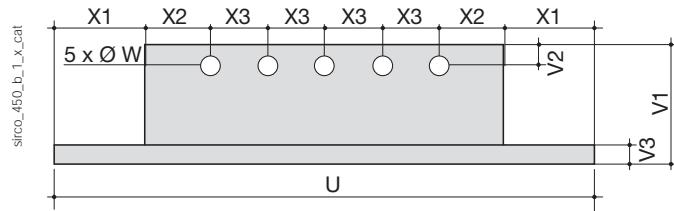

Rating (A)		SIRCO	SIRCO AC	U	W	X1	X2	X3	V1	V2	V3
4000 ... 5000	4000	286	13	48	35	35	30	86	15	15	15

# SIRCO PV IEC 60947-3

Load break switches for photovoltaic applications  
from 100 to 3200 A, up to 1500 VDC



## Function

**SIRCO PV** are manually operated load break switches.

Making and breaking capacity under load conditions up to 1500 VDC.

These extremely durable switches have been tested and approved for use in the most demanding applications.

They have been designed and tested for all types of applications: grounded, floating or bipolar.

## Advantages

### Optimise your investment

- Thanks to a reduced number of bridging bars, you can limit your costs and save mounting time.
- A 2 poles SIRCO PV will reduce heating and can be integrated in a smaller enclosure.

### High quality materials

SIRCO PV is an extremely robust device in a glass fibre reinforced polyester frame. This material provides:

- high mechanical strength,
- stability to temperature variations (RTI of 130°C),
- high dielectric strength (high CTI / tested as per standard ASTM D 2303).

### Take advantage of an innovative design

The SIRCO PV can be directly connected to up to four independent PV panel strings. The global solution cost is therefore reduced in comparison with the use of four distinct switches.

### Reliability and performance

Our range of SIRCO PV load break switches is compliant to standards UL98B and IEC 60947-3.

SIRCO PV have been tested to critical currents and at a 10 kA short-circuit during 50 ms without specific protection.

## The solution for

- > Combiner box
- > Recombiner box
- > Inverter



## Strong points

- > Patented switching technology up to 500 VDC/pole
- > Positive indication
- > Up to 1500 VDC according to IEC 60947-3

## Conformity to standards

- > IEC 60947-3
- > IEC 60364-7-712
- > UL 98B<sup>(1)</sup>



## Approvals and certifications<sup>(1)</sup>




(1) Product reference on request.

### Typical PV architecture

The SIRCO PV range provides safe disconnection and isolation at all levels within your PV installation.

SIRCO-PV 054 B

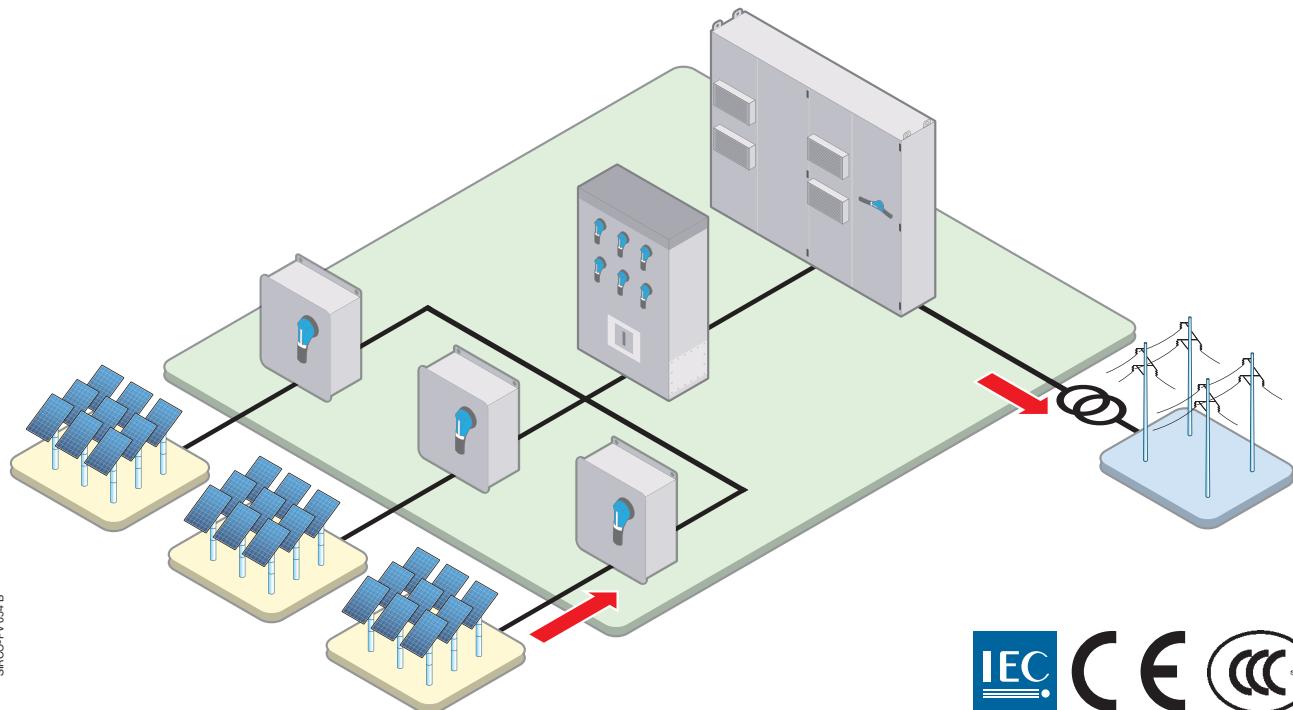

### The SOCOMEC solutions

LEVEL OF INSTALLATION	SOCOMEC SOLUTIONS	
Combiner box		SIRCO PV One circuit up to 400 A at 1500 VDC
Recombiner box		SIRCO PV 4 circuits up to 500 A at 1000 VDC <sup>(1)</sup> 2 circuits up to 500 A at 1500 VDC
Inverter		SIRCO PV One circuit up to 3200 A at 1000 VDC up to 2000 A at 1500 VDC

(1) Please consult us.

## References

### 1000 VDC - Back mounting

Rating (A)	Frame size	Number of poles	Switch body	Direct handle	External handle	Shaft for external handle	Quantity to be ordered to connect 2 poles in series
<b>1 PV circuit</b>							
100 A	B4	2 P	26PV 2010	J1 type Black 1112 1111 Red 1113 1111	S2 type <sup>(1)</sup> Black IP55 1421 2111 Black IP65 1423 2111 Red/Yellow IP65 1424 2111	200 mm 1400 1020 320 mm 1400 1032 400 mm 1400 1040	-
160 A	B4	2 P	26PV 2016				2 x 2609 0025
250 A	B4	2 P	26PV 2025				2 x 2709 0027
315 A	B4	2 P	26PV 2031				1 x 2609 1100
400 A	B4	4 P	26PV 4040				2 x 2609 1200
500 A	B4	4 P	26PV 4050				2 x 2609 1200
630 A	B5	4 P	26PV 4063				1 x 2709 0027
800 A	B5	4 P	26PV 4080				1 x 2709 0027
1250 A	B6	4 P	26PV 4120	J4 type Black 1142 1111 Red 1143 1111	S4 type <sup>(1)</sup> Black IP65 1443 3111 Red/Yellow IP65 1444 3111	200 mm 1401 1520 320 mm 1401 1532 400 mm 1401 1520	-
2000 A	B7	4 P	26PV 4200				1 x 2609 1100
3200 A	B8	4 P	26PV 4320				1 x 2609 1100
<b>2 PV circuits</b>							
100 A	B4 <sub>DS</sub>	4 P	26PV 5010	J2 type Black 1122 1111 Red 1123 1111	S2 type <sup>(1)</sup> Black IP55 1421 2111 Black IP65 1423 2111 Red/Yellow IP65 1424 2111	200 mm 1400 1020 320 mm 1400 1032 400 mm 1400 1040	-
160 A	B4 <sub>DS</sub>	4 P	26PV 5016				2 x 2609 0025
250 A	B4 <sub>DS</sub>	4 P	26PV 5025				2 x 2709 0027
315 A	B4 <sub>DS</sub>	4 P	26PV 5031				1 x 2609 1100
630 A	B5 <sub>DS</sub>	8 P	26PV 8063	J4 type Black 1142 1111 Red 1143 1111	S4 type <sup>(1)</sup> Black IP65 1443 3111 Red/Yellow IP65 1444 3111	200 mm 1401 1520 320 mm 1401 1532 400 mm 1401 1520	-
800 A	B6 <sub>DS</sub>	8 P	26PV 8080				1 x 2609 1100
1250 A	B6 <sub>DS</sub>	8 P	26PV 8120				1 x 2609 1200
2000 A	B7 <sub>DS</sub>	8 P	26PV 8200				1 x 2609 1200

(1) Defeatable handle.

### 1500 VDC - Back mounting

Rating (A)	Frame size	Number of poles	Switch body	Direct handle	External handle	Shaft for external handle	Quantity to be ordered to connect 2 poles in series
<b>1 PV circuit</b>							
160 A	B4T	3 P	26PV 3015	J1 type Black 1112 1111 Red 1113 1111	S2 type <sup>(1)</sup> Black IP55 1421 2111 Black IP65 1423 2111 Red/Yellow IP65 1424 2111	200 mm 1400 1020 320 mm 1400 1032 400 mm 1400 1040	Standard bridging bar 1 x 2609 0026
250 A	B4T	3 P	26PV 3024				Back bridging bar 1 x 2609 0041
315 A	B4T	3 P	26PV 3030				1 x 2609 1100
400 A	B4T	3 P	26PV 3039				1 x 2609 1200
800 A	B6 <sub>DS</sub>	8 P	26PV 8080	J4 type Black 1142 1111 Red 1143 1111	V1 type Black IP65 2799 7145	320 mm 4199 3018	-
1250 A	B6 <sub>DS</sub>	8 P	26PV 8120				1 x 2609 1100
2000 A	B7 <sub>DS</sub>	8 P	26PV 8200				1 x 2609 1200

(1) Defeatable handle.

## Accessories

### Direct operation handle

Frame size	Handle type	Handle colour	Reference
B4 ... B5	B2	Black	2699 5052
		Red	2699 5053
	J1	Black	1112 1111
		Red	1113 1111
B6 ... B7	J4	Black	1142 1111
		Red	1143 1111
B4 <sub>DS</sub> ... B5 <sub>DS</sub>	B2	Black	2699 5052
		Red	2699 5053
	J4	Black	1142 1111
		Red	1143 1111
	J2	Black	1122 1111
		Red	1123 1111
B6 <sub>DS</sub> ...B7 <sub>DS</sub>	J4	Black	1142 1111
		Red	1143 1111
B8	J4	Black	1142 1111
		Red	1143 1111



### Door interlocked external operation handle

#### Use

Door interlocked external operation handles include an escutcheon, are padlockable and must be utilised with an extension shaft.

In a combiner box, located close to the solar cell strings, or located close to the inverter, we recommend to use a door interlocked external handle for its safety features.

#### Example

The locking function of the enclosure in the "ON" position will force the operator to safely disconnect and isolate the solar cell strings prior to any intervention.

Opening the door when the switch is on "ON" position is possible by defeating the locking function using a tool (authorised persons only). The interlocking function is restored when the door is re-closed.



Frame size	Handle type	Handle colour	Degree of protection	Reference
B4 ... B5	S2	Black	IP55	1421 2111
	S2	Black	IP65	1423 2111
	S2	Red/ Yellow	IP65	1424 2111
B6 ... B7	S4	Black	IP65	1443 3111
	S4	Red/ Yellow	IP65	1444 3111
B8	V1	Black	IP65	2799 7145
B4 <sub>DS</sub>	S2	Black	IP55	1421 2111
	S2	Black	IP65	1423 2111
	S2	Red/ Yellow	IP65	1424 2111
B5 <sub>DS</sub>	S4	Black	IP65	1443 3111
	S4	Red/ Yellow	IP65	1444 3111
B6 <sub>DS</sub> ... B7 <sub>DS</sub>	V1	Black	IP65	2799 7145

## Accessories (continued)

### Shaft for external handle


#### Use

Standard lengths:

- 200 mm,
- 320 mm,
- 400 mm.

Other lengths: Please consult us.

Frame size	Handle type	Dimensions X (mm)	Length (mm)	Reference
B4	S2	150 ... 295	200	1400 1020
B4	S2	150 ... 415	320	1400 1032
B4	S2	150 ... 495	400	1400 1040
B5	S2	203 ... 328	200	1400 1020
B5	S2	203 ... 448	320	1400 1032
B5	S2	203 ... 525	400	1400 1040
B6	S4	220 ... 343	200	1401 1520
B6	S4	220 ... 463	320	1401 1532
B6	S4	220 ... 543	400	1401 1540
B7	S4	305 ... 366	200	1401 1520
B7	S4	305 ... 485	320	1401 1532
B7	S4	305 ... 564	400	1401 1540
B8	V1	415 ... 690	320	2799 3018
B8	V1	415 ... 820	450	2799 3019
B4 <sub>DS</sub>	S2	210...310	200	1400 1020
B4 <sub>DS</sub>	S2	210...430	320	1400 1032
B4 <sub>DS</sub>	S2	210...510	400	1400 1040
B5 <sub>DS</sub>	S4	280...390	200	1401 1520
B5 <sub>DS</sub>	S4	280...510	320	1401 1532
B5 <sub>DS</sub>	S4	280...590	400	1401 1540
B6 <sub>DS</sub>	V1	425...577	320	4199 3018
B6 <sub>DS</sub>	V1	425...697	400	4199 3019
B7 <sub>DS</sub>	V1	425...697	320	4199 3018
B7 <sub>DS</sub>	V1	425...777	400	4199 3019

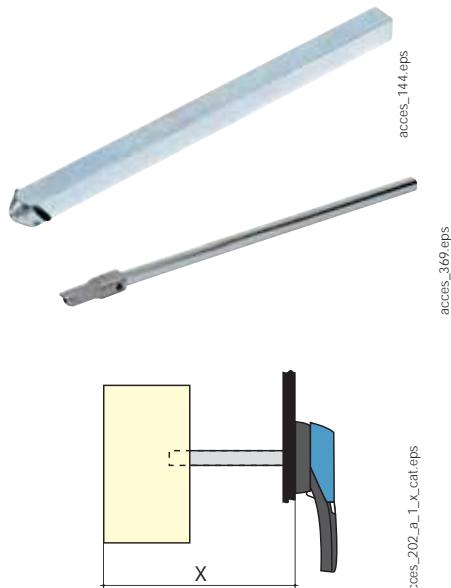

### Shaft guide for external operation

#### Use

To guide the shaft extension into the external handle.

This accessory enables the handle to engage the extension shaft with a misalignment of up to 15 mm.

Required for a shaft length over 320 mm.

Description	Reference
Shaft guide	1429 0000



### S-type handle adapter

#### Use

Enables S-type handles to be fitted in place of existing older style Socomec handles.  
Adapter can also be utilised as a spacer to increase the distance between the panel door and the handle lever.

#### Dimensions

Adds 12 mm to the depth of the handle.



(1) IP: protection degree according to IEC 60529 standard.

## Auxiliary contact

### Use

Pre-break and signalling of positions 0 and I:

- 1 to 2 NO/NC auxiliary contacts,
- 1 to 4 NO + NC auxiliary contacts,
- 1 to 2 low level NO/NC auxiliary contacts.

### Characteristics

NO/NC AC: IP2 with front operation.

### Connection to the control circuit

By 6.35 mm fast-on terminal.

### Electrical characteristics

30 000 operations.



acces\_076.eps

### NO/NC changeover auxiliary contacts

Frame size	Position AC	Type	Reference
B4 ... B8	1 contact	NO/NC	2699 0031
B4 ... B8	2 contacts	NO/NC	2699 0032
B4 <sub>DS</sub> ... B7 <sub>DS</sub>	1 contact	NO/NC	2699 0061
B4 <sub>DS</sub> ... B7 <sub>DS</sub>	2 contacts	NO/NC	2699 0062

### Low level NO/NC auxiliary contacts

Frame size	Position AC	Type	Reference
B4 ... B7	1 contact	NO/NC	2699 0301
B4 ... B7	2 contacts	NO/NC	2699 0302

## Terminal screen

### Use

Top and bottom protection against direct contact with terminals or connection parts.

Frame size	No. of poles	Position	Pack	Reference
B4	2 P	Top or bottom	1 unit	2698 3020
B4T	3 P	Top or bottom	1 unit	26984020
B4	4 P	Top or bottom	1 unit	2698 4020
B5	3 P	Top or bottom	1 unit	2698 3050
B5	4 P	Top or bottom	1 unit	2698 4050
B6	4 P	Top or bottom	1 unit	2698 4080
B7	4 P	Top or bottom	1 unit	2698 4120
B8	4 P	Top or bottom	1 unit	2698 4200
B4 <sub>DS</sub>	2 P	Top or bottom	1 unit	1509 3025
B5 <sub>DS</sub>	6 P	Top and bottom	2 units	1509 3063
B5 <sub>DS</sub>	8 P	Top and bottom	2 units	1509 4063
B6 <sub>DS</sub>	8 P	Top and bottom	2 units	1509 4080



acces\_079.eps

## Inter-phase barrier

### Use

Safe isolation between the terminals.

Frame size	No. of poles	Reference
B4	2 P	2998 0023
B4T	3 P	2998 0023
B4	4 P	2998 0024
B5	4 P	2998 0014
B6...B8	3 P	Included
B6...B8	4 P	Included

The inter-phase barriers are not mandatory but we recommend to separate the polarities + and -.

## Accessories (continued)

### Bridging bars for connecting poles in series

#### Use

The bridging bars permit easy connection of the poles in series, allowing the following configurations<sup>(1)</sup>.

(1) Other connections: refer to mounting instructions.

#### 1000 VDC - 1 independent PV circuit

Switch body Reference	Rating (A)	Frame size	Fig.	Quantity of bridging bars kits to order per switch - ungrounded	Fig.	Reference
26PV 4040	400	B4		4		2609 0025
26PV 4050	500					
26PV 4063	630	B5		4		2709 0027
26PV 4080	800					
26PV 4120	1250	B6		2		2609 1100
26PV 4200	2000	B7		2		2609 1200
26PV 4320	3200	B8		2		
26PV 8063	630	B5 <sub>DS</sub>		8		2709 0027
26PV 8080	800	B6 <sub>DS</sub>		4		
26PV 8120	1250				2609 1100	
26PV 8200	2000	B7 <sub>DS</sub>		4		2609 1200









### Bridging bars for connecting poles in series (continued)

#### Use

The bridging bars permit easy connection of the poles in series, allowing the following configurations<sup>(1)</sup>.

(1) Other connections: refer to mounting instructions.

#### 1500 VDC - 1 independent PV circuit

Switch body Reference	Rating (A)	Frame size	Quantity to be ordered to connect 2 poles in series	Fig.	Quantity of bridging bars kits to order per switch - ungrounded	Fig.	Reference
26PV 3015	160	B4T	1		1		2609 0026
							2609 0041
26PV 3024	250	B4T	1		1		2609 0026
							2609 0041
26PV 3030	315	B4T	1		1		2609 0026
							2609 0041
26PV 3039	400	B4T	1		1		2609 0026
							2609 0041

## Accessories (continued)


## Bridging bars for connecting poles in series (continued)

## Use

The bridging bars permit easy connection of the poles in series, allowing the following configurations<sup>(1)</sup>.

(1) Other connections: refer to mounting instructions.

## 1500 VDC - 1 independent PV circuit


Switch body Reference	Rating (A)	Frame size	Quantity to be ordered to connect 2 poles in series	Fig.	Quantity of bridging bars kits to order per switch - ungrounded	Fig.	Reference
26PV 8080	800	B6 <sub>DS</sub>	1		4		2609 1100
26PV 8120	1250	B6 <sub>DS</sub>	1		4		2609 1100
26PV 8200	2000	B7 <sub>DS</sub>	1		4		2609 1200

## Characteristics

### Characteristics according to IEC 60947-3


Rated Current $I_n$			100 A		160 A		250 A			
Reference			26PV 2010	26PV 5010	26PV 2016	26PV 5016	26PV 3015	26PV 2025	26PV 5025	26PV 3024
Frame size			B4	B4 <sub>DS</sub>	B4	B4 <sub>DS</sub>	B4T	B4	B4 <sub>DS</sub>	B4T
Thermal current at 40°C (A)			100	100	160	160	160	250	250	250
Thermal current at 45°C (A)			100	100	160	160	160	250	250	250
Thermal current at 50°C (A)			100	100	160	160	160	250	250	250
Thermal current at 55°C (A)			100	100	160	160	160	250	250	250
Thermal current at 60°C (A)			100	100	160	160	160	250	250	250
Thermal current at 65°C (A)			100	100	160	160	152	250	250	237
Thermal current at 70°C (A)			100	100	160	160	144	250	250	225
Rated insulation voltage $U_i$ (V)			1500	1500	1500	1500	1500	1500	1500	1500
Rated impulse withstand voltage $U_{imp}$ (kV)			12	12	12	12	12	12	12	12
Number of circuits			Rated voltage	Utilisation category	$I_e$ (A)	$I_e$ (A)	$I_e$ (A)	$I_e$ (A)	$I_e$ (A)	$I_e$ (A)
$I_e$ (A)	1 circuit	1000 VDC	DC-21 B	100	-	160	-	-	250	-
	2 circuits			-	100	-	160	-	-	250
	1 circuit	1500 VDC	DC-21 B	-	-	-	-	-	-	-
	2 circuits			-	-	-	-	-	-	-
	1 circuit	DC-PV1		-	-	-	-	160	-	250
Number of pole(s) in series per circuit			1P+; 1P- (1)	1P+; 1P- (2)	1P+; 1P- (1)	1P+; 1P- (2)	2P+; 1P- (3)	1P+; 1P- (1)	1P+; 1P- (2)	2P+; 1P- (3)
Number of pole(s) of the device			2 P	4 P	2 P	4 P	3 P	2 P	4 P	3 P
Short-circuit capacity (without protection)										
Rated short-time withstand current 0.3 s. (kA eff)			10	10	10	10	10	10	10	10
Rated short-time withstand current 1 s. (kA eff)			5	5	5	5	5	5	5	5
Power dissipation per poles of the PV switch (W/P) @ 40°C			0.8	0.8	2	2	2.5	4.7	4.7	5
Humidity according to IEC 60947-1 Annex Q (%)			95	95	95	95	95	95	95	95
Connection										
Nominal Cu cable section (mm <sup>2</sup> )			35	35	70	70	70	120	120	120
Nominal Cu busbar width (mm)			32	32	32	32	32	32	32	32

(1)

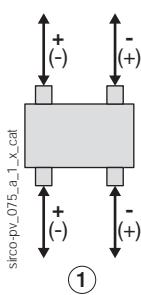


1. Utility 1  
2. Utility 2

(2)

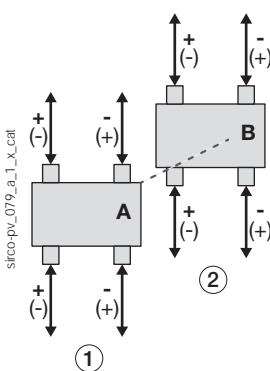


(3)

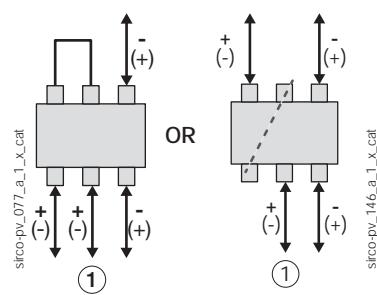


## Characteristics (continued)

### Characteristics according to IEC 60947-3


Rated Current $I_n$		315 A			
Reference	Frame size	26PV 2031	26PV 5031	26PV 3030	
Thermal current at 40°C (A)	B4	315	315	315	
Thermal current at 45°C (A)	B4 <sub>DS</sub>	315	315	315	
Thermal current at 50°C (A)	B4T	315	315	315	
Thermal current at 55°C (A)		315	315	315	
Thermal current at 60°C (A)		315	315	315	
Thermal current at 65°C (A)		315	315	299	
Thermal current at 70°C (A)		315	315	283	
Rated insulation voltage $U_i$ (V)		1500	1500	1500	
Rated impulse withstand voltage $U_{imp}$ (kV)		12	12	12	
Number of circuits	Rated voltage	Utilisation category	$I_e$ (A)	$I_e$ (A)	
$I_e$ (A)	1 circuit 1000 VDC	DC-21 B	315	-	
			-	315	
	1 circuit 2 circuits 1500 VDC	DC-21 B	-	-	
			-	-	
		DC-PV1	-	315	
Number of pole(s) in series per circuit			1P+; 1P- <sup>(1)</sup>	1P+; 1P- <sup>(2)</sup>	
Number of pole(s) of the device			2 P	4 P	
Short-circuit capacity (without protection)				2P+; 1P- <sup>(3)</sup>	
Rated short-time withstand current 0.3 s. (kA eff)		10	10	10	
Rated short-time withstand current 1 s. (kA eff)		5	5	5	
Power dissipation per poles of the PV switch (W/P) @ 40°C		8	8	9.5	
Humidity according to IEC 60947-1 Annexe Q (%)		95	95	95	
Connection					
Nominal Cu cable section (mm <sup>2</sup> )		185	185	185	
Nominal Cu busbar width (mm)		32	32	32	

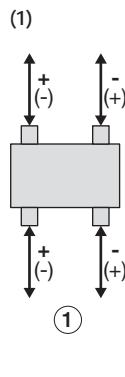

1. Utility 1  
2. Utility 2

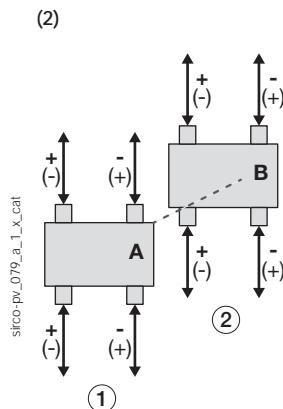

sirco-pv\_079\_a\_1\_x\_cat

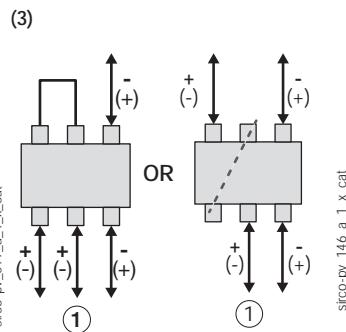


sirco-pv\_077\_a\_1\_x\_cat

sirco-pv\_146\_a\_1\_x\_cat


Characteristics according to IEC 60947-3

Rated Current $I_n$		400 A		500 A
Reference		26PV 4040	26PV 3039	26PV 4050
Frame size		B4	B4T	B4
Thermal current at 40°C (A)		400	400	500
Thermal current at 45°C (A)		400	400	500
Thermal current at 50°C (A)		400	400	500
Thermal current at 55°C (A)		400	400	500
Thermal current at 60°C (A)		400	400	500
Thermal current at 65°C (A)		380	380	475
Thermal current at 70°C (A)		360	360	450
Rated insulation voltage $U_i$ (V)		1500	1500	1500
Rated impulse withstand voltage $U_{imp}$ (kV)		12	12	12
Number of circuits	Rated voltage	Utilisation category	$I_e$ (A)	$I_e$ (A)
$I_e$ (A)	1 circuit 2 circuits	1000 VDC 1500 VDC	400	-
			-	-
	1 circuit 2 circuits		-	-
	1 circuit	DC-PV1	-	400
Number of pole(s) in series per circuit		2P+; 2P- <sup>(1)</sup>	2P+; 1P- <sup>(2)</sup>	2P+; 2P- <sup>(1)</sup>
Number of pole(s) of the device		4 P	3 P	4 P
Short-circuit capacity (without protection)				
Rated short-time withstand current 0.3 s. (kA eff)		10	10	10
Rated short-time withstand current 1 s. (kA eff)		5	5	5
Power dissipation per poles of the PV switch (W/P) @ 40°C		20	15	30
Humidity according to IEC 60947-1 Annexe Q (%)		95	95	95
Connection				
Nominal Cu cable section (mm <sup>2</sup> )		240	240	2 x 150
Nominal Cu busbar width (mm)		32	32	32

(1)

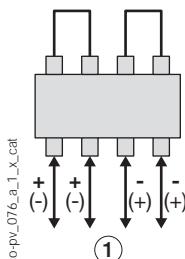

(2)

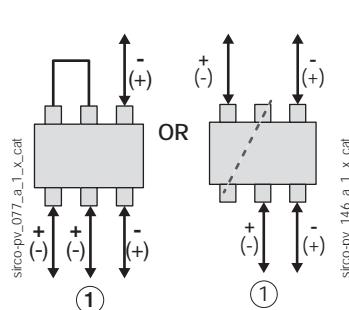

sirco-pv\_076\_a\_1\_x\_cat


sirco-pv\_077\_a\_1\_x\_cat

sirco-pv\_146\_a\_1\_x\_cat

## Characteristics (continued)

### Characteristics according to IEC 60947-3

Rated Current $I_n$		630 A		800 A		
Reference		26PV 4063	26PV 8063	26PV 4080	26PV 8080	
Frame size		B5	B5 <sub>DS</sub>	B5	B5 <sub>DS</sub>	
Thermal current at 40°C (A)		630	630	800	800	
Thermal current at 45°C (A)		630	630	760	760	
Thermal current at 50°C (A)		630	630	720	720	
Thermal current at 55°C (A)		630	630	685	685	
Thermal current at 60°C (A)		560	560	650	650	
Thermal current at 65°C (A)		540	540	620	620	
Thermal current at 70°C (A)		510	510	590	590	
Rated insulation voltage $U_i$ (V)		1500	1500	1200	1500	
Rated impulse withstand voltage $U_{imp}$ (kV)		12	12	12	12	
Number of circuits	Rated voltage	Utilisation category	$I_e$ (A)	$I_e$ (A)	$I_e$ (A)	
$I_e$ (A)	1 circuit	DC-21 B	630	-	800	
	2 circuits		-	630	-	
$I_e$ (A)	1 circuit	DC-21 B	-	-	-	
	2 circuits		-	-	800	
Number of pole(s) in series per circuit			2P+; 2P- <sup>(1)</sup>	2P+; 2P- <sup>(2)</sup>	2P+; 2P- <sup>(1)</sup>	
Number of pole(s) of the device			4 P	8 P	4 P	
<b>Short-circuit capacity (without protection)</b>						
Rated short-time withstand current 0.3 s. (kA eff)			10	10	10	
Rated short-time withstand current 1 s. (kA eff)			5	5	5	
Power dissipation per poles of the PV switch (W/P) @ 40°C			40	40	70	
Humidity according to IEC 60947-1 Annexe Q (%)			95	95	95	
<b>Connection</b>						
Nominal Cu cable section (mm <sup>2</sup> )			2 x 185	2 x 185	2 x 240	
Nominal Cu busbar width (mm)			40	40	50	
					50	

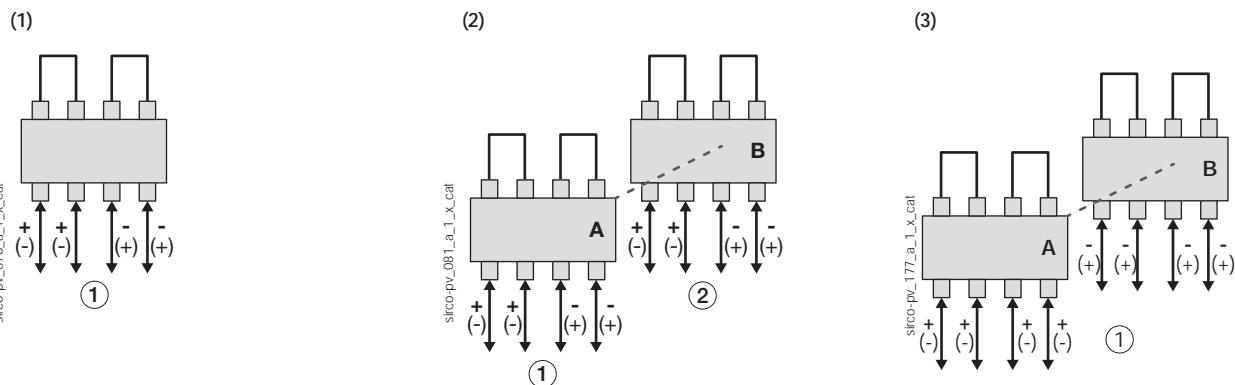


1. Utility 1

2. Utility 2

Characteristics according to IEC 60947-3


Rated Current $I_n$			1250 A		2000 A		3200 A	
Reference			26PV 4120	26PV 8120	26PV 4200	26PV 8200	26PV 4320	
Frame size			B6	B6 <sub>DS</sub>	B7	B7 <sub>DS</sub>	B8	
Thermal current at 40°C (A)			1250	1250	2000	2000	3200	
Thermal current at 45°C (A)			1250	1250	2000	2000	3200	
Thermal current at 50°C (A)			1250	1250	1850	1850	3200	
Thermal current at 55°C (A)			1180	1180	1730	1730	3040	
Thermal current at 60°C (A)			1125	1125	1600	1600	2888	
Thermal current at 65°C (A)			1050	1050	1520	1520	2743	
Thermal current at 70°C (A)			1000	1000	1440	1440	2606	
Rated insulation voltage $U_i$ (V)			-	-	1500	1500	1500	
Rated impulse withstand voltage $U_{imp}$ (kV)			12	12	12	12	12	
Number of circuits	Rated voltage	Utilisation category	$I_e$ (A)					
$I_e$ (A)	1 circuit	DC-21 B	1250	-	2000	-	3200	
	2 circuits		-	1250	-	2000	-	
	1 circuit	DC-21 B	-	-	1250	-	2000	
	2 circuits		-	-	-	-	-	
Number of pole(s) in series per circuit			2P+; 2P- <sup>(1)</sup>	2P+; 2P- <sup>(2)</sup>	4P+; 4P- <sup>(3)</sup>	2P+; 2P- <sup>(1)</sup>	2P+; 2P- <sup>(2)</sup>	
Number of pole(s) of the device			4 P	8 P	4 P	8 P	4 P	
Short-circuit capacity (without protection)								
Rated short-time withstand current 0.3 s. (kA eff)			10	10	10	10	10	
Rated short-time withstand current 1 s. (kA eff)			5	5	5	5	5	
Power dissipation per poles of the PV switch (W/P) @ 40°C			-	63	-	125	-	
Humidity according to IEC 60947-1 Annexe Q (%)			95	95	95	95	95	
Connection								
Nominal Cu cable section (mm <sup>2</sup> )			2 x 240	2 x 240	-	-	-	
Nominal Cu busbar width (mm)			63	63	100	100	4 x 100 x 5	

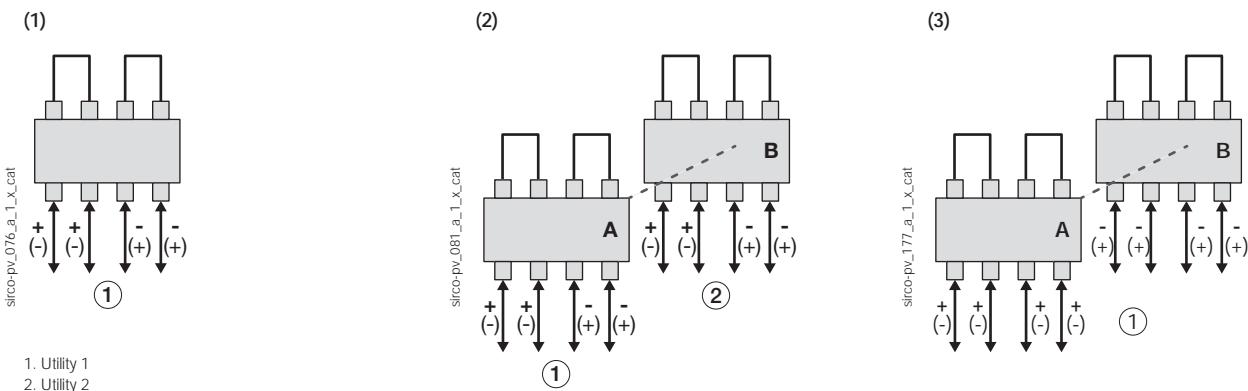

## Dimensions (mm)

100 to 315 A - B4 - 2P - 1000 VDC - 1 circuit


26PV 2010 - 26PV 2016 - 26PV 2025 - 26PV 2031

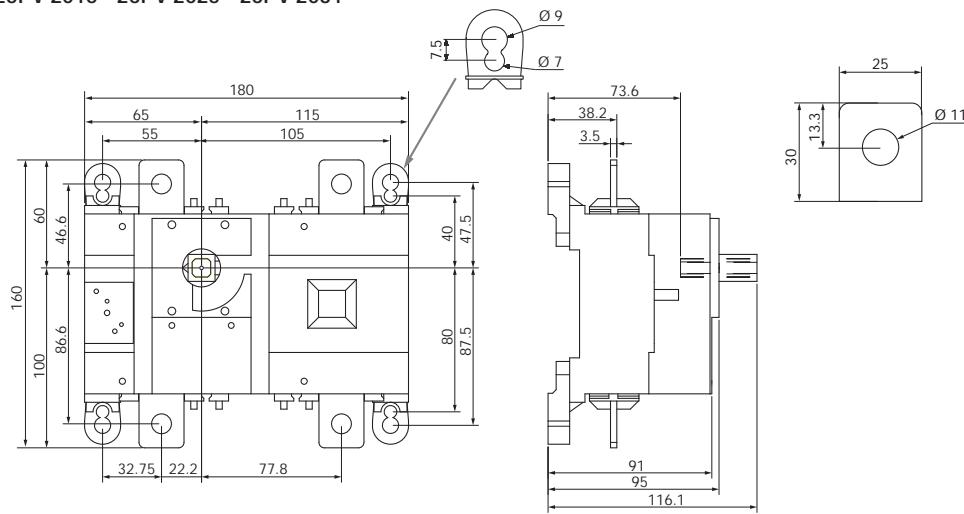

sirco-pv\_141\_a\_1\_x\_cat.ai

400 to 500 A - B4 - 4P - 1000 VDC - 1 circuit


26PV 4040 - 26PV 4050

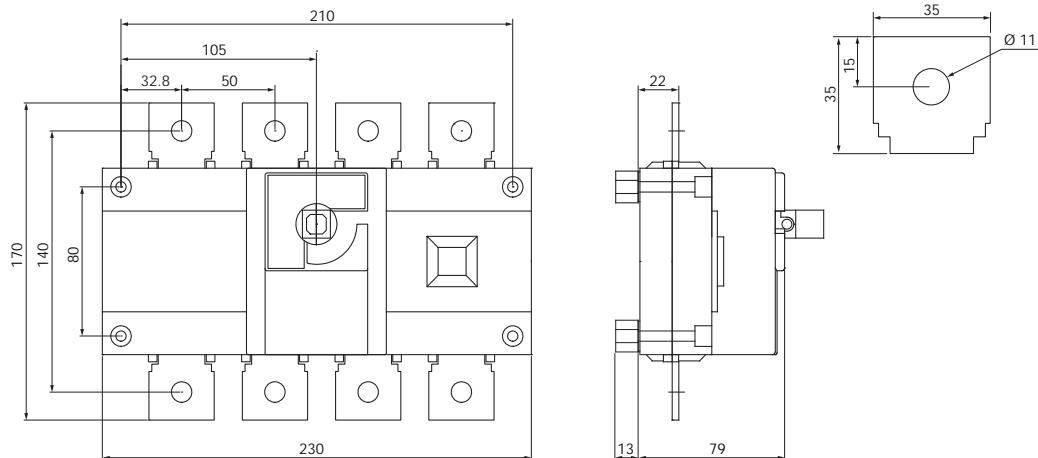

sirco-pv\_142\_a\_1\_x\_cat.ai

630 to 800 A - B5 - 4P - 1000 VDC - 1 circuit


26PV 4063 - 26PV 4080

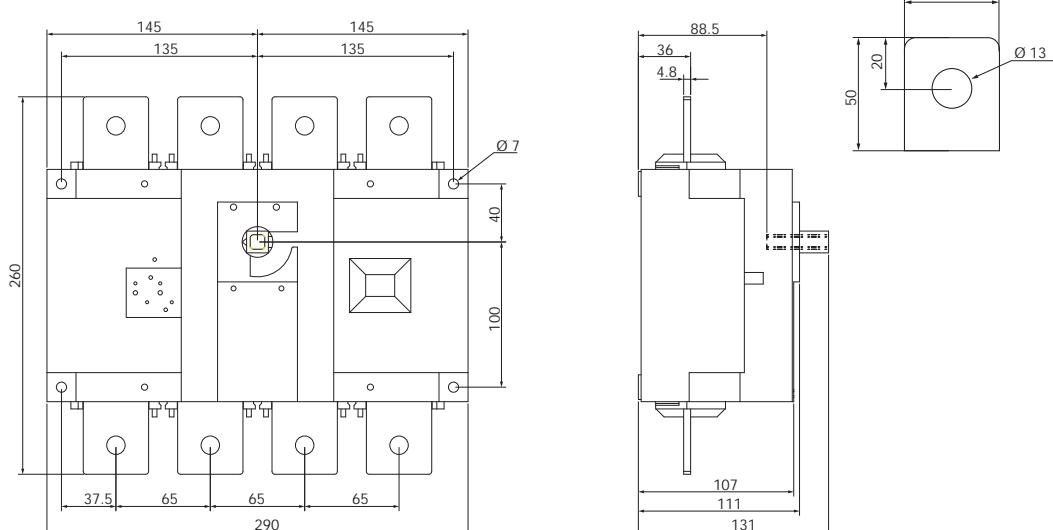

sirco-pv\_143\_a\_1\_x\_cat.ai

1250 A - B6 - 4P - 1000 VDC - 1 circuit


26PV 4120

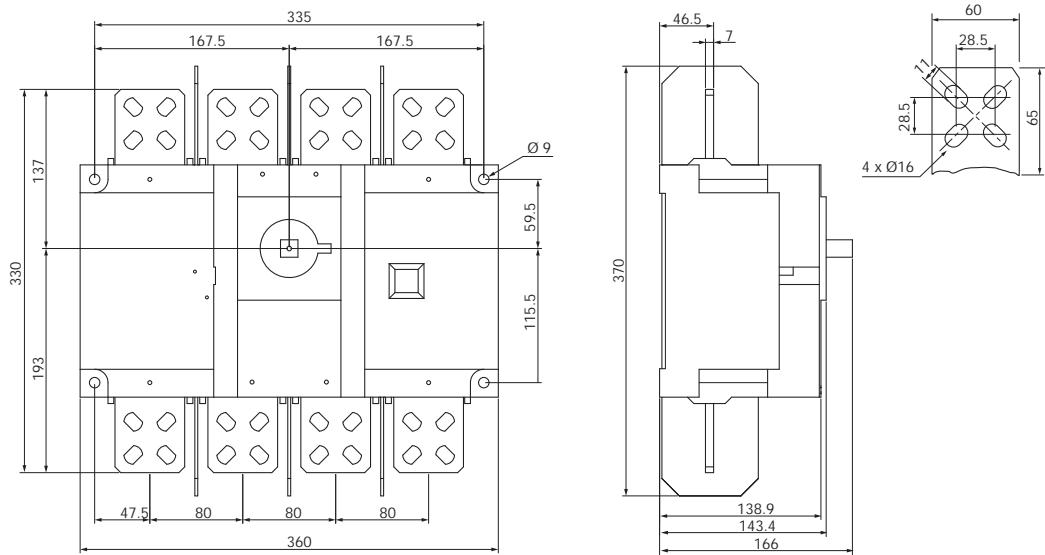

sirco-pv\_144\_a\_1\_x\_cat.ai

2000 A - B7 - 4P - 1000 VDC - 1 circuit

26PV 4200

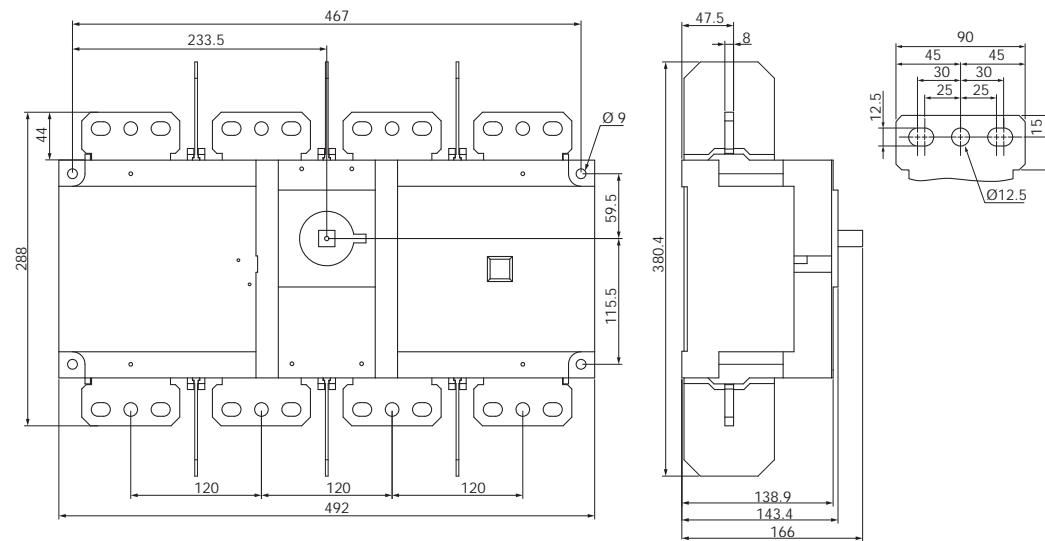


sirco-pv\_145\_a\_1\_x\_cat.ai

## Dimensions (mm) (continued)

3200 A - B8 - 4P - 1000 VDC - 1 circuit


26PV 4320

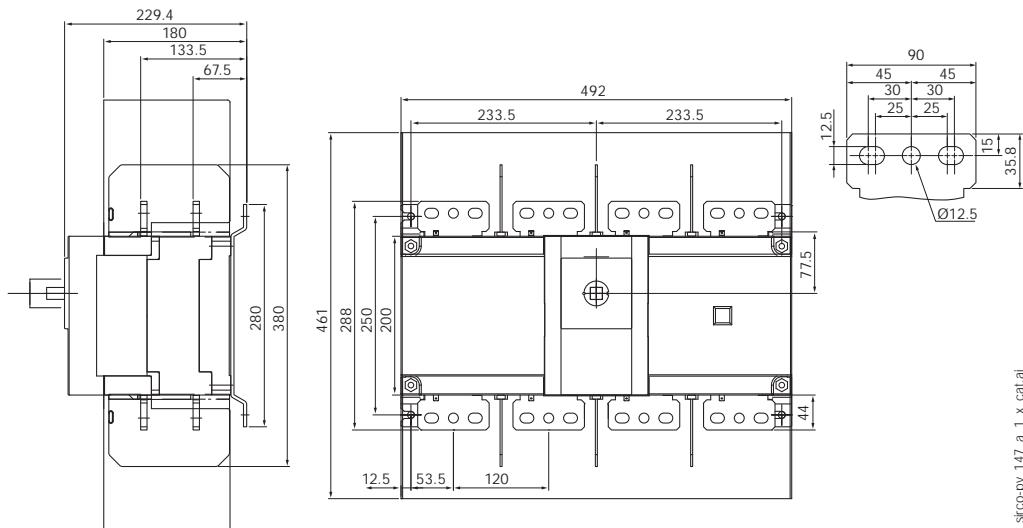

sirco-pv\_147\_a\_1x\_cat.ai

100 to 315 A - B4<sub>DS</sub> - 4P - 1000 VDC - 2 circuits


26PV 5010 - 26PV 5016 - 26PV 5025 - 26PV 5031

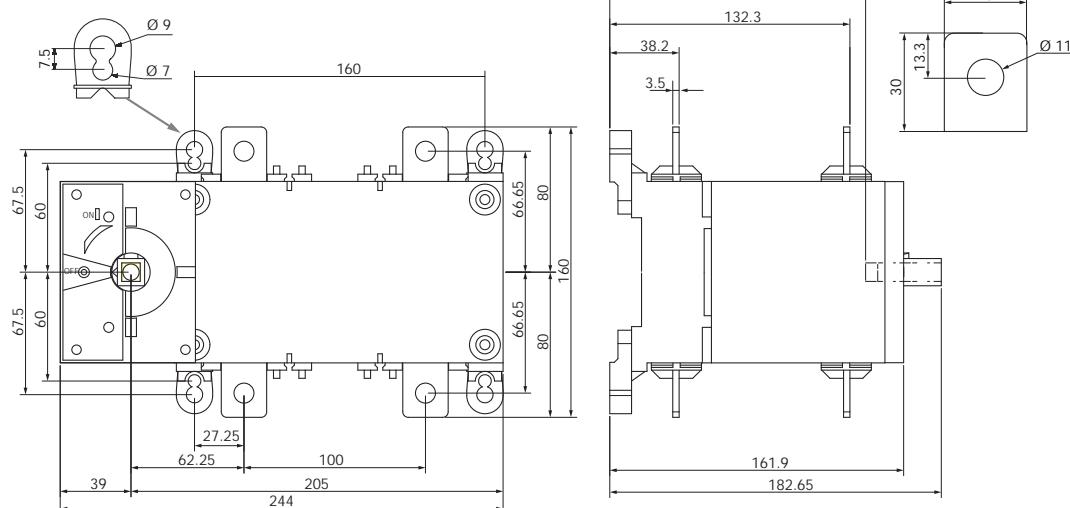

sirco-pv\_148\_a\_1x\_cat.ai

630 A - B5<sub>DS</sub> - 8P - 1000 VDC - 2 circuits


26PV 8063

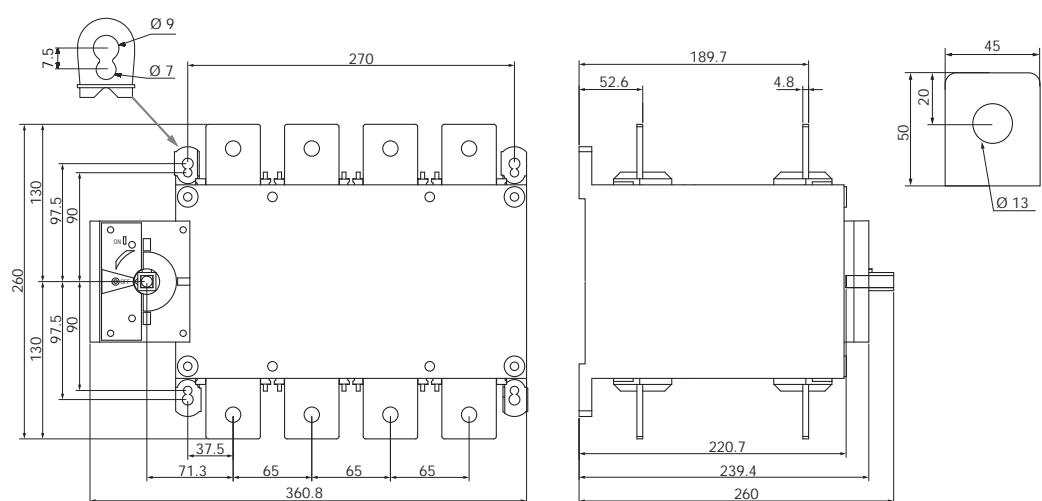

sirco-pv\_150\_a\_1x\_cat.ai

800 A - B6<sub>DS</sub> - 8P - 1000 VDC - 2 circuits


26PV 8080

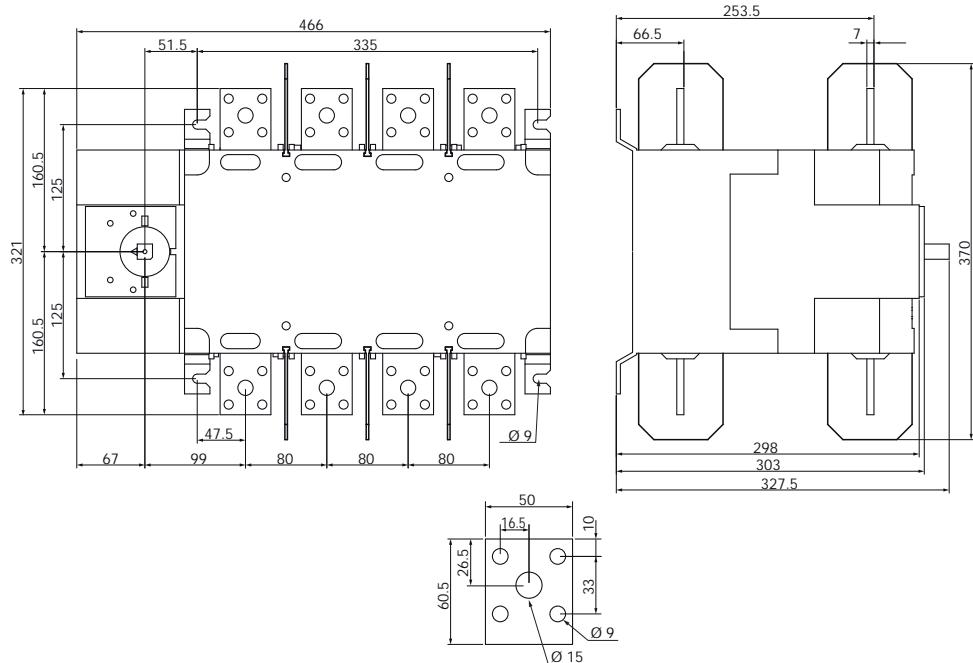

sirco-pv\_151\_a\_1x\_cat.ai

1250 A - B6<sub>DS</sub> - 8P - 1000 VDC - 2 circuits

26PV 8120

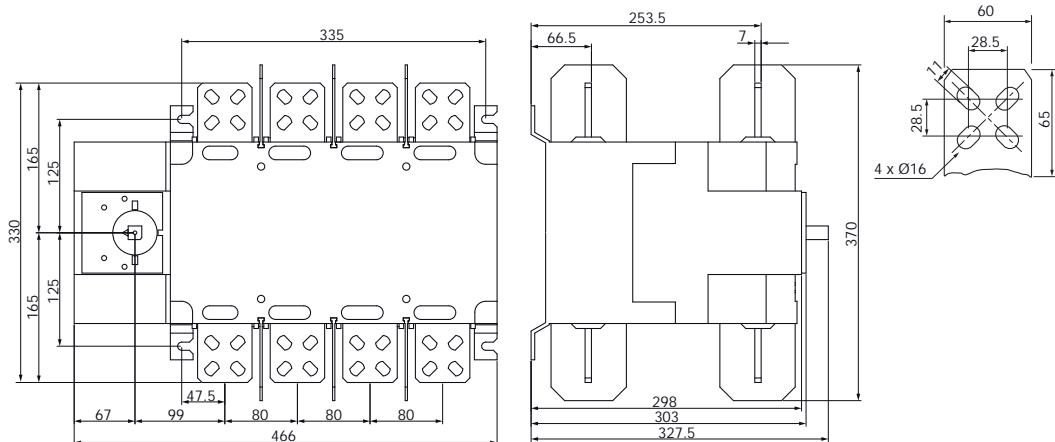


sirco-pv\_152\_a\_1x\_cat.ai

Dimensions (mm) (continued)

2000 A - B7<sub>DS</sub> - 8P - 1000 VDC - 2 circuits


26PV 8200

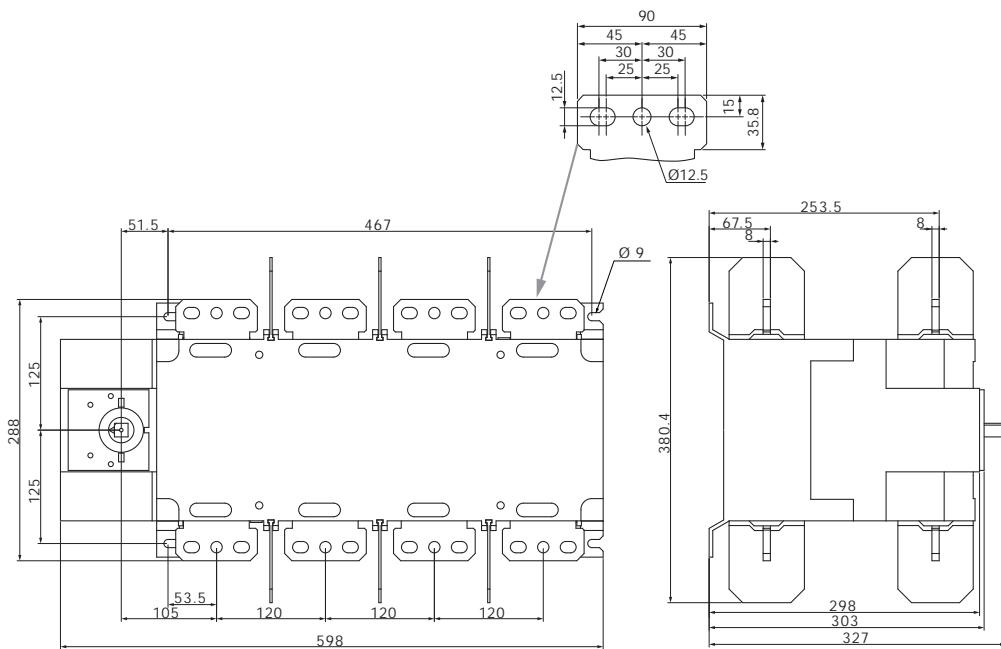

sirco-pv\_153\_a\_1\_x\_cat.ai

160 to 400 A - B4T - 3P - 1500 VDC - 1 circuit


26PV 3015 - 26PV 3024 - 26PV 3030 - 26PV 3039

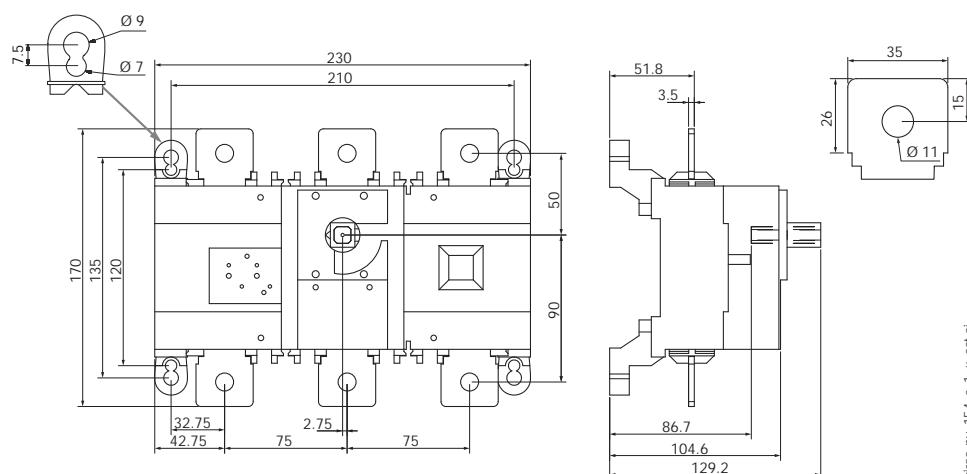

sirco-pv\_154\_a\_1\_x\_cat.ai

800 A - B6<sub>DS</sub> - 8P - 1500 VDC - 1 circuit


26PV 8080

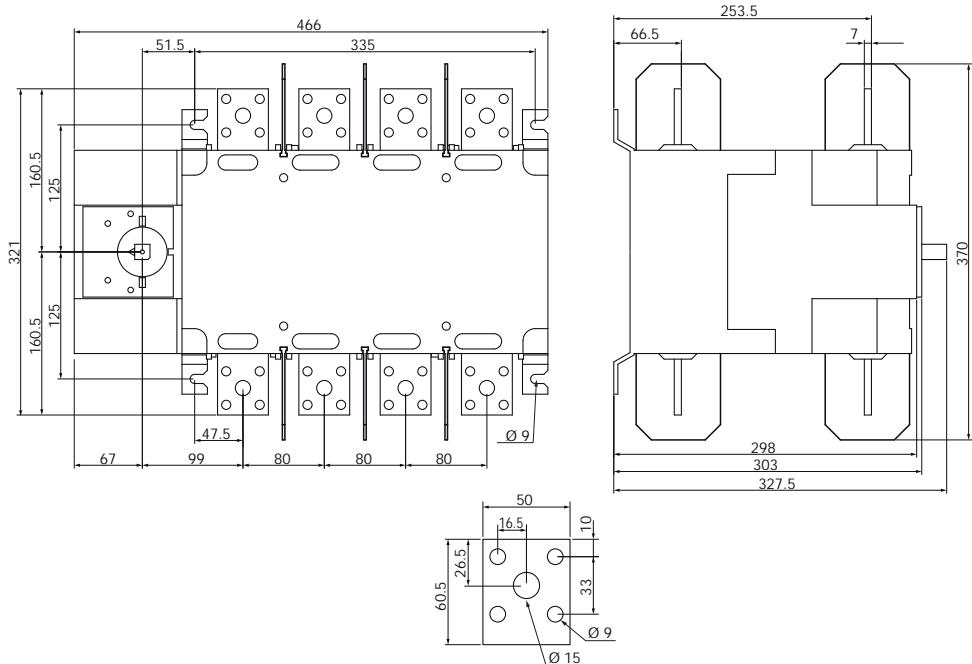

sirco-pv\_151\_a\_1\_x\_cat.ai

1250 A - B6<sub>DS</sub> - 8P - 1500 VDC - 1 circuit

26PV 8120

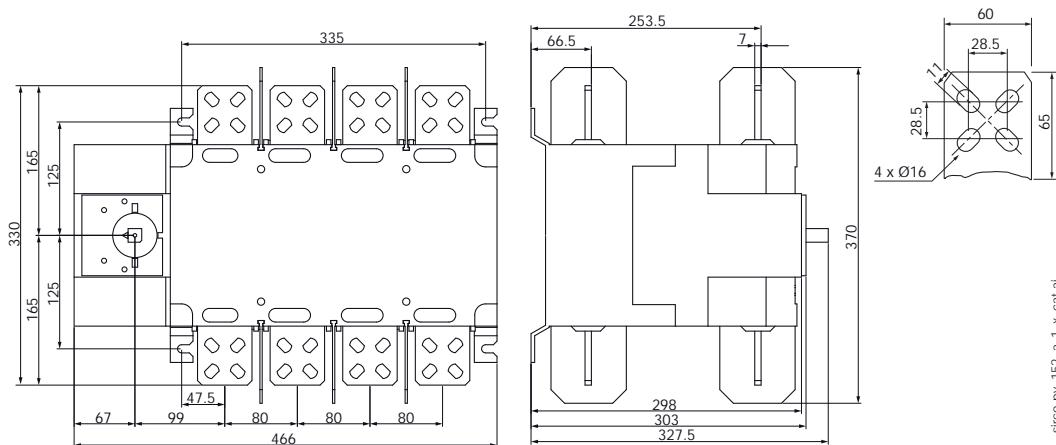


sirco-pv\_152\_a\_1\_x\_cat.ai

## Dimensions (mm) (continued)

2000 A - B7<sub>DS</sub> - 8P - 1500 VDC - 1 circuit



26PV 8200

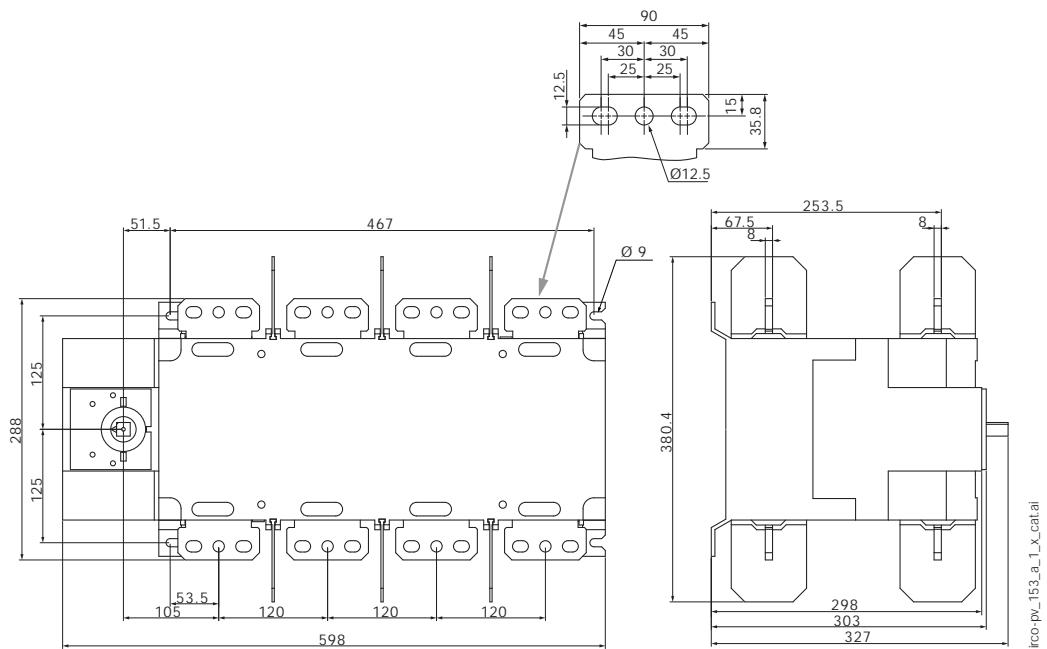



SIRCO-pv-153-a-1-x.cat.ai

## Dimensions for external handles (mm)



B4 - B4<sub>DS</sub> - B5

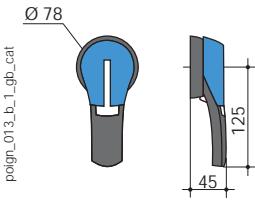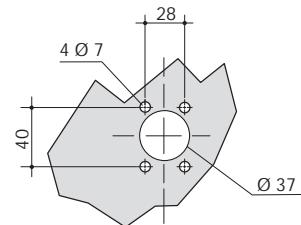Handle type	Front operation Direction of operation	Door drilling
<b>S2 type</b>   <p>Front view: Ø 78 mm, 125 mm height, 45 mm base thickness.      Side view: Ø 78 mm, 350 mm total length, 60 mm base thickness.</p>	<b>Front operation</b> Direction of operation: 0° to 90° counter-clockwise.	 <p>Door drilling: Hexagonal pattern with 4 Ø 7 mm holes, 28 mm top width, Ø 37 mm center hole, 40 mm bottom width, and 28 mm side wall thickness.</p>

B5<sub>DS</sub> - B6 - B7

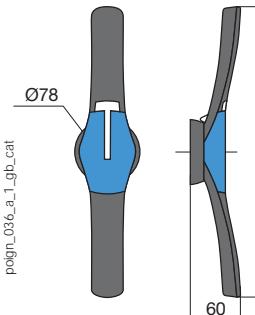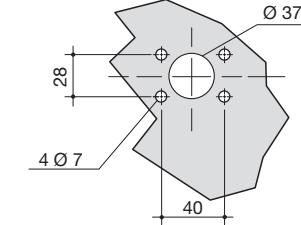Handle type	Front operation Direction of operation	Door drilling
<b>S4 type</b>   <p>Front view: Ø 78 mm, 350 mm total length, 60 mm base thickness.</p>	<b>Front operation</b> Direction of operation: 0° to 90° counter-clockwise.	 <p>Door drilling: Hexagonal pattern with 4 Ø 7 mm holes, 28 mm top width, Ø 37 mm center hole, 40 mm bottom width, and 28 mm side wall thickness.</p>


B8 - B6<sub>DS</sub> - B7<sub>DS</sub>

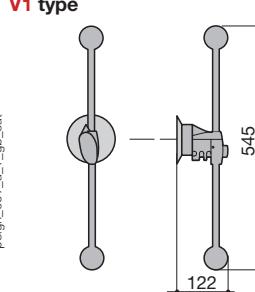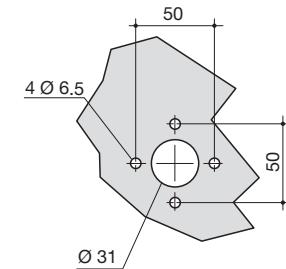Handle type	Front operation Direction of operation	Door drilling
<b>V1 type</b>   <p>Front view: 545 mm total length, 122 mm base thickness.</p>	<b>Front operation</b> Direction of operation: 0° to 90° counter-clockwise.	 <p>Door drilling: Hexagonal pattern with 4 Ø 6.5 mm holes, 50 mm top width, Ø 31 mm center hole, 50 mm bottom width, and 31 mm side wall thickness.</p>

### Bridging bars (mm)


2609 0025

sirco-ul\_030\_a.1.x.cat

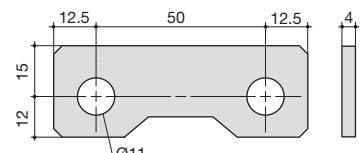


2709 0027

sirco-pv\_179\_a.1.x.cat

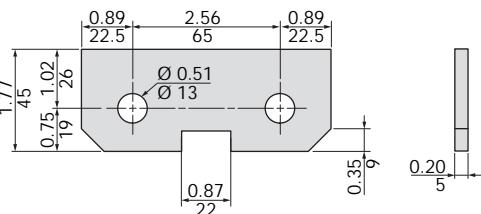


2609 0026

sirco-pv\_160\_a.1.x.cat.ai

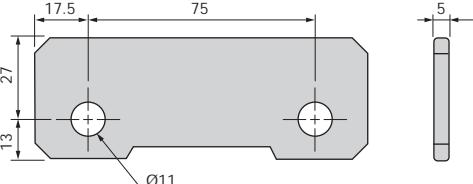



2609 1200

sirco-ul\_034\_a.1.x.cat

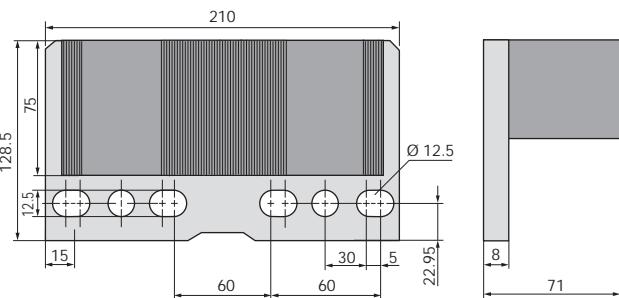


2709 0045

sirco-pv\_134\_a.1.x.cat

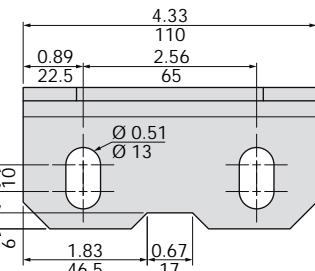


2609 0080

sirco-ul\_031\_a.1.x.cat

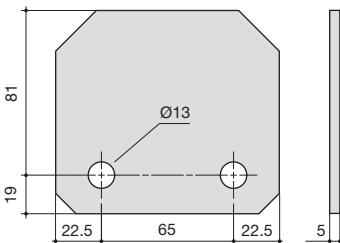


2609 1100

sirco-ul\_032\_a.1.x.cat

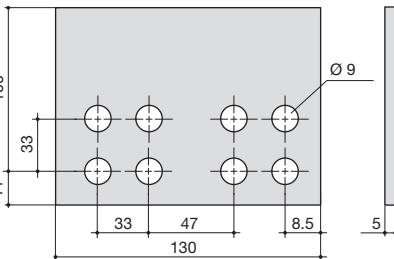


2609 0041

sirco-pv\_181\_a.1.x.cat.ai

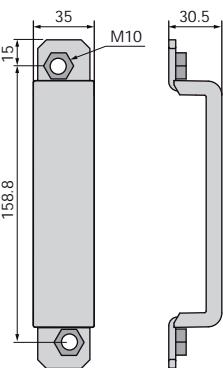


## Mounting orientation











B4 to B8

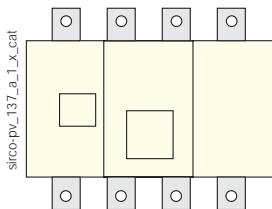

B4<sub>DS</sub> - B5<sub>DS</sub>

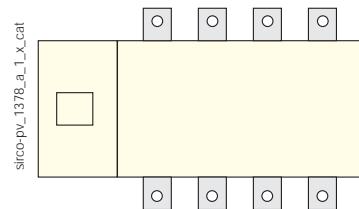

B6<sub>DS</sub> - B7<sub>DS</sub>

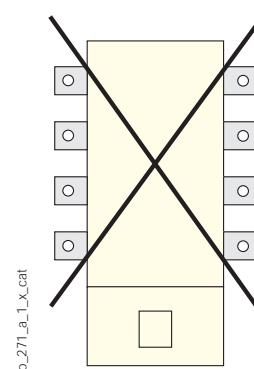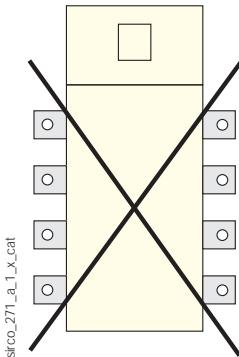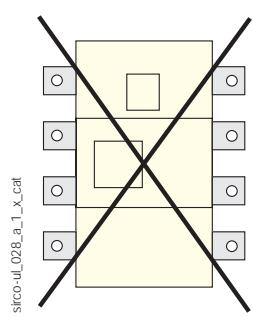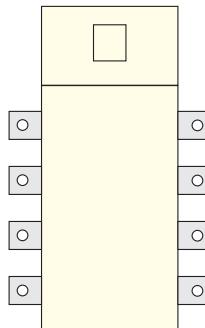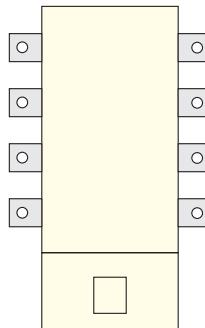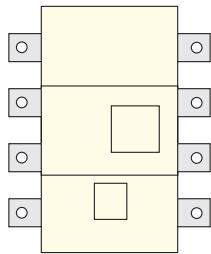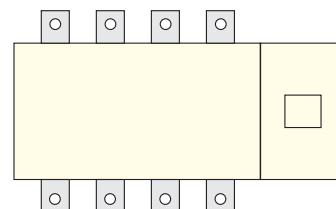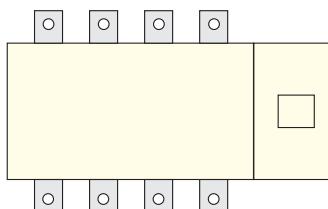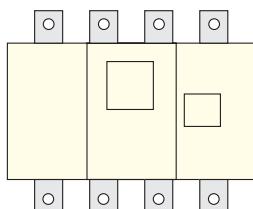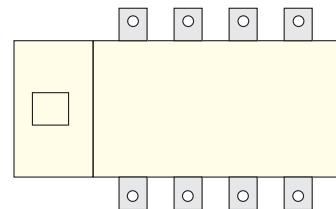

# INOSYS LBS

Load break switches for DC and PV applications  
160 to 630 A, up to 1500 VDC



## Functions

**INOSYS LBS** is a range of load break switches that can be manually controlled. These switches can be operated manually using the handle to disconnect all or part of the electrical installation. They ensure on-load opening/closing and safe disconnection of any low voltage electrical circuit up to 1500 VDC. They can also be used for emergency power switching applications. They are available for DC-PV2 utilization category.

## Advantages

### High performance power switching in confined spaces

INOSYS LBS load break switches incorporate patented technology that provides a breaking capacity of between 500 and 750 VDC per pole, providing 1500 VDC in just 2 poles, and significantly limiting power dissipation. All in an exceptionally compact enclosure.

### Safe to use

- Direct position indicator on the bar and visible contact with containment of the electrical arc.
- The switch is completely independent of the operating speed, which ensures safe use under any conditions.
- High temperatures permitted: without derating up to 55 °C (131°F), operational from -40 to +70 °C.

### Designed for harsh environments.

- Vibration-tested (13.2 Hz to 100 Hz at 0.7 G).
- Impact-tested (15 g for three cycles).
- Humidity-tested (2 cycles, 55 °C, 95% humidity).
- Salt spray-tested (3 cycles with storage humidity, 40 °C, 93% humidity after each cycle).



### Easy to install

- Wiring: the non-polarisation of the switch allows for all types of wiring and connections.
- Integrated auxiliary contacts.

## Modular solution for flexible configuration

- Single or double-pole switch

The same switch can be used on earth-connected or insulated networks with a simple change in the wiring configuration.

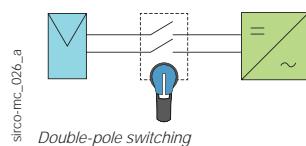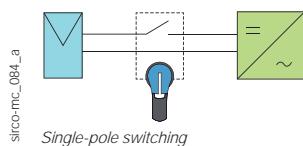

## The solution for

- > Disconnection within PV installation
- > Battery protection
- > DC equipment & process isolation

## Strong points

- > High-performance switching in a compact design
- > Easy integration
- > Reinforced safety with visible contact indication
- > Efficient with low power-loss

## Compliance with standards

- > IEC 60947-3, DC-21B & DC-PV2



- > UL98B File E346418



- > KEMA-KEUR



- > CCC



## Compatible with requirements


- > IEC 60364-7-712
- > NEC art. 690
- > AS/NZS 5033

## Compliance with environmental standards

- > IEC 60947-1 Annex Q, Stage F
- > IEC 60068-2-1
- > IEC 60068-2-2
- > IEC 60068-2-27
- > IEC 60068-2-30
- > IEC 60068-2-52
- > IEC 60068-2-6



## Typical applications: local safe disconnection for DC and PV applications

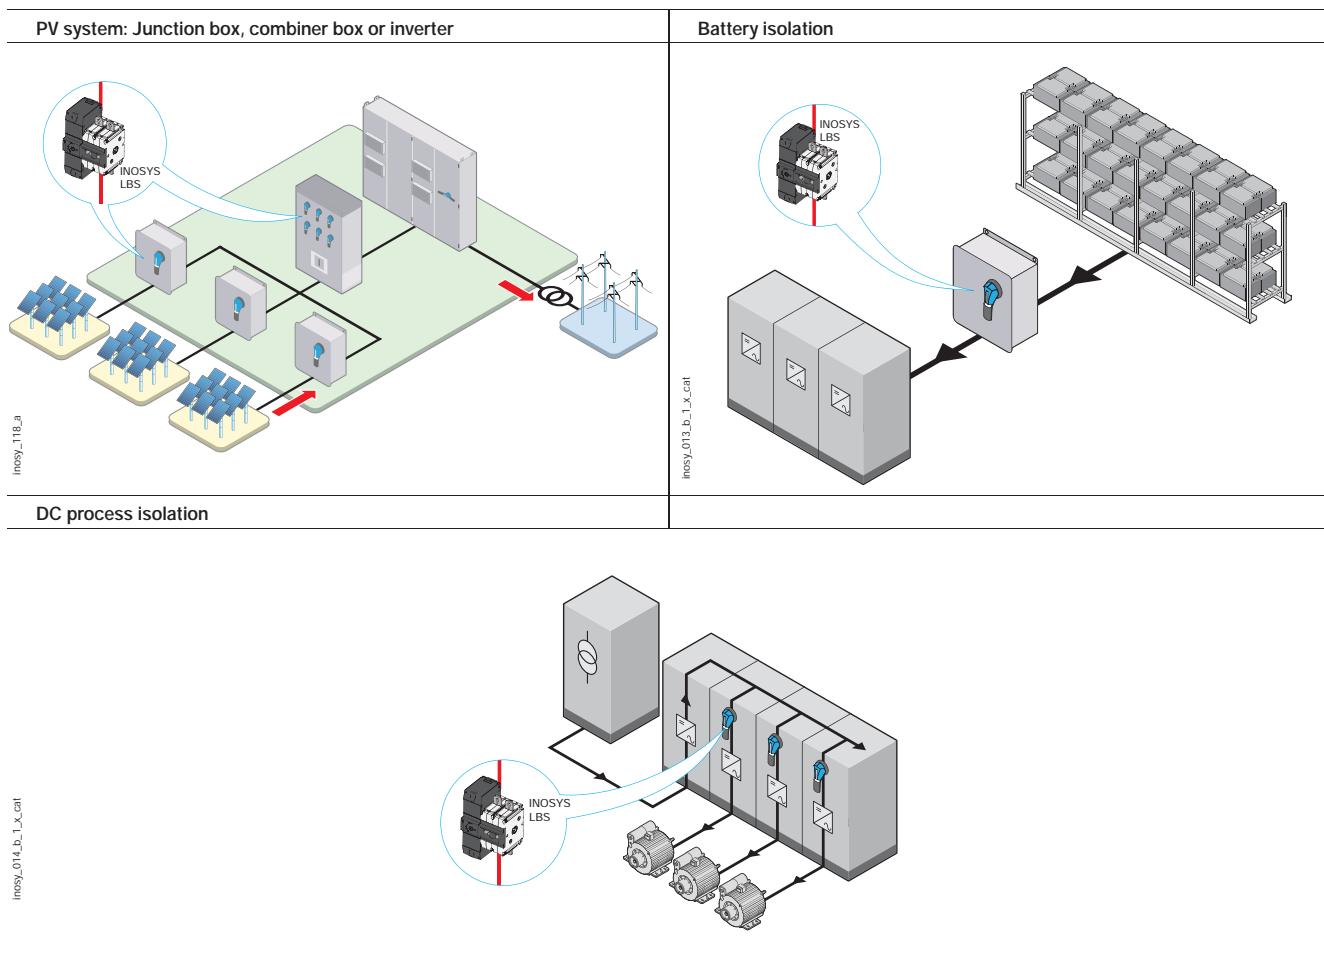

## The SOCOMEC solutions

SIRCO PV Manual PV switches	INOSYS LBS Visible breaking switches for DC and PV applications
 Up to 3200 A at 1000 VDC Up to 2000 A at 1500 VDC Up to 4 circuits	 Up to 630 A (IEC) and 600 A (UL) at 1500 VDC

## Introduction



1. INOSYS LBS 400 A - 1500 V DC
2. External operation handle
3. Direct operation handle
4. Shaft for external operation
5. Auxiliary contact
6. Inter-phase barriers
7. Terminal shrouds
8. Terminal screen
9. Bridging bar to arrange the poles in series
10. Captive nut
11. Mounting insert
12. Cage terminals

## References

### INOSYS LBS

#### 1000 VDC - 1 circuit

Rating (A)	Frame size	No. of poles per circuit	Switch body <sup>(1)</sup>	External operation	Aux. Contact
160 A	F2	2 P (1 P+, 1 P-)	86P0 2016	Shaft 320 mm 1400 1032	
250 A	F2	2 P (1 P+, 1 P-)	86P0 2025	Handle type S2 Black IP65 74F 2111	
315 A	F2	2 P (1 P+, 1 P-)	86P0 2031	Shaft 320 mm 1400 1032	NO/NC 8499 0001
400 A	F3	2 P (1 P+, 1 P-)	86P0 2040	Handle type S2L Black IP65 14AF 2111	

(1) The switches are supplied without accessories.

(2) Please contact us

#### 1500 VDC - 1 circuit

Rating (A)	Frame size	No. of poles per circuit	Switch body <sup>(1)</sup>	External operation	Aux. Contact
160 A	F2	2 P (1 P+, 1 P-)	86P0 2017	Shaft 320 mm 1400 1032  Handle type S2 Black IP 65 74F 2111	NO/NC 8499 0001
			86P1 1017 <sup>(3)</sup>		
		3 P (2 P+, 1 P-)	86P0 3016		
			86P1 1026 <sup>(3)</sup>		
		2 P (1 P+, 1 P-)	86P0 2026		
			86P1 1026 <sup>(3)</sup>		
250 A	F2	3 P (2 P+, 1 P-)	86P0 3025	Shaft 320 mm 1400 1032  Handle type S2 Black IP 65 74F 2111	NO/NC 8499 0001
			86P0 2032		
		2 P (1 P+, 1 P-)	86P1 1032 <sup>(3)</sup>		
			86P0 3031		
		2 P (1 P+, 1 P-)	86P0 2041		
			86P1 1041 <sup>(3)</sup>		
315 A	F3	2 P (1 P+, 1 P-)	86P0 2064	Shaft 320 mm 1400 1032  Handle type S2L Black IP 65 14AF 2111	NO/NC 8499 0001
			86P1 1064 <sup>(3)</sup>		
400 A	F3	2 P (1 P+, 1 P-)	86P0 2064	Shaft 320 mm 1400 1032  Handle type S2L Black IP 65 14AF 2111	NO/NC 8499 0001
			86P1 1064 <sup>(3)</sup>		
630 A	F3	2 P (1 P+, 1 P-)	86P0 2064	Shaft 320 mm 1400 1032  Handle type S2L Black IP 65 14AF 2111	NO/NC 8499 0001
			86P1 1064 <sup>(3)</sup>		

#### 1500 VDC - 2 circuits

Rating (A)	Frame size	No. of poles per circuit	Switch body <sup>(1)</sup>	External operation	Aux. Contact
400 A	F3	2 P (1 P+, 1 P-)	86P2 2041 <sup>(2)</sup>	Shaft 320 mm 1400 1032  Handle type S2L Black IP 65 14AF 2111	NO/NC 8499 0001
			86P2 2051		
			86P2 2064 <sup>(2)</sup>		

(1) The switches are supplied without accessories.

(2) Centred mechanism.

## Accessories

### Direct operation handle

Frame size	Handle type	Handle colour	Reference
F2	E2	Black	8499 5022
F2	E2	Red	8499 5023
F3	E3	Black	8499 5032



E2 handle

acces\_400\_a\_1\_cat

### External operation handle

#### Use

The external control handles include a breastplate and can be padlocked. External handles should be used with a shaft extension.

Note: We recommend using IP55 for indoor and IP65 for outdoor applications.

#### Example of use:

When the handle is locked in the "ON" position, the operator must make sure to disconnect and isolate the circuit before accessing the board and carrying out maintenance work.

You can open the door when the switch is in the "ON" position by bypassing the lock function with a specially designed tool (authorised persons only). The lock is automatically re-applied when the door is closed.



Handle type S2

acces\_150.eps

Frame size	Handle type	Handle colour	Protection degree	Front operation Reference	Side operation Reference <sup>(2)</sup>
F2	S2	Black	IP65	742F 2111	14YA 2111
F2	S2	Red	IP65	14AE 2111	
F3	S2L <sup>(1)</sup>	Black	IP65	14AF 2111	14AA 2111
F3	S2L <sup>(1)</sup>	Red	IP65	14AE 2111	

(1) S2L handles have an extended socket: please see the section on dimensions.

(2) Only compatible with left mechanism version.

### Shaft for external operation

Frame size	Handle type	Length (mm)	Reference
F2 - F3	S2, S2L	200	1400 1020
F2 - F3	S2, S2L	320	1400 1032
F2 - F3	S2, S2L	400	1400 1040

Other colour schemes: please contact us.



Shaft for S2 and S2L handles

acces\_401\_a\_1\_cat

### Shaft guide for external operation

#### Use

Allows you to guide the shaft for external control.

This accessory can correct any misalignment of the control shaft by up to 15 mm.

Recommended for shaft lengths over 320 mm.



acces\_260\_a\_2\_cat

## Auxiliary contact

### Use

Provide information about the position and pre-break depending on installation location.

### Characteristics

Switching type: NO/NC,  
IP2X with front control (screw cap).  
10 000 operations.  
Max. 3 per switch.




acces\_402\_a\_1\_cat

Frame size	Connection type	Type	Reference
F2 - F3	Screws	Standard NO/NC	8499 0001
F2 - F3	Screws	Low level NO/NC	8499 0002

### Characteristics

Type of auxiliary contact	Min. current (A)	$I_{th}$ (A)	Operating current $I_e$ (A)			
			24 VDC	48 VDC	230 VAC	440 VAC
			DC-14	DC-14	AC-15	AC-15
Standard	12.5 mA / 24 V	16	1	0.2	4	4
Low level	1 mA / 4 V	16	1	0.2	2	1

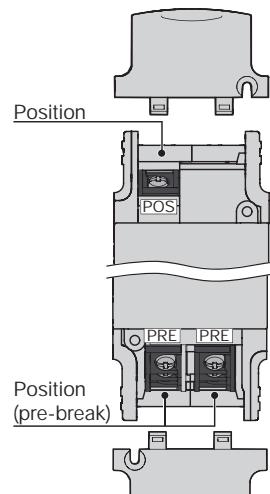

acces\_465\_a\_1\_gb\_cat

## Bridging bar for poles in series

### Use

The bridging bars enable the poles to be connected in series, allowing the following configurations.

### 1500 VDC – 1 circuit – dual polarity switching

Frame size	Rating (A)	No. of poles per circuit	Quantity to order	Reference
F2	160 ... 315	3 P	1	8409 0016 <sup>(1)</sup>

<sup>(1)</sup> Kit includes 2 identical bridging bars.



acces\_411\_a\_1\_cat

### 1500 VDC – 1 circuit with full voltage switching per polarity / 2 circuits – single polarity switching

Frame size	Rating (A)	No. of poles per circuit	Quantity to order	Reference
F3	400	4 P / 2 P	2	8409 0040 <sup>(1)</sup>
F3	500	4 P / 2 P	2	8409 0041
F3	630	4 P / 2 P	2	8409 0063

<sup>(1)</sup> Kit includes 2 identical bridging bars.


### Accessories (continued)

#### Inter-phase barriers

##### Use

Safety isolating break between the terminals, essential for use at 1000 VDC and 1500 VDC or between 2 circuits.

Frame size	Type	Packaging (units)	Reference
F2 - F3	Short	2	8499 2202
F2 - F3	Short	3	8499 2203
F2 - F3	Long	2	8499 2212
F2 - F3	Long	3	8499 2213

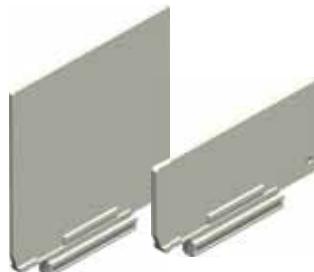

acces\_405\_a\_1\_cat acces\_406\_a\_1\_cat

#### Terminal shrouds

##### Use

For top or bottom protection against direct contact with terminals or connection parts; provides IP4 protection and phase separation. 1 P type to cover 1 pole connection.

##### Advantages

Perforations for thermographic inspection / voltage check without the need to remove the shrouds. Terminal shrouds can be fixed in place with a holding insert. Includes break-off tabs for precise adaptation to cables or insulated bars.

Frame size	Packaging (units)	No. of poles	Position	Reference
F2	3	1 P	Top or bottom	8499 4213 (1)
F2	4	1 P	Top or bottom	8499 4214 (1)
F3	4	1 P	Top or bottom	8499 4314 (1)

(1) Compatible with the holding insert which can be fitted to lock the shrouds in place.



acces\_407\_a\_1\_cat

#### Terminal screens

##### Use

Provides top and bottom protection against direct contact with terminals or connection parts.

##### Advantages

Perforations for thermal checks.  
Assembly requires mounting inserts (provided with terminal screens).

Frame size	No. of poles	Position	Reference <sup>(1)</sup>
F2	2 P	Top and bottom	8499 3222
F2	3 P	Top and bottom	8499 3232
F3	2 P	Top and bottom	8499 3322

(1) Each reference comprises 2 terminal screens for top and bottom protection.



acces\_408\_a\_1\_cat

## Mounting insert

### Use

Used to secure terminal shrouds / inter-phase barriers on the switch.

Frame size	Packaging (units)	Reference
F2 - F3	10	8499 6220
F2 - F3	100	8499 6221



acces\_409\_a\_1\_cat

## Captive nut

### Use

This accessory enables simple one-sided connection to the power terminals. It can be mounted on either side of the terminal for front or rear connection.



acces\_399\_a\_1\_cat

## Voltage tap

### Use

Allows you to connect sensors or measure voltage with a fast-on connection.

Frame size	Packaging (units)	Reference
F2	12	8499 9012
F3	12	8499 9013



acces\_412\_a\_1\_cat

## Characteristics

### Characteristics according to IEC 60947-3

Rated current $I_n$			160 A	250 A	315 A	400 A	500 A	630 A
Frame size			F2	F2	F2	F3	F3	F3
Thermal current at 40 °C (A)			160	250	315	400	500	630
Thermal current at 50 °C (A)			160	250	315	400	500	630
Thermal current at 60 °C (A)			160	250	315	400	500	630
Rated insulation voltage $U_i$ (V)			1500	1500	1500	1500	1500	1500
Rated impulse withstand voltage $U_{imp}$ (kV)			12	12	12	12	12	12
Number of circuits	Nominal voltage	Utilisation category	$I_e$ (A)					
1 circuit	1000 VDC <sup>(1)</sup>	DC-21 B	160	250	315	400	500	630
1 circuit	1500 VDC <sup>(2)</sup>	DC-21 B	160	250	315	400	500	630
Number of circuits	Nominal voltage	Utilisation category	$I_e$ (A)					
1 circuit	1000 VDC <sup>(1)</sup>	PV2	-	-	-	-	-	-
1 circuit	1500 VDC <sup>(2)</sup>	PV2	160	250	315	400	500	630
2 circuits	1500 VDC <sup>(2)</sup>	PV2	-	-	-	400	500	630
Short-circuit operation at 1000 VDC and 1500 VDC (unprotected)								
Current rated as short-time withstand $I_{cw}$ 1s (kA rms)			5	5	5	8	8	8
Rated short-circuit breaking capacity $I_{cm}$ (peak kA) – 60 ms			10	10	10	10	10	10
Connection								
Recommended Cu rigid cable cross-section <sup>(3)</sup>			70	120	185	240	2 x 150	2 x 185
Recommended width of copper bars (mm) <sup>(3)</sup>			20	20	20	25	25	25
Mechanical characteristics								
Durability (number of operating cycles)			8000	8000	8000	8000	8000	8000
Power dissipation per pole (W/pole)			4.5	11.2	13	13	21.6	30.2


(1) 2 poles in series.

(2) 2 or 3 poles in series.


(3) For aluminium connections, please contact us.

## Dimensions (in/mm)


### INOSYS LBS

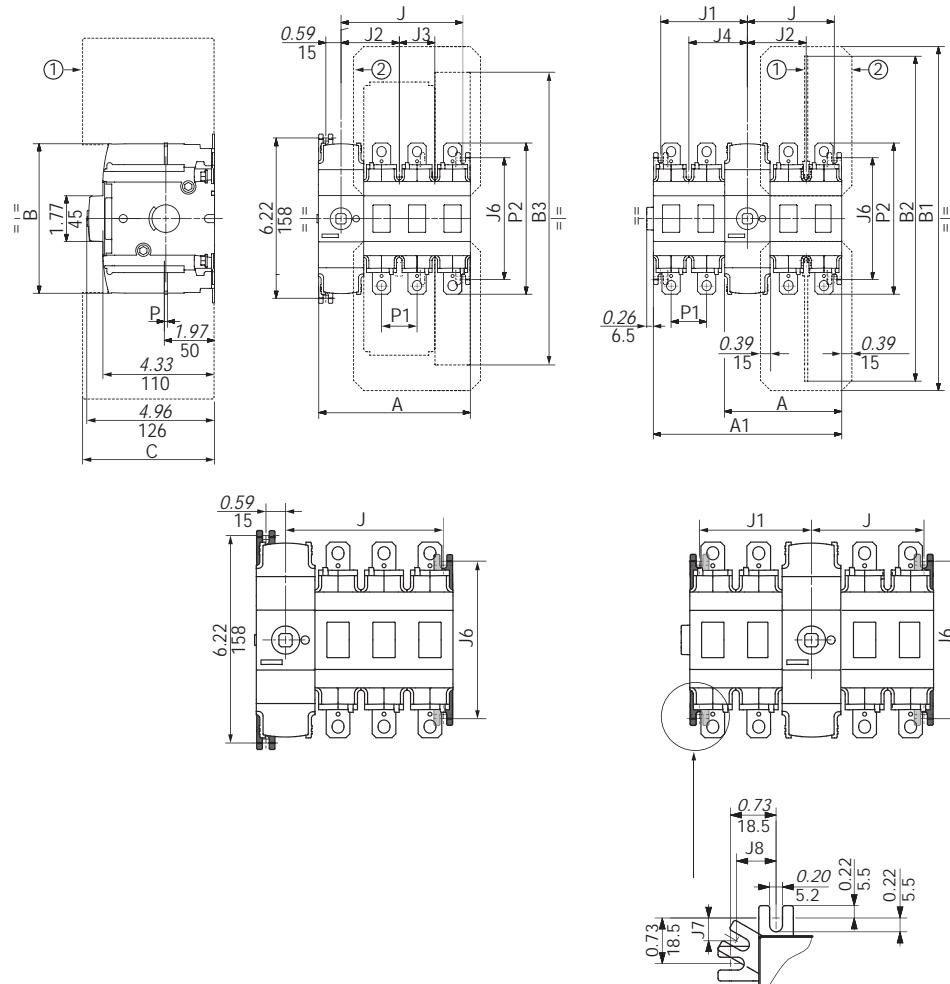

Wiring terminal F2



Wiring terminal F3

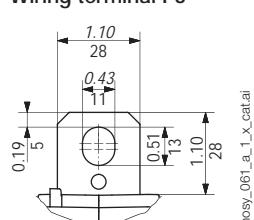




inosy\_f66\_a\_1\_x\_cat.ai

Rating (A)	Frame size	Units	A		A1		J		J1		J	
			2 P	3 P	1+1 P / 2+2 P	1+1 P / 2+2 P	1+1 P / 2+2 P	2 P	3 P	2 P	3 P	
160 ... 315	F2	inches	4.60	5.98	4.60 / 7.36	1.97 / 3.37	2.05 / 3.44	3.35	4.72	85.5	120.5	
		mm	117	152	117 / 187	50.5 / 85.5	52.5 / 87.5	85.5	120.5			
400	F3	inches	5.40	7.17	5.40 / 8.94	2.36 / 4.15	2.44 / 4.23	4.13	-	105.5	-	
		mm	137	182	137 / 227	60.5 / 105.5	62.5 / 107.5	105.5	-			

Rating (A)	Frame size	Units	B	B1	IEC short	IEC long	UL	B3	IEC	C	UL	J2	J3	J4	J6	P1	P2
160 ... 315	F2	inches	5.90	13.35	7.85	12.61	10.31	11.64	4.33	4.33	2.26	1.38	2.34	4.72	1.38	5.87	
		mm	154	339	199	320	262	296	110	110	57.5	35	59.5	120	35	149	
400	F3	inches	5.90	16.28	9.35	14.11	15.5	14.12	4.33	5.31	2.64	1.77	2.72	6.22	1.77	7.87	
		mm	154	414	237	358	394	359	110	135	67.5	45	69.5	158	45	200	




## Dimensions of external handles (in/mm)

F2

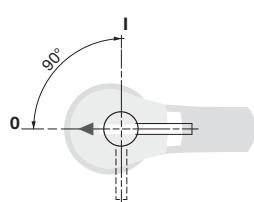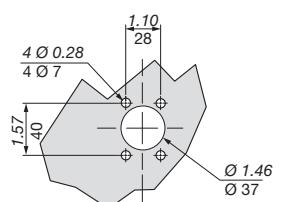Handle type	Front operation		Door drilling
	Direction of operation		
S2 type			

poign\_013\_b\_1\_jus\_cat.eps

F3

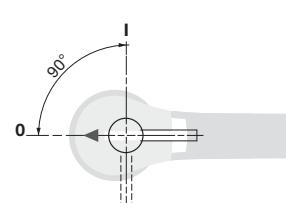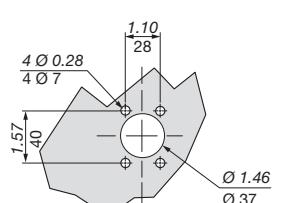
Handle type	Front operation		Door drilling
	Direction of operation		
S2L type			

poign\_069\_b\_1\_jus\_cat.eps

## Wiring configuration

1 circuit - 1000 VDC

F2-F3 - 2 P

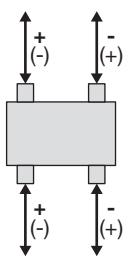


1. Circuit 1

srico-pv\_075\_a\_1\_x\_cat.eps


1 circuit - 1500 VDC

F2 - 3 P

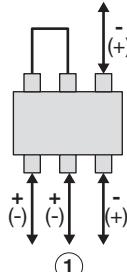

srico-pv\_077\_a\_1\_x\_cat.eps


F2-F3 - 2 P

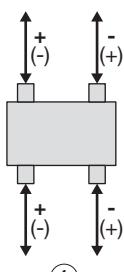

srico-pv\_075\_a\_1\_x\_cat.eps


2 circuits - 1500 VDC

F3 - 2 P

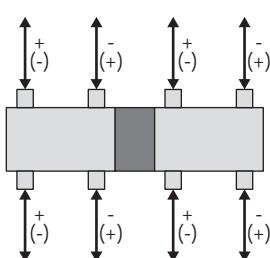

inosy\_165\_a\_1\_x\_cat.ai

1 circuit - 1500 VDC per polarity

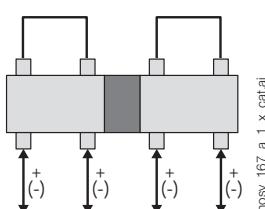


inosy\_167\_a\_1\_x\_cat.ai

## Bridging bars (in/mm)

F2

8409 0016<sup>(1)</sup>


(1) Kit includes 2 identical bars.

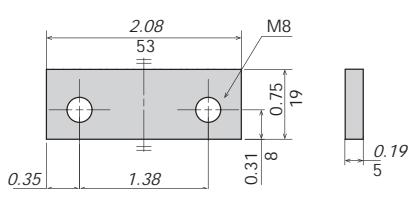

F3


8409 0040<sup>(1)</sup>

(1) Kit comprises 2 identical bars.

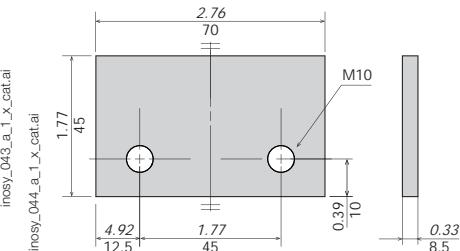


F3

8409 0041

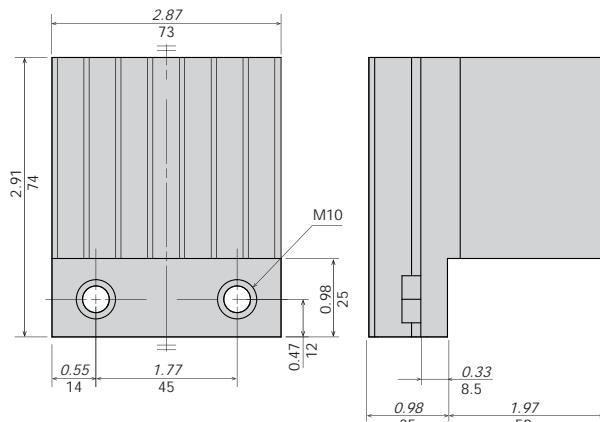

8409 0063

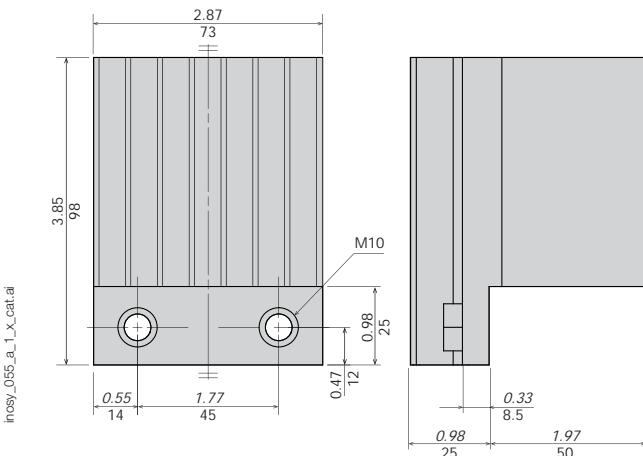


inosy\_016\_a\_1\_x\_cat.ai

## Mounting orientation

F2 - F3

All mounting orientations are possible. Derating may apply - please consult us.



inosy\_169\_a.psd

# Load break switches

## for specific applications

Despite already offering a wide range of load break switches, SOCOMEC also manufactures specific products to suit any requirement. Some of these products can be seen on these two pages. This list is not exhaustive.

Please do not hesitate to contact us.

### **SIRCO** range with overrated neutral



The use of power electronics is becoming more and more frequent. Chopper, rectifiers and current inverters distort the signal by reinjecting the 3rd order harmonics which are combined in the neutral. Range available from 125 to 1800 A.

SIRCO 3 x 250 A with 400 A rated neutral

### **SIRCO** high short-circuit withstand



- 80 kA rms 1 s.
- 110 kA rms 0.1 s.
- 240 kA peak.

### **SIRCO** early break AC



- Complete range from 125 to 3200 A.
- Double positive break indication given through a position indication window, located directly on the product, and by the operating handle.
- Features an early break auxiliary contact as standard.
- Severe load duty categories (AC-22 and AC-23).
- High resistance to damp heat (supplied "tropicalised").


SIRCO 3 x 1250 A with early prebreak AC

### Compliance with standards


- > IEC 60947-3
- > BS EN 60947-3
- > EN 60947-3
- > NBN EN 60947-3
- > VDE 0660-107 (1992)



## SIRCO for earthing

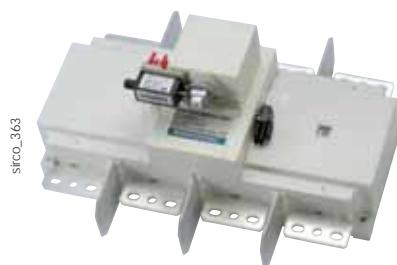

- From 800 to 1800 A.
- 50 kA rms 1 s.
- Special S4 type handle.
- Undervoltage coil interlocking.

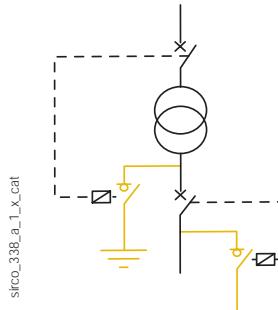

## Remotely operated load break switches

### SIRCO MOT AT



#### Function

SIRCO MOT AT are remotely operated 3/4 pole load break switches. They make and break under load conditions and provide safety isolation for any low voltage electrical circuit. This is ensured via volt-free contacts using either a pulse or contactor logic.

#### Advantages

##### • Extended power range

These products offer great flexibility thanks to a wide power supply range of 208 to 277 VAC ±20%.

##### • Integrated auxiliary contacts

As part of the product monitoring function, the SIRCO MOT AT enables the transmission of information relating to their position. This is possible thanks to the standard integration of an auxiliary contact for each position.

#### General characteristics

- 2 stable positions (I, 0).
- One auxiliary contact per position as standard.
- Positive break indication
- AUT/MAN selector.
- Manual emergency operation.
- Padlocking in position 0 (position I optional).
- Ratings: from 125 to 3200 A.

## References

Rating (A)		125	160	250	400	630	800
No. of poles	Power supply voltage	Reference	Reference	Reference	Reference	Reference	Reference
3 P	230 VAC	9915 3012	9915 3016	9915 3025	9915 3040	9915 3063	9915 3080
4 P	230 VAC	9915 4012	9915 4016	9915 4025	9915 4040	9915 4063	9915 4080

Rating (A)		1000	1250	1600	2000	2500	3200
No. of poles	Power supply voltage	Reference	Reference	Reference	Reference	Reference	Reference
3 P	230 VAC	9915 3100	9915 3120	9915 3160	9915 3200	9915 3250	9915 3320
4 P	230 VAC	9915 4100	9915 4120	9915 4160	9915 4200	9915 4250	9915 4320

# UL and CSA load break switches

from 16 to 1200 A



## Function

### Standard UL 508: load break switches for control of electric motors

They ensure on-load making and breaking and provide safety isolation for motor control up to 600 V.

### Standard UL 98 and UL 489: load break switches

They ensure on-load making and breaking and provide safety isolation for all electrical circuits up to 600 V.

## General characteristics

### SIRCO M

- Positive break indication
- Backplate or DIN-rail mounting.
- Padlocking in position 0 with max. 3 padlocks for external control.
- Door locked when the switch is on for devices with external front operation.

### SIRCO

- Positive break indication.
- Padlocking in position 0 with max. 3 padlocks for external control.
- Door locked when the switch is on for devices with external front operation.

### INOSYS LBS

- Visible breaking (contact position indication).
- Shunt or undervoltage tripping function from 24 to 220 VDC and from 24 to 230 VAC.
- Opening and closing independent of speed of movement.
- No de-rating up to 60°C and an operating temperature range of -25 to +70°C.

## Something to think about

- SOCOMEC also offers a full range of load break switches, with direct or front external control that fully comply with UL & CSA standards.
- A specific UL/CSA product catalogue is available on request, don't hesitate to contact us for your copy.
- Important:  
all electrical equipment designed for the North American market must conform to UL/CSA standards.



## Compliance with standards

- UL 508  
(file UL E 173959)
- UL 98  
(file UL E 201138)
- CSA 22.2 n°4  
(file CSA 189705)

## Standard UL 508: motor control

### SIRCO M

Rating (A)	16	20	25	30	40	60	80
N° of poles							
3 P	•	•	•	•	•	•	•
4 P	•	•	•	•	•	•	•
Operation type							
Frontal direct/external	•	•	•	•	•	•	•
Type of mounting							
Front/back	•	•	•	•	•	•	•



sircm\_132\_a

## Standard UL 489: load break switches

### SIRCO V

Rating (A)	30	
N° of poles	Operation type	
3 P	Frontal direct/external	•
3 P + switched neutral	Lateral direct/external	•



sircv\_092\_a1\_cat


## Standard UL 98: load break switches

### SIRCO M and SIRCO

Type	SIRCO M			SIRCO					
	30	60	100	200	400	600	800	1000	1200
N° of poles									
3 P	•	•	•	•	•	•	•	•	•
4 P	•	•	•	•	•	•	•	•	•
Operation type									
External front	•	•	•	•	•	•	•	•	•



sirco\_ul022\_b1\_cat

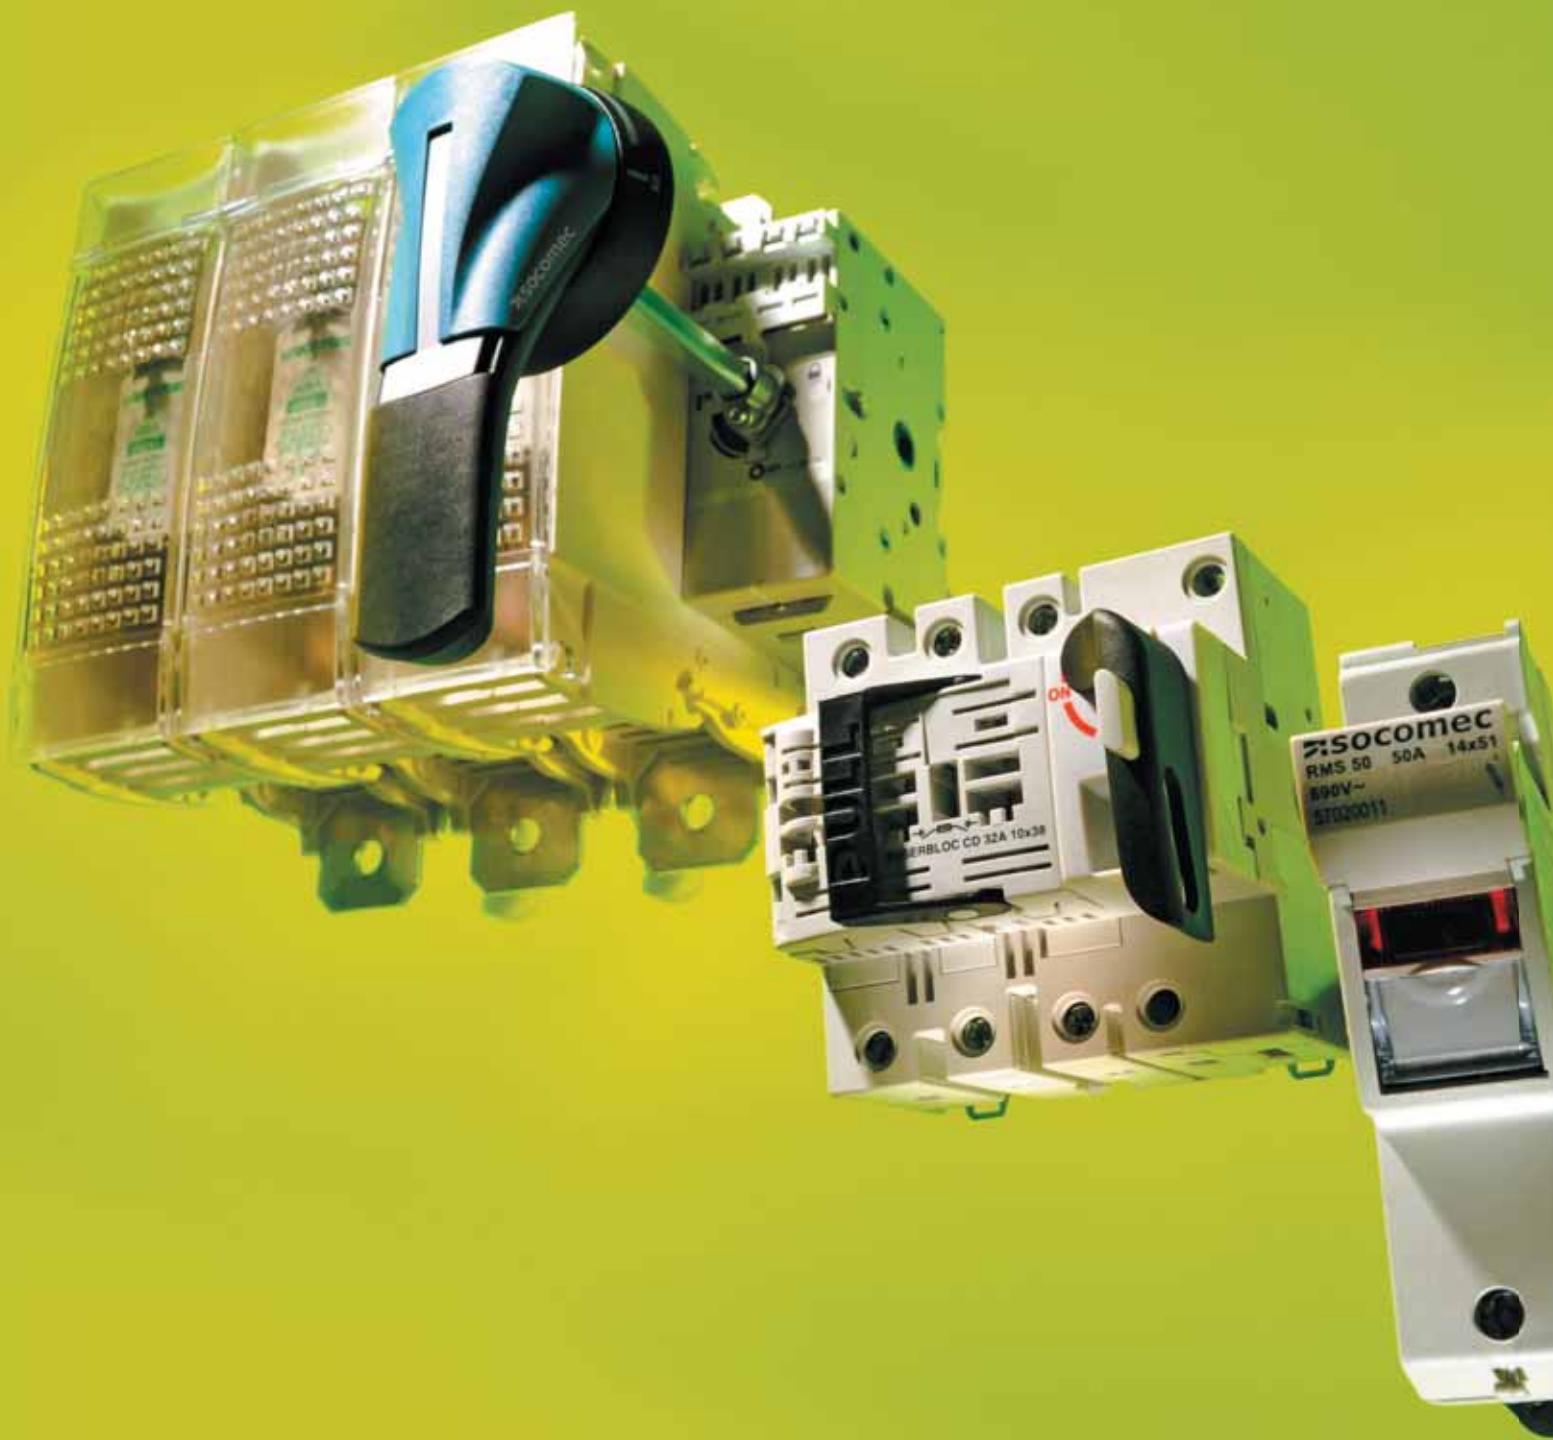

# Fuse protection

Fuse solutions: undeniable advantages over circuit breakers.....	p. 102
Why choose Socomec?.....	p. 103
Selection guide for fuse protection.....	p. 104

## Front/side-control fuse combination switches

Motor protection



**FUSERBLOC**  
< 50 A  
*Consult us*

Protection for main switchboards



**FUSERBLOC**  
50 to 400 A  
*Consult us*

Protection for distribution boards



**FUSERBLOC**  
630 to 1250 A  
*Consult us*

## Special products

Fuse combination switches for special applications



*p. 128*

Fuse protection solutions

> 2500 A  
*Contact us*

## Direct-control fuse combination switches

Motor protection



**FUSERBLOC**  
< 50 A  
*Consult us*

Protection for main switchboards



**FUSERBLOC**  
50 to 400 A  
*Consult us*

## Front/side-control uR fuse combination switches

Semi-conductor protection



**FUSERBLOC**  
for uR fuses  
50 à 1250 A  
*Consult us*

## Fuse combination switches with tripping function and visible breaking



**FUSOMAT**  
250 to 1250 A  
*Consult us*



**SIDERMAT**  
combination  
1600 to 1800 A  
*Consult us*

## Fused disconnectors



**RM - RMS**  
32 to 125 A  
*Consult us*



**RM CC**  
Class CC  
30 A  
*Consult us*

## UL / CSA range

Fused isolator switches

compliant with standards  
UL489, UL98 and CSA C22.2

Approuvés pour l'utilisation dans les applications les plus sévères, telles que l'interrupteur de tête (Service Entrance) et pour la protection et déconnexion du moteur :

- Standard positions 0 and 1
- Standard positions 0, 1 and Test.

For UL class CC, J, L... fuses :  
please contact us.



30 to 800 A  
*Consult us*

## Fuse base



Fuse base  
160 to 2500 A  
*Consult us*



IP2X fuse base  
160 to 2500 A  
*Consult us*

## Industrial fuses

Distribution protection



**gG fuses**  
0.5 to 1250 A  
*Consult us*

Motor protection



**aM fuses**  
0.16 to 1250 A  
*Consult us*

Semi-conductor protection



**uR fuses**  
5 to 2000 A  
*Consult us*

## Photovoltaic industrial fuses



**RM PV**  
32 to 50 A  
*Consult us*



**RM PV**  
32 A  
1500 VDC  
*Consult us*



**PV**  
fuse bases  
32 to 600 A  
*Consult us*



**gPV fuses**  
1 to 600 A  
*Consult us*

## Compliant with standard IEC/EN 61439

All the steps for producing an assembly that complies with this standard can be found in our guide, "Implementing standard IEC / EN 61439".  
[https://www.socomec.com/catalogues-brochures\\_en.html](https://www.socomec.com/catalogues-brochures_en.html)

# Fuse solutions: undeniable advantages over circuit breakers

SOCOMECH has always promoted the benefits of fuses for both personal and equipment safety. In fact, fuse protection offers serious benefits compared to the circuit breaker in a large number of applications.

Fuse switches guarantee reliable breaking and protection, from the distribution of power to protection of the motor. Key benefits at a glance:

- **Highly limited short circuits**

The thermal and mechanical effects generated during a short circuit can be considerable. The speed of a fuse's break capacity ensures a much better limitation of the fault current than circuit breaker solutions (see Fig. 1).

- **High breaking capacity**

Our fuses have a 100 kA breaking capacity (or more); so you don't have to worry about the short-circuit current when choosing the product for you.

- **Easy selection**

Discrimination between upstream and downstream fuses of the same type is guaranteed as long as the upstream fuse rating is 1.6 times or more higher than the downstream fuse. This feature guarantees a seamless supply of energy (see the example in Fig. 2).

- **Confined breaking**

During a short-circuit, the generated energy is absorbed by the silica and remains contained in the body of the fuse, avoiding the spread of the arc or even the projection of incandescent materials.

- **Double breaking**

Our switch disconnectors break the circuit upstream and downstream of the fuse, allowing it to be replaced safely.

## Good to know

- Controlled with the high/low voltage transformer sensor, triggering fuse switch disconnectors are the best way to ensure cut-off and general protection functions.
- Protecting your system with ultra-rapid (uR) fuses is the only way to effectively protect the semiconductors used in electronic equipment (variable speed drives, etc.) against short circuits.

## Photovoltaic applications

SOCOMECH offers solutions for fuse load break switches and fuse disconnect switches.



Contact us

## Technical specifications

All the information you need about how to control your electrical system is just one click away!



[www.socomec.com/application-guide-scp\\_en](http://www.socomec.com/application-guide-scp_en)

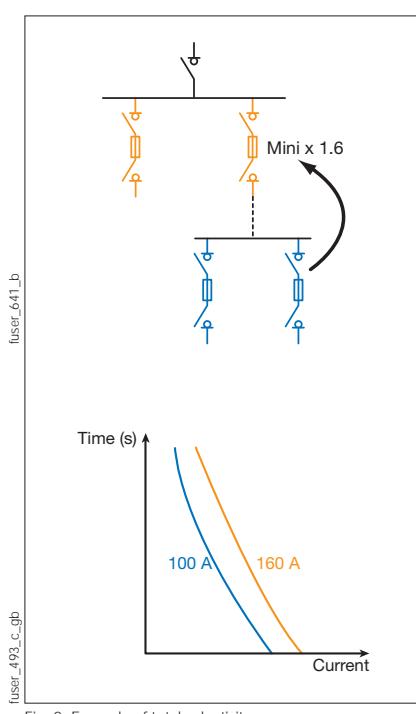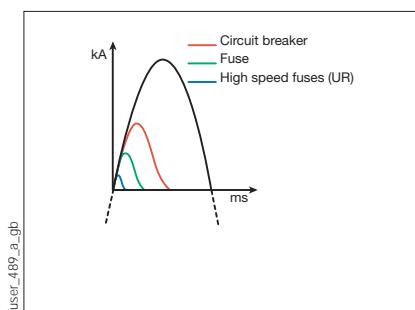

# Why choose Socomec?

With over 90 years of experience, SOCOMECA offers a range of switches and components for building a complete fuse protection solution. Working with us will also bring you plenty of other benefits:



## An active commercial network

Our service teams have built their reputation on reassuring guidance, flexible skills and reactivity.



## A wide range

Whatever your business (industry, data centres, photovoltaics, etc.), we can meet all your electrical protection needs with this product range.



## Quality products

SOCOMECA is recognised by its customers for the reliability of its fuse solutions.



## Customised solutions

Do our standard products not meet your needs? As a specialised manufacturer, we can adapt our products to your specific needs. Contact us today to look into every option. Contact your SOCOMECA representative.

## What you need to know!

We also offer a wide range of devices that safely protect both people and electronic devices (differential protection, surge protection).

See the section, "Electronic protection". page 361.



resys\_081\_a  
sgys\_076\_a\_1\_cat

# Selection guide

## Fuse protection

Application?

Type of operation?

Industry						
<b>FUSERBLOC</b> Front/side control 25 to 1250 A <i>p. 106</i>						
<b>FUSERBLOC</b> Direct control 25 to 400 A <i>Consult us</i>						
<b>FUSOMAT SIDERMAT</b> combination 250 to 1800 A <i>Consult us</i>						
<b>RM - RMS</b> 32 to 125 A <i>Consult us</i>						
<b>Fuse bases</b> 160 to 2500 A <i>Consult us</i>						
<b>gG and AM NFC/DIN</b> 0.16 to 1250 A <i>Consult us</i>						
<b>Applications</b>						
Transformer output			•			•
Section connectors				•	•	•
Cabinet entrance	•	•	•			•
Wiring						•
Motor circuits	•	•	•			•
Semi-conductor protection				•	•	
Photovoltaic installations						
<b>Device operation</b>						
Manual	•	•	•			
Via tripping			•			
<b>Location of manual handle</b>						
Front		•	•			
Side		•		up to 1250 A		
Via a panel			up to 32 A			
<b>Location of external handle</b>						
Front	•		•			
Right side	•			up to 1250 A		
Left side	Contact us					
Central	Contact us					
<b>Breaking</b>						
Fully visible	•	•	•			
Visible			•			
<b>Fuses</b>						
NFC/DIN	• / •	• / •	- / •	• / -	- / •	•
BS	see the UK catalogue	see the UK catalogue				•
UL	see UL catalogue	see UL catalogue				•
Other						

Location of operating handle?

Positive or visible break indication?

Type of fuse?

	Power electronics (inverters, UPS)		Photovoltaics		
	<b>FUSERBLOC</b> for uR fuses	uR fuses	<b>RM PV</b>	<b>RM PV</b>	PV fuse bases
	50 to 1250 A <i>Consult us</i>	5 to 2000 A <i>Consult us</i>	32 to 50 A <i>Consult us</i>	32 A - 1500 VDC <i>Consult us</i>	2 to 600 A <i>Consult us</i>
	•	•	•	•	•
	•				
	•				
	•				
	•				
	• / •	•	gPV	gPV	gPV

# FUSERBLOC

Front/side-control fuse combination switches  
for industrial fuses up to 1250 A

Fuse protection



## Function

The **front/right-side FUSERBLOC** is a manually operated multi-pole fuse load break switch. They make and break on load and provide safety isolation and protection against overcurrent for any low voltage electrical circuit.

This range includes both direct and external-control models, with 2, 3 and 4 poles and from 25 to 1250 A.

## Advantages

### Improved safety

- Complete isolation of the fuse with double breaking per pole (top and bottom of fuse).
- Positive break indication

### High breaking capacity

Protection against overloads and short-circuits thanks to high breaking capacity fuses (100 kA rms).


### Multi-use

A single device can be operated with a handle, either mounted directly on the unit itself or externally, on the door or on the side of an electrical enclosure or cabinet.

### Specific functionalities for simplified use

- TEST position for front/side-control devices up to 400 A allows control circuits to be tested without switching power, thanks to the use of U-type auxiliary contacts. In the TEST position, the cabinet door can be opened.
- Mechanical or electronic fuse blown detection system (see DDMM or FMD).

## Customised solutions

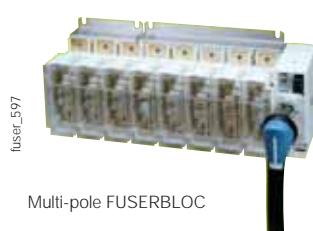

Multi-pole FUSERBLOC



Centred operation

## The solution for

- Motor feeders
- Protection of industrial cabinets



## Strong points

- Improved safety
- High breaking capacity
- Multi-use
- Specific functionalities for simplified use

## Extended range

- Centred or left side operation, rear connections, plug-in connections.  
Contact us

## Compliance with standards



- IEC 60947-3
- EN 60947-3
- BS EN 60947-3
- NBN EN 60947-3
- IEC 60269-1
- DIN EN 60269-1
- NF EN 60269-1
- IEC 60269-2
- GB/T14048.3
- VDE 0636-1
- VDE 0660-107
- UL standards: see FUSERBLOC UL

## Approvals and certifications<sup>(1)</sup>



LOVAG



(1) Product references on request.

## What you need to know

- In addition to the FUSERBLOC rating, product selection also depends on the fuse characteristics and functional specifications, which need to be in accordance with the application. SOCOMEC FUSERBLOC devices are equipped with **NFC/DIN fuses** (for BS fuses, please contact us)



- Whether it is 3-pole + switched neutral or 3-pole + solid neutral, the 25 to 32 A FUSERBLOC with **direct** and **external** control is the best compact solution.

- For ratings 25 to 400 A, the **flat mounting kit** provides a compact solution ideally suited to plug-in units.
- Maintaining outputs from the DC common bus.



# FUSERBLOC

Front/side-control fuse combination switches  
for industrial fuses up to 1250 A

## References

### NFC and DIN – front/right-side operation – 25 to 125 A

Rating (A) / Fuse size / Casing size	No. of poles	Switch body	Direct front handle I-0-TEST	External front handle I - 0	TEST external front handle I - 0 - TEST	External right- side handle I - 0	Shaft for handle	Auxiliary contact	Terminal shrouds	Electronic fuse blown indication <sup>(5)</sup>	
CD 25 A / 10 x 38 / 0	3 P	3631 3002 <sup>(1)</sup>	3629 4012				200 mm 1401 0520 320 mm 1401 0532 <sup>(2)</sup>				
	3 P + switched neutral	3631 4002 <sup>(1)</sup>									
	3 P+ solid neutral	3631 5002 <sup>(1)</sup>									
CD 32 A / 10 x 38 / 0	3 P	3631 3003									
	3 P + switched neutral	3631 4003									
	3 P+ solid neutral	3631 5003									
CD 32 A / 14 x 51 / 0	3 P	3631 3004 <sup>(1)</sup>		Type S1 Black IP55 1411 2111 <sup>(2)</sup>	Type S1 Black IP65 1413 2115	Type S1 Black IP55 1415 2111 <sup>(2)</sup>	200 mm 1401 0520 320 mm 1401 0532 <sup>(2)</sup>				
	3 P + switched neutral	3631 4004 <sup>(1)</sup>									
	3 P+ solid neutral	3631 5004 <sup>(1)</sup>									
50 A / 14 x 51 / 11	2 P	3831 2005		1413 2111 Red/Yellow IP65 1414 2111	1414 2115	1417 2111 Red/Yellow IP65 1418 2111	200 mm 1401 0520 320 mm 1401 0532 <sup>(2)</sup>				
	3 P	3831 3005 <sup>(1)</sup>									
	4 P	3831 6005 <sup>(1)</sup>									
63 A / 00C / 12	2 P	3831 2006					Type U 1 contact NC 3999 0701 <sup>(3)</sup>		3 LEDs 155...260 VAC 3899 3120		
	3 P	3831 3006 <sup>(1)</sup>									
	4 P	3831 6006 <sup>(1)</sup>									
100 A / 22 x 58 / 13	2 P	3831 2010	3999 5020				200 mm 1400 1020 320 mm 1400 1032 <sup>(2)</sup> 500 mm 1400 1050				
	3 P	3831 3010 <sup>(1)</sup>									
	4 P	3831 6010 <sup>(1)</sup>									
125 A / 22 x 58 / 13	2 P	3831 2011		S2 type Black IP55 1421 2111 <sup>(2)</sup>	1423 2115	S2 type Black IP55 1425 2111 <sup>(2)</sup>	200 mm 1400 1020 320 mm 1400 1032 <sup>(2)</sup> 500 mm 1400 1050		2 P 3998 2016 <sup>(4)</sup>		
	3 P	3831 3011									
	4 P	3831 6011									
125 A / 00 / 13	2 P	3831 2012		1423 2111 Red IP65 1424 2111	1424 2115	1427 2111 Red IP65 1428 2111	200 mm 1400 1020 320 mm 1400 1032 <sup>(2)</sup> 500 mm 1400 1050		3 P 3998 3016 <sup>(4)</sup>		
	3 P	3831 3012									
	4 P	3831 6012									

(1) Available enclosed (see "Enclosed fuse switches").

(2) Standard.

(3) Maximum 4 contacts.

(4) Top or bottom. Provide 2 terminal shrouds for complete upstream and downstream protection.

(5) Mechanical fuse blown auxiliary contact (DDMM), see "Accessories".

## NFC and DIN – front/right-side operation – 160 to 1250 A

Rating (A) / Fuse / Casing size	No. of poles	Switch body	Direct front handle I-0-TEST	External front handle I - 0	External front TEST handle I - 0 - Test	External right side handle I - 0	Shaft for handle	Auxiliary contact	Terminal shrouds	Electronic fuse blown indication <sup>(6)</sup>
160 A / 00 / 13	2 P	3831 2015	3999 5020					Type U 1 contact NC 3999 0701 <sup>(3)</sup> 1 contact NO 3999 0702 <sup>(3)</sup>	2 P 3998 2016 <sup>(5)</sup> 3 P 3998 3016 <sup>(5)</sup> 4 P 3998 4016 <sup>(5)</sup>	
	3 P	3831 3015								
	4 P	3831 6015								
160 A / 0 / 14	2 P	3831 2016		S2 type Black IP55 1421 2111 <sup>(2)</sup> Black IP65 1423 2111 Red IP65 1424 2111	S2 type Black IP55 1423 2115 Black IP65 1427 2111 Red IP65 1428 2111	200 mm 1400 1020 320 mm 1400 1032 500 mm 1400 1050			2 P 3998 2025 <sup>(5)</sup> 3 P 3998 3025 <sup>(5)</sup> 4 P 3998 4025 <sup>(5)</sup>	
	3 P	3831 3016 <sup>(1)</sup>								
	4 P	3831 6016 <sup>(1)</sup>								
250 A / 1 / 15	2 P	3831 2024	3999 5021						2 P 3998 2040 3 P 3998 3040 4 P 3998 4040	3 LEDs 155...260 VAC 3899 3120
	3 P	3831 3024 <sup>(1)</sup>								
	4 P	3831 6024 <sup>(1)</sup>								
400 A / 2 / 16	2 P	3831 2038							2 P 3898 2080 <sup>(5)</sup> 3 P 3898 3080 <sup>(5)</sup> 4 P 3898 4080 <sup>(5)</sup>	3 LEDs 380...690 VAC 3899 3380
	3 P	3831 3038 <sup>(1)</sup>								
	4 P	3831 6038 <sup>(1)</sup>								
630 A / 3 / 17	2 P	3811 2063	3899 6011	Type S3 Black IP65 1433 3111 <sup>(2)</sup> Red IP65 1434 3111				Type U 1 contact NC 3999 0701 <sup>(4)</sup> 1 contact NO 3999 0702 <sup>(4)</sup>	2 P 3898 2080 <sup>(5)</sup> 3 P 3898 3080 <sup>(5)</sup> 4 P 3898 4080 <sup>(5)</sup>	
	3 P	3811 3063 <sup>(1)</sup>								
	4 P	3811 6063 <sup>(1)</sup>								
800 A / 3 / 17	2 P	3811 2080	1141 3011	Type S4 Black IP65 1443 3111 <sup>(2)</sup> Red IP65 1444 3111		Type S3 Black IP65 1437 7911	200 mm 1400 1220 320 mm 1400 1232 500 mm 1400 1250		2 P 3898 2120 <sup>(5)</sup> 3 P 3898 3120 <sup>(5)</sup> 4 P 3898 4120 <sup>(5)</sup>	
	3 P	3811 3080								
	4 P	3811 6080								
800 A / 4 / 18	2 P	3811 2081								
	3 P	3811 3081								
	4 P	3811 6081								
1250 A / 4 / 18	2 P	3811 2120								
	3 P	3811 3120								
	4 P	3811 6120								

(1) Available enclosed (see "Enclosed fuse switches").

(2) Standard.

(3) Maximum 4 contacts.

(4) Maximum 8 contacts.

(5) Top or bottom. Provide 2 terminal shrouds for complete upstream and downstream protection.

(6) Mechanical fuse blown auxiliary contact (DDMM), see "Accessories".

# FUSERBLOC

Front/side-control fuse combination switches  
for industrial fuses up to 1250 A

## Accessories

Frame front handle can be locked in position 0 for direct control

Rating (A)	Frame size	Command	Handle colour	Reference
50 - 160	11-12-13-14	I-0-TEST	Black	3999 5020
250 - 400	15-16	I-0-TEST	Black	3999 5021



Direct front-operation handle

Front operation				
Rating (A)	Frame size	Figure N°	Handle colour	Reference
20 - 32	0	1	Black	3629 4012
20 - 32	0	1	Red	3629 4013
630 - 800	17	2	Black	3899 6011
800 - 1250	18	3	Black	1141 3011



Handle locks in position 0 for external control

Padlockable handle in position 0							
Rating (A)	Frame size	Handle type	Handle colour	Command	External IP <sup>(1)</sup>	Defeatable handle	Reference
CD 25 ... 63	0/11/12	S1	Black	I - 0	IP55	Yes	1411 2111
CD 25 ... 63	0/11/12	S1	Black	I - 0	IP65	Yes	1413 2111
CD 25 ... 63	0/11/12	S1	Red/Yellow	I - 0	IP65	Yes	1414 2111
CD 25 ... 63	0/11/12	S1	Black	I - 0 - Test	IP65	Yes	1413 2115
CD 25 ... 63	0/11/12	S1	Red/Yellow	I - 0 - Test	IP65	Yes	1414 2115
100 - 400	13 ... 16	S2	Black	I - 0	IP55	Yes	1421 2111
100 - 400	13 ... 16	S2	Black	I - 0	IP65	Yes	1423 2111
100 - 400	13 ... 16	S2	Red/Yellow	I - 0	IP65	Yes	1424 2111
100 - 400	13 ... 16	S2	Black	I - 0 - Test	IP55	Yes	1423 2115
100 - 400	13 ... 16	S2	Red/Yellow	I - 0 - Test	IP65	Yes	1424 2115
630 ... 800	17	S3	Black	I - 0	IP65	Yes	1433 3111
630 ... 800	17	S3	Red/Yellow	I - 0	IP65	Yes	1434 3111
800 ... 1250	18	S4	Black	I - 0	IP65	Yes	1443 3111
800 ... 1250	18	S4	Red/Yellow	I - 0	IP65	Yes	1444 3111

(1) IP: protection index according to IEC 60529.



Padlockable handle in position 1-0 for external control

Padlockable handle in position 0 and I					
Rating (A)	Frame size	Handle type	Handle colour	External IP <sup>(1)</sup>	Reference
CD 25 ... 63	0/11/12	S1	Black	IP65	1413 2311
100 - 400	13 ... 16	S2	Black	IP65	1423 2311

(1) IP: protection index according to IEC 60529.



## Padlockable metal handle in position 1-0 for external front control

Rating (A)	Frame size	Handle type	Handle colour	External IP <sup>(1)</sup>	Defeatable handle	Reference
CD 25 ... 63	0/11/12	S1	Black	IP65	Yes	141D 2911
CD 25 ... 63	0/11/12	S1	Red/Yellow	IP65	Yes	141E 2911
100 - 400	13 ... 16	S2	Black	IP65	Yes	142D 2911
100 - 400	13 ... 16	S2	Red/Yellow	IP65	Yes	142E 2911
600 ... 800	17	S3	Black	IP65	Yes	143D 3911
600 ... 800	17	S3	Red/Yellow	IP65	Yes	143E 3911
800 ... 1250	18	S4	Black	IP65	Yes	144D 3911
800 ... 1250	18	S4	Red/Yellow	IP65	Yes	144E 3911

(1) IP: protection index according to IEC 60529.



## Handle locks in position 1-0 for external side control

Rating (A)	Frame size	Handle type	Handle colour	External IP <sup>(1)</sup>	Reference
CD 25 ... 63	0/11/12	S1	Black	IP55	1415 2111
CD 25 ... 63	0/11/12	S1	Black	IP65	1417 2111
CD 25 ... 63	0/11/12	S1	Red/Yellow	IP65	1418 2111
100 - 400	13 ... 16	S2	Black	IP55	1425 2111
100 - 400	13 ... 16	S2	Black	IP65	1427 2111
100 - 400	13 ... 16	S2	Red/Yellow	IP65	1428 2111
630 ... 1250	17/18	S3	Black	IP65	1437 3111
630 ... 1250	17/18	S3	Red/Yellow	IP65	1438 3111

(1) IP: protection index according to IEC 60529.



## Type S handle adapter

## Use

Handle extension.

## Dimensions

Add 12 mm to the handle depth.

Handle colour	Available for order in multiples of	External IP <sup>(1)</sup>	Reference
Black	1	IP65	1493 0000

(1) IP: protection index according to IEC 60529.



## Alternative colour Type S handle cover

## Use

For single lever handle types S1, S2, S3 and double lever handle type S4.  
Other colours available - please contact us.

Handle colour	Available for order in multiples of	Handle type	Reference
Light grey	50	S1, S2, S3	1401 0001
Dark grey	50	S1, S2, S3	1401 0011
Light grey	50	S4	1401 0031
Dark grey	50	S4	1401 0041



# FUSERBLOC

Front/side-control fuse combination switches  
for industrial fuses up to 1250 A

## Accessories (continued)

### Shaft extensions for external front

#### Use

Standard lengths:

- 200 mm
- 320 mm
- 400 mm
- 500 mm.

Other lengths available - please contact us.




acces\_45

acces\_369

Rating (A)	Frame size	Shaft length (mm)	Reference
CD 25 ...CD 32	0	200	1401 0520
CD 25 ...CD 32	0	320	1401 0532
CD 25 ...CD 32	0	400	1401 0540 <sup>(1)</sup>
50 - 400	11 ... 16	200	1400 1020
50 - 400	11 ... 16	320	1400 1032
50 - 400	11 ... 16	500	1400 1050 <sup>(2)</sup>
630 ...800	17	200	1400 1220
630 ...1250	17/18	320	1400 1232
630 ... 1250	17/18	500	1400 1250 <sup>(1)</sup>

(1) Use the accessory "guide cone for external operation".

(2) Use the accessory "shaft extension support for external front operation".

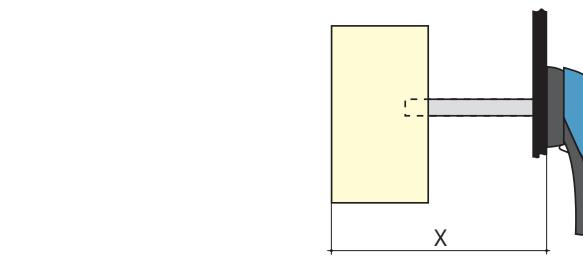

acces\_202\_a\_1\_X\_cat


### Dimension X (mm) for FUSERBLOC NFC and DIN

Rating (A)	CD 25 ...CD 32	50	63	100 ... 160	160	250 ...400	630 ... 800	800 ... 1250
Fuse size	10x38/14x51	14x51	00C	22x58/00	0	1/2	3	4
Frame size	0	11	12	13	14	15/16	17	18
Shaft extension length (mm)								
200	102 ... 245	100 ... 230	125 ... 230	135 ... 230	145 ... 230	160 ... 230	270 ... 304	
320	102 ... 365	100 ... 350	125 ... 350	135 ... 350	145 ... 350	160 ... 350	270 ... 424	304 - 424
400	102 ... 445	100 ... 430	125 ... 430	135 ... 430	145 ... 430	160 ... 430	270 ... 504	304 - 504
500		100 ... 530	125 ... 530	135 ... 530	145 ... 530	160 ... 530	270 ... 604	304 - 604

### Shaft for external side operation

#### Use

Standard length, 200 mm.

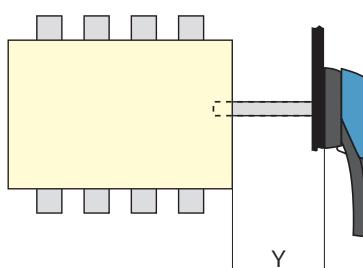

acces\_203\_a\_1\_Y\_cat

### Shaft guide for external operation

#### Use

For use with S Type handles, to guide the shaft extension into the external handle.

This accessory enables the handle to engage the extension shaft with a misalignment of up to 15 mm.

Required for a shaft length over 320 mm.

Designation	Reference
Shaft guide	1429 0000



acces\_260

## Key handle interlocking system

### Use


Locking in position 0 of the direct, front or right side operation:

- using a padlock (not supplied) in direct right side operation: available as standard on the handle,

- using a padlock (not supplied): right-side or front operation switch from 50 to 1250 A, integrated as standard
- using a lock (not supplied) in external operation.

### Locking using RONIS EL 11 AP lock (not supplied)

Rating (A)	Frame size	Command	Figure N°	Reference
CD 25 ... 1250	0 ... 18	external front	1	1499 7701

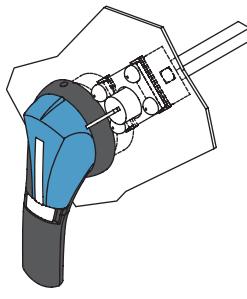

access\_158\_a\_1\_x\_cat

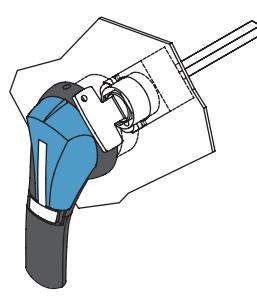


Fig. 2

access\_157\_a\_1\_x\_cat

### Locking using Type K CASTELL lock (not supplied)

Rating (A)	Frame size	Command	Figure N°	Reference
CD 25 ... 1250	0 ... 18	external front	3	1499 7702

Fig. 1

### Locking using Type FS CASTELL lock (not supplied)

Rating (A)	Frame size	Command	Figure N°	Reference
CD 25 ... 1250	0 ... 18	external front	2	1499 7703

Rating (A)	Frame size	Command	Reference
CD 25 ... 1250	0 18	external front	1499 7702

## Flat mounting kit

### Use

The flat mounting kit is ideally suited to pull-out units.

Kit to be used with a handle for flat mounting.

Rating (A)	Frame size	Type	Reference
CD 25 ... CD 32	0	Kit + 200 mm shaft	1429 7709
50 - 400	11 ... 16	Kit + 200 mm shaft	1429 7710



fuser\_535

## Handle for flat mounting kit

### Padlockable handle in position 0

Rating (A)	Frame size	Handle type	Handle colour	External IP <sup>(1)</sup>	Reference
CD 25 ... 63	0/11/12	S1	Black	IP55	1411 2111 <sup>(2)</sup>
CD 25 ... 63	0/11/12	S1	Red/Yellow	IP65	1414 2111 <sup>(2)</sup>
100 - 400	13 ... 16	S2	Black	IP55	1421 2111 <sup>(2)</sup>
100 - 400	13 ... 16	S2	Red/Yellow	IP65	1424 2111 <sup>(2)</sup>

(1) IP: protection index according to IEC 60529.

(2) Defeatable handle in position I.



Handle type S2

fuser\_536

## External front operation shaft support accessory

### Use

This support maintains shaft position for extension shafts greater than 320 mm in length.

Rating (A)	Frame size	Reference
50 - 400	11 ... 16	3899 0400



fuser\_698

# FUSERBLOC

Front/side-control fuse combination switches  
for industrial fuses up to 1250 A

## Accessories (continued)

### Integrated solid neutral link

#### Use

Fixing the solid neutral onto the mechanism produces a device with a solid neutral of the same size as a standard three-pole device (+ 6 mm).

For external front operation				
Rating (A)	Frame size	Bar rating (A)	Reference	
100 ... 125	13	125	3829 9310	
160	13	160	3829 9320	
160	14	200	3829 9320	
250	15	250	3829 9325	
400	16	400	3829 9339	
630 ... 800	17	800	3829 9308	
800 ... 1250	18	1250	3829 9312	



acces\_130

### Solid neutral module for front control

Rating (A)	Frame size	I <sub>max</sub> (A)	Distance (mm)	Reference
50	11	50	27	3629 9227
63	12	63	32	3629 9232
100 ... 160	13	160	36	3629 9236
160	14	160	50	3629 9250
250	15	250	60	3629 9260
400	16	400	66	3629 9265
630 ... 800	17	800	94	3629 9294
800 ... 1250	18	1250	120	3629 9212



acces\_199

### Solid neutral link

NFC and DIN devices				
Rating (A)	Frame size	Fuse size	I <sub>max</sub> (A)	Reference
50	11	14 x 51	50	6029 0000
100 ... 125	13	22 x 58	125	6039 0000
63 ... 160	12/13	00C / 00	160	6420 0000
160	14	0	160	6421 0000
250	15	1	250	6421 0001
400	16	2	400	6421 0002
630 ... 800	17	3	800	6421 0003
800 - 1250	18	4	1250	6441 0005



fusib\_123

### Terminal shrouds

#### Use

Top or bottom IP20 protection (on the front) against direct contact with terminals or connection parts.

2 sets required to fully shroud both incoming and outgoing terminals.

Rating (A)	Frame size	Position	No. of poles	Reference
CD 25 ... 63	0/12	Upstream/downstream	2 / 3 / 4 P	integrated
100 ... 160	13/14	Upstream/downstream	2 P	3998 2016
100 ... 160	13/14	Upstream/downstream	3 P	3998 3016
100 ... 160	13/14	Upstream/downstream	4 P	3998 4016
250 - 400	15	Upstream/downstream	2 P	3998 2025
250 - 400	15	Upstream/downstream	3 P	3998 3025
250 - 400	15	Upstream/downstream	4 P	3998 4025
400	16	Upstream/downstream	2 P	3998 2040
400	16	Upstream/downstream	3 P	3998 3040
400	16	Upstream/downstream	4 P	3998 4040
630 ... 800	17	Upstream/downstream	2 P	3998 2080
600 ... 800	17	Upstream/downstream	3 P	3998 3080
600 ... 800	17	Upstream/downstream	4 P	3998 4080
800 ... 1250	18	Upstream/downstream	2 P	3998 2120
800 ... 1250	18	Upstream/downstream	3 P	3998 3120
800 ... 1250	18	Upstream/downstream	4 P	3998 4120



fuser\_314

## Type S and Type ST auxiliary contacts

## Use

For FUSERBLOCS 50 to 1250 A, position 0 and I signalling by 1 to 4 NO + NC auxiliary contacts.

## Electrical principle

The NO + NC Type S auxiliary contacts can be configured as 2 NC or 2 NO.

## Connection

By terminals with max. cross-section 10 mm<sup>2</sup>.

## Mechanical characteristics

30,000 operations.



acces\_051

## References

## Type S auxiliary contacts 0-I for external front and right-side operation

Rating (A)	Frame size	Contact type	Auxiliary contact type S Reference	Actuating kit for auxiliary contact (optional) Reference
50 ... 1250	11 ... 18	NC+NO	3999 0041 <sup>(1)</sup>	3999 0003

## Type ST auxiliary contacts I-0-TEST for external front and right-side operation

Rating (A)	Frame size	Contact type	Description	Auxiliary contact type ST Reference	Actuating kit for auxiliary contact Reference
50 - 400	11 ... 16	NC+NO	TEST + ON	3999 0141 <sup>(2)</sup>	3999 0103
50 - 400	11 ... 16	2 O	TEST + ON	3999 0241 <sup>(2)</sup>	3999 0103

(1) Actuating kit for auxiliary contact type S signalling included.

(2) Actuating kit for auxiliary contact type ST signalling to be ordered in addition.



acces\_083

## Characteristics

Rating (A)	Current Nominal (A)	Operating current I <sub>e</sub> (A)	
		250 VAC AC-13	400 VAC AC-13
50 ... 1250	20	10	8

## Important

- > For 400 A rating, casing 16, an adaptation kit reference 3999 000 must be ordered in addition to the auxiliary contact kit.

Type U auxiliary contacts<sup>(1)</sup>

## Use

Compact universal type auxiliaries can be configured to be operated on both standard and TEST position switches. Each housing can accommodate up to 2 interlocked auxiliary contacts.

## Connection to the control circuit

By terminals with max. section 2 x 2.5 mm<sup>2</sup>

For FUSERBLOC CD 25 to 400 A: pre-break and signalling of positions 0, I and Test

For FUSERBLOC ≥ 630 A: pre-break and signalling of positions 0 and I.



acces\_056

## References


NC auxiliary contacts			
Rating (A)	Frame size	Contact	Reference <sup>(1)</sup>
CD 25 ... 1250	0 ... 18	1	3999 0701 <sup>(2)</sup>

## NO auxiliary contacts

Rating (A)	Frame size	Contact	Reference <sup>(1)</sup>
CD 25 ... 1250	0 ... 18	1	3999 0702 <sup>(2)</sup>

(1) CD 25 - CD 32: Cannot be mounted in direct operation.

(2) CD 25-160 A - 4 AC Max with no additional holder for auxiliary contact.  
250-400 A - 8 AC Max with no additional holder for auxiliary contacts.

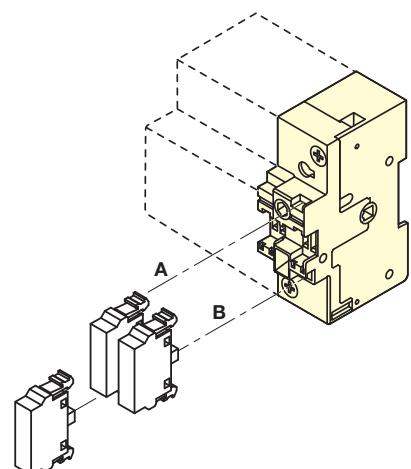

acces\_043\_a\_1\_x\_cat

(1) Type U auxiliary contacts cannot be mounted in conjunction with integrated solid neutral.

# FUSERBLOC

Front/side-control fuse combination switches  
for industrial fuses up to 1250 A

## Accessories (continued)

### Electronic fuse blown indication (FMD)

#### Use

For BS88, DIN and UL fuse cartridge, with or without striker.

#### Principle

The Fuse Melting Device (FMD) detects fuse blowing using a bistable relay and a signalling LED. It can be mounted on a DIN rail, a back plate, next to the FUSERBLOC, or on the door.

#### References

For FUSERBLOC 63 to 1250 A - size 000 to 4

No. of LEDs	Ph/Ph operating voltage	Reference
3	155 - 260 VAC	3899 3120
3	380 - 690 VAC	3899 3380

#### Accessories

Kit to connect accessories	Standard	Reference
Kit to connect accessories	Door mounted	3829 9120

#### Relay characteristics

Rating (A)	Relay operational current $I_c$ (A)	
	AC-15	DC-13
63 - 1250	2.5 A	0.2



acces\_310  
3-LED version

### Important

- For 400 A rating, casing 16, mounted on the device itself, an adaptation kit reference 3999 0000 must be ordered in addition to the FMD.

### DDMM-type auxiliary contact for NFC/DIN-striking fuse device

#### Use

For fuse cartridge with striker (size 14 x 51; 22 x 58; 0; 1; 2; 3 and 4).

#### Connection to the control circuit

By 6.35 mm fast-on terminal.

#### Electrical principle

NO/switched neutral auxiliary contact detects fuse blowing.

#### Mechanical characteristics

30,000 operations.

#### References

NO/NC type auxiliary contacts for 2 poles

Rating (A)	Frame size	Fusibles <sup>(1)</sup>	Contact	Reference
50	11	14 x 51	1 <sup>st</sup>	3994 0405
100 ... 125	13	22 x 58	1 <sup>st</sup>	3994 0210
160	14	NH0	1 <sup>st</sup>	3994 0216
250	15	NH1-NH2	1 <sup>st</sup>	3994 0225
400 <sup>(1)</sup>	16	NH2	1 <sup>st</sup>	3894 0440
630 ... 800	17	NH3	1 <sup>st</sup>	3894 1206
800 ... 1250	18	NH4	1 <sup>st</sup>	3894 1212

NO/NC type auxiliary contacts for 3 poles

Rating (A)	Frame size	Fuses	Contact	Reference
CD 32	0	14 x 51	1 <sup>st</sup>	3994 0303
50	11	14 x 51	1 <sup>st</sup>	3994 0405
100 ... 125	13	22 x 58	1 <sup>st</sup>	3994 0310
160	14	NH0 - NH00	1 <sup>st</sup>	3994 0316
250	15	NH1-NH2	1 <sup>st</sup>	3994 0325
400 <sup>(1)</sup>	16	NH2	1 <sup>st</sup>	3894 0440
630 ... 800	17	NH3	1 <sup>st</sup>	3894 1306
800 ... 1250	18	NH4	1 <sup>st</sup>	3894 1312
50 ... 250	11/13/14/15	14x51 ... NH2	2:	3994 1901
400	16	NH2	2:	3994 1902
630 ... 1250	17/18	NH3-NH4	2:	3994 1901

NO/NC type auxiliary contacts for 4-pole or 3-pole + neutral

Rating (A)	Frame size	Fuses	Contact	Reference
50	11	14 x 51	1 <sup>st</sup>	3994 0405
100 ... 125	13	22 x 58	1 <sup>st</sup>	3994 0410
160	14	NH0	1 <sup>st</sup>	3994 0416
250	15	NH1-NH2	1 <sup>st</sup>	3994 0425
400 <sup>(1)</sup>	16	NH2	1 <sup>st</sup>	3894 0440
630 ... 800	17	NH3	1 <sup>st</sup>	3894 1406
800 ... 1250	18	NH4	1 <sup>st</sup>	3894 1412
50 ... 250	11/13/14/15	14x51 ... NH2	2:	3994 1901
400	16	NH2	2:	3994 1902
630 ... 1250	17/18	NH3-NH4	2:	3994 1901



fuser\_311

DDMM for cylindrical fuses



fuser\_312

DDMM for NH fuses

(1) NH00 fuse = size 00. NH4 fuse = size 4.

#### Characteristics

Rating (A)	Current Nominal (A)	Operating current $I_e$ (A)			
		250 VAC AC-13	400 VAC AC-13	24 VDC DC-13	48 VDC DC-13
CD 32 ... 1250	16	4	3	12	2

## Cage terminals

### Use

Connection of bare copper cables onto the terminals (without lugs).

### References


Rating max (A)	Frame size	No. of poles	Reference
CD 25 ... 63	0 ... 12	2 / 3 / 4 P	integrated
100 ... 160	13/14	3 P	5400 3016
100 ... 160	13/14	4 P	5400 4016
250	15	3 P	5400 3025
250	15	4 P	5400 4025
400	16	3 P	5400 3040
400	16	4 P	5400 4040



acces\_053

### Connections

Rating (A)	Cable section: flexible (mm <sup>2</sup> )	Cable section: rigid (mm <sup>2</sup> )	Flexible bar width (mm)	Stripped (mm)
100 ... 160	16 ... 95	16 ... 95	13	22
250	16 ... 185	16 ... 185	18	27
400	50 ... 240	50 ... 300	20	34

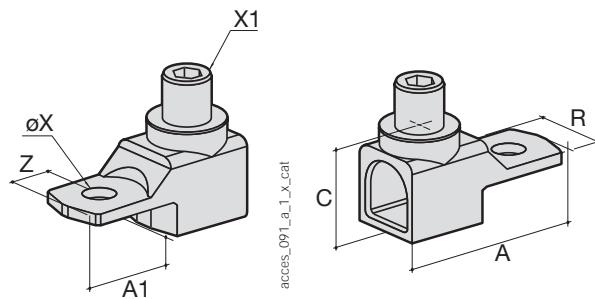acces\_091\_a\_1\_X\_cat  
acces\_092\_a\_1\_X\_cat

### Dimensions

Rating (A)	A	A1	C	R	ØX	X1	Z
100 ... 160	47.5	22.5	25	20	8.5	M12	10
250	62	31.5	31.5	25	10.5	M16	14
400	71.5	32	38	32	10.5	M20	15

## Label

### Use

Customisable self-adhesive label allowing identification of the devices.

Dimensions W x H (mm)	To be ordered in multiples of	Reference
18 x 13	50	7769 9999



acces\_044

# FUSERBLOC

Front/side-control fuse combination switches

for industrial fuses up to 1250 A

## Characteristics according to IEC 60947-3

25 to 125 A

References	3631 x002	3631 x003	3631 x004	3831 x005	3831 x006	3831 x010	3831 x011	3831 x012
"x" corresponds to digit for number of pole (2 = 2 P, 3 = 3 P, 6 = 4 P)								
Type	CD 25 A	CD 32 A	CD 32 A	Mod. 50 A	Mod. 63 A	Mod. 100 A	Mod. 125 A	Mod. 125 A
Frame size	0	0	0	11	12	13	13	13
Casing pitch per power pole (mm)	-	-	-	27	32	36	36	36
Number of poles	3, 4(switted neutral), 4(solid neutral)	3, 4(switted neutral), 4(solid neutral)	3, 4(switted neutral), 4(solid neutral)	2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4
Assigned thermal current $I_{th}$ (35 °C)	25 A	32 A	32 A	50 A	63 A	100 A	125 A	125 A
NFC/DIN fuse size	NFC 10 x 38	NFC 10 x 38	NFC 14 x 51	NFC 14 x 51	NH000	NFC 22 x 58	NFC 22 x 58	NH00
Rated operating voltage $U_e$ (V)	690 V	690 V	690 V	690 V	690 V	690 V	690 V	690 V
Rated insulation voltage $U_i$ (V)	800	800	690	800	800	800	800	800
Rated impulse withstand voltage $U_{imp}$ (kV)	8	8	8	8	8	8	8	8
Short-circuit characteristics								
Prospective short-circuit current at $U_e$ 400/415V AC (kA rms)	100	100	100	100	100	100	100	50
Prospective short-circuit current at $U_e$ 660/690V AC (kA rms)	100	100	-	100	100	100	100	50
Rated peak withstand current in $I_{cc}$ $U_e$ 415 V AC (kA peak) (single switch)	5.5	5.5	5.5	5.52	7.3	11.9	13.6	-
Rated peak withstand current in $I_{cc}$ $U_e$ 690 V AC (kA peak) (single switch)	5.2	6.1	-	6.5	7.3	15.8	20.4	10.4
Rated operating current $I_e$ (A)								
Nominal voltage	Operating category	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>
415 V AC	AC 21 A / AC 21 B	25/25	32/32	32/32	50/50	63/63	100/100	125/125
415 V AC	AC 22 A / AC 22 B	25/25	32/32	32/32	50/50	63/63	100/100	125/125
415 V AC	AC 23 A / AC 23 B	25/25	32/32	32/32	50/50	63/63	100/100	125/125
500 V AC	AC 21 A / AC 21 B	25/25	32/32	32/32	50/50	63/63	100/100	125/125
500 V AC	AC 22 A / AC 22 B	25/25	32/32	32/32	50/50	63/63	100/100	125/125
500 V AC	AC 23 A / AC 23 B	25/25	32/32	32/32	50/50	63/63	100/100	125/125
690 V AC	AC 20 A / AC 20 B	25/25	32/32	32/32	50/50	63/63	100/100	125/125
690 V AC	AC 21 A / AC 21 B	25/25	32/32	32/32	50/50	63/63	100/100	125/125
690 V AC <sup>(2)</sup>	AC 22 A / AC 22 B	25/25	32/32	32/32	50/50	63/63	100/100	125/125
690 V AC <sup>(2)</sup>	AC 23 A / AC 23 B	25/25	32/32	32/32	50/50	63/63	100/100	125/125
220 V DC	DC 21 A / DC 21 B	-/25	-/32	-/32	-	-/63	100/100	100/100
220 V DC	DC 22 A / DC 22 B	-/25	-/32	-/32	-	-	100/100	100/100
220 V DC	DC 23 A / DC 23 B	-/25 <sup>(3)</sup>	-/25 <sup>(3)</sup>	-/25 <sup>(3)</sup>	-	-	100/100	100/100
440 V DC	DC 21 A / DC 21 B	-	-	-	-	-/63 <sup>(4)</sup>	100 <sup>(4)</sup> /100 <sup>(4)</sup>	100 <sup>(4)</sup> /100 <sup>(4)</sup>
440 V DC	DC 22 A / DC 22 B	-	-	-	-	-	100 <sup>(4)</sup> /100 <sup>(4)</sup>	100 <sup>(4)</sup> /100 <sup>(4)</sup>
440 V DC	DC 23 A / DC 23 B	-	-	-	-	-	100 <sup>(4)</sup> /100 <sup>(4)</sup>	100 <sup>(4)</sup> /100 <sup>(4)</sup>
Rated operating power in AC-23 (kW)								
At $U_e$ 415 VAC without pre-break auxiliary contact <sup>(1)(5)</sup>	11/11	15/15	15/15	25/25	30/30	51/51	63/63	63/63
At $U_e$ 690 VAC without pre-break auxiliary contact <sup>(1)(5)</sup>	22/22	25/25	25/25	45/45	55/55	90/90	90/90	90/90
Reactive power (kvar)								
At $U_e$ 415 VAC <sup>(5)</sup>	11	15	15	23	28	45	55	55
Power dissipation (W / pole)								
Dissipated power	3.1	4.1	5.9	7.3	8.4	14.5	19.9	20.3
Power dissipated by fuse	2.4	2.9	4.3	4.6	6	9	11	12.5
Power dissipated by switch body	0.7	1.2	1.6	2.45	4.35	6.8	8.63	6
Wiring capacity of conductors								
Minimum Cu cable cross-section (mm <sup>2</sup> )	2.5	2.5	2.5	6	10	25	35	35
Minimum Cu cable cross-section (mm <sup>2</sup> )	16	16	16	25	25	95	95	95
Maximum busbar width (mm)	-	-	-	-	-	20	20	20
Min. tightening torque (Nm)	2	2	2	3	3	9	9	9
Mechanical characteristics								
Durability (number of operating cycles)	10 000	10 000	10 000	10 000	10 000	10 000	10 000	10 000
Operating torque (Nm)	4.1	4.1	4.1	8.7	8.7	9.7	9.7	10.2
Weight of a 3-pole device without extras (kg)	0.48	0.48	0.50	0.80	1	1.5	1.5	1.5
Weight of a 4-pole device without extras (kg)	0.50	0.50	0.52	1	1.3	2	2	2
Weight of 1 P extra (kg)	-	-	-	0.2	0.3	0.5	0.5	0.5
Storage temperature (°C)						-50 ... +85		
Operating temperature (°C)						-20...+70		
Regulatory compliance						IEC 60947-3		
Certification						IEC, KEMA, Loyd's and CCC		
Degree of pollution	3	3	3	3	3	3	3	3

(1) Category with index A = frequent operation / Category with index B = infrequent operation.

(2) With terminal shrouds or phase barrier.

(3) 3-pole device with 2 poles in series for the '+' and 1 pole for the '-'.

(4) 4-pole device with 2 poles in series per polarity.

(5) The power value is given for information only: the current values vary from one manufacturer to another.

(6) For a rated operational voltage  $U_e$  = 400 VAC.

## 160 to 1250 A

References		3831 x015	3831 x016	3831 x024	3831 x038	3811 x063	3811 x080	3811 x081	3811 x120
Type		Mod. 160 A	Mod. 160 A	Mod. 250 A	Mod. 400 A	Mod. 630 A	Mod. 800 A	Mod. 800 A	Mod. 1250 A
Frame size		13	14	15	16	17	17	18	18
Casing pitch per power pole (mm)		36	50	60	66	94	94	120	120
Number of poles		2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4
Assigned thermal current $I_{th}$ (35 °C)		160 A	160 A	250 A	400 A	630 A	800 A	800 A	1250 A
NFC/DIN fuse size		NH00	NH0	NH1	NH2	NH3	NH3	NH4	NH4
Rated operating voltage $U_e$ (V)		690 V	600 V	690 V	690 V	690 V	690 V	415 V	415 V
Rated insulation voltage $U_i$ (V)		800	800	800	1,000	1,000	1,000	1,000	1,000
Rated impulse withstand voltage $U_{imp}$ (kV)		8	8	8	12	12	12	12	12
Short-circuit characteristics									
Prospective short-circuit current at $U_e$ 400/415V AC (kA rms)		50	100	100	50	100	100	100	100
Prospective short-circuit current at $U_e$ 660/690V AC (kA rms)		50	50	50	50	100	100	-	-
Rated peak withstand current in $I_{cc}$ $U_e$ 415 V AC (kA peak) (single switch)		18.95	22.66	23.9	33.5	48	54.18	50.8	53.2
Rated peak withstand current in $I_{cc}$ $U_e$ 690 V AC (kA peak) (single switch)		13.5	14	29	29.9	58.7	58.7	-	-
Rated operating current $I_e$ (A)									
Nominal voltage	Operating category	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>
415 V AC	AC 21 A / AC 21 B	160/160	160/160	250/250	400/400	-/630	-/800	-/800	-/1250
415 V AC	AC 22 A / AC 22 B	160/160	160/160	250/250	400/400	-/630	-/800	-/800	-/1250
415 V AC	AC 23 A / AC 23 B	160/160	160/160	250/250	400/400	-/630	-/800	-/800	-/1250
500 V AC	AC 21 A / AC 21 B	160/160	160/160	250/250	-/400	-/630	-/800	-/800	-/1250
500 V AC	AC 22 A / AC 22 B	160/160	160/160	250/250	-/400	-/630	-/800	-/800	-/1250
500 V AC	AC 23 A / AC 23 B	160/160	160/160	250/250	-	-	-	-	-
690 V AC	AC 20 A / AC 20 B	160/160	160/160	250/250	400/400	630/630	800/800	800/800	1250/1250
690 V AC	AC 21 A / AC 21 B	160/160	160/160	250/250	-/400	-/630	-/800	-/800	-/1250
690 V AC <sup>(2)</sup>	AC 22 A / AC 22 B	160/160	160/160	250/250	-/400	-/630	-/800 <sup>(6)</sup>	-/800	-/1250
690 V AC <sup>(2)</sup>	AC 23 A / AC 23 B	125/125	125/125	250/250	250/315	-	-	-	-
220 V DC	DC 21 A / DC 21 B	160/160	160/160	250/250	-	-	-	-	-
220 V DC	DC 22 A / DC 22 B	160/160	160/160	250/250	-	-	-	-	-
220 V DC	DC 23 A / DC 23 B	125/125	125/125	200/200	-	-	-	-	-
440 V DC	DC 21 A / DC 21 B	160 <sup>(3)</sup> /160 <sup>(3)</sup>	160 <sup>(3)</sup> /160 <sup>(3)</sup>	250 <sup>(3)</sup> /250 <sup>(3)</sup>	-	-	-	-	-
440 V DC	DC 22 A / DC 22 B	160 <sup>(3)</sup> /160 <sup>(3)</sup>	160 <sup>(3)</sup> /160 <sup>(3)</sup>	250 <sup>(3)</sup> /250 <sup>(3)</sup>	-	-	-	-	-
440 V DC	DC 23 A / DC 23 B	125 <sup>(3)</sup> /125 <sup>(3)</sup>	125 <sup>(3)</sup> /125 <sup>(3)</sup>	200 <sup>(3)</sup> /200 <sup>(3)</sup>	-	-	-	-	-
Rated operating power in AC-23 (kW)									
At $U_e$ 415 VAC without pre-break auxiliary contact <sup>(1)(5)</sup>		80/80	80/80	132/132	220/220	355/355	450/450	450/450	560/560
At $U_e$ 690 VAC without pre-break auxiliary contact <sup>(1)(5)</sup>		110/110	110/110	220/220	220/295	295/400	400/400	400/400	400/475
Reactive power (kvar)									
At $U_e$ 415 VAC <sup>(5)</sup>		75	75	115	185	290	365	355	460
Power dissipation (W / pole)									
Power dissipation		21.6	23	41.1	57.4	122	134		264
Power dissipated by fuse		12	15	23	33	60	65	70	110
Power dissipated by switch body		10.4	10.4	19	24.4	61	68		154
Wiring capacity of conductors									
Minimum Cu cable cross-section (mm <sup>2</sup> )		35	50	95	185	2 x 150	2 x 185		
Minimum Cu cable cross-section (mm <sup>2</sup> )		95	95	240	240	2 x 300	2 x 300	4 x 185	4 x 185
Maximum busbar width (mm)		20	20	32	45	63	63	80	80
Min. tightening torque (Nm)		9	9	20	20	40	40	40	40
Mechanical characteristics									
Durability (number of operating cycles)		10 000	10 000	10 000	10 000	5 000	8 000	3 000	3 000
Operating torque (Nm)		10.2	9.7	13	17	56	57	62	62
Weight of a 3-pole device without extras (kg)		1.8	1.8	3.2	4.8	16	17	25	25
Weight of a 4-pole device without extras (kg)		2.3	2.3	4.5	6.1	20	21.5	30	30
Weight of 1 P extra (kg)		0.5	0.5	1.3	1.3			3	3
Storage temperature (°C)						-50 ... +85			
Operating temperature (°C)						-20...+70			
Regulatory compliance						IEC 60947-3			
Certification						IEC, KEMA, Loyd's and CCC			
Degree of pollution		3	3	3	3	3	3	3	3

(1) Category with index A = frequent operation / Category with index B = infrequent operation.

(5) The power value is given for information only; the current values vary from one manufacturer to another.

(2) With terminal shrouds or phase barrier.

(6) For a rated operational voltage  $U_e$  = 400 VAC.

(3) 3-pole device with 2 poles in series for the '+' and 1 pole for the '-'.

(4) 4-pole device with 2 poles in series per polarity.


# FUSERBLOC

Front/side-control fuse combination switches  
for industrial fuses up to 1250 A

## Dimensions for front/side external operation


25 to 32 A (size 10 x 38)

External front operation

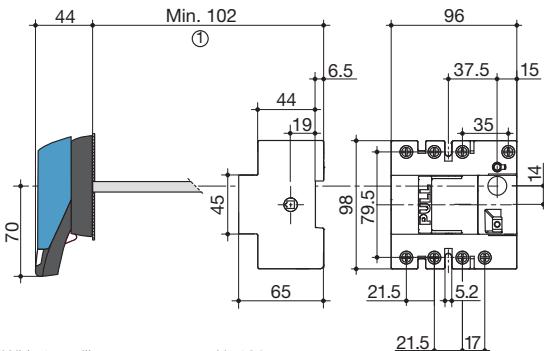


1. With 1 auxiliary contact type U: 130 mm.  
With 2 auxiliary contacts type U: 155 mm.

External side operation

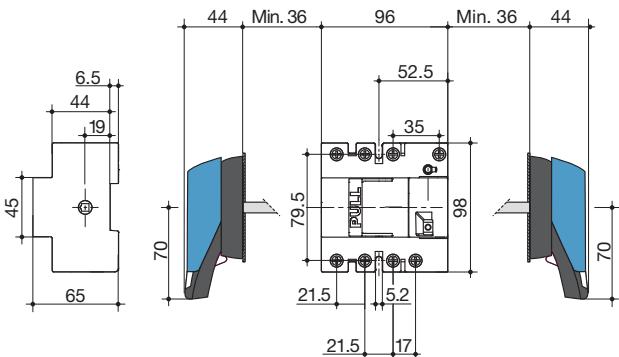


32 A (size 14 x 51)

External front operation

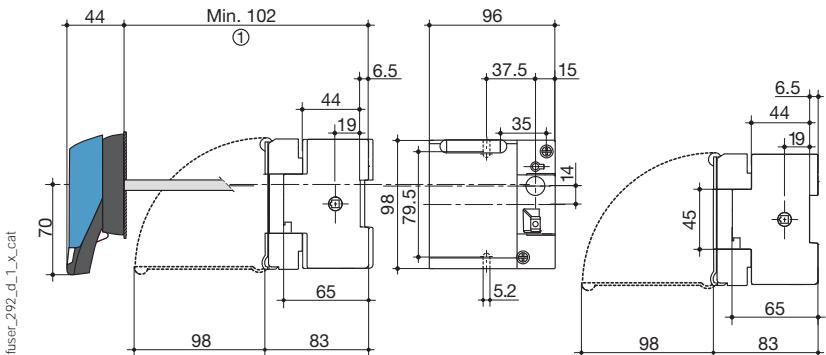


1. With 1 auxiliary contact type U: 130 mm.  
With 2 auxiliary contacts type U: 155 mm.

External side operation

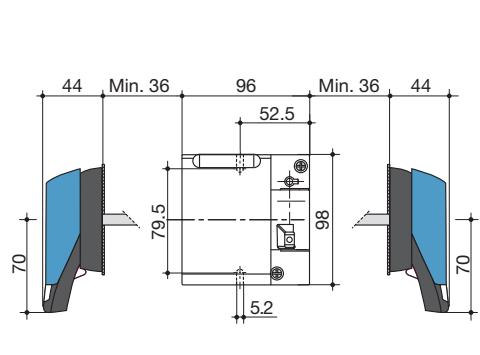


## Dimensions - direct operation

25 A (size 10 x 38)

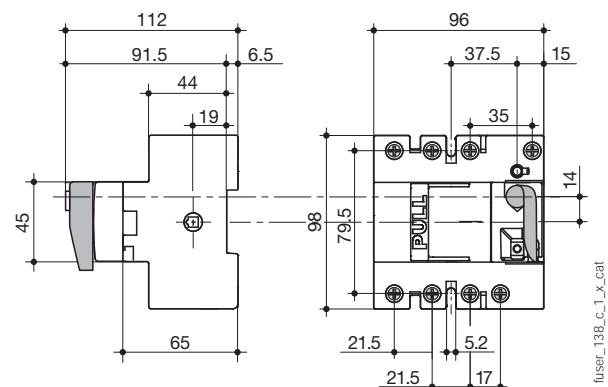

32 A (size 14 x 51)




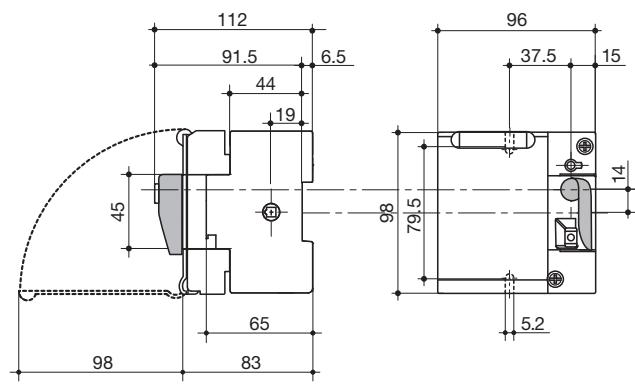


## Dimensions for direct front and front/side external operation

50 to 160 A

50 - 63 A: cage connection.

100 - 160 A: cage connection.

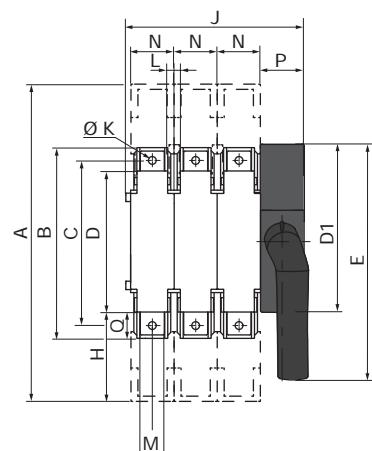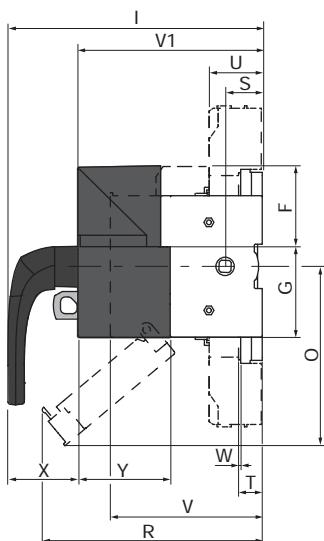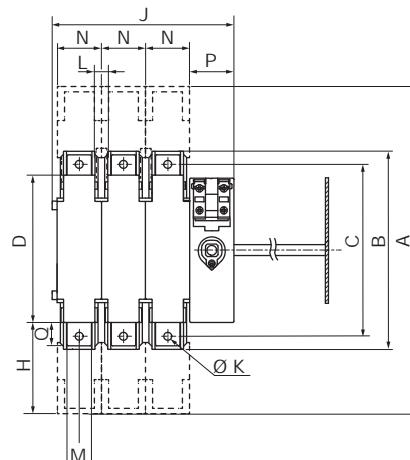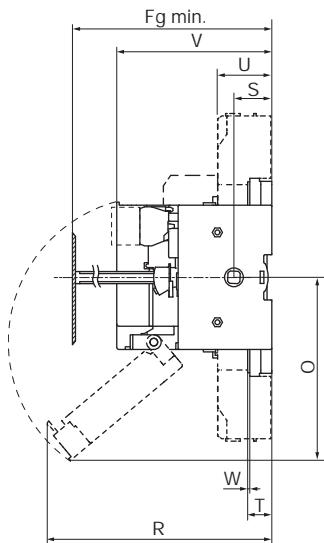

fuser\_751\_a\_1\_x\_cat.ai

fuser\_752\_a\_1\_x\_cat.ai





Rating (A)	Fuse size	Frame size	Fg min.	A	B	C	D	D1	E	F	G	H	I	J		K	L	M	N	O	P	Q	R	S	T	U	V	V1	W	X	Y
														3P	4P																
50	14 x 51	11	100		118		106	143	200	67.5	75.5		212.1	121	148	6.2	15	12	27	85	36.8	15	153	31			87	153.6	2	58.5	77
63	00C	12	125		118		106	143	200	67.5	75.5		212.1	136	168	6.2	20	12	32	159	36.8	15	145	31			116	153.6	2	58.5	77
100	22x58	13	135	268	162	141	127	143	200	67.5	75.5	75	212.1	148	184	8.5	16	20	36	141	36.8	41	187	31	19.5	43.5	116	153.6	2.5	58.5	77
125	22x58	13	135	268	162	141	127	143	200	67.5	75.5	75	212.1	148	184	8.5	16	20	36	141	36.8	41	179	31	19.5	43.6	116	153.6	2.5	58.5	77
125	NH00	13	135	268	162	141	127	143	200	67.5	75.5	75	212.1	148	184	8.5	16	20	36	141	36.8	41	193	31	19.5	43.7	126	153.6	2.5	58.5	77
160	NH00	13	135	268	162	141	127	143	200	67.5	75.5	75	212.1	190	240	8.5	16	20	36	141	36.8	41	193	31	19.5	43.8	126	153.6	2.5	58.5	77
160	NH0	14	145	268	162	141	140	143	200	67.5	75.5	75	212.1	190	240	8.5	20	20	50	174	36.8	41	229	31	19.5	43.9	136	153.6	2.5	58.5	77

# FUSERBLOC

Front/side-control fuse combination switches  
for industrial fuses up to 1250 A

Dimensions for direct front and front/side external operation (continued)

250 A

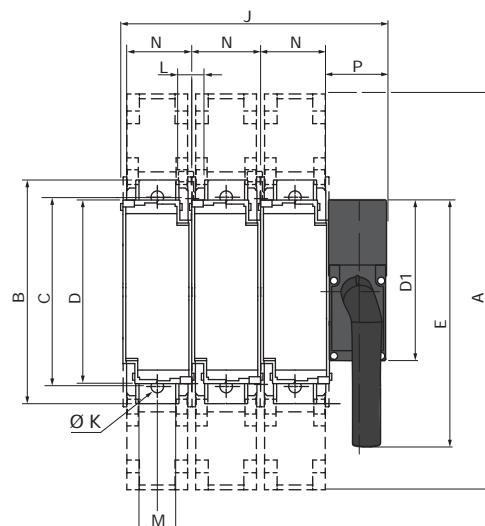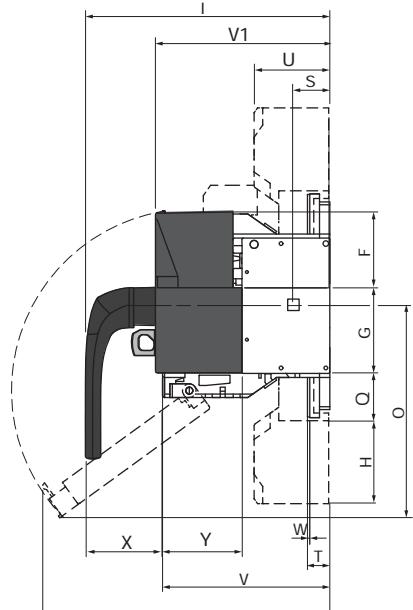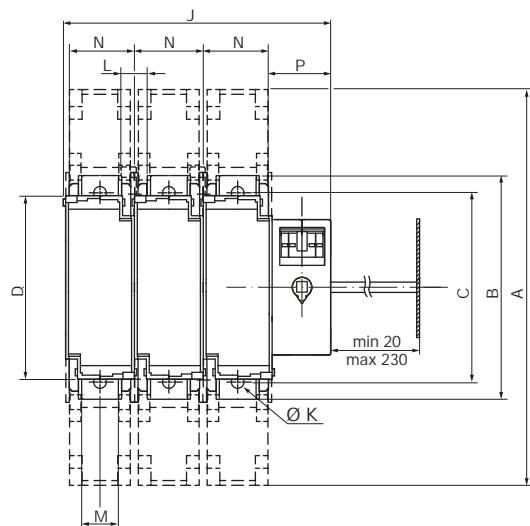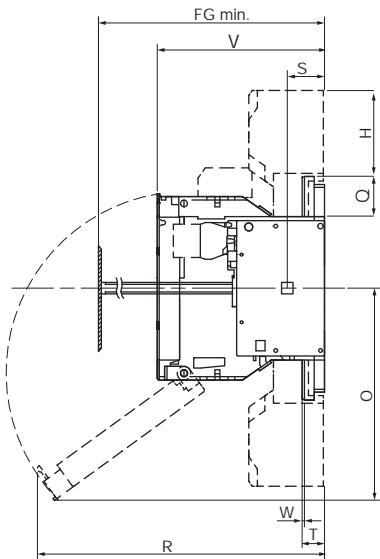


fuser\_748\_a\_1\_x\_cat.ai


fuser\_749\_a\_1\_x\_cat.ai

Rating (A)	Fuse size	Frame size	Fg min.	A	B	C	D	D1	E	F	G	H	I	J	3P	4P	K	L	M	N	O	P	Q	R	S	T	U	V	V1	W	X	Y
250	NH1	15	154	345	195	166	162	143	220	67.5	75.5	110	212.1	234	294	8.5	28	32	60	185	51.6	52	251	31	19.5	65	146	142	2.5	58.5	77	

400 A

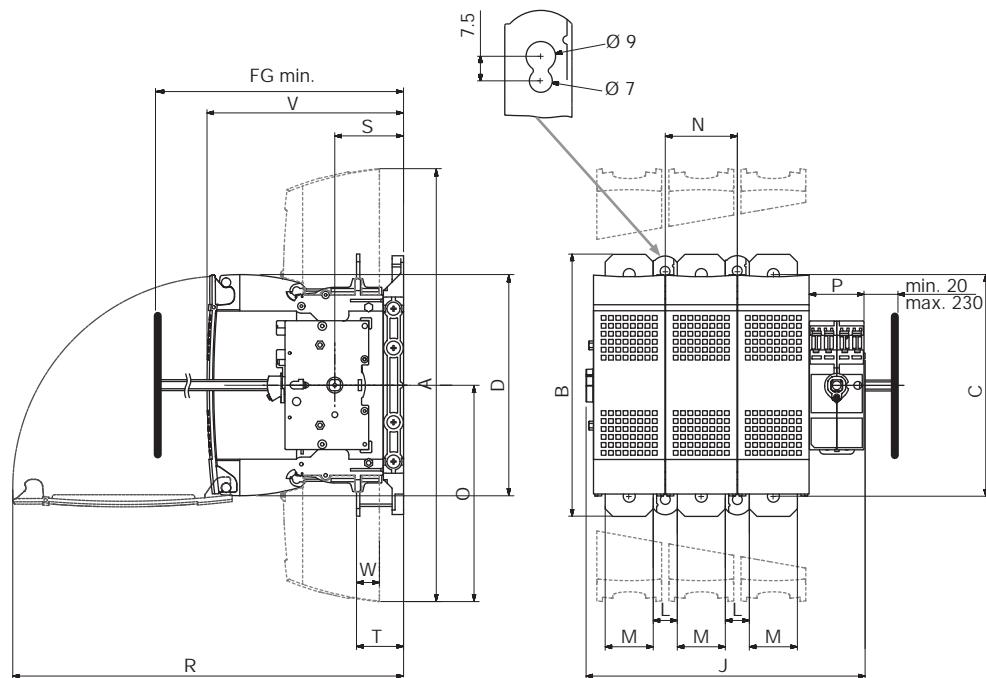

fuser\_733\_c\_1\_x\_cat.ai

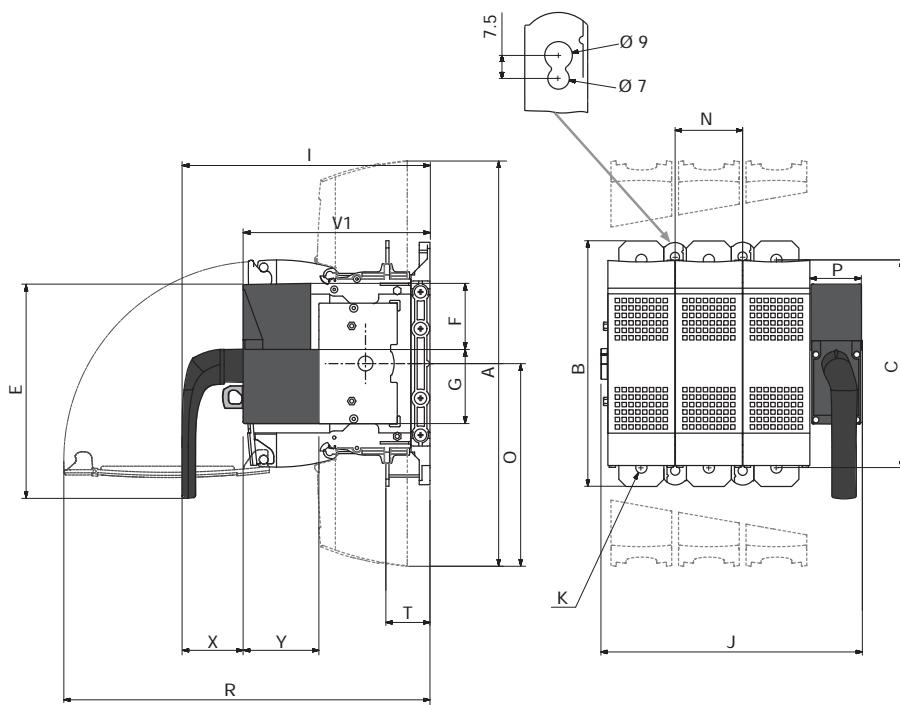

fuser\_750\_a\_1\_x\_cat.ai


Rating (A)	Fuse size	Frame size	Fg min.	A	B	C	D	D1	E	F	G	I	J	3P	4P	K	L	M	N	O	P	R	S	T	V	V1	W	X	Y
400	NH2	16	188	397	240	203	203	143	220	67.5	75.5	239	256	321	11	34	32	66	199	50	360	63	43	180	184	3	58.5	77	

# FUSERBLOC

Front/side-control fuse combination switches  
for industrial fuses up to 1250 A

Dimensions for direct and external operation

630 to 1250 A

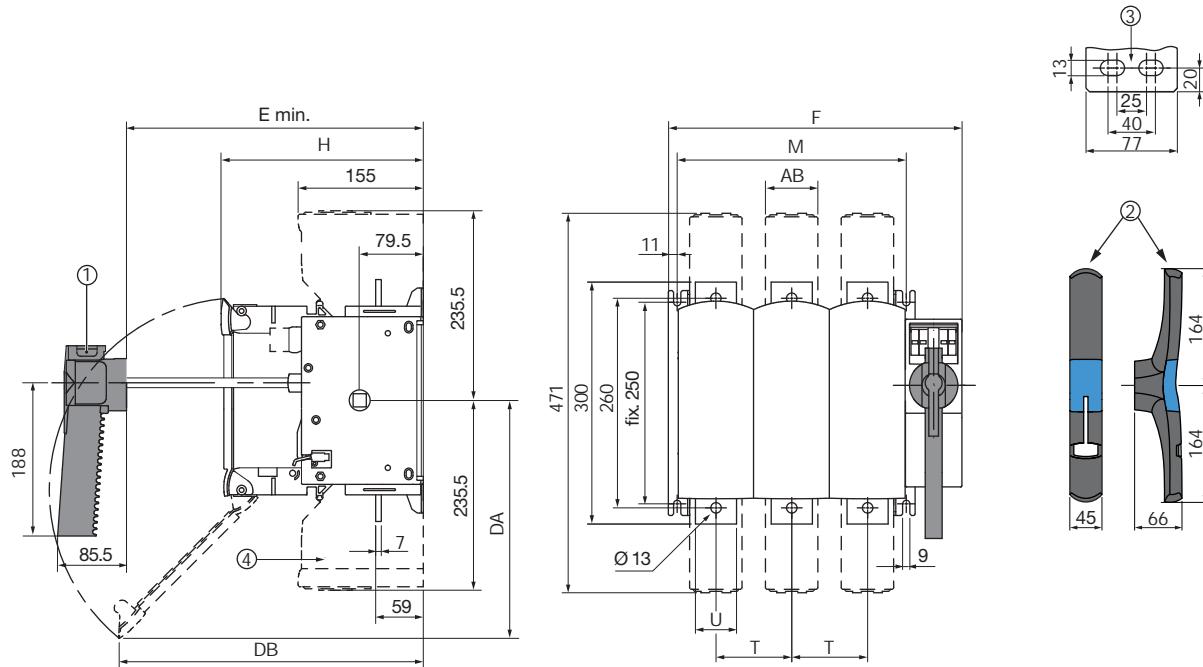





1. Handle for casing size 17.
2. Handle for casing size 18.
3. Connection terminals for casing size 18.
4. Terminal cover.

fuser\_415\_i\_1\_x\_cat.ai





Rating (A)	Fuse size	Frame size	Overall dimensions	Case					Switch mounting		Connection		Terminal shrouds
				F 3 P	F 4 P	H	DA	DB	M 3p.	M 4p.	T	U	
630	3	17	265	364	458	250	300	380	284	378	94	51	65
800	3	17	265	364	458	250	300	380	284	378	94	51	65
800	4	18	304	442	562	289	355	295	362	482	120	77	88
CD 1250	4	18	304	442	562	289	355	295	362	482	120	77	88

## Dimensions for external handles





25 to 32 A

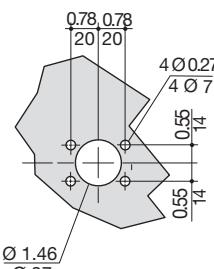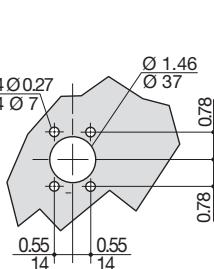Handle type	Front operation		Side operation	
	Direction of operation	Door drilling	Direction of operation	Door drilling
<b>S1 type</b> Box size 0				

50 to 400 A

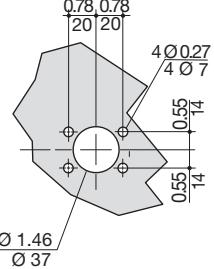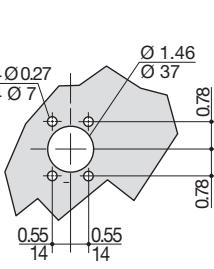Handle type	Front operation		Side operation	
	Direction of operation	Door drilling	Direction of operation	Door drilling
<b>S2 type</b> Box size 11-16				

630 to 800 A


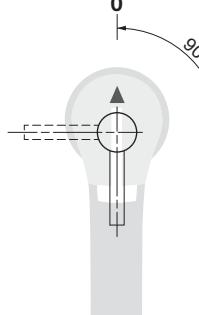
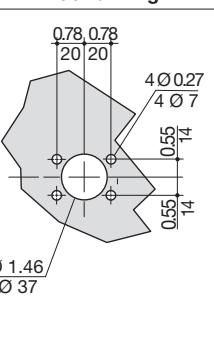
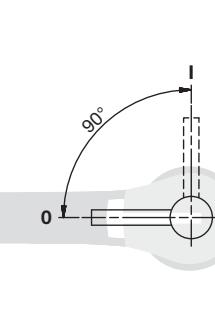
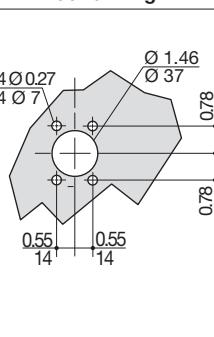
Handle type	Front operation		Side operation	
	Direction of operation	Door drilling	Direction of operation	Door drilling
<b>S3 type</b> Box size 17				

# FUSERBLOC

Front/side-control fuse combination switches  
for industrial fuses up to 1250 A

Dimensions for external handles (continued)

800 to 1250 A

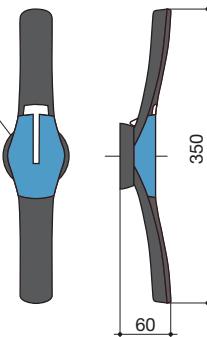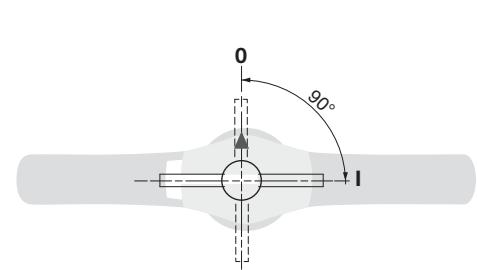
Handle type	Front operation		Side operation Direction of operation	Door drilling
	Direction of operation			
<b>S3 type</b> Box size 18				
<b>S4 type</b>				

page\_054\_a\_1\_gb\_cat.eps

## Dimensions for direct-control casings




50 to 400 A

## Case handle type

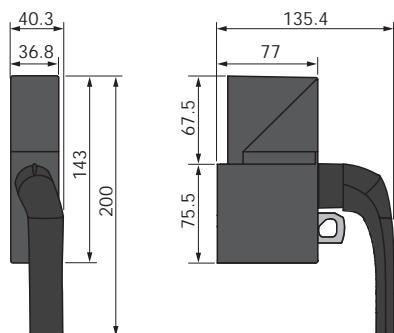50 to 160 A  
Case 11 to 14

## Direct control

## Operating direction

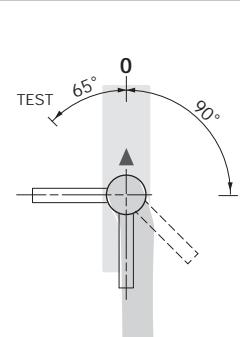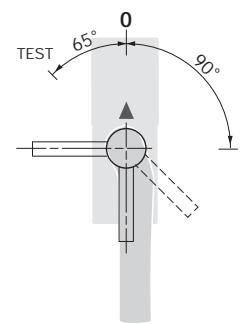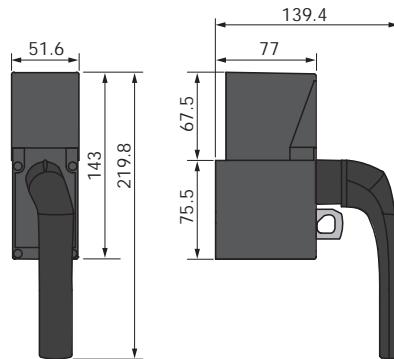250 to 400 A  
Case 15 to 16

# Fuse combination switches for special applications

Despite already offering a wide range of fuse combination switches, SOCOMEC also manufactures specific products suitable for all your requirements. A small selection of these products can be seen on these two pages. The list is not exhaustive. Please contact us for more information.

## Compliance with standards

- > IEC 60947-3
- > BS EN 60947-3
- > IEC 60269-2
- > VDE 0660-107



## Multi-pole **FUSERBLOC**



fuser\_597.eps

Thanks to the modular concept of FUSERBLOC it is possible to produce multi-pole devices and combine ratings from 50 to 1250 A.

This is interesting when several motors need to be operated through a single handle.

Example: protecting three AC motors and a single DC motor.

This simple concept also provides a considerable space saving in electrical cabinets when compared to other solutions.

## Fuse combination changeover switch



fuser\_426.eps

Available from 20 to 400 A, the FUSERBLOC changeover switch range is a great solution for safeguarding your energy supply and protecting and isolating pumps and sensitive loads.

# Fuse combination switches for special applications

## LMDC **FUSERBLOC**

fuser-lm\_002.eps




Protect variable speed drives under a common DC bus.

Multifunctional device for performing maintenance work on a branch of the electrical installation while leaving the rest of the equipment switched on.

Isolation, protection and precharge switch-capacitor within a single device.

**Example:** VSD disconnected from the common DC bus. When the inverter capacitors discharge, the direct power would otherwise prompt an inrush current that can damage the inverter, or even shut down the entire system (voltage drop). This inrush current must be limited.

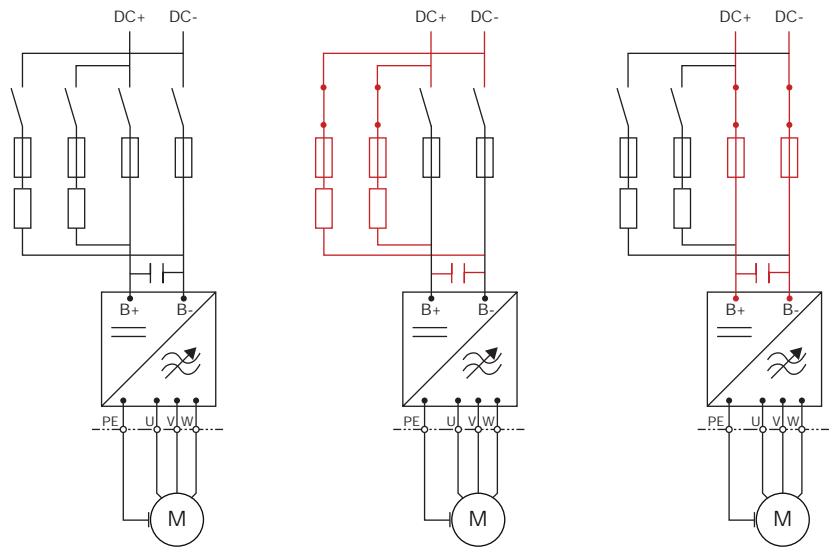


Disconnected variable speed drive and motor

The device is manually switched ON and the capacitors are charged through the precharge circuit while limiting the inrush current.

The device automatically switches over to the main protection circuit, connecting the VSD to the DC bus.

fuser-lm\_012\_a1\_x\_cat.ai

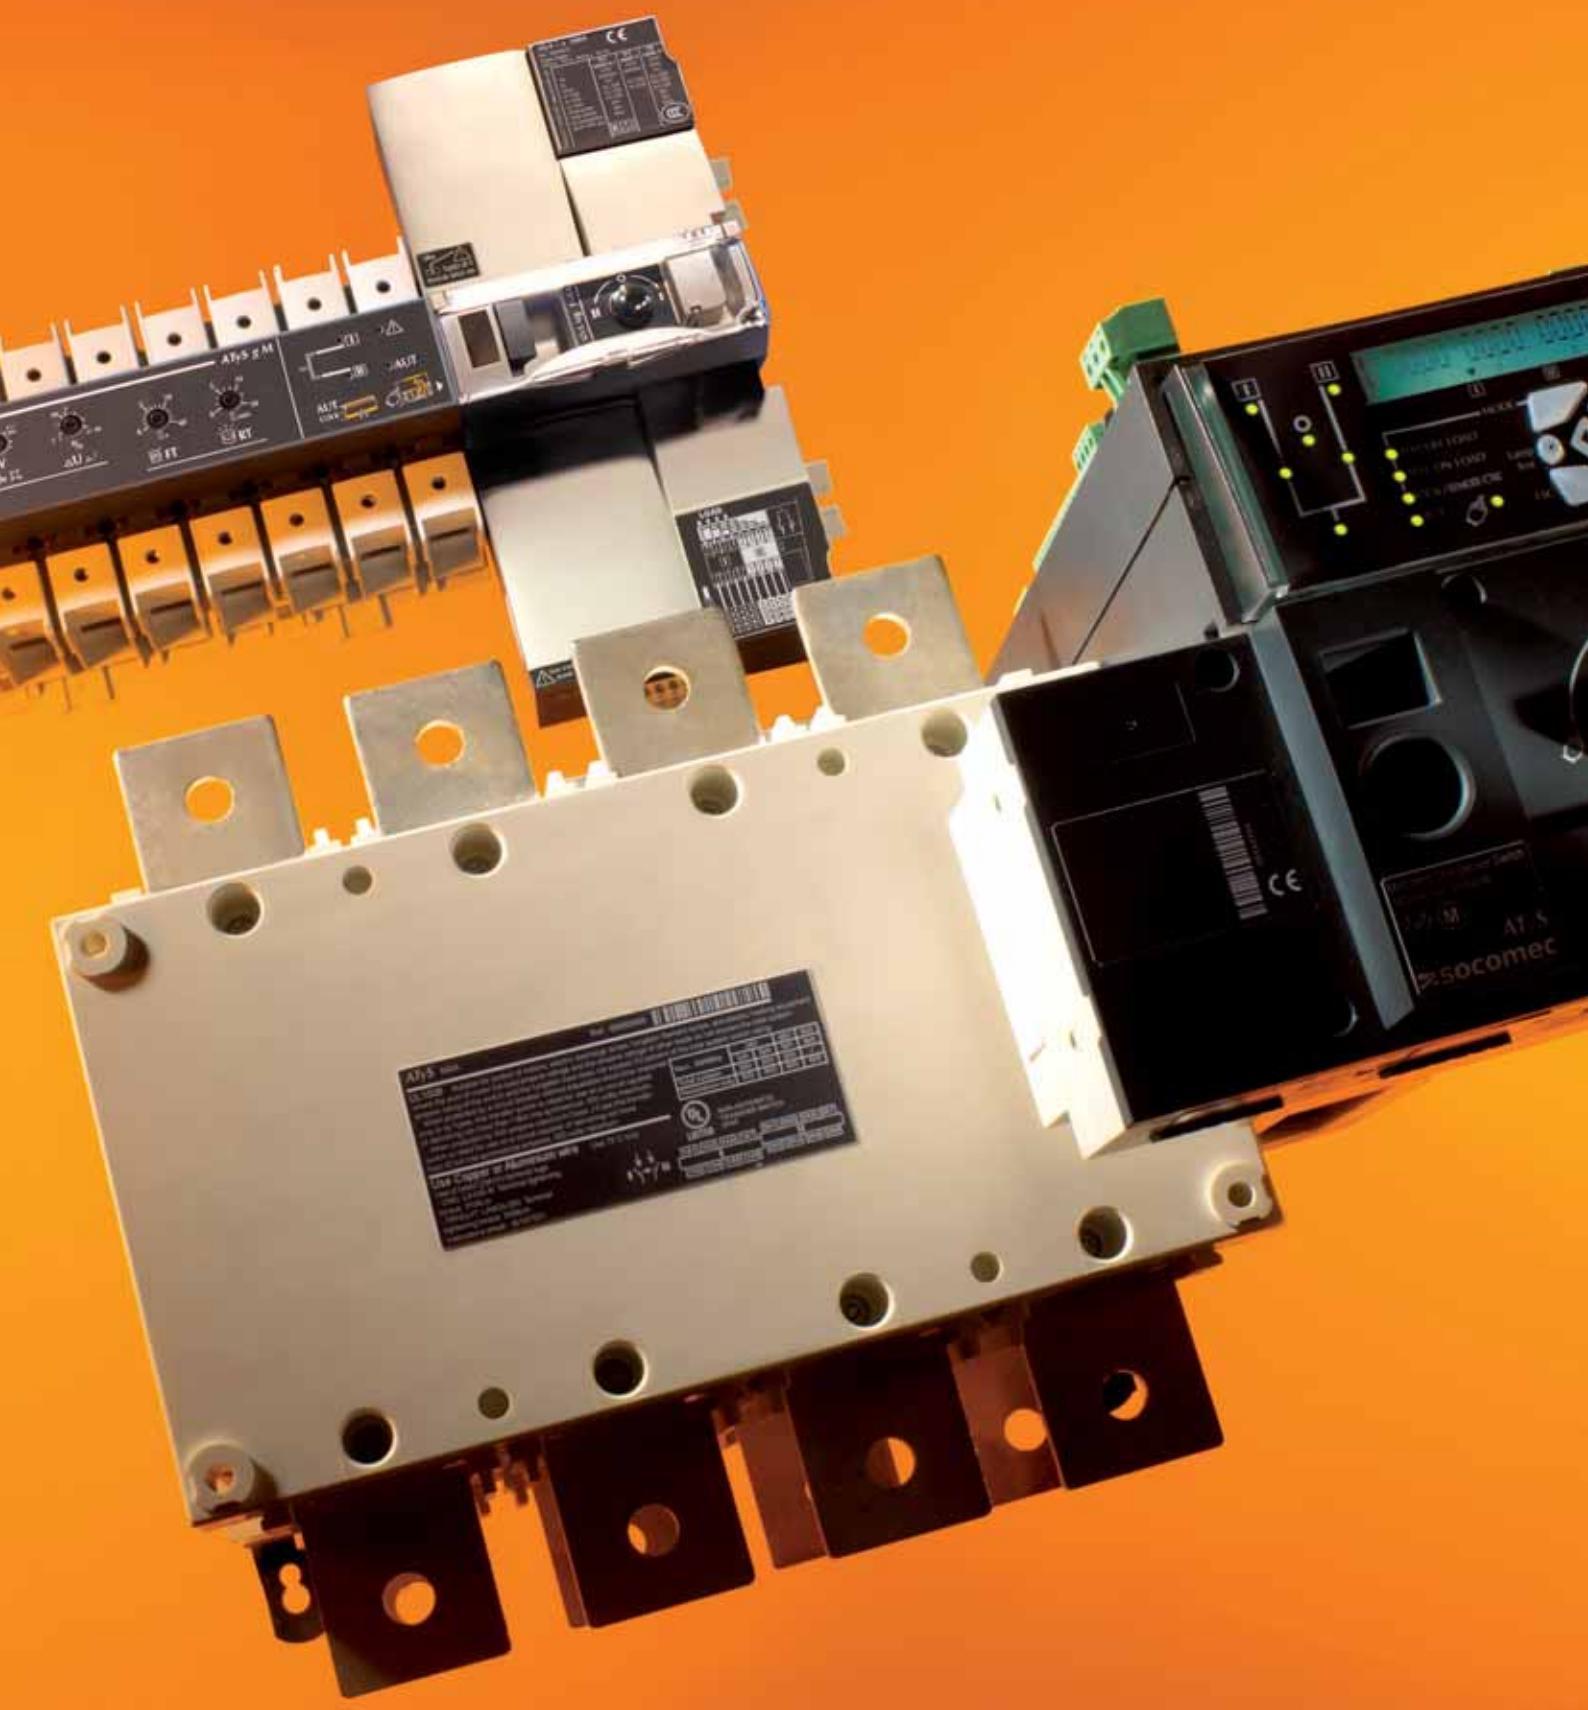

# Transfer switches

Security and reliability for your transfer applications.....	p. 132
Manually operated Transfer Switching Equipment selection guide.....	p. 134
Remotely operated and Automatic Transfer Switching Equipment selection guide .....	p. 136

## Manual transfer switches



**COMO CS**  
25 to 100 A  
p. 140



**SIRCOVER**  
125 to 3200 A  
p. 146

## Motorised modular transfer switches

**ATyS M range** p. 164

40 to 160 A



**ATyS d M**  
p. 166



**ATyS t M**  
**ATyS g M**  
p. 168



**ATyS p M**  
p. 170

## Motorised transfer switches

**ATyS S range** p. 178

40 to 6300 A



**ATyS S**  
**ATyS d S**  
p. 180



**ATyS r**  
p. 188



**ATyS g**  
p. 190



**ATyS p**  
p. 192



**ATyS d H**  
p. 210

## Universal ATS controller

Automatic control of different switching technologies: circuit breakers, contactors, switches.



**ATyS C25**  
p. 212



**ATyS C35**  
new  
p. 214



**ATyS C55**  
p. 216



**ATyS C65**  
p. 218

## UL product range

**UL range** p. 220



**SIRCOVER UL1008**  
100 to 1200 A  
Consult us



**ATyS UL1008**  
100 to 400 A  
Consult us

## Enclosed solutions

SOCOMEc offers a range of pre-equipped enclosures in steel or polyester.



Enclosed  
**SIRCOVER**  
Conult us



Enclosed  
**ATyS M**  
Conult us



Enclosed  
**ATyS**  
Conult us

## Any particular requirement?

Thanks to our extensive experience we have developed an impressive portfolio of customised solutions (motorised transfer switches with overlapping contacts and cooled poles, specific software, etc.). Please contact us if you have any specific requests.

For all your applications, even the most critical, trust the experts.

# Security and reliability for your transfer applications

An undisputed leader in the field of changeover switching, SOCOMEC is continuously innovating to ensure the continuity of electrical distribution.




From the COMO CS manual transfer switch (25 - 100 A) to the ATyS p automatic transfer switch (up to 3200 A) and the ATyS d H remotely operated transfer switch (up to 6300 A), our range of changeover switches cover most applications as standard.

## Products for all switching applications from 25 to 6300 A

SOCOMEC transfer switches can be used not only for normal/emergency source switching, but also to manage the switching of loads or for earthing/earthing solutions.

Your application	Manual changeover switches	Motorised changeover switches	Automatic changeover switches
Changeover switches (network/network - network/genset - genset/genset)	•	•	•
Bypass application	•	•	•
Other AC applications (load switching - grounding/earthing - phase switching)	•		
Photovoltaic applications	•		

## Secure switching for all your transfers

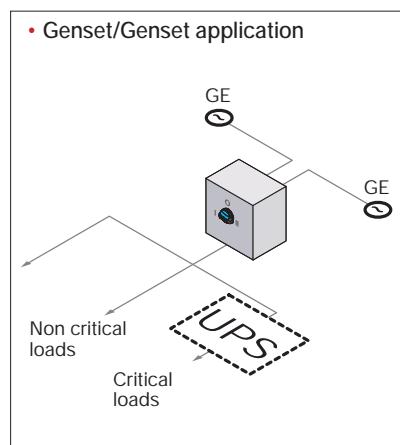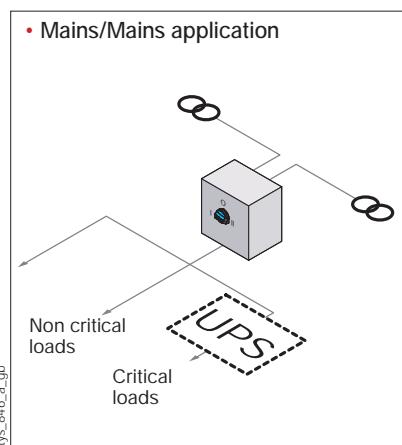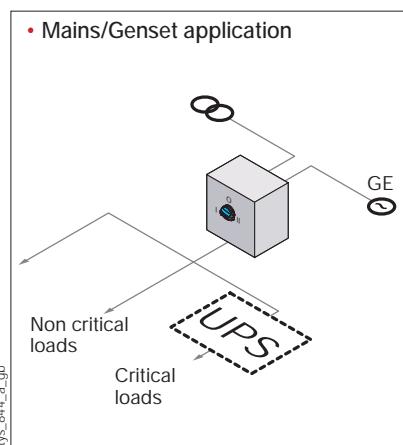

### Expert Services

- > Study, definition, advice, implementation, maintenance and training...
- > Our Expert Services extend to a complete offer of customised services to make your project a success.



# Security and reliability for your transfer applications

## Secure switching compliant with standard IEC 60947-6-1

The standard IEC 60947-6-1 "Low-voltage switchgear and controlgear – Multiple function equipment – Transfer Switching Equipment" is dedicated to changeover switches.

This standard applies to Transfer Switching Equipment (TSE) with interruption of the supply to the load during transfer, the rated voltage of which does not exceed 1000 VAC or 1500 VDC, be it any of the following:

- **MTSE**

According to the standard IEC 60947-6-1, MTSE (Manually operated Transfer Switching Equipment) is manually operated transfer switching equipment. As such, it requires a person to be present to operate the handle.

- **RTSE**

According to the standard IEC 60947-6-1, RTSE (Remotely operated Transfer Switching Equipment) is transfer switching equipment that is controlled remotely. As such, they require an external controller to provide them with commands.

- **ATSE**

According to the standard IEC 60947-6-1, ATSE (Automatic Transfer Switching Equipment) is transfer switching equipment that is controlled automatically. It differs from RTSE in that it has an integrated controller. As such, these devices are self-monitoring in terms of power source availability, and will start up the genset if required and switch automatically to the power source that is present.

This standard also defines categories of use, depending on the needs of the application, which may apply to the TSE:

Type of current	Utilisation category		Type of load
	Application A <sup>(1)</sup>	Application B <sup>(2)</sup>	
Alternating current	AC-31A	AC-31B	Non-inductive or low-inductive loads
	AC-32A	AC-32B	Mixed resistive and inductive loads, including moderate overvoltages
	AC-33A	AC-33B	Motors or various loads including motors, resistive loads and loads comprising up to 30% incandescent lamps

(1) Application A: Frequent switching.

(2) Application B: Infrequent switching.

### UL applications

SOCOMECH UL 1008 transfer switches are designed for use in "total system optional standby power" applications with a secure transfer of load power between a regular source and a backup source.

"Optional standby systems" are installed to provide a backup power supply for buildings where a power failure could mean disruption, interruptions to operation or damage to products or processes.

# Selection guide

## Manually operated Transfer Switching Equipment

How many poles?

What type of operations?

		
	<b>COMO CS</b> 25 to 100 A <i>p. 140</i>	
Number of poles		
3 P		•
4 P		•
Switch operation		
I-0-II		•
I-I+II-II		•
Bypass		•
Indication of breaking		
Positive break indication		•
Operating handle		
Front direct/external operation		•
Door mountable switch		•

(1) Depending on the version. From 125 to 3200 A for SIRCOVER I-0-II; from 125 to 1800 A for SIRCOVER I-I+II-II and from 125 to 1600 A for SIRCOVER Bypass.

What type  
of breaking  
indication?

	
	<b>SIRCOVER</b> 125 à 3200 A <sup>(1)</sup> <i>p. 146</i>
	•
	•
	•
	•
	•
	•

# Selection guide

## Remotely operated and Automatic Transfer Switching Equipment ATyS

Which type of power supply?

Which application?

RTSE (Remotely operated)				
40 to 125 A	40 to 160 A	125 to 3200 A	4000 to 6300 A	
				
<b>ATyS S</b> <i>p. 180</i>	<b>ATyS dS</b> <i>p. 180</i>	<b>ATyS dM</b> <i>p. 166</i>	<b>ATyS r</b> <i>p. 188</i>	<b>ATyS dH</b> <i>p. 210</i>

### Type of power supply

Power supply 12, 24 or 48 VDC	.				
Single power supply 230 VAC	.			.	
Dual power supply 230 VAC		.	.		.

### Connection of remote control interface

D10					
D20					

### Application

Mains/Mains	.	.	.	.	.
Mains/Genset	.	.	.	.	.
Genset/Genset	.	.	.	.	.

### Configuration

Configuration using potentiometers and dip switches					
Configuration using display and keyboard					
Voltage and frequency auto-configuration					

### Functions

Contact for product availability				.	
Fixed function inputs/outputs (defined by the factory)	.	.	.	.	.
Configurable inputs/outputs					
Voltage and frequency checks					
Phase rotation check					
Unbalanced phase check					
LED indication of source availability					
LED position indication					
Programming of genset startup					
Genset connected on switch II	.	.	.	.	.
Genset connected on switch I	.	.	.	.	.
Test On Load					
Test Off Load					
Load shedding					
Display and measurement of powers and energy (when utilising CTs)					

### Supervision

Programming of genset startup					
RS485 communication					
Ethernet communication					
Webserver via Ethernet module					
Data logging					

(1) With an external controller.

(2) Only on two pole versions.

(3) Only available on the version with COM.

(4) Configurable output.

## Functionalities?



## Need of supervision?

# Selection guide

## ATS Controller

Which type of power supply?

Which application?

	Classic functions	Simple and digital functions
	<b>ATyS C25</b> <small>p. 212</small>	 <b>ATyS C35</b> <small>p. 214</small>
Power supply		
AC Supply voltage Phase-Neutral	184-300 VAC	184-300 VAC
AC Supply voltage Phase-Phase	N/A	N/A
Frequency supply range	45-65 Hz	45-66 Hz
DC Supply voltage (optional)	12-24 VDC	12-24 VDC
Powered by USB port		
30s energy backup during blackout		
Integrated external DPS to switch (6A AC1) <sup>(2)</sup>	•	•
Internal DPS from voltage sensing <sup>(3)</sup>	•	•
Measurement		
Voltage measurement range	90-520 VAC (Phase-phase)	90-520 VAC (Phase-phase)
Voltage measurement accuracy		
Frequency measurement accuracy		
Phase angle measurement		•
Current / Power / and energy measurement		
Application		
RTSE class compatibility	PC (switch based) / CC (contactor)	PC (switch based) / CC (contactor) / CB (circuit breaker)
Main-Main	•	•
Main-Gen	•	•
Gen-Gen		
HMI		
LCD Screen		96x64 pixels
Wizard configuration		
Remote display (D70 / D50)		
Compatible with webview (D70/M70)		
Configuration with ECS		
Communication		
RS485 - Modbus	•	•
Dibus (digiware RJ45 connexion)		
Functions		
Tests	On load	On load / Off-load
Inhibition	•	•
Password protection		1 level
Breaker trip management		
In-phase transfer		
Genset Cycler		
Genset scheduler		
Bypass timers		
Configurable alarms		
Event recording		
Load shedding		
I/O		
Inputs	5 fixed	4 fixed 3 programmable
Outputs	4 fixed	4 fixed 1 programmable <sup>(1)</sup>
Environment		
IP rating (front face)	IP4X	IP4X
IK	IK 08	IK 08
EMC (according to IEC 61326-1 & IEC 60947-6-1)	Class A	Class A
Overtoltage category	III	III
Pollution CAT	PD 2	PD 2
Temperature use range	-25 - +70°C	-25 - +70°C

(1) In Main-Main mode only fixed in Main-Gen. (2) Supplies voltages from both source to motor. (3) Product can be powered by both sources.

Functionalities?

Digiware  
connectivity

Smart functions	Connected functions
	
<b>ATyS C55</b> <i>p. 216</i>	<b>ATyS C65</b> <i>p. 218</i>
N/A	N/A
80-576 VAC	80-576 VAC
45-66 Hz	45-66 Hz
9-28 VDC	9-28 VDC
•	•
•	•
•	•
50-576 VAC	50-576 VAC
0.5%	0.5%
0.1%	0.1%
•	•
•	•
PC (switch based) / CC (contactor) / CB (circuit breaker)	PC (switch based) / CC (contactor) / CB (circuit breaker)
•	•
•	•
•	•
350x160 pixels	350x160 pixels
•	•
•	•
•	•
•	•
•	•
On load / Off-load	On load / Off-load
•	•
3 level	3 level
•	•
•	•
•	•
1 program	4 programs
•	•
•	•
300 events	3000 events
basic load shed	Basic & smart load shed
6 programmable	6 programmable (+24 optional)
6 programmable	6 programmable (+18 optional)
IP4X (IP65 with gasket)	IP 65
IK 08	IK 08
Class A & B	Class A & B
III	III
PD 3	PD3
-30 - +70°C	-30 - +70°C

# COMO CS

## Manual Cam Transfer Switches from 25 to 100 A



**COMO CS** - Door mounting  
I-II 3 P 25 A



**COMO CS** in enclosure  
I-0-II 3 P 40 A

### Function

COMO CS are manually operated multi-pole transfer switches. They ensure switching, transfer of sources or transfer of two low voltage circuits on load as well as their safe disconnection.

### Advantages

#### Simple installation

The "quick fix" allows significant time saving in fixing the handle to the device. The devices sold in enclosed version are ready for installation.

#### Quick mounting

The accessories offered are common to all the products in the range. The products are designed for installation:

- on the rear of the cabinet on a backplate,
- on the rear of the cabinet on a DIN rail,
- on the door with a direct handle.

#### Effective in all circumstances

The devices are available with 3 standard switching types that can cover a wide variety of applications:

- I-II
- I-0-II
- I-0-II with bypass

Please consult us for adaptations to specific wiring diagrams.

### The solution for

- > Industry  
(machine control)



### Strong points

- > Simple installation
- > Quick mounting
- > Effective in all circumstances

### Compliance with standards

- > IEC 60947-3



- > UL 60947-4-1




88EJ &5LM6

\* cULus under certification.

### Configurations

#### Backplate switch mounted with external handle

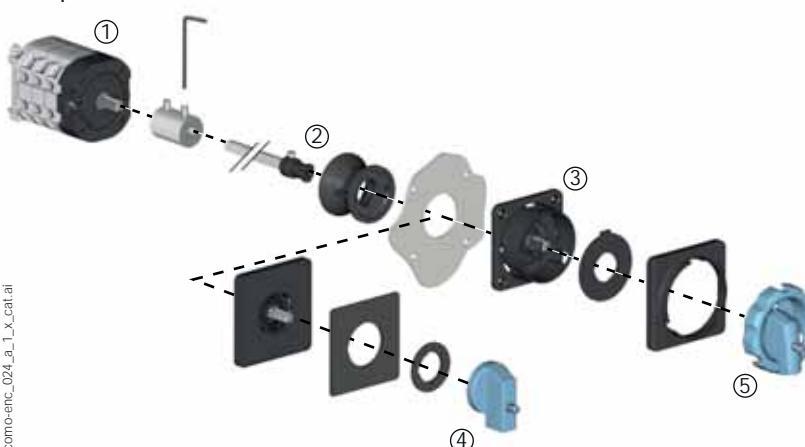


Functional diagram (for further details see the installation instructions supplied with the product).

1. Shaft extension

2. Shaft guide
3. Signalling plate
4. Non padlockable handle

#### Direct quickfixing handle for door or backplate mounted switch

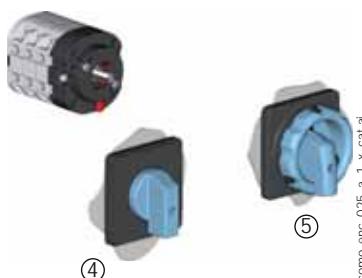

5. Padlockable handle

como-enc\_025\_a\_1x\_cat.ai

## References

### COMO CS

Backplate mounting with direct quickfixing handles or external handles

Rating (A)	N° of poles	Switching type	Switch body rear mounting <sup>(1)</sup>	Padlockable direct quick fixing handle	Non-padlockable direct quick fixing handle	Padlockable external handle <sup>(2)</sup>	Non-padlockable external handle <sup>(2)</sup>
25 A	3 P	I - II	4320 3002				
	4 P	I - II	4320 4002				
	3 P	I - O - II	4330 3002				
	4 P	I - O - II	4330 4002				
	3 P	Bypass I - O - II	4350 3002				
	4 P	Bypass I - O - II	4350 4002				
40 A	3 P	I - II	4320 3004				
	4 P	I - II	4320 4004				
	3 P	I - O - II	4330 3004				
	4 P	I - O - II	4330 4004				
	3 P	Bypass I - O - II	4350 3004				
	4 P	Bypass I - O - II	4350 4004				
63 A	3 P	I - II	4320 3006				
	4 P	I - II	4320 4006				
	3 P	I - O - II	4330 3006				
	4 P	I - O - II	4330 4006				
	3 P	Bypass I - O - II	4350 3006				
	4 P	Bypass I - O - II	4350 4006				
100 A	3 P	I - II	4320 3010				
	4 P	I - II	4320 4010				
	3 P	I - O - II	4330 3010				
	4 P	I - O - II	4330 4010				
	3 P	Bypass I - O - II	4350 3010				
	4 P	Bypass I - O - II	4350 4010				

(1) Mounting on DIN rail and backplate from 25 to 40 A and mounting on backplate for ratings from 63 to 100 A.

(2) Delivered with shaft and plate for front external control.

Door mounting with direct quickfixing handles

Rating (A)	N° of poles	Switching type	Switch body mounting on door	Padlockable direct quick fixing handle	Non-padlockable direct quick fixing handle
25 A	3 P	I - II	4320 3102		
	4 P	I - II	4320 4102		
	3 P	I - O - II	4330 3102		
	4 P	I - O - II	4330 4102		
	3 P	Bypass I - O - II	4350 3102		
	4 P	Bypass I - O - II	4350 4102		
40 A	3 P	I - II	4320 3104		
	4 P	I - II	4320 4104		
	3 P	I - O - II	4330 3104		
	4 P	I - O - II	4330 4104		
	3 P	Bypass I - O - II	4350 3104		
	4 P	Bypass I - O - II	4350 4104		
63 A	3 P	I - II	4320 3106		
	4 P	I - II	4320 4106		
	3 P	I - O - II	4330 3106		
	4 P	I - O - II	4330 4106		
	3 P	Bypass I - O - II	4350 3106		
	4 P	Bypass I - O - II	4350 4106		
100 A	3 P	I - II	4320 3110		
	4 P	I - II	4320 4110		
	3 P	I - O - II	4330 3110		
	4 P	I - O - II	4330 4110		
	3 P	Bypass I - O - II	4350 3110		
	4 P	Bypass I - O - II	4350 4110		

### Other solutions with enclosures

#### General characteristics



como-enc\_019.eps

- Available for switching types I-II and I-O-II
- Different enclosure sizes adapted to your needs.
  - Maximum safety during maintenance operations due to triple padlocking of the handle in position 0 (position I for switching type I-II).
  - IP 65 / NEMA 4, 4X : When installed in an industrial environment, protection degree IP 65 and NEMA 4 , 4X ensures that the products are protected against dust and water jets.
  - Red-yellow operating handle.


#### References

Rating (A)	No. of poles	Switching type	Reference
25 A	3 P	I - II	4321 3C02
	4 P	I - II	4321 4C02
	3 P	I - O - II	4331 3C02
	4 P	I - O - II	4331 4C02
40 A	3 P	I - II	4321 3C04
	4 P	I - II	4321 4C04
	3 P	I - O - II	4331 3C04
	4 P	I - O - II	4331 4C04
63 A	3 P	I - II	4321 3C06
	4 P	I - II	4321 4C06
	3 P	I - O - II	4331 3C06
	4 P	I - O - II	4331 4C06
100 A*	3 P	I - II	4321 3C10
	4 P	I - II	4321 4C10
	3 P	I - O - II	4331 3C10
	4 P	I - O - II	4331 4C10


\* For an ambient temperature of 35 °C

#### Dimensions (in/mm)

##### 25 to 40 A

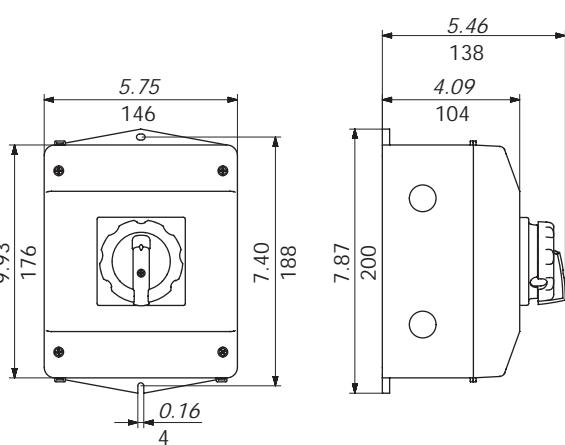

##### 63 to 100 A

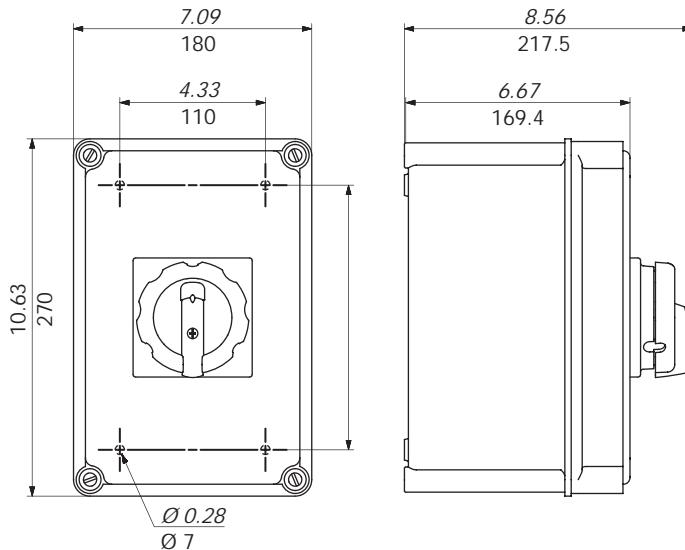

como-enc\_022\_a\_1x\_cat.ai  
como-enc\_023\_a\_1x\_cat.ai

## Characteristics according to IEC 60947-3

25 to 100 A

Conventional free air thermal current $I_{th}$ at 40 °C (A)	25 A	40 A	63 A	100 A
Conventional free air thermal current $I_{th}$ at 50 °C (A)	25	34	63	100
Conventional free air thermal current $I_{th}$ (60 °C) (A)	19	24	53	90
Rated insulation voltage $U_i$ (V)	690	690	690	690
Rated impulse withstand voltage $U_{imp}$ (kV)	4	6	6	6
<b>Rated operational currents <math>I_e</math> (A)</b>				
<b>Utilisation category at 400 VAC</b>				
AC-21A	25	40	63	100
AC-22A	20.5	40	63	100
AC-23A	15	29	63	63
AC-3	12	22	/	/
<b>Utilisation category at 690 VAC</b>				
AC-21A	25	40	63	100
AC-22A	20.5	40	63	100
AC-23A	8.5	17	63	63
AC-3	7	12.8	/	/
<b>Operational power in AC-23 (kW)<sup>(1)</sup></b>				
At 400 VAC without pre-break AC	7.5	15	37	37
At 690 VAC without pre-break AC	4.8	15	/	/
<b>Fuse protected short-circuit withstand with gG DIN fuses</b>				
Prospective short-circuit (kA rms)	7	10	5	5
Associated fuse rating (A)	25	40	63	100
Rated operational voltage (V.a.c.)	690	690	690	690
<b>Connection</b>				
Minimum CU cable cross-section (mm <sup>2</sup> )	0.5	1	1.5	4
Maximum CU cable cross-section (mm <sup>2</sup> )	4	10	16	35
Tightening torque min - max (Nm)	0.8-1.2	1.2-1.5	2.5	1.5
<b>Mechanical characteristics</b>				
Durability (number of operating cycles)	100 000	100 000	100 000	100 000
Weight of a 3 pole device (g)	109	184	440	440
Weight of a 4 pole device (g)	130	221	535	535

(1) The power is given for information only, the current values vary from one manufacturer to another.

## Characteristics according to UL 60947-4-1

25 to 100 A

General use rating (A)	25 A	40 A	63 A	100 A
UL certification file	88EJ		5LM6	
Short circuit rating at 600 VAC (kA)	10	5	/	
Type of fuse	RK5		/	
Max fuse rating (A)	150		/	
<b>Max horsepower rating (HP)</b>				
120 VAC / 1 phase	-	2		/
120 VAC / 3 phase	-	5		/
240 VAC / 1 phase	-	3		/
240 VAC / 3 phase	-	10		/
480 VAC / 3 phase	-	20		/
600 VAC / 3 phase	5.2	20		/
<b>Connection terminals</b>				
Solid wire (AWG)	#14-#12	#14-#8	#14-#4	#10-#2
Wire stripping distance (in/mm)	0.31 / 8	0.39 / 10	0.51 / 13	0.51 / 13
<b>Mechanical characteristics</b>				
Durability (number of operating cycles)	100000	100000	100000	100000
Tightening torque (Lb.in / N.m)	8.8 / 1	13.3 / 1.5	22.1 / 2.5	13.3 / 1.5
Weight of a 3 pole device (lb)	0.24	0.4	1	1
Weight of a 4 pole device (lb)	0.28	0.49	1.18	1.18



### Dimensions (in/mm)

25 to 100A

Mounting on door - Fixing with direct handle



Door width		Mini	Maxi
Unit		in	mm
		0.04	0.16
		1	4

Rating (A)	Unit	I-II / I-0-II		L Bypass I-0-II		C	D
		3 P	4 P	3 P	4 P		
25	in	3.19	3.66	4.13	4.61	1.54	1.57
	mm	81	93	105	117	39	40
40	in	3.31	4.82	4.33	4.84	2.11	2.2
	mm	84	97	110	123	53.6	56
63 - 100	in	4.45	5.28	6.1	6.93	2.91	2.8
	mm	113	134	155	176	74	71

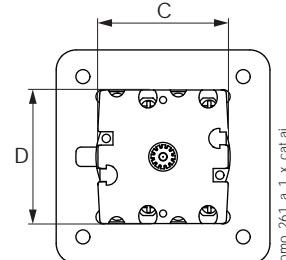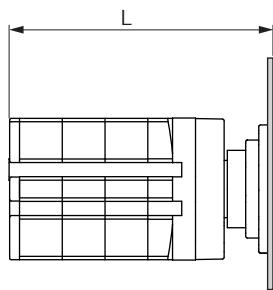

como\_261\_a\_1\_x\_cat.ai

Mounting on backplate / DIN rail - Rear fixing of direct handle

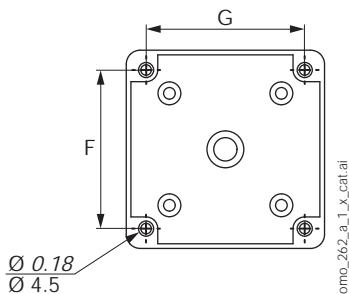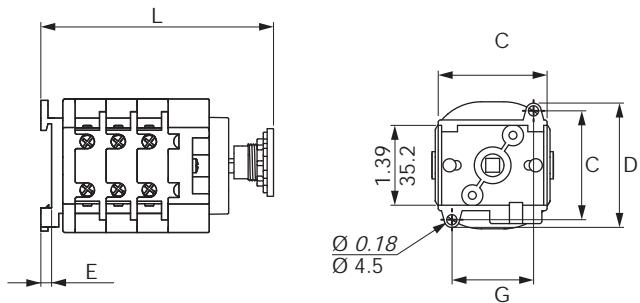

como\_262\_a\_1\_x\_cat.ai

Rating (A)	Unit	I-II / I-0-II		L Bypass I-0-II		E	C	D	F	G
		3 P	4 P	3 P	4 P					
25	in	3.20	3.68	4.15	4.57	0.18	1.89	2.2	1.65	1.42
	mm	81.4	93.4	105.4	116.1	4.5	48	56	47	36
40	in	3.73	4.28	4.28	5.08	0.18	1.89	2.2	1.65	1.42
	mm	94.7	107.7	120.7	129	4.5	48	56	47	36
63 ... 100	in	5.10	5.97	6.83	7.54	-	2.99	2.99	2.68	2.68
	mm	129.5	151.5	173.5	191.5	-	76	76	68	68


Mounting on backplate / DIN rail - Rear fixing of external handle

Rating (A)	Unit	X-L <sup>(3)</sup>				E	B		
		I-II / I-0-II		Bypass I-0-II					
		3 P	4 P	3 P	4 P				
25	in	3.15	3.63	4.10	4.57	0.18	1.24		
	mm	80.1	92.1	104.1	116.1	4.5	31.6		
40	in	3.54	4.06	4.57	5.08	0.18	1.24		
	mm	90	103	116	129	4.5	31.6		
63 ... 100	in	5.06	5.89	6.71	7.54	-	1.24		
	mm	128.5	149.5	170.5	191.5	-	31.6		

(1) X is the distance between the inside of the door and the fixing plate

(2) L is the total length of the shaft (max 200 mm)

(3) Minimum distance between the inside of the door and the fixing plate

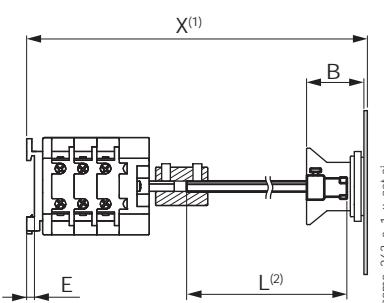

como\_263\_a\_1\_x\_cat.ai

## Dimensions for handles

25 to 100 A


Handle type	Front operation Direction of operation	Door drilling
<b>K1 type</b> non padlockable		
<b>K1 type</b> padlockable		

pgm...075\_a.1\_gb\_cat.ai

pgm...076\_a.1\_gb\_cat.ai

# SIRCOVER

## Manual Transfer Switching Equipment from 125 to 3200 A

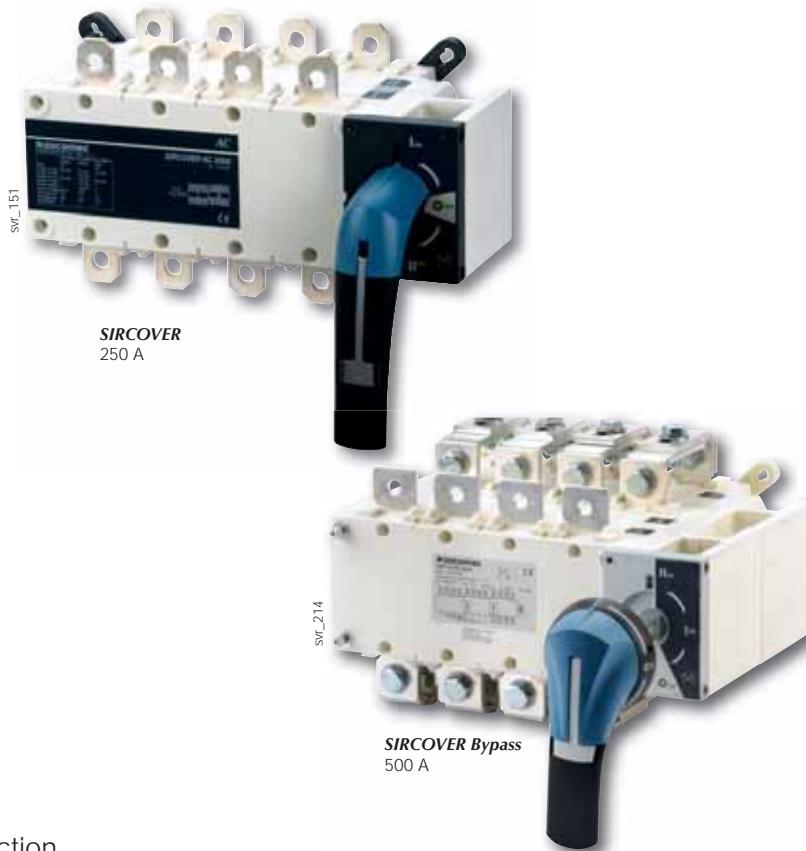

### Function

SIRCOVER products are manually operated transfer switches with positive break indication. There are 4 ranges in the series:

- **SIRCOVER** for open transition switching (I-O-II) available in 3 or 4 pole.
- **SIRCOVER** for overlapping contact switching (I-I+II-II). For applications where both sources are synchronised and there is to be no interruption to the load supply during transfer - available in 3 or 4 pole.
- **SIRCOVER Bypass**. This combination of three interlocked load break switches provides 3+6 or 4+8 poles for bypass applications.
- **SIRCOVER Bypass** for overlapping contact switching (I-I+II-II). This combination of three interlocked load break switches provides bypass to an UPS or other devices when sources are synchronised and the UPS is in static bypass mode.

They provide on-load transfer between two sources for any low voltage power circuit, as well as safety isolation by double breaking per pole. Other applications include source inversion (e.g. to change the direction of a motor) or grounding/earthing.

### Advantages

#### A complete range

There are 4 SIRCOVER models to meet every need: The standard model I-O-II, the overlapping contact model I-I+II-II, the bypass model and the bypass with overlapping contact model I-I+II-II.

#### Easy to connect

For ratings of 2000 to 3200 A, we offer copper bar connection pieces. This gives you the option of different connection methods - flat, edgewise with top or bottom bridging.

#### Stable positions

SIRCOVER devices have three stable positions, unaffected by voltage fluctuations and vibrations, protecting your loads from network disturbances.

#### On-load switching

With its AC-23 and AC-33 characteristics, tested according to standards IEC 60947-3 and IEC 60947-6-1, the SIRCOVER enables safe on-load switching for any type of load. With its on-load transfer capabilities, it is not necessary to isolate loads prior to transfer therefore the SIRCOVER offers an economical solution.

#### The solution for

- > Manufacturing
- > Power distribution



#### Strong points

- > Complete range
- > Easy to connect
- > Stable positions
- > On-load switching

#### Conformity to standards

- > IEC 60947-6-1
- > IEC 60947-3
- > GB/T 14048-11



#### Approvals and certifications<sup>(1)</sup>



(1) Product references on request.


#### SIRCOVER in enclosure



See "Enclosed transfer switches".


### What you need to know

- SIRCOVER with **break-before-make contacts (I-O-II)** are available as 3 or 4 pole models with ratings of 125 to 3200 A. They are available in steel or polyester enclosures (125 to 1600 A).
- SIRCOVER switches with **3 overlapping contact positions (I-I+II-II)** are available as 3 or 4 pole models from 125 to 1600 A. They are available in steel enclosures.
- With **break-before-make (I-O-II)** or overlapping contact positions (I-I+II-II), SIRCOVER Bypass devices are a combination of three interlocked switches enabling the use with 3+6 or 4+8 poles from 125 to 1600 A. They are available in steel enclosures.
- All SIRCOVER can be operated with **direct front operation** or **external handles**.

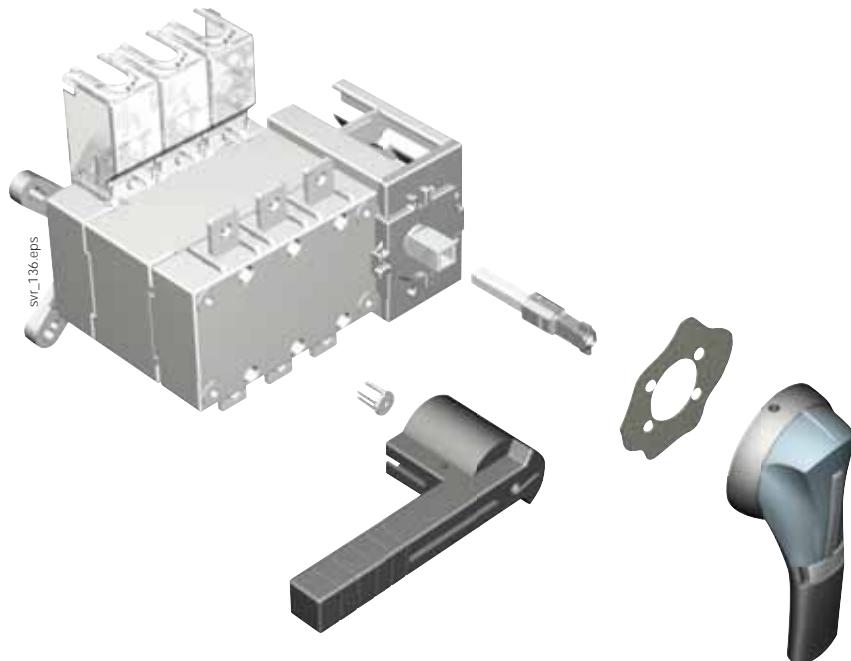


- **Connection pieces for copper bars** allows the connection between the 2 power terminals of the same pole (Fig. 1 and 2) and the bridging of switch I and switch II on the top or the bottom for ratings 2000, 2500 and 3200 A (Fig. 3).

Fig. 1

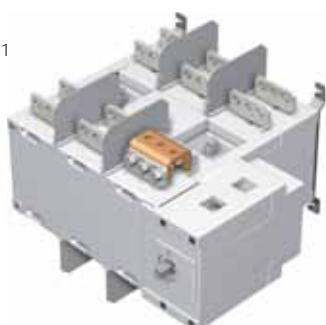


Top or bottom  
flat connection

Fig. 2

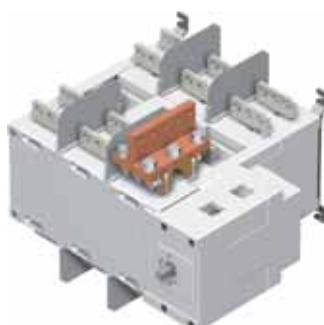

Top or bottom  
edgewise connection

Fig. 3

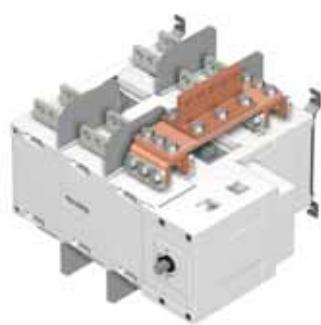

Top or bottom  
bridging connection

## References

### SIRCOVER I-0-II

Rating(A) / Frame size	No. of poles	Switch body	Direct handle	External handle	Shaft for external handle	Bridging bars <sup>(6)</sup>	Auxiliary contact	Terminal shrouds	Terminal screens
125 A / B3	3 P	41AC 3013				3 P 4109 3019 4 P 4109 4019		3 P 2694 3014 <sup>(3)(4)</sup> 4 P 2694 4014 <sup>(3)(4)</sup>	3 P 1509 3012 4 P 1509 4012
	4 P	41AC 4013							
160 A / B3	3 P	41AC 3016				4109 3025 4109 4025	1 <sup>st</sup> /2 <sup>nd</sup> NO/NC contact 4109 0021 <sup>(2)</sup>	3 P 2694 3021 <sup>(3)(4)</sup> 4 P 2694 4021 <sup>(3)(4)</sup>	3 P 1509 3025 4 P 1509 4025
	4 P	41AC 4016							
200 A / B3	3 P	41AC 3020			200 mm 1400 1020	3 P 4109 3039 4 P 4109 4039		3 P 2694 3051 <sup>(3)(4)</sup> 4 P 2694 4051 <sup>(3)(4)</sup>	3 P 1509 3063 4 P 1509 4063
	4 P	41AC 4020							
250 A / B4	3 P	41AC 3025	J2 type Blue 1122 1111	IP55 1421 2113	320 mm 1400 1032 <sup>(1)</sup>	4109 3050 4109 4050		3 P 1509 3080 4 P 1509 4080	1509 3160 1509 4160
	4 P	41AC 4025							
315 A / B4	3 P	41AC 3031		IP65 1423 2113 <sup>(1)</sup>		4109 3063 4109 4063		included	1509 3160 1509 4160
	4 P	41AC 4031							
400 A / B4	3 P	41AC 3040				4109 3063 4109 4063		included	1509 3160 1509 4160
	4 P	41AC 4040							
500 A / B5	3 P	41AC 3050				4109 3063 4109 4063		included	1509 3160 1509 4160
	4 P	41AC 4050							
630 A / B5	3 P	41AC 3063				4109 3063 4109 4063		included	1509 3160 1509 4160
	4 P	41AC 4063							
800 A / B6	3 P	41AC 3080				4109 3080 4109 4080		3 P 1509 3080 4 P 1509 4080	1509 3160 1509 4160
	4 P	41AC 4080							
1000 A / B6	3 P	41AC 3100	J3 type Black 1132 1111	S4 type Black 1401 1520	200 mm 1401 1520	4109 3120 4109 4120		1509 3160 1509 4160	1509 3160 1509 4160
	4 P	41AC 4100							
1250 A / B6	3 P	41AC 3120		IP65 1443 3113	320 mm 1401 1532 <sup>(1)</sup>	4109 3160 4109 4160		1509 3160 1509 4160	1509 3160 1509 4160
	4 P	41AC 4120							
1600 A / B7	3 P	41AC 3160				4109 3160 4109 4160		1509 3160 1509 4160	1509 3160 1509 4160
	4 P	41AC 4160							
2000 A / B8	3 P	41AC 3200			200 mm 2799 3015	(5)	1 <sup>st</sup> and 2 <sup>nd</sup> NO/NC contact included		1509 3160 1509 4160
	4 P	41AC 4200							
2500 A / B8	3 P	41AC 3250	S5 type Black 2799 7042	S5 type Black 1453 8113	320 mm 2799 3018 <sup>(1)</sup>			1509 3160 1509 4160	1509 3160 1509 4160
	4 P	41AC 4250							
3200 A / B8	3 P	41AC 3320			450 mm 2799 3019			1509 3160 1509 4160	1509 3160 1509 4160
	4 P	41AC 4320							

(1) Standard.

(2) 2 contacts supplied: one for position I and one for position II.

(3) For complete shrouding at front, rear, top and bottom, order quantity 4; if equipped with bridging bars order quantity 3.





(4) For top and bottom shrouding for the front only, order quantity 2.

(5) See "Copper bar connection pieces".

(6) For a 3 pole device order quantity 3 bridging bars, for a 4 pole device order quantity 4.

## Operating principle

### SIRCOVER I-0-II

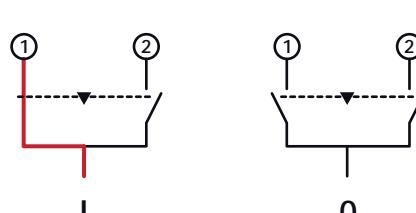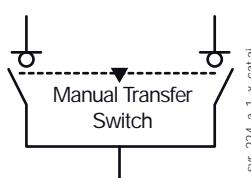

swf\_225\_a\_1\_X\_cat.ai

## SIRCOVER I-I+II-II

Rating (A) / Frame size	No. of poles	Switch body	Direct handle	External handle	Shaft for external handle	Bridging bars <sup>(6)</sup>	Auxiliary contact	Terminal shrouds	Terminal screens
125 A / B3	3 P	4190 3013				3 P 4109 3019 4 P 4109 4019		3 P 2694 3014 <sup>(3)(4)</sup> 4 P 2694 4014 <sup>(3)(4)</sup>	3 P 1509 3012 4 P 1509 4012
	4 P	4190 4013							
160 A / B3	3 P	4190 3016				320 mm 1400 1032 <sup>(1)</sup>	1 <sup>st</sup> /2 <sup>nd</sup> NO/NC contact 4109 0021 <sup>(2)</sup>	3 P 2694 3021 <sup>(3)(4)</sup> 4 P 2694 4021 <sup>(3)(4)</sup>	3 P 1509 3025 4 P 1509 4025
	4 P	4190 4016							
200 A / B3	3 P	4190 3019				4109 3025 4109 4025 4109 3039 4109 4039		2694 3051 <sup>(3)(4)</sup> 2694 4051 <sup>(3)(4)</sup>	1509 3063 1509 4063
	4 P	4190 4019							
250 A / B4	3 P	4190 3025				4109 3063 4109 4063		3 P 1509 3080 4 P 1509 4080	3 P 1509 3080 4 P 1509 4080
	4 P	4190 4025							
400 A / B4	3 P	4190 3039				4109 3120 4109 4120		4109 3160 4109 4160	1509 3160 1509 4160
	4 P	4190 4039							
630 A / B5	3 P	4190 3063				4109 3120 4109 4120		4109 3160 4109 4160	1509 3160 1509 4160
	4 P	4190 4063							
800 A / B6	3 P	4190 3080				4109 3160 4109 4160		4109 3160 4109 4160	1509 3160 1509 4160
	4 P	4190 4080							
1250 A / B6	3 P	4190 3120				4109 3160 4109 4160		4109 3160 4109 4160	1509 3160 1509 4160
	4 P	4190 4120							
1600 A / B7	3 P	4190 3160				4109 3160 4109 4160		4109 3160 4109 4160	1509 3160 1509 4160
	4 P	4190 4160							

(1) Standard.

(2) 2 contacts supplied: one for position I and one for position II.

(3) For complete shrouding at front, rear, top and bottom, order quantity 4; if equipped with bridging bars order quantity 3.


(4) For top and bottom shrouding for the front only, order quantity 2.

(5) See "Copper bar connection pieces".

(6) For a 3 pole device order quantity 3 bridging bars, for a 4 pole device order quantity 4.

## Operating principle

### SIRCOVER I-I+II-II

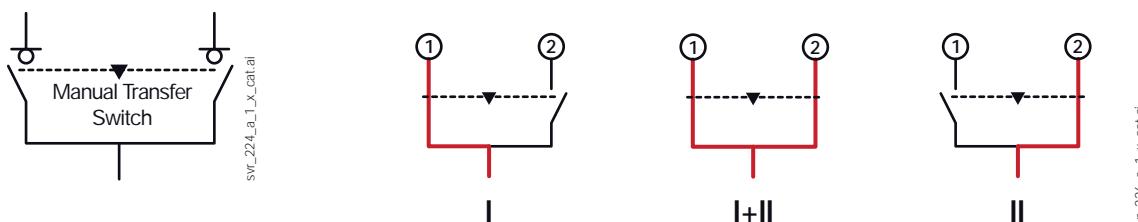

**Warning:** Please note that in position I+II contacts overlap.  
In case of UPS, make sure it is working in static bypass mode before operating.

## References (continued)

### SIRCOVER Bypass I-0-II

Rating (A) / Frame size	No. of poles	Switch body	Direct handle	External handle	Shaft for external handle	Bridging bars <sup>(6)</sup>	Auxiliary contact	Terminal shrouds	Terminal screens			
125 A / B3	3 P	41AC 7013	J2 type Blue 1122 1111	S2 type Blue IP55 1421 2113	200 mm 1400 1020	3 P 2x 4109 3019	1 <sup>st</sup> /2 <sup>nd</sup> NO/NC contact 4109 0021 <sup>(2)</sup>	3 P 2694 3014 <sup>(3)(4)</sup> 4 P 2694 4014 <sup>(3)(4)</sup>	3 P 1509 3012 4 P 1509 4012			
	4 P	41AC 9013										
160 A / B3	3 P	41AC 7016	Red 1123 1111	Blue IP65 1423 2113 <sup>(1)</sup>	320 mm 1400 1032 <sup>(1)</sup>	4 P 2x 4109 4019						
	4 P	41AC 9016										
200 A / B3	3 P	41AC 7020	J3 type Black 1132 1111	S3 type Blue IP65 1433 3113	200 mm 1401 1520	2x 4109 3025	3 P 2694 3021 <sup>(3)(4)</sup> 4 P 2694 4021 <sup>(3)(4)</sup>	3 P 1509 3025 4 P 1509 4025				
	4 P	41AC 9020										
250 A / B4	3 P	41AC 7025	J4 type Black 1142 1111 <sup>(5)</sup>	V2 type Black IP65 4199 7146	320 mm 1401 1532 <sup>(1)</sup>	2x 4109 3039 320 mm 1401 1532 <sup>(1)</sup>	2x 4109 3039	3 P 2694 3051 <sup>(3)(4)</sup> 4 P 2694 4051 <sup>(3)(4)</sup>	3 P 1509 3063 4 P 1509 4063			
	4 P	41AC 9025										
400 A / B4	3 P	41AC 7040	J4 type Black 1142 1111 <sup>(5)</sup>	V2 type Black IP65 4199 7146	450 mm 2799 3018 <sup>(1)</sup>	2x 4109 3120 450 mm 2799 3018 <sup>(1)</sup>	2x 4109 4120	3 P 1509 3160 4 P 1509 4160	3 P 1509 3080 4 P 1509 4080			
	4 P	41AC 9040										
630 A / B5	3 P	41AC 7063	J4 type Black 1142 1111 <sup>(5)</sup>	V2 type Black IP65 4199 7146	450 mm 2799 3019	2x 4109 3160 450 mm 2799 3019	2x 4109 4160	3 P 1509 4080 4 P 1509 4160	3 P 1509 3160 4 P 1509 4160			
	4 P	41AC 9063										
800 A / B6	3 P	41AC 7080	J4 type Black 1142 1111 <sup>(5)</sup>	V2 type Black IP65 4199 7146	450 mm 2799 3019	2x 4109 3160 450 mm 2799 3019	2x 4109 4160	3 P 1509 4080 4 P 1509 4160	3 P 1509 3160 4 P 1509 4160			
	4 P	41AC 9080										
1250 A / B6	3 P	41AC 7120	J4 type Black 1142 1111 <sup>(5)</sup>	V2 type Black IP65 4199 7146	450 mm 2799 3019	2x 4109 3160 450 mm 2799 3019	2x 4109 4160	3 P 1509 4080 4 P 1509 4160	3 P 1509 3160 4 P 1509 4160			
	4 P	41AC 9120										
1600 A / B7	3 P	41AC 7160	J4 type Black 1142 1111 <sup>(5)</sup>	V2 type Black IP65 4199 7146	450 mm 2799 3019	2x 4109 3160 450 mm 2799 3019	2x 4109 4160	3 P 1509 4080 4 P 1509 4160	3 P 1509 3160 4 P 1509 4160			
	4 P	41AC 9160										

(1) Standard.

(2) 2 contacts supplied: one for position I and one for position II.

(3) For complete shrouding at front, rear, top and bottom, order quantity 6; if equipped with bridging bars order quantity 4.


(4) For top and bottom shrouding for the front only, order quantity 2.

(5) Double lever handle.

(6) For a 3 pole device order quantity 6 bridging bars, for a 4 pole device order quantity 8.

## Operating principle

### SIRCOVER Bypass I-0-II

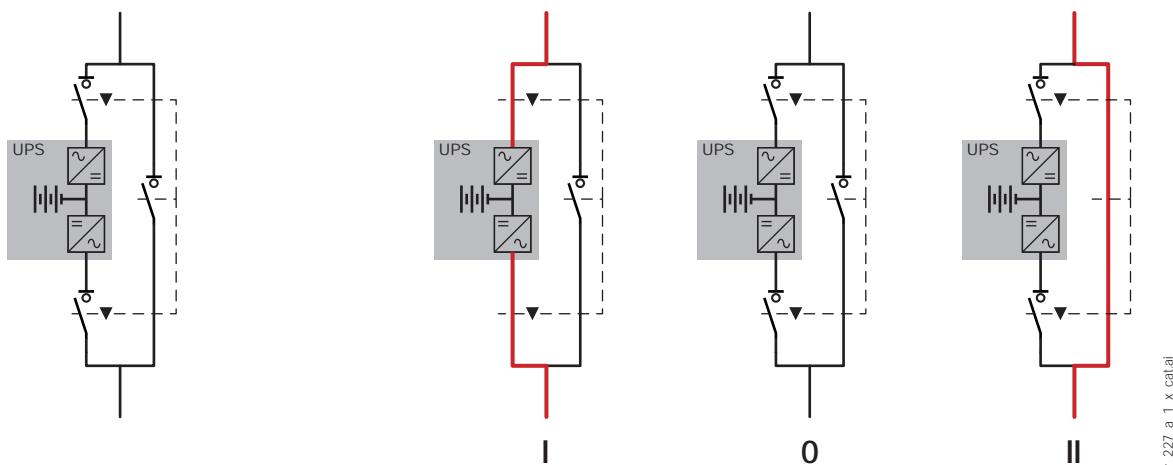

svr\_227\_a\_1\_X\_cat[ai]

### SIRCOVER Bypass I-I+II-II

Rating (A) / Frame size	No. of poles	Switch body	Direct handle	External handle	Shaft for external handle	Bridging bars <sup>(6)</sup>	Auxiliary contact	Terminal shrouds	Terminal screens
125 A / B3	3 P	46AC 7013	J2 type Blue 1122 1111	S2 type Blue IP 65 1423 2114 <sup>(1)</sup>	200 mm 1400 1020	3 P 2x 4109 3019	1st/2nd NO/NC contact 4109 0021 <sup>(2)</sup>	3 P 2694 3014 <sup>(3)(4)</sup>	3 P 1509 3012
	4 P	46AC 9013				4 P 2x 4109 4019		4 P 2694 4014 <sup>(3)(4)</sup>	4 P 1509 4012
160 A / B3	3 P	46AC 7016	Red 1123 1111	S2 type Blue IP 65 1423 2114 <sup>(1)</sup>	320 mm 1400 1032 <sup>(1)</sup>	3 P 2x 4109 3019	1st/2nd NO/NC contact 4109 0021 <sup>(2)</sup>	3 P 2694 3021 <sup>(3)(4)</sup>	3 P 1509 3025
	4 P	46AC 9016				4 P 2x 4109 4019		4 P 2694 4021 <sup>(3)(4)</sup>	4 P 1509 4025
200 A / B3	3 P	46AC 7020	Red 1123 1111	S2 type Blue IP 65 1423 2114 <sup>(1)</sup>	200 mm 1400 1020	3 P 2x 4109 3025	1st/2nd NO/NC contact 4109 0021 <sup>(2)</sup>	3 P 2694 3051 <sup>(3)(4)</sup>	3 P 1509 3063
	4 P	46AC 9020				4 P 2x 4109 4025		4 P 2694 4051 <sup>(3)(4)</sup>	4 P 1509 4063
250 A / B4	3 P	46AC 7025	J3 type Black 1132 1111	S3 type Blue IP65 1433 3114	200 mm 1401 1520	3 P 2x 4109 3039	1st/2nd NO/NC contact 4109 0021 <sup>(2)</sup>	3 P 2694 3021 <sup>(3)(4)</sup>	3 P 1509 3025
	4 P	46AC 9025				4 P 2x 4109 4039		4 P 2694 4021 <sup>(3)(4)</sup>	4 P 1509 4025
400 A / B4	3 P	46AC 7040	J3 type Black 1132 1111	S3 type Blue IP65 1433 3114	320 mm 1401 1532 <sup>(1)</sup>	3 P 2x 4109 3063	1st/2nd NO/NC contact 4109 0021 <sup>(2)</sup>	3 P 2694 3051 <sup>(3)(4)</sup>	3 P 1509 3063
	4 P	46AC 9040				4 P 2x 4109 4063		4 P 2694 4051 <sup>(3)(4)</sup>	4 P 1509 4063
630 A / B5	3 P	46AC 7063	J4 type Black 1142 1111 <sup>(5)</sup>	V2 type Black IP65 4199 7146	200 mm 2799 3015	3 P 2x 4109 3080	1st/2nd NO/NC contact 4109 0021 <sup>(2)</sup>	3 P 1509 3080	3 P 1509 4080
	4 P	46AC 9063				4 P 2x 4109 4080		4 P 2694 4080	
800 A / B6	3 P	46AC 7080	J4 type Black 1142 1111 <sup>(5)</sup>	V2 type Black IP65 4199 7146	320 mm 2799 3018 <sup>(1)</sup>	3 P 2x 4109 3120	1st/2nd NO/NC contact 4109 0021 <sup>(2)</sup>	3 P 2694 3120	3 P 1509 3160
	4 P	46AC 9080				4 P 2x 4109 4120		4 P 2694 4120	
1250 A / B6	3 P	46AC 7120	J4 type Black 1142 1111 <sup>(5)</sup>	V2 type Black IP65 4199 7146	450 mm 2799 3019	3 P 2x 4109 3160	1st/2nd NO/NC contact 4109 0021 <sup>(2)</sup>	3 P 2694 3160	3 P 1509 4160
	4 P	46AC 9120				4 P 2x 4109 4160		4 P 2694 4160	
1600 A / B7	3 P	46AC 7160	J4 type Black 1142 1111 <sup>(5)</sup>	V2 type Black IP65 4199 7146	450 mm 2799 3019	3 P 2x 4109 4160	1st/2nd NO/NC contact 4109 0021 <sup>(2)</sup>	3 P 2694 4160	3 P 1509 4160
	4 P	46AC 9160							

(1) Standard.

(2) 2 contacts supplied: one for position I and one for position II.

(3) For complete shrouding at front, rear, top and bottom, order quantity 6; if equipped with bridging bars order quantity 4.


(4) For top and bottom shrouding for the front only, order quantity 2.

(5) Double lever handle.

(6) For a 3 pole device order quantity 6 bridging bars, for a 4 pole device order quantity 8.

### Operating principle

#### SIRCOVER Bypass I-I+II-II

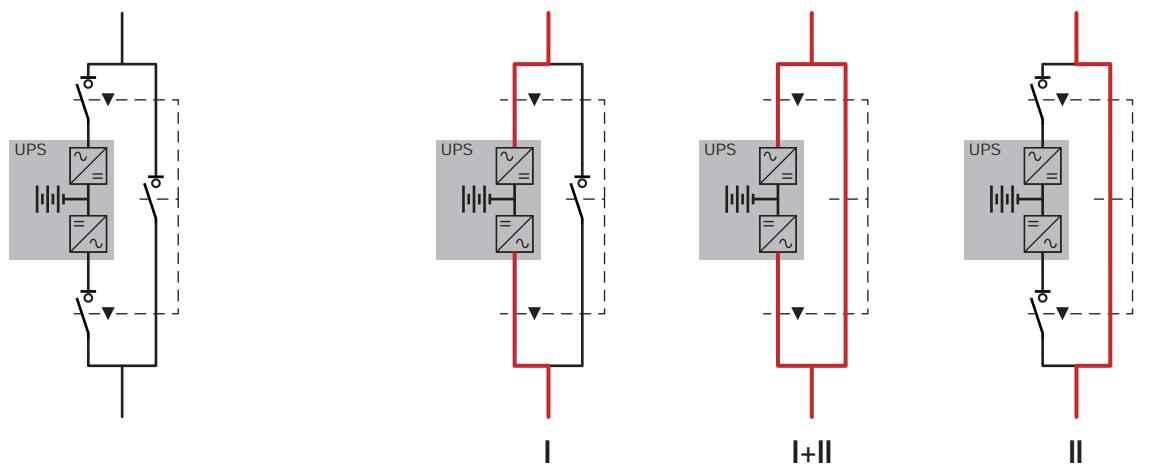

**Warning:** Please note that in position I+II contacts overlap.  
In case of UPS, make sure it is working in static bypass mode before operating.

svr.228.a\_1x\_catal

## Accessories

### Direct operation handle

SIRCOVER I-0-II and I-I+II-II				
Rating (A)	Frame size	Handle colour	Handle type	Reference
125 ... 630	B3 ... B5	Blue	J2	1122 1111
125 ... 630	B3 ... B5	Red	J2	1123 1111
800 ... 1600	B6 ... B7	Blue	J3	1132 1111
2000 ... 3200	B8	Black	S5	2799 7042 <sup>(1)</sup>

(1) Double lever handle.



### External operation handle

#### Use

Door interlocked external front operation handles include an escutcheon, are padlockable and must be utilised with an extension shaft.

SIRCOVER I-0-II and I-I+II-II					
Rating (A)	Frame size	Switching type	External IP <sup>(1)</sup>	Handle type	Reference
125 ... 630	B3 ... B5	I - 0 - II	IP55	S2	1421 2113
125 ... 630	B3 ... B5	I - 0 - II	IP65	S2	1423 2113
125 ... 630	B3 ... B5	I - I+II - II	IP65	S2	1423 2114
800 ... 1600	B6 ... B7	I - 0 - II	IP65	S4	1443 3113 <sup>(2)</sup>
800 ... 1600	B6 ... B7	I - I+II - II	IP65	S4	1443 3114 <sup>(2)</sup>
2000 ... 3200	B8	I - 0 - II	IP65	S5	1453 8113 <sup>(2)</sup>

(1) IP: protection index according to IEC 60529.

(2) Double lever handle.

SIRCOVER Bypass					
Rating (A)	Frame size	Switching type	External IP <sup>(1)</sup>	Handle type	Reference
125 ... 200	B3	I - 0 - II	IP55	S2	1421 2113
125 ... 200	B3	I - 0 - II	IP65	S2	1423 2113
250 ... 630	B4 ... B5	I - 0 - II	IP65	S3	1433 3113
800 ... 1600	B6 ... B7	I - 0 - II	IP65	V2	4199 7146

(1) IP: protection index according to IEC 60529.



## Alternative S type handle cover colours

### Use

For single lever handles S2, S3 and for double lever handle S4.

Other colours available: consult us.

Colour	To be ordered in multiples of	Handle type	Reference
Light grey	50	S2, S3	1401 0001
Dark grey	50	S2, S3	1401 0011
Light grey	50	S4	1401 0031
Dark grey	50	S4	1401 0041



acces\_198.eps

## S type handle adapter

### Use

Enables S type handles to be fitted in place of existing older style SOCOMEC handles. Adapter can also be utilised as a spacer to increase the distance between the panel door and the handle lever.

Colour	To be ordered in multiples of	External IP <sup>(1)</sup>	Reference
Black	1	IP65	1493 0000

(1) IP: protection index according to IEC 60529.

### Dimensions

Add 12 mm to the handle depth.



acces\_187.eps

## Shaft guide for external operation

### Use

For use with S type handles, to guide the shaft extension into the external handle. This accessory enables the handle to engage the extension shaft with a misalignment of up to 15 mm. Recommended for a shaft length over 320 mm.

Designation	Reference
Shaft guide	1429 0000



acces\_260.eps

### Accessories (continued)

#### Shaft for external operation

##### Use

Standard lengths:

- 200 mm,
- 320 mm,
- 450 mm.

Other lengths available: consult us.



acces\_369.eps




acces\_144.eps

##### SIRCOVER I-0-II and I-I+II-II

Rating (A)	Frame size	Length (mm)	Side X (mm)	Reference
125 ... 400	B3 ... B4	200	210 ... 310	1400 1020
125 ... 400	B3 ... B4	320	210 ... 430	1400 1032
500 ... 630	B5	200	280 ... 390	1400 1020
500 ... 630	B5	320	280 ... 510	1400 1032
800 ... 1600	B6 ... B7	200	425 ... 577	1401 1520
800 ... 1600	B6 ... B7	320	425 ... 697	1401 1532
2000 ... 3200	B8	200	653 ... 803	2799 3015
2000 ... 3200	B8	320	653 ... 923	2799 3018
2000 ... 3200	B8	450	653 ... 1053	2799 3019

##### SIRCOVER Bypass

Rating (A)	Frame size	Length (mm)	Side X (mm)	Reference
125 ... 200	B3	200	320 ... 450	1400 1020
125 ... 200	B3	320	320 ... 570	1400 1032
250 ... 400	B4	200	298 ... 420	1401 1520
250 ... 400	B4	320	298 ... 540	1401 1532
630	B5	200	417 ... 539	1401 1520
630	B5	320	417 ... 659	1401 1532
800 ... 1600	B6 ... B7	200	550 ... 680	2799 3015
800 ... 1600	B6 ... B7	320	550 ... 800	2799 3018
800 ... 1600	B6 ... B7	450	550 ... 930	2799 3019



sirr\_202\_a\_1\_x\_cat.eps

### Bridging bars

##### Use

For creating a common connection between switches I & II, on the top or bottom side of the SIRCOVER, to enable, for example, the load to be fed from either incoming source (I or II).

For SIRCOVER Bypass, twice the quantity of bridging bars are required (6 for 3 pole device and 8 for 4 pole).

Rating (A)	Frame size	No. of poles	Diameter (mm)	Reference <sup>(1)</sup>
125 ... 200	B3	3 P	20 x 2.5	4109 3019
125 ... 200	B3	4 P	20 x 2.5	4109 4019
250	B4	3 P	25 x 2.5	4109 3025
250	B4	4 P	25 x 2.5	4109 4025
315 ... 400	B4	3 P	32 x 5	4109 3039
315 ... 400	B4	4 P	32 x 5	4109 4039
500	B5	3 P	32 x 5	4109 3050
500	B5	4 P	32 x 5	4109 4050
630	B5	3 P	50 x 5	4109 3063
630	B5	4 P	50 x 5	4109 4063
800 ... 1000	B6	3 P	50 x 6	4109 3080
800 ... 1000	B6	4 P	50 x 6	4109 4080
1250	B6	3 P	60 x 8	4109 3120
1250	B6	4 P	60 x 8	4109 4120
1600	B7	3 P	90 x 10	4109 3160
1600	B7	4 P	90 x 10	4109 4160

(1) SIRCOVER: For a 3 pole device order quantity 3 bridging bars, and for a 4 pole device order quantity 4.

SIRCOVER Bypass: For a 3 pole device order quantity 6 bridging bars, and for a 4 pole device order quantity 8.

##### SIRCOVER I-0-II and SIRCOVER I-I+II-II




acces\_205.eps


##### SIRCOVER Bypass



acces\_208.eps



acces\_041.eps



sirr\_068\_a\_1\_x\_cat.eps

## Copper bar connection pieces

### Use

For ratings 2000 to 3200 A.

Enables:

- Flat connection: the connection pieces provide a link between the two power terminals of the same pole (Fig. 1).
- Edgewise connection: the connection pieces provide a link between the two power terminals of the same pole and an edgewise bar connection terminal.
- Top or bottom bridging between two poles (Fig. 3).

Connection: the quantities given in the below table refer to the number of pieces required per pole, top or bottom.

Bridging connection: the quantities given refer to the number of pieces required to complete a single bridging connection between two poles.

Reference		2000 – 2500 A			3200 A			
		Fig. 1		Fig. 2	Fig. 3	Fig. 1		Fig. 2
		Connection		Bridging connection I - II	Connection	Flat	Edgewise	Bridging connection I - II
		Flat	Edgewise					
Connection - part A	2619 1200	1	1	2 <sup>(2)</sup>	included	included	included	
Bolt kit 35 mm - part B	2699 1201	1 <sup>(1)</sup>		2 <sup>(2)</sup>	1 <sup>(1)</sup>			2 <sup>(2)</sup>
Bolt kit 45 mm - part B	2699 1200	1 <sup>(1)</sup>			1 <sup>(1)</sup>			
T + Bolt kit - part C	2629 1200		1	1		1	1	
Bracket + Bolt kit - part D	2639 1200		1			1		
Bar + Bolt kit - part E	4109 0320			1				1

(1) Choose the bolt length according to the thickness of the bars being connected; if bar thickness is greater than 20 mm, 45 mm bolts are required.

(2) For bridging connections, quantity 2 pieces are required for creating the link between the two power terminals of the same pole for switch bodies I and II.

The quantities of the applicable pieces then need to be multiplied by the number of connection points (power terminals) in order to determine the total quantity required of each part.

Example: for a 4 pole 2500 A SIRCOVER with upstream edgewise connection (Fig. 2) and downstream bridging (Fig. 3), the following quantities will be required:

Part	Upstream edgewise quantity	Downstream bridging quantity	Total quantity
A	8	8	16
B	0	8	8
C	8	4	12
D	8	0	8
E	0	4	4

## Auxiliary contact

### Use

Pre-breaking and signalling of positions I and II: 1 to 2 NO/NC auxiliary contacts in each position.

Low level AC: consult us.

### Connection to the control circuit

By 6.35 mm fast-on terminal.

### Electrical characteristics

30,000 operations.


### Characteristics

Rating (A)	Frame size	Nominal current (A)	Operating current I <sub>e</sub> (A)			
			250 VAC AC-13	400 VAC AC-13	24 VDC DC-13	48 VDC DC-13
125 ... 3200	B3... B8	16	12	8	14	6

### NO/NC changeover contact


Rating (A)	Frame size	Contact(s)	Reference
125 ... 1600	B3 ... B7	1 <sup>st</sup> / 2 <sup>nd</sup>	4109 0021
2000 ... 3200	B8	1 <sup>st</sup> / 2 <sup>nd</sup>	included

Fig. 1

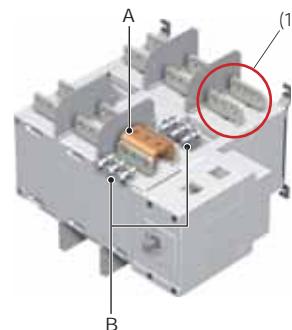


acces\_457\_a\_1\_x\_cat

Fig. 2

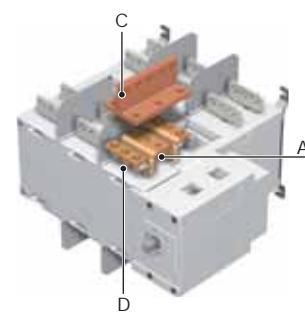

acces\_457\_a\_1\_x\_cat

Fig. 3

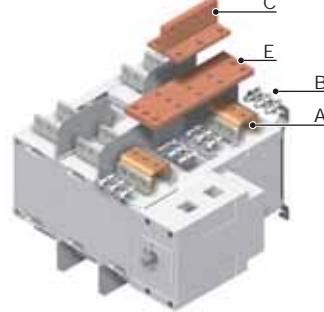

acces\_230\_c\_1\_x\_cat



svr\_058\_a\_1\_cat.eps



acces\_065.eps

## Accessories (continued)

### Terminal shrouds

#### Use

Protection against direct contact with terminals or connecting parts.

#### Advantage

Perforations allow remote thermographic inspection without the need to remove the shrouds.

Rating (A)	Frame size	No. of poles	Position	Reference
125 ... 200	B3	3 P	top / bottom / front (I) / rear (II)	2694 3014(1)(2)
125 ... 200	B3	4 P	top / bottom / front (I) / rear (II)	2694 4014(1)(2)
250 ... 400	B4	3 P	top / bottom / front (I) / rear (II)	2694 3021(1)(2)
250 ... 400	B4	4 P	top / bottom / front (I) / rear (II)	2694 4021(1)(2)
500 ... 630	B5	3 P	top / bottom / front (I) / rear (II)	2694 3051(1)(2)
500 ... 630	B5	4 P	top / bottom / front (I) / rear (II)	2694 4051(1)(2)



acces\_206.psd

(1) For complete shrouding at front, rear, top and bottom, order 4 x for a SIRCOVER and 6 x for a SIRCOVER Bypass; if equipped with bridging bars order 3 x for a SIRCOVER and 4 x for a SIRCOVER Bypass.

(2) For top and bottom shrouding for the front only, order 2 x for a SIRCOVER and a SIRCOVER Bypass.

### Terminal screens

#### Use

Upstream and downstream protection against direct contact with terminals or connection parts. For upstream and downstream protection, order quantity 1.



acces\_207.eps

Rating (A)	Frame size	No. of poles	Position	Reference
125 ... 200	B3	3 P	top / bottom	1509 3012
125 ... 200	B3	4 P	top / bottom	1509 4012
250 ... 400	B4	3 P	top / bottom	1509 3025
250 ... 400	B4	4 P	top / bottom	1509 4025
500 ... 630	B5	3 P	top / bottom	1509 3063
500 ... 630	B5	4 P	top / bottom	1509 4063
800 ... 1250	B6	3 P	top / bottom	1509 3080
800 ... 1250	B6	4 P	top / bottom	1509 4080
1600	B7	3 P	top / bottom	1509 3160
1600	B7	4 P	top / bottom	1509 4160
2000 ... 3200	B8	3 / 4 P	top / bottom	included

### Inter-phase barrier

#### Use

Safe isolation between the terminals, essential for use at 690 VAC or in a polluted or dusty atmosphere.

Rating (A)	Frame size	No. of poles	Reference
125 ... 200	B3	3 P	2998 0033
125 ... 200	B3	4 P	2998 0034
250 ... 400	B4	3 P	2998 0023
250 ... 400	B4	4 P	2998 0024
500 ... 630	B5	3 P	2998 0013
500 ... 630	B5	4 P	2998 0014
800 ... 3200	B6 ... B8	3/4 P	included

## Key handle interlocking system

Padlocking in position I, 0 or II				
SIRCOVER Rating (A) / Frame size	SIRCOVER Bypass Rating (A) / Frame size	Operation	Figure	Reference
125 ... 630 / B3 ... B5	125 ... 200 / B3	external	1	1423 2813

Locking using RONIS EL11AP lock in position 0 (not included)				
SIRCOVER Rating (A) / Frame size	SIRCOVER Bypass Rating (A) / Frame size	Operation	Figure	Reference
125 ... 630 / B3 ... B5	125 ... 200 / B3	direct	2	4109 1006 <sup>(1)</sup>
	250 ... 630 / B4 ... B5	direct	3	consult us
800 ... 1600 / B6 ... B7	800 ... 1600 / B6 ... B7	direct	3	4109 1004 <sup>(2)</sup>
2000 ... 3200 / B8		direct	3	4109 2007 <sup>(2)</sup>
125 ... 630 / B3 ... B5	125 ... 630 / B3 ... B5	external	4	1499 7701 <sup>(2)</sup>
2000 ... 3200 / B8	800 ... 1600 / B6 ... B7	external	4	2799 7002 <sup>(2)</sup>

(1) Specific handle included.

(2) This locking facility can be configured by the user in the 3 positions.

Locking using RONIS EL11AP lock in position I, 0, II (not included)				
SIRCOVER Rating (A) / Frame size	SIRCOVER Bypass Rating (A) / Frame size	Operation	Figure	Reference
125 ... 630 / B3 ... B5	125 ... 200 / B3	direct	2	4109 1002 <sup>(1)</sup>
	250 ... 630 / B4 ... B5	direct	3	consult us
800 ... 1600 / B6 ... B7	800 ... 1600 / B6 ... B7	direct	3	4109 1004 <sup>(2)</sup>
2000 ... 3200 / B8		direct	3	4109 2007 <sup>(2)</sup>
125 ... 630 / B3 ... B5	125 ... 630 / B3 ... B5	external	4	1499 7701 <sup>(2)</sup>
2000 ... 3200	800 ... 1600 / B6 ... B7	external	4	2799 7002 <sup>(2)</sup>

(1) Specific handle included.

(2) This locking facility can be configured by the user in the 3 positions.

Locking using 230 VAC undervoltage coil in position 0 (factory fitted)				
SIRCOVER Rating (A) / Frame size	SIRCOVER Bypass Rating (A) / Frame size	Operation	Figure	Reference
800 ... 3200 / B6 ... B8	800 ... 1600 / B6 ... B7	direct	3	consult us

Locking using Type K CASTELL lock (not supplied)				
SIRCOVER Rating (A) / Frame size	SIRCOVER Bypass Rating (A) / Frame size	Operation	Figure	Reference
125 ... 1600 / B3 ... B7	125 ... 630 / B3 ... B5	external	4	1499 7702
2000 ... 3200 / B8	800 ... 1600 / B6 ... B7	external	4	2799 7003

### Use

- Padlocked (padlock not included). This device is factory mounted in the direct or external operation handle and allows the use of up to 3 padlocks.
- Locking:
  - using lock (not supplied),
  - using undervoltage coil.
- The interlocking positions are either determined as standard or configured by the user by removing the pre-form tabs.
- Padlocking and locking can be combined.

Fig. 1





Fig. 2




acces\_061\_a\_1\_x.cat

Fig. 3



acces\_132\_a\_1\_x.cat

Fig. 4

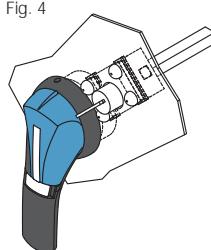

acces\_158\_a\_1\_x.cat

## Other specific accessories



bd\_03\_04\_01

- Customised protection screens (for specific dimensions or high ambient temperatures).
- Connection accessories.
- Low level auxiliary contacts.

### Characteristics according to IEC 60947-3 and IEC 60947-6-1

#### 125 to 630 A

Thermal current $I^{th}$ at 40°C	125 A B3	160 A B3	200 A B3	250 A B4	315 A B4	400 A B4	500 A B5	630 A B5
Frame size								
Rated insulation voltage $U_i$ (V)	800	800	800	1000	1000	1000	1000	1000
Rated impulse withstand voltage $U_{imp}$ (kV)	8	8	8	12	12	12	12	12
Rated operational currents $I_e$ (A) according to IEC 60947-6-1								
Rated voltage	Utilisation category	A/B <sup>(1)</sup>						
415 VAC	AC-31 B	125	160	200	250	315	400	500
415 VAC	AC-32 B				200	315	400	500
415 VAC	AC-33 B				200	200	200	400
Rated operational currents $I_e$ (A) according to IEC 60947-3								
Rated voltage	Utilisation category	A/B <sup>(1)</sup>						
415 VAC	AC-21 A / AC-21 B	125/125	160/160	200/200	250/250	315/315	400/400	500/500
415 VAC	AC-22 A / AC-22 B	125/125	160/160	200/200	250/250	315/315	400/400	500/500
415 VAC	AC-23 A / AC-23 B	125/125	160/160	200/200	200/200	315/315	400/400	500/500
500 VAC	AC-21 A / AC-21 B	125/125	160/160	200/200	250/250	315/315	400/400	500/500
500 VAC	AC-22 A / AC-22 B	125/125	160/160	200/200	200/250	200/315	200/400	500/500
500 VAC	AC-23 A / AC-23 B	80/80	80/80	80/80	200/200	200/200	200/200	400/400
690 VAC <sup>(3)</sup>	AC-21 A / AC-21 B	125/125	160/160	200/200	200/200	200/200	200/200	500/500
690 VAC <sup>(3)</sup>	AC-22 A / AC-22 B	125/125	125/125	125/125	160/160	160/160	160/160	400/400
690 VAC <sup>(3)</sup>	AC-23 A / AC-23 B	63/80	63/80	63/80	125/125	125/125	125/125	400/400
220 VDC	DC-21 A / DC-21 B	125/125	160/160	200/200	250/250	250/250	250/250	500/500
220 VDC	DC-22 A / DC-22 B	125/125	160/160	200/200	250/250	250/250	250/250	500/500
220 VDC	DC-23 A / DC-23 B	125/125	125/125	125/125	200/200	200/200	200/200	500/500
440 VDC <sup>(2)</sup>	DC-21 A / DC-21 B	125/125	125/125	125/125	200/200	200/200	200/200	500/500
440 VDC <sup>(2)</sup>	DC-22 A / DC-22 B	125/125	125/125	125/125	200/200	200/200	200/200	500/500
440 VDC <sup>(2)</sup>	DC-23 A / DC-23 B	125/125	125/125	125/125	200/200	200/200	200/200	500/500
Operation power in AC-23 (kW) <sup>(4)</sup>								
At 415 VAC without AC pre-break	58/58	75/75	100/100	100/100	145/145	190/190	235/235	235/280
At 690 VAC without AC pre-break	50/62	50/62	50/62	90/90	90/90	90/90	310/310	310/310
Reactive power (kvar) <sup>(4)</sup>								
At 415 VAC (kvar)	60/60	75/75	100/100	125/125	150/150	200/200	250/250	250/300
Fuse protected short-circuit withstand as per IEC 60947-3 (kA rms prospective)								
Prospective short-circuit current with gG DIN fuses at 415 VAC (kA rms)	100	100	50	50	50	50	50	50
Prospective short-circuit current with gG DIN fuses at 690 VAC (kA rms)				50	50	50	50	50
Associated fuse rating (A)	125	160	200	250	315	400	500	630
Short-circuit withstand without protection as per IEC 60947-3								
Rated short-time withstand current 0.3s $I_{cw}$ at 415 VAC (kA rms)	12	12	12	15 <sup>(5)</sup>	15 <sup>(5)</sup>	15 <sup>(5)</sup>	17 <sup>(5)</sup>	17 <sup>(5)</sup>
Rated short-time withstand current 1s $I_{cw}$ at 415 VAC (kA rms)	7	7	7	8 <sup>(5)</sup>	8 <sup>(5)</sup>	8 <sup>(5)</sup>	11 <sup>(5)</sup>	10 <sup>(5)</sup>
Rated peak withstand current at 415 VAC (kA peak)	20	20	20	30	30	30	45	45
Short-circuit withstand without protection as per IEC 60947-6-1								
Rated short-time withstand current 30 ms $I_{cw}$ at 415 VAC (kA rms)	10	10	10	10	10	10		
Rated short-time withstand current 60 ms $I_{cw}$ at 415 VAC (kA rms)							10	12.6
Connection								
Minimum Cu cable cross-section as per IEC 60947-1 (mm <sup>2</sup> )	35	35	50	95	120	185	2 x 95	2 x 120
Recommended Cu busbar cross-section (mm <sup>2</sup> )							2 x 32 x 5	2 x 40 x 5
Maximum Cu cable cross-section (mm <sup>2</sup> )	50	95	120	150	240	240	2 x 185	2 x 300
Maximum Cu busbar width (mm)	25	25	25	32	32	32	50	50
Min./max. tightening torque (Nm)	9/13	9/13	9/13	20/26	20/26	20/26	20/26	20/26
Mechanical specifications								
Durability (number of operating cycles)	10,000	10,000	10,000	8,000	8,000	8,000	5,000	5,000
Weight 3 P (kg)	2.9	2.9	2.9	3.8	3.9	3.9	8.6	9.1
Weight 4 P (kg)	4.1	4.1	4.1	4.6	4.9	4.9	10.4	11.1

(1) Category with index A = frequent operation - Category with index B = infrequent operation.

(3) Interphase barriers must be installed on the products.

(2) 3-pole device with 2 pole in series for the "+" an 1 pole for the "-".

(4) The power value is given for information only, the current values vary from one manufacturer to another.

4-pole device with 2 poles in series by polarity.

(5) Values given at 690 VAC.

## 800 to 3200 A

Thermal current I <sup>th</sup> at 40°C		800 A	1000 A	1250 A	1600 A	2000 A	2500 A	3200 A
Frame size		B6	B6	B6	B7	B8	B8	B8
Rated insulation voltage U <sub>i</sub> (V)		1000	1000	1000	1000	1000	1000	1000
Rated impulse withstand voltage U <sub>imp</sub> (kV)		12	12	12	12	12	12	12
Rated operational currents I <sub>e</sub> (A) according to IEC 60947-6-1								
Rated voltage	Utilisation category	A/B <sup>(1)</sup>						
415 VAC	AC-31 B	800	1000	1250	1600	2000	2500	3200
415 VAC	AC-32 B	800	1000	1250	1250	2000	2000	2000
415 VAC	AC-33 B	800	1000	1000	1000	1250	1250	1250
Rated operational currents I <sub>e</sub> (A) according to IEC 60947-3								
Rated voltage	Utilisation category	A/B <sup>(1)</sup>						
415 VAC	AC-21 A / AC-21 B	800/800	1000/1000	1250/1250	1600/1600	-/2000	-/2500	-/3200
415 VAC	AC-22 A / AC-22 B	800/800	1000/1000	1250/1250	1600/1600	-/2000	-/2500	-/3200
415 VAC	AC-23 A / AC-23 B	800/800	1000/1000	1250/1250	1250/1250	-/1600	-/1600	-/1600
500 VAC	AC-21 A / AC-21 B	800/800	1000/1000	1250/1250	1600/1600	-/2000	-/2000	-/2000
500 VAC	AC-22 A / AC-22 B	630/630	800/800	1000/1000	1600/1600			
500 VAC	AC-23 A / AC-23 B	630/630	630/630	800/800	1000/1000			
690 VAC <sup>(3)</sup>	AC-21 A / AC-21 B	800/800	1000/1000	1250/1250	1600/1600	-/2000	-/2000	-/2000
690 VAC <sup>(3)</sup>	AC-22 A / AC-22 B	630/630	800/800	1000/1000	1000/1000			
690 VAC <sup>(3)</sup>	AC-23 A / AC-23 B	630/630	630/630	800/800	800/800			
220 VDC	DC-21 A / DC-21 B	800/800	1000/1000	1250/1250	1250/1250			
220 VDC	DC-22 A / DC-22 B	800/800	1000/1000	1250/1250	1250/1250			
220 VDC	DC-23 A / DC-23 B	800/800	1000/1000	1250/1250	1250/1250			
440 VDC <sup>(2)</sup>	DC-21 A / DC-21 B	800/800	1000/1000	1250/1250	1250/1250			
440 VDC <sup>(2)</sup>	DC-22 A / DC-22 B	800/800	1000/1000	1250/1250	1250/1250			
440 VDC <sup>(2)</sup>	DC-23 A / DC-23 B	800/800	1000/1000	1250/1250	1250/1250			
Operation power in AC-23 (kW) <sup>(4)</sup>								
At 415 VAC without AC pre-break		375/375	450/450	560/560	560/560	-/710	-/710	-/710
At 690 VAC without AC pre-break		475/475	475/475	620/620	620/620			
Reactive power (kvar) <sup>(4)</sup>								
At 415 VAC (kvar)		400/400	500/500	650/650	650/650	-/850	-/850	-/850
Fuse protected short-circuit withstand as per IEC 60947-3 (kA rms prospective)								
Prospective short-circuit current with gG DIN fuses at 415 VAC (kA rms)		50	50	100	100			
Prospective short-circuit current with gG DIN fuses at 690 VAC (kA rms)		50	50	50				
Associated fuse rating (A)		800	1000	1250	2x800			
Short-circuit withstand without protection as per IEC 60947-3								
Rated short-time withstand current 0.3s I <sub>cw</sub> at 415 VAC (kA rms)		64	64	64	78	78	78	78
Rated short-time withstand current 1s I <sub>cw</sub> at 415 VAC (kA rms)		35	35	35	50	50	50	50
Rated peak withstand current at 415 VAC (kA peak)		55	55	80	110	120	120	120
Short-circuit withstand without protection as per IEC 60947-6-1								
Rated short-time withstand current 30 ms I <sub>cw</sub> at 415 VAC (kA rms)								
Rated short-time withstand current 60 ms I <sub>cw</sub> at 415 VAC (kA rms)		20	20	25	32	50	50	50
Connection								
Minimum Cu cable cross-section as per IEC 60947-1 (mm <sup>2</sup> )		2 x 185						
Recommended Cu busbar cross-section (mm <sup>2</sup> )		2 x 50 x 5	2 x 63 x 5	2 x 60 x 7	2 x 100 x 5	3 x 100 x 5	2 x 100 x 10	3 x 10 x 100
Maximum Cu cable cross-section (mm <sup>2</sup> )		4 x 185	4 x 185	4 x 185	6 x 185			
Maximum Cu busbar width (mm)		63	63	63	100	100	100	100
Min./max. tightening torque (Nm)		20/26	20/26	20/26	40/45	40/45	40/45	40/45
Mechanical specifications								
Durability (number of operating cycles)		4,000	4,000	4,000	3,000	3,000	3,000	3,000
Weight 3 P (kg)		20.5	21.0	21.6	25.7	42.0	42.0	52.3
Weight 4 P (kg)		24.8	25.6	26.2	32.0	52.9	52.9	66.6

(1) Category with index A = frequent operation - Category with index B = infrequent operation.

(3) Interphase barriers must be installed on the products.

(2) 3-pole device with 2 pole in series for the "+" and 1 pole for the "-".

(4) The power value is given for information only, the current values vary from one manufacturer to another.


4-pole device with 2 poles in series by polarity.

(5) Values given at 690 VAC.

## Dimensions


### SIRCOVER 125 to 1600 A / B3 to B7

#### Direct front operation

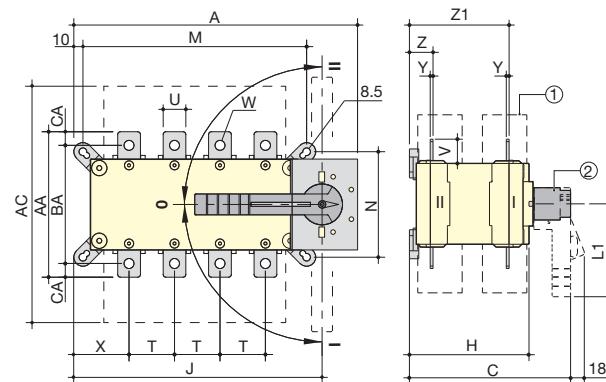

A. S2 type handle for external operation: 125 to 630 A  
B. S4 type handle for external operation: 800 to 1600 A

#### External front operation

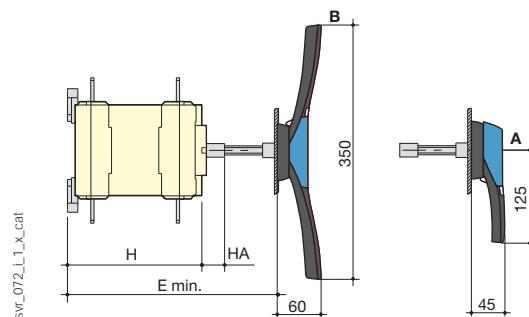


1. Terminal shrouds
2. Direct operation handle:  
- 125 to 630 A; L1 = 140 mm,  
- 800 to 1600 A; L1 = 210 mm.

Rating (A)/ Frame size	Overall dimensions				Terminal shrouds	Switch body				Switch mounting			Connection											
	A 3p.	A 4p.	C	E min		AC	H	HA	J 3p.	J 4p.	M 3p.	M 4p.	N	T	U	V	W	X 3p.	X 4p.	Y	Z	Z1	AA	BA
125 / B3	221	251	218	208 ... 436	235	148	25	182	212	156	186	101	36	20	25	8.5	56	50	3.5	28	124	135	115	10
160 / B3	221	251	218	208 ... 436	235	148	25	182	212	156	186	101	36	20	25	8.5	56	50	3.5	28	124	135	115	10
200 / B3	221	251	218	208 ... 436	235	148	25	182	212	156	186	101	36	20	25	8.5	56	50	3.5	28	124	135	115	10
250 / B4	262	312	218	208 ... 436	280	148	25	223	273	196	246	116	50	25	30	11	61	61	3.5	30	124	160	130	15
315 / B4	262	312	218	208 ... 436	280	148	25	223	273	196	246	116	50	35	35	11	61	61	3.5	30	124	170	140	15
400 / B4	262	312	218	208 ... 436	280	148	25	223	273	196	246	116	50	35	35	11	61	61	3.5	30	124	170	140	15
500 / B5	319	379	295	285 ... 513	401	225	25	272	332	246	306	176	65	32	37	13	70.5	65.5	5	43	180	235	205	15
630 / B5	319	379	295	285 ... 513	400	225	25	272	332	246	306	176	65	45	50	13	70.5	65.5	5	43	180	260	220	20
800 / B6	386	466	375	425 ... 577	459	298	29	306.5	386.5	255	336	250	80	50	60.5	15	48	48	7	66.5	253.5	321		26.5
1000 / B6	386	466	375	425 ... 577	459	298	29	306.5	386.5	255	336	250	80	50	60.5	15	48	48	7	66.5	253.5	321		26.5
1250 / B6	386	466	375	425 ... 577	459	298	29	306.5	386.5	255	336	250	80	60	65	16x11	48	48	7	66.5	255.5	330		29.5
1600/B7	478	598	375	425 ... 577	461	298	29	388.5	518.5	347	467	250	120	90	43.5	12.5x5	54	54	8	66.5	255.5	288		15

### SIRCOVER 2000 to 3200 A / B8

#### Direct front operation

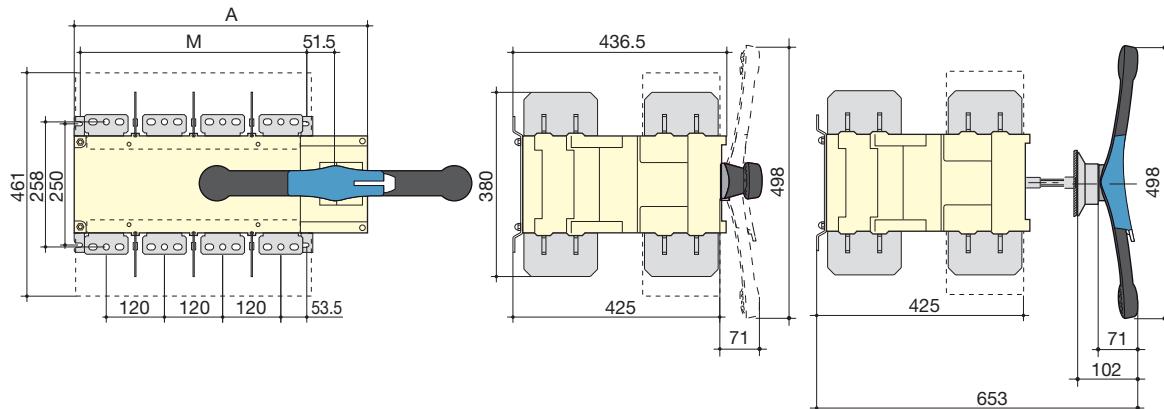


svr\_150\_a\_1\_x\_cat


Rating (A) / Frame size	Overall dimensions		Switch mounting	
	A 3p.	A 4p.	M 3p.	M 4p.
2000 ... 3200 / B8	478	598	347	467

**SIRCOVER Bypass 125 to 1600 A / B3 to B7**

Direct front operation

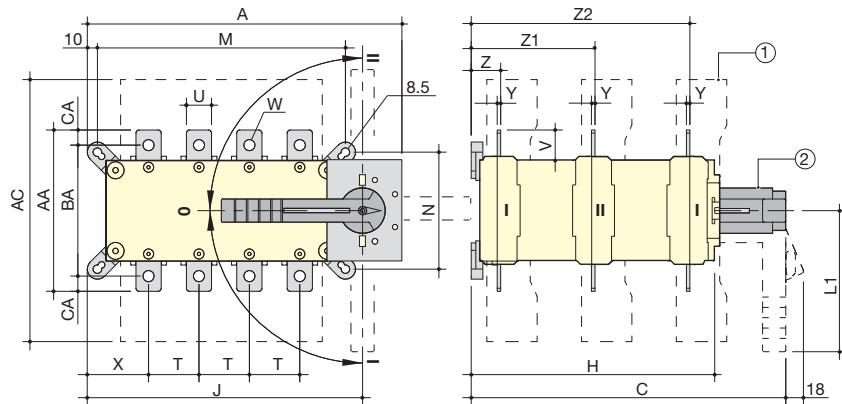

External front operation

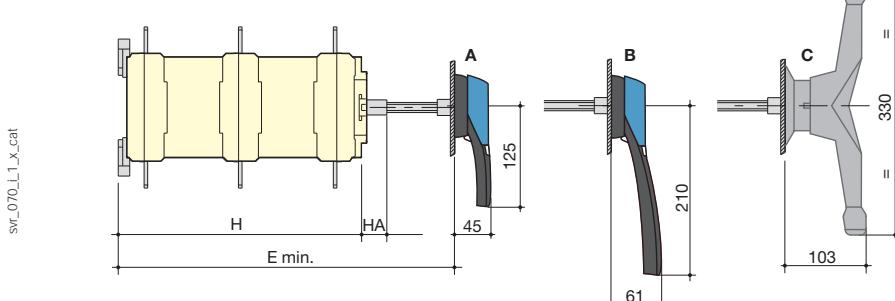

A. S2 type handle for external operation: 125 to 200 A  
B. S3 type handle for external operation: 250 to 630 A  
C. External double lever handle: 800 to 1600 A

1. Terminal shrouds
2. Direct operation handle:
  - 125 to 200 A: L1 = 140 mm,
  - 250 to 630 A: L1 = 210 mm,
  - 800 to 1600 A: L1 = diameter 330 mm.




Rating (A) / Frame size	Overall dimensions			Terminal shrouds		Switch body				Switch mounting				Connection											
	A 3+6p.	A 4+8p.	C	E min.	AC	H	HA	J 3+6p.	J 4+8p.	M 3+6p.	M 4+8p.	N	T	U	V	W	X 3+6p.	X 4+8p.	Y	Z	Z1	Z2	AA	BA	AC
125 / B3	221	251	313	320	235	243	25	182	212	156	186	101	36	20	25	8.5	56	50	3.5	28	124	219	135	115	10
160 / B3	221	251	313	320	235	243	25	182	212	156	186	101	36	20	25	8.5	56	50	3.5	28	124	219	135	115	10
200 / B3	221	251	313	320	235	243	25	182	212	156	186	101	36	20	25	8.5	56	50	3.5	28	124	219	135	115	10
250 / B4	262	312	313	298	280	243	25	223	273	196	246	116	50	25	30	11	61	61	3.5	30	124	219	160	130	10
400 / B4	262	312	313	298	280	243	25	223	273	196	246	116	50	35	35	11	61	61	3.5	30	124	219	170	140	15
630 / B5	319	379	432	417	400	362	25	272	332	246	306	176	65	45	50	13	70.5	65.5	5	43	180	317	260	220	20
800 / B6	386	466	560	550	459	479	29	306.5	386.5	255	335	250	80	50	60.5	15	48	48	7	66.5	253.5	439.5	321	26.5	
1250 / B6	386	466	560	550	459	479	29	306.5	386.5	255	335	250	80	60	65	16x11	48	48	7	66.5	253.5	439.5	320	29.25	
1600/B7	478	598	560	550	461	479	29	388.5	518.5	347	467	250	120	90	43.5	12.5x5	54	54	8	66.5	253.5	439.5	288	15	

Connection terminals

SIRCOVER and  
SIRCOVER Bypass 800 A / B6

SIRCOVER and  
SIRCOVER Bypass 1250 A / B6

SIRCOVER 1600 to 3200 A / B7 to B8  
SIRCOVER Bypass 1600 A / B7

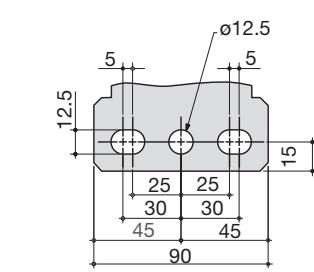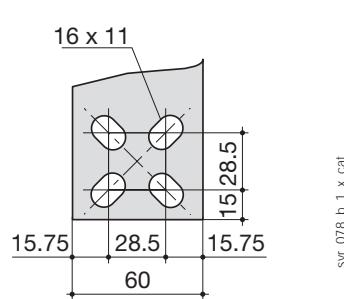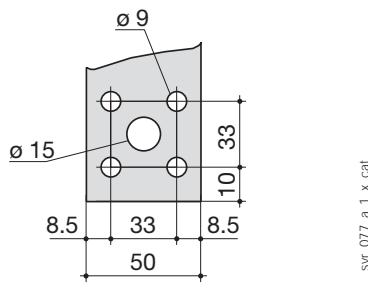

## Dimensions for external handles

### SIRCOVER 125 to 630 A / B3 to B5

Handle type	Front operation		Door drilling
	Direction of operation	0 or I+II	
<b>S2 type</b>			 

(1) Ø31 to Ø37: rear screw mounting,  
Ø37: front clip mounting.

### SIRCOVER 800 to 1600 A / B6 to B7

Handle type	Front operation		Door drilling
	Direction of operation	0 or I+II	
<b>S4 type</b>			 

(1) Ø31 to Ø37: rear screw mounting,  
Ø37: front clip mounting.  
(2) Ø6 to Ø7: clip mounting

### SIRCOVER 2000 to 3200 A / B8





Handle type	Front operation		Door drilling
	Direction of operation	0 or I	
<b>S5 type with V Escutcheon</b>			

polyn\_030\_a\_1\_gb\_cat

polyn\_031\_a\_1\_gb\_cat

polyn\_023\_a\_1\_gb\_cat

SIRCOVER Bypass 125 to 200 A / B3

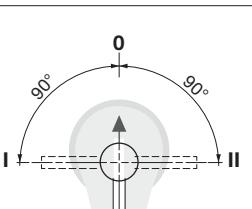Handle type	Front operation Direction of operation	Door drilling
<b>S2 type</b>  	 	With lock RONIS EL11AP With lock CASTELL K

(1) Ø31 to Ø37: rear screw mounting,  
Ø37: front clip mounting.

## SIRCOVER Bypass 250 to 630 A / B4 to B5

(1) Ø31 to Ø37: rear screw mounting,  
Ø37: front clip mounting.

SIRCOVER Bypass 800 to 1600 A / B6 to B7

Handle type	Front operation Direction of operation	Door drilling
J4 type		 

# The **ATyS M** range: safe and reliable solutions

A complete range of automatic and remotely operated transfer switches from 40 to 160 A

RTSE (Remotely operated)	ATSE (Automatic)
 <b>ATyS <i>d</i> M</b> Motorised Transfer Switching Equipment	 <b>ATyS <i>t</i> M</b> Automatic Transfer Switching Equipment
 <b>ATyS <i>g</i> M</b> Automatic Transfer Switching Equipment	 <b>ATyS <i>p</i> M</b> Automatic Transfer Switching Equipment
Dual power supply 	Automatic controller to manage mains/ mains applications 
	Automatic controller to manage mains/ genset applications 
	Mains/mains and mains/genset Tripping function, programmable parameters and communication 

## The advantages



### Secure operation

- Electrical and mechanical interlocking for optimum safety.
- Positive break indication with two mechanical switch position indicators for clear and secure use.
- Padlocking in the 0 position enables the lockout function on each product.
- Padlocking in 3 positions can also be configured prior to installation.
- Permanent indication of product availability thanks to the Watchdog relay, which constantly monitors the product operating conditions (ATyS g M and ATyS p M).



### High performance

- On-load making and isolation for using a single product with any load type, including inductive loads (AC-33).
- Immunity to control voltage fluctuations thanks to stable positions and power supply only required during switching.
- Excellent dynamic withstand for improved safety when closing on a short-circuit.
- Extremely low electrical blackout time (ATyS d M < 90ms) guaranteed thanks to the electromagnetic actuator technology used with rotary self-cleaning contacts.



### A fully compact solution

- All-in-one solution, with minimum risk of incorrect mounting or wiring.
- Highly reliable thanks to the compliance with IEC 60947-6-1, the standard governing transfer switching equipment.
- Simplified ordering process: a single reference for the complete solution.



### Intuitive use

- Manual emergency control: The product can be operated **quickly and safely** using an emergency handle.
- Simple selection of operating mode (Auto/Manual) using an integrated selector.



### Rapid commissioning

- **ATyS d M:** No configuration required.
- **ATyS t M and ATyS g M:** Configuration in just a few minutes using a screwdriver.
- **ATyS p M:** Simplified configuration (EASY CONFIG software and LCD screen on the device).



### Easy to install

- Two switching devices mounted side-by-side for easy access to cabling with installation in a standard 18 module enclosure (product has a very low depth).
- Quick and easy mounting on a DIN rail or back plate.
- Simplified wiring thanks to the cage clamp terminals and dedicated bridging bars that allows a common outgoing connection whilst retaining the cage terminal connections.

### Performance

IEC 60947-6-1 / GB 14048-11

- > AC 32B - up to 160 A
- > AC 33B - up to 125 A
- > AC 33iB - up to 160 A  
Class PC switch technology

IEC 60947-3

- > AC 23B - up to 160 A

### Enclosed ATyS M



See "Enclosed transfer switches" pages.

### Expert Services

- > Study, definition, advice, implementation, maintenance and training...
- > Our Expert Services team offers customised support to make your project a success.



# ATyS d M

Remotely operated Transfer Switching Equipment  
from 40 to 160 A



## Function

ATyS d M devices are 2 pole or 4 pole transfer switches that are remotely controlled using volt-free contacts from an external controller. They are modular products with positive break indication. They are intended for use in low voltage power supply systems where a brief interruption of the load supply is acceptable during transfer.

## Advantages

### Secure

ATyS d M have both electrical and mechanical interlocks for optimum security. They also feature a positive break indicator, confirming switch position with dual mechanical indicators for increased safety.

### High-speed transfer

ATyS d M devices are based on a coil solution with rotating contacts, therefore ensuring an extremely short black-out duration (< 90ms).

### Superior electrical performance

ATyS d M devices are compliant with IEC 60947-6-1, the standard governing transfer switches. Their AC-33B properties of up to 125 A mean you can use the same product for resistive and inductive loads.

### Immune to voltage fluctuations

The power supply of the ATyS d M is only active during transfer. As the product is based on stable positions, it is not affected by network voltage fluctuations.

## The solution for

- > Applications with a normal/ emergency external controller
- > Building Management System (BMS)



## Strong points

- > Secure
- > Superior electrical performance
- > High-speed transfer
- > Immune to voltage fluctuations

## Conformity to standards

- > IEC 60947-6-1
- > IEC 60947-3
- > GB/T 14048.11



## Approvals and certifications



## Operating modes



Easy selection of AUT/MAN mode



Manual emergency operation



Padlocking facility

## What you need to know



### Electrical control

The positions are controlled by dry contacts on any external automated system (e.g. ATyS C25). These positions are stable even in case of loss of input supply.

### Control logic

Two types of control logic are offered:

- Pulse logic
  - A switching command of at least 60 ms is necessary to initiate operation.
  - Commands I and II have priority over command 0.
  - The first command received (I or II) has priority as long as it remains present.
- Contactor logic
  - Command 0 must be maintained.
  - If command I or II disappears, the device returns to position 0, so long as the power supply is available.

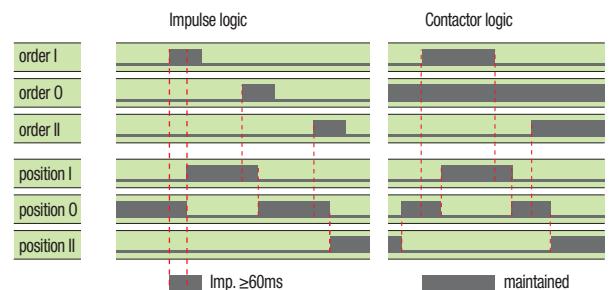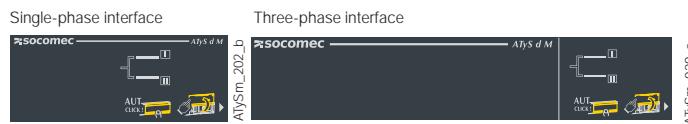

### Power supply


The ATyS d M is equipped with two independent 230 VAC power inputs (176-288 VAC), 50/60 Hz (45/65 Hz).

These two supplies can be connected individually; one to switch I and the other to switch II:

- Power supply 101-102 must be available to reach position I
- Power supply 201-202 must be available to reach position II.

The use of a dual power supply (DPS) or an external supply module secures the command of the 3 positions irrespective of the power supply source.

In this case, both the supply inputs must be connected in parallel.

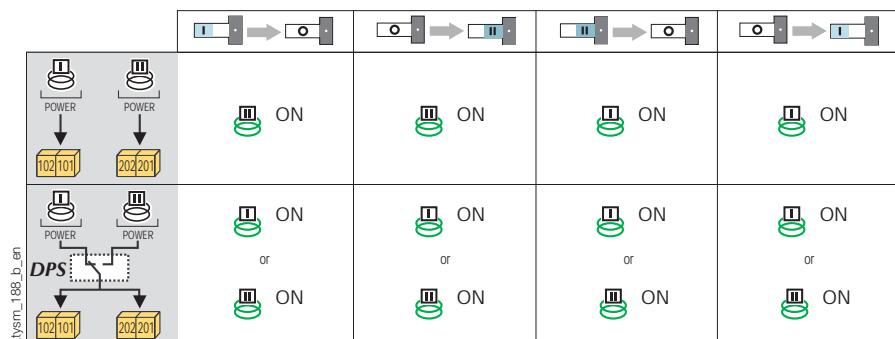

## References

### ATyS d M

Rating (A)	No. of poles	ATyS d M	Bridging bars	Voltage sensing and power supply tap	Terminal shrouds	Auxiliary contact block
40 A	2 P	9323 2004				1 <sup>st</sup> unit included
	4 P	9323 4004				
63 A	2 P	9323 2006	2 P 1309 2006	4 P 1309 4006	2 pieces 1399 4006	2 <sup>nd</sup> unit Separate common points 1309 1001 <sup>(2)</sup>
	4 P	9323 4006				
80 A	2 P	9323 2008			2 pieces 2294 4016 <sup>(1)</sup>	Linked common points 1309 1011 <sup>(2)</sup>
	4 P	9323 4008				
100 A	2 P	9323 2010				
	4 P	9323 4010				
125 A	2 P	9323 2012				
	4 P	9323 4012				
160 A	2 P	9323 2016	1309 2016			
	4 P	9323 4016				


(1) For the three-phase version, for complete upstream and downstream protection, please order 2x; for the single-phase version please order the part just 1x.

(2) 1 NO/NC contact block for positions I, 0 and II.

# ATyS t M - ATyS g M

## Automatic Transfer Switching Equipment

from 40 to 160 A

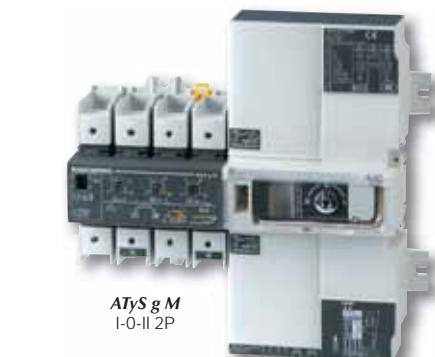

### Function

**ATyS t M** and **ATyS g M** are modular automatic transfer switches with positive break indication. ATyS t M are 4 pole (three-phase) devices and ATyS g M are 2 or 4 pole (single or three-phase) devices.

They have all the functions of the ATyS d M together with an integrated controller, giving them automatic features dedicated to mains/mains (ATyS t M) and mains/genset (ATyS g M) applications. They are intended for use in low voltage power supply systems where a brief interruption of the load supply is acceptable during transfer.

### Advantages

#### Quick start

ATyS t M and g M transfer switches offer significant time saving during commissioning (the process takes 2 to 3 minutes). Thanks to the design that allows commissioning through just one potentiometer (4 on the ATyS g M) and four DIP switches, a screwdriver is all that is required to configure the parameters.

#### ATyS t M: dedicated to three-phase mains/mains applications

In addition to its single-phase and three-phase voltage & frequency monitoring for both incoming sources, the product's integrated controller also features functions that are specific to mains/genset applications (genset control, test on load, etc.).

#### ATyS g M: dedicated to mains/genset applications

The ATyS t M integrated controller has been designed to provide all the functions necessary for these applications (operation with or without priority, preferred source selection) together with the monitoring of the voltage and frequency of both sources for three-phase networks.

#### Secure programming

To ensure that the correct configuration is maintained an optional sealable cover can be fitted in order to avoid any unintentional modifications to the programming.

### The solution for

- > High-rise buildings
- > Data centers
- > Healthcare buildings



### Strong points

- > Fast commissioning
- > ATyS d M with an integrated controller for dedicated mains/mains or mains/genset functions
- > Secure programming

### Conformity to standards

- > IEC 60947-6-1
- > IEC 60947-3
- > GB/T 14048.11



### Approvals and certifications<sup>(1)</sup>



(1) Product references on request.

## What you need to know

The ATyS t M and ATyS g M are automatic transfer switching equipment that include a fully integrated ATS controller. These products are self powered from incoming supplies: 230 VAC (176-288 VAC), 50/60 Hz (45/65Hz).

## References

### ATyS t M

Rating (A)	No. of poles	Network (VAC)	ATyS t M	Bridging bars	Voltage sensing and power supply tap	Terminal shrouds	Auxiliary contact block	Sealable cover
40 A	4 P	230/400	9344 4004	4 P 1309 4006	2 pieces 1399 4006	2 pieces 2294 4016 <sup>(1)</sup>	1 unit Separate common points 1309 1001 <sup>(2)</sup> Linked common points 1309 1011 <sup>(2)</sup>	1359 0000
63 A	4 P	230/400	9344 4006					
80 A	4 P	230/400	9344 4008					
100 A	4 P	230/400	9344 4010					
125 A	4 P	230/400	9344 4012					
160 A	4 P	230/400	9344 4016					

(1) For complete upstream and downstream protection please order quantity 2.

(2) 1 NO/NC contact block for positions I, 0 and II.

### ATyS g M

Rating (A)	No. of poles	Network (VAC) <sup>(3)</sup>	ATyS g M	Bridging bars	Voltage sensing and power supply tap	Terminal shrouds	Auxiliary contact block	Sealable cover
40 A	2 P	230	9353 2004	2 P 1309 2006	2 pieces 1399 4006	2 pieces 2294 4016 <sup>(1)</sup>	1 unit Separate common points 1309 1001 <sup>(2)</sup>	2 P 1359 2000
	4 P	230/400	9354 4004					
63 A	2 P	230	9353 2006	4 P 1309 4006	2 pieces 1399 4006	2 pieces 2294 4016 <sup>(1)</sup>	Linked common points 1309 1011 <sup>(2)</sup>	4 P 1359 0000
	4 P	230/400	9354 4006					
80 A	2 P	230	9353 2008	2 P 1309 2006	2 pieces 1399 4006	2 pieces 2294 4016 <sup>(1)</sup>	1 unit Separate common points 1309 1001 <sup>(2)</sup>	2 P 1359 2000
	4 P	230/400	9354 4008					
100 A	2 P	230	9353 2010	4 P 1309 4006	2 pieces 1399 4006	2 pieces 2294 4016 <sup>(1)</sup>	Linked common points 1309 1011 <sup>(2)</sup>	4 P 1359 0000
	4 P	230/400	9354 4010					
125 A	2 P	230	9353 2012	2 P 1309 2006	2 pieces 1399 4006	2 pieces 2294 4016 <sup>(1)</sup>	1 unit Separate common points 1309 1001 <sup>(2)</sup>	2 P 1359 2000
	4 P	230/400	9354 4012					
160 A	2 P	230	9353 2016	4 P 1309 4006	2 pieces 1399 4006	2 pieces 2294 4016 <sup>(1)</sup>	Linked common points 1309 1011 <sup>(2)</sup>	4 P 1359 0000
	4 P	230/400	9354 4016					

(1) 4 pole version - for complete upstream and downstream protection please order quantity 2; for 2 pole version order quantity 1.

(2) 1 NO/NC contact block for positions I, 0 and II.

(3) For 127/230VAC networks, please contact your supplier.

# ATyS p M

Automatic Transfer Switching Equipment  
from 40 to 160 A



## Function

ATyS p M are single-phase or three-phase modular automatic transfer switches with positive break indication.

Functions include ATyS t M and ATyS g M capability, with additional programmable parameters and a tripping function. A product model with communication is available. They are intended for use in low voltage power supply systems where a brief interruption of the load supply is acceptable during transfer.

## Advantages

### Flexible programming

ATyS p M time delays and inputs/outputs are completely configurable, hence enabling the easy monitoring of specific applications (load shedding, test...) and the definition of an operating cycle specifically adapted to your application.

### Trip function

ATyS p M features a function for returning to the 0 position in case of the loss of both power supply sources (tripping). This protects the load from issues due to source instability.

### Communication and configuration

A specific version of ATyS p M is available with integrated Modbus communication. This gives access to most product data (status, voltages, frequencies...). A user friendly configuration software is also available free (Easyconfig) to configure, view and save all the parameters in the ATyS p M.

### Remote control interface

Specifically designed for installations where the product is enclosed, the remote interface displays product status on the front panel (D10) or displays and controls with access to programming (D20).

## The solution for

- > High-rise buildings
- > Data centres
- > Healthcare buildings
- > Banks and insurance companies
- > Transport (airports, tunnels, etc.)



## Strong points

- > Flexible programming
- > Trip function
- > Communication and configuration
- > Remote control interface

## Conformity to standards

- > IEC 60947-6-1
- > IEC 60947-3
- > GB/T 14048.11




## Approvals and certifications



## What you need to know

The ATyS p M are automatic transfer switching equipment that include a fully integrated ATS controller. These products are self powered from incoming supplies: 230 VAC (160-305 VAC), 50/60 Hz (45/65Hz). Automatic products are all equipped with a sequence logic. Here is an example of the sequence logic in case of loss and return of the preferred source.

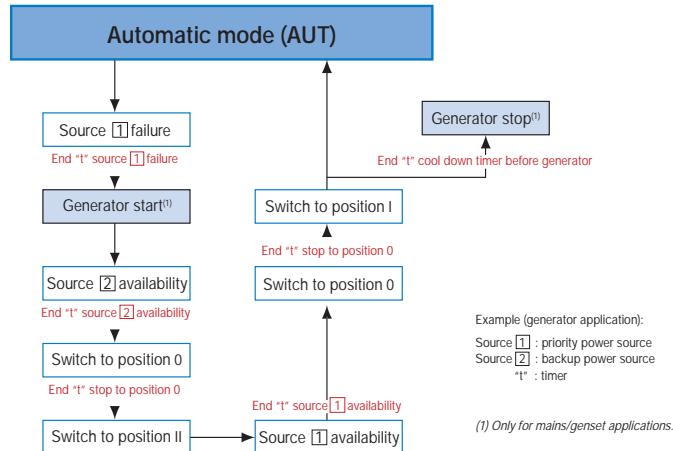


atys\_028\_h\_1\_gb\_cat

## Easyconfig

**Easyconfig software** is the ideal solution to save time and simplify complex configuration.

You can configure the following parameters:

- application type,
- voltage and frequency thresholds,
- timers,
- inputs/outputs...

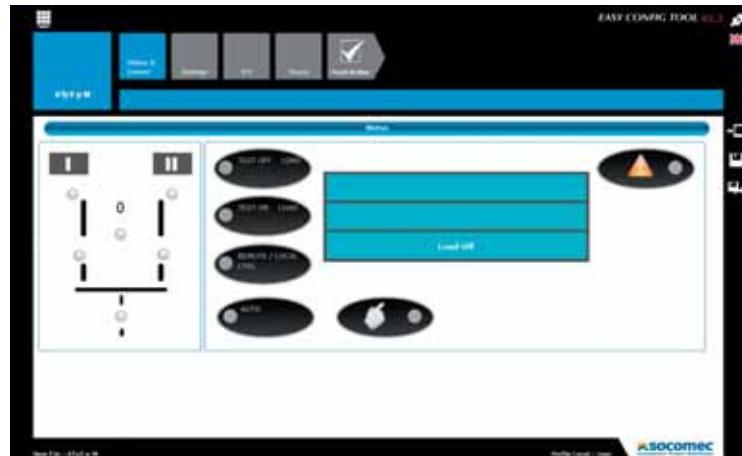

atys\_849\_b\_gb

## ATyS p M

Rating (A)	No. of poles	Network (VAC) <sup>(3)</sup>	ATyS p M	ATyS p M + com	Bridging bars	Voltage sensing and power supply tap	Terminal shrouds	Auxiliary contact block	Remote interface
40 A	4 P	230/400	9364 4004	9384 4004	4 P 1309 4006	2 pieces 1399 4006	2 pieces 2294 4016 <sup>(1)</sup>	1 piece Separate common points 1309 1001 <sup>(2)</sup> Linked common points 1309 1011 <sup>(2)</sup>	D10 9599 2010
63 A	4 P	230/400	9364 4006	9384 4006					
80 A	4 P	230/400	9364 4008	9384 4008					
100 A	4 P	230/400	9364 4010	9384 4010					D20 9599 2020
125 A	4 P	230/400	9364 4012	9384 4012					
160 A	4 P	230/400	9364 4016	9384 4016					

(1) For complete upstream and downstream protection please order quantity 2.

(2) 1 NO/NC contact block for positions I, 0 and II.

(3) For 127/230VAC networks, please contact us.

# ATyS M range

## ATyS d M, ATyS t M, ATyS g M, ATyS p M

from 40 to 160 A


### Accessories

#### Bridging bars

##### Use

Used to bridge the outgoing common connection between switch I and switch II. The bridging bar does not reduce the connection capacity of the cage terminals.

Rating (A)	No. of poles	Reference
40 ... 125	2 P	1309 2006
160	2 P	1309 2016
40 ... 125	4 P	1309 4006
160	4 P	1309 4016

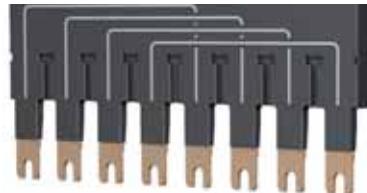

atysm\_025.eps

#### Voltage sensing and power supply tap

##### Use

It allows connection of  $2 \times 1.5 \text{ mm}^2$  voltage sensing or power cables.

The single-pole voltage sensing tap can be mounted in any of the terminals (incoming) without reducing their connecting capacity.

Rating (A)	Pack	Reference
40 ... 160	2 pieces	1399 4006



atysm\_026\_a.eps

#### Terminal shrouds

##### Use

Protection against direct contact with terminals or connecting parts.

##### Advantages of the terminal shrouds

Perforations allow remote thermographic inspection without the need to remove the shrouds. Possibility of sealing.

##### Mounting

For complete upstream and downstream protection of 4 pole products, please order quantity 2; for 2 pole products please order quantity 1.



atysm\_027\_a.eps

(1) Reference composed of 2 pieces.

#### Auxiliary contact

##### Use

A maximum of two auxiliary contact blocks can be fitted to each product. Each auxiliary contact block integrates 3 NO/NC auxiliary contacts (I, O, II).

The ATyS d M is delivered as standard with 1 block with separate common points.

##### Characteristics:

250 VAC / 5 A maximum.

24 VDC / 2 A maximum.



acces\_353.eps



acces\_398.eps

#### Sealable cover

##### Use

Prevents access to the ATyS t M and ATyS g M configuration panels.

Rating (A)	No. of poles	Reference
40 ... 160	2 P	1359 2000
40 ... 160	4 P	1359 0000



atysm\_313.eps

## Polycarbonate enclosure

### Use

Dedicated to the installation of a three-phase ATyS M, it enables easy integration of a compact transfer switch solution.

Rating (A)	H x W x D (mm)	Reference
40 ... 160	385 x 385 x 193	1309 9006



atysm\_036.eps

## Extension unit

### Use

Combined with the polycarbonate enclosure, the extension unit provides additional space in order to connect 70 mm<sup>2</sup> cables to the ATyS M with ease.

Rating (A)	Reference
40 ... 160	1309 9007



atysm\_039.eps

## Residential enclosure

### Use

Dedicated to the implementation of a single-phase ATyS M, the plastic enclosure provides a compact IP41 transfer switch solution with easy integration.

Rating (A)	H x W x D (mm)	Reference
40 ... 160	410 x 305 x 150	1309 9056



atysm\_196.psd

## Double power supply - DPS

### Use


Allows an ATyS d M to be supplied by two 230 VAC 50/60 Hz networks.

### Input

- The input is considered as "active" from 200 VAC.
- Maximum voltage: 288 VAC.
- Internal protection: each input is fuse protected (3.15 A).
- Connection on terminals: max. 6 mm<sup>2</sup>.
- Modular product: the width of 4 modules.

Description of accessories	Reference
DPS	1599 4001

Input 1	Input 2	Output
230 VAC	0 VAC	230 VAC (input 1)
0 VAC	230 VAC	230 VAC (input 2)
230 VAC	230 VAC	230 VAC (input 1)
0 VAC	0 VAC	0 VAC

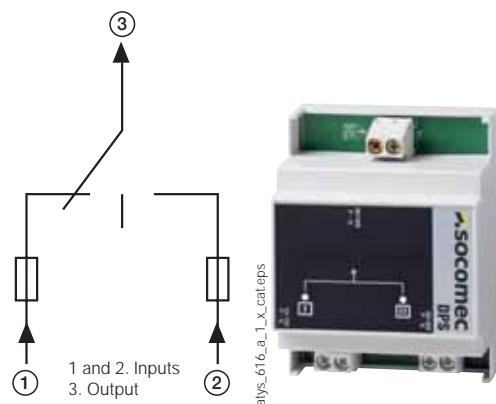

atys\_616\_a\_1\_x\_cat.eps

atys\_612.psd

# ATyS M range

ATyS d M, ATyS t M, ATyS g M, ATyS p M

from 40 to 160 A

## Accessories (continued)

### Auto-transformer

#### Use

For use with ATyS M in 400 VAC three-phase applications that have no distributed neutral.

The ATyS M includes integrated sensing and power supply circuits, therefore a neutral connection is required for 400 VAC three-phase applications. When no neutral connection is available this autotransformer (400/230 VAC, 400 VA) provides the 230 VAC required for the ATyS to function.



trato\_165.eps

Rating (A)	Reference
40 ... 160	1599 4121

### Remote interfaces for ATyS p M

#### Use

To remotely display source availability and position indication on the front of a panel when the ATyS M is enclosed.

The remote interface is powered directly from the ATyS M via the RJ45 connection cable.

Maximum cable length: 3 m.

#### D10

To display source availability and position indication on the front panel of an enclosure.

Protection degree: IP21.

#### D20

In addition to the functions of the D10, the D20 displays measurements and enables control and configuration from the front of the display panel.

Protection degree: IP21.

#### Door mounting


2 holes Ø 22.5.

ATyS M connection via RJ45 cable, not isolated.

Cable not provided.



ays\_564.eps  
ays\_565.eps

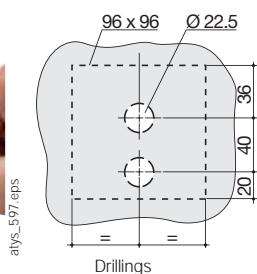

ays\_16\_a\_cat.eps

Description of accessories	Reference
D10	9599 2010
D20	9599 2020

Reference
1599 2009

### Connecting cable for remote interfaces

#### Use

To connect between a remote interface (type D10 or D20) and a control product (ATyS p M).

#### Characteristics:

RJ45 8 wire straight-through, non isolated cable. Length 3 m.



access\_209.eps

### Cage-terminal interface

#### Use

The power connection terminals allow conversion of the cage clamp terminals into bolt-on type connection terminals, enabling connection of up to two 35 mm<sup>2</sup> cables or one 70 mm<sup>2</sup> cable. Compatible with aluminium terminals. Each power connection terminal is provided with separation screens.

Rating (A)	Reference
40 ... 160	1399 4017 <sup>(1)</sup>


(1) For complete conversion, order quantity 3.



aysm\_252.ps


## Dimensions

### ATyS M 40 to 160 A

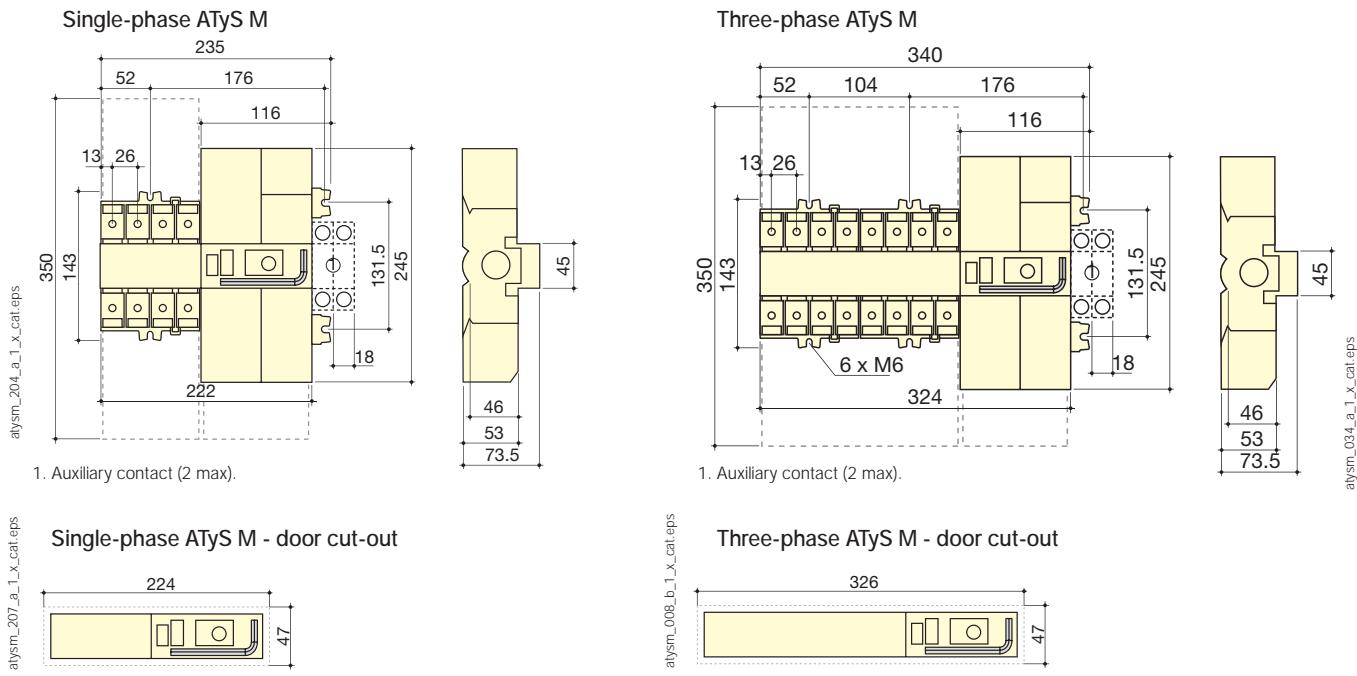


## Terminals and connections

### Single-phase ATyS d M

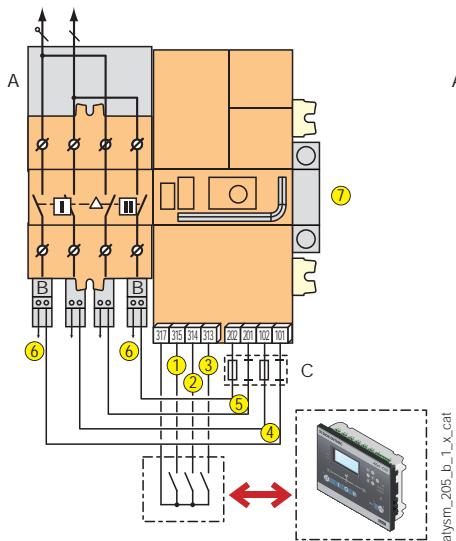

### Three-phase ATyS d M

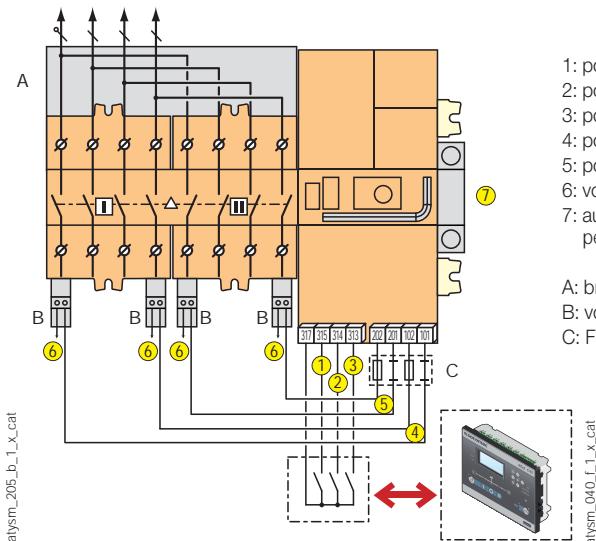

- 1: position I control
- 2: position II control
- 3: position 0 control
- 4: power supply I (230 VAC)
- 5: power supply II (230 VAC)
- 6: voltage tap
- 7: auxiliary contact block - 1 NO/NC per position I, 0, II (factory fitted)

A: bridging bar (accessory)  
B: voltage sensing tap (accessory)  
C: F1 / F2 = fuse 10 A gG


# ATyS M range

ATyS d M, ATyS t M, ATyS g M, ATyS p M


from 40 to 160 A

## Terminals and connections (continued)


### Three-phase ATyS t M

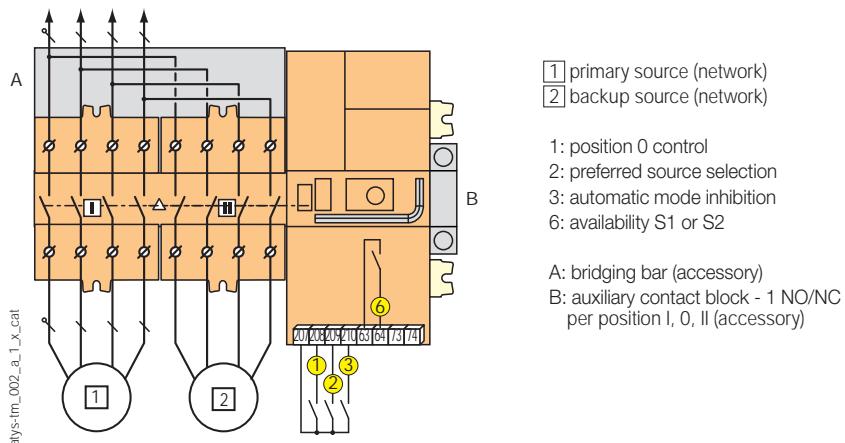


### Single-phase ATyS g M

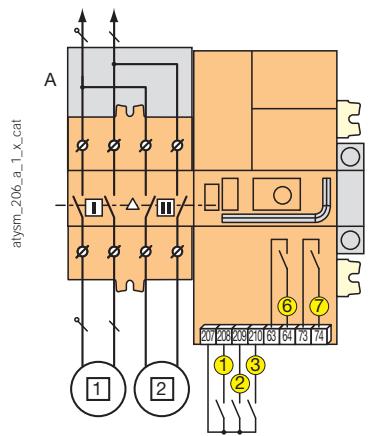

### Three-phase ATyS g M

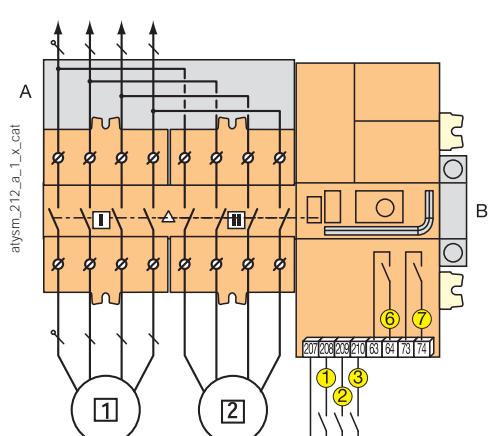

### Three-phase ATyS p M

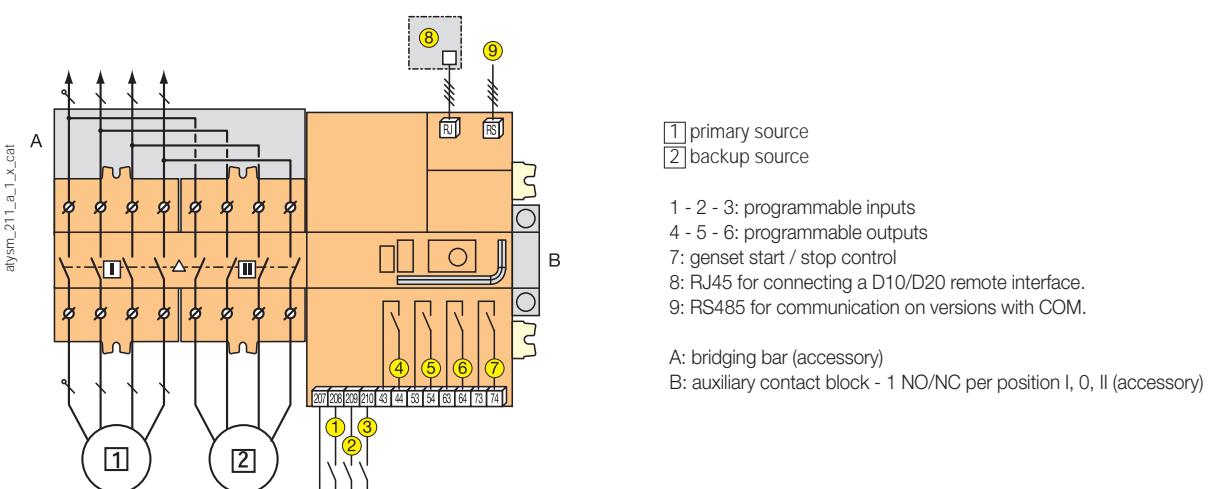

## Characteristics according to IEC 60947-3 and IEC 60947-6-1

40 to 160 A

Thermal current $I_{th}$ at 40°C	40 A	63 A	80 A	100 A	125 A	160 A
Rated insulation voltage $U_i$ (V) (power circuit)	800	800	800	800	800	800
Rated impulse withstand voltage $U_{imp}$ (kV) (power circuit)	6	6	6	6	6	6
Rated insulation voltage $U_i$ (V) (control circuit)	300	300	300	300	300	300
Rated impulse withstand voltage $U_{imp}$ (kV) (control circuit) - ATyS d M	4	4	4	4	4	4
Rated impulse withstand voltage $U_{imp}$ (kV) (control circuit) - ATyS t M, g M and p M	2.5	2.5	2.5	2.5	2.5	2.5

Rated operational currents  $I_e$  (A) according to IEC 60947-6-1

Rated voltage	Utilisation category	A/B <sup>(1)</sup>					
415 VAC	AC-31 A / AC-31 B	40/40	63/63	80/80	100/100	100/125	100/160
415 VAC	AC-32 A / AC-32 B	40/40	63/63	80/80	100/100	100/125	100/160
415 VAC	AC-33 A / AC-33 B	-/40	-/63	-/80	-/100	-/125	-/125

Rated operational currents  $I_e$  (A) according to IEC 60947-3

Rated voltage	Utilisation category	A/B <sup>(1)</sup>					
415 VAC	AC-20 A / AC-20 B	40/40	63/63	80/80	100/100	125/125	160/160
415 VAC	AC-21 A / AC-21 B	40/40	63/63	80/80	100/100	125/125	160/160
415 VAC	AC-22 A / AC-22 B	40/40	63/63	80/80	100/100	125/125	160/160
415 VAC	AC-23 A / AC-23 B	40/40	63/63	80/80	100/100	125/125	125/160
690 VAC	AC-21 A / AC-21 B	40/40	63/63	80/80	100/100	125/125	160/160
690 VAC	AC-22 A / AC-22 B	40/40	63/63	80/80	80/80	100/125	100/125
690 VAC	AC-23 A / AC-23 B	40/40	63/63	63/63	80/80	80/80	80/80

Current rated as conditional short-circuit with fuse gG DIN

Conditional short-circuit current (kA rms)	50	50	50	50	50	40
Associated fuse rating (A)	40	63	80	100	125	160

Current rated as conditional short-circuit with any brand of circuit breaker that ensures tripping in less than 0.3s <sup>(4)</sup>

Current rated as short-time withstand $I_{cw}$ 0.3s (kA rms)	7	7	7	7	7	7
--	---	---	---	---	---	---

Short-circuit operation (switch only)

Current rated as short-time withstand $I_{cw}$ 1s (kA rms) <sup>(2)</sup>	4	4	4	4	4	4
Rated peak withstand current (kA peak) <sup>(2)</sup>	17	17	17	17	17	17

Connection

Minimum connection cross-section (mm <sup>2</sup> )	10	10	10	10	10	10
Maximum Cu cable cross-section (mm <sup>2</sup> )	70	70	70	70	70	70
Tightening torque (Nm)	5	5	5	5	5	5

Switching time<sup>(5)</sup>

I - 0 or II - 0, following a command (ms)	45	45	45	45	45	45
Transfer time I - II or II - I, following a command (ms)	180	180	180	180	180	180
I-0 or II-0, after outage (s)	1.2	1.2	1.2	1.2	1.2	1.2
I-II or II-I transfer time, after outage (s)	1.4	1.4	1.4	1.4	1.4	1.4
Contact transfer time ("black-out") I-II min. (ms) <sup>(3)</sup>	150	150	150	150	150	150

Power supply

Min./max. auxiliary power supply (VAC) (ATyS d M, t M and g M)	176/288	176/288	176/288	176/288	176/288	176/288
Min./max. auxiliary power supply (VAC) (ATyS p M)	160/305	160/305	160/305	160/305	160/305	160/305

Control supply power demand

Rated power (VA)	6	6	6	6	6	6
Max. intensity at 230 VAC (A) - ATyS d M, t M and g M	30	30	30	30	30	30
Max. intensity at 230 VAC (A) - ATyS p M	20	20	20	20	20	20

Mechanical specifications

Durability (number of operating cycles)	10,000	10,000	10,000	10,000	10,000	10,000
Weight of single-phase models - non-packaged (kg)	2.8	2.8	2.8	2.8	2.8	2.8
Weight of single-phase models - including packaging (kg)	3.5	3.5	3.5	3.5	3.5	3.5
Weight of three-phase models - non-packaged (kg)	3.5	3.5	3.5	3.5	3.5	3.5
Weight of three-phase models - including packaging (kg)	4.2	4.2	4.2	4.2	4.2	4.2

(1) Category with index A = frequent operation / Category with index B = infrequent operation.

(2) For a rated operational voltage  $U_e$  = 400 VAC.

(3) 5% tolerance.


(4) Value for coordination with any circuit breaker that ensures tripping in less than 0.3s.

For coordination with specific circuit-breaker references, higher short-circuit current values are available. Please contact us.


(5) At rated voltage - excluding time delays, where applicable.

# The ATyS S range: a robust solution

A range of transfer switches from 40 to 125 A

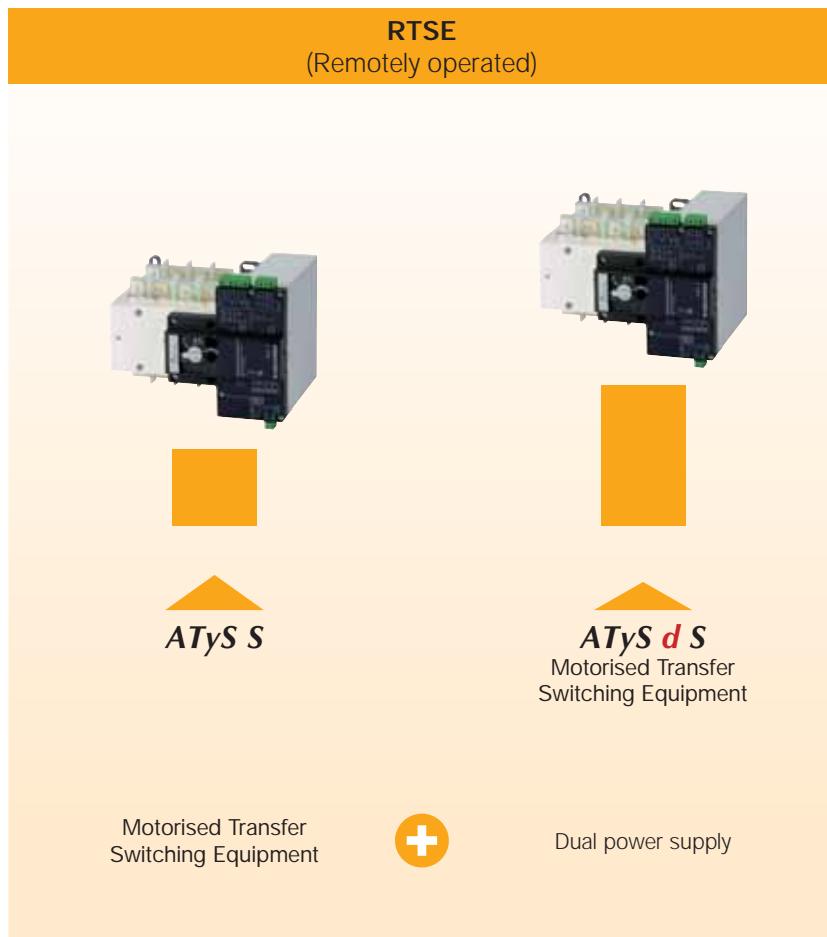

Three application types

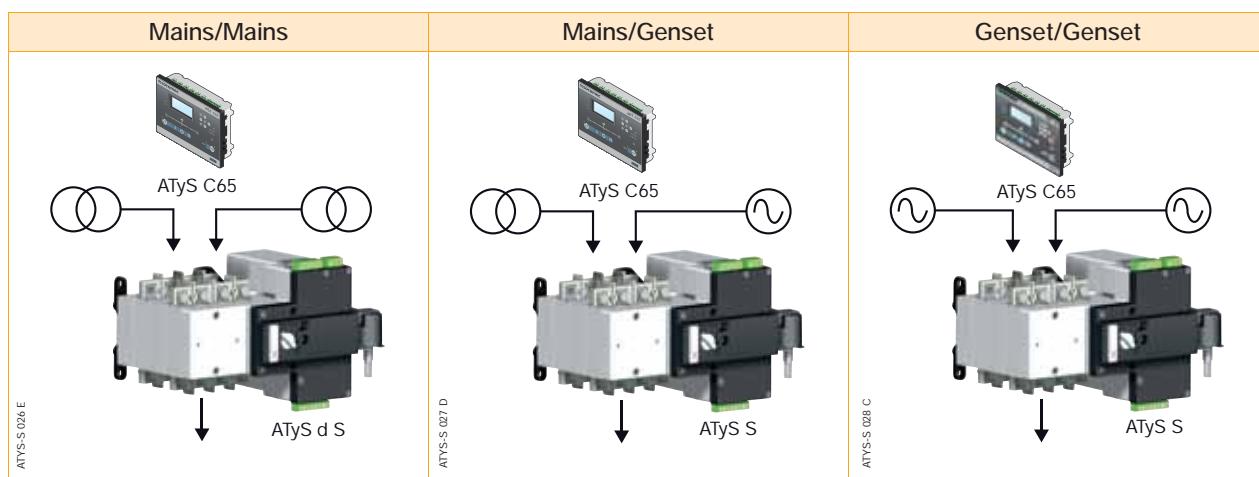

## The advantages



### Safe and reliable

- An extended lifetime thanks to a switching principle based on stable positions.
- Positive break indication.
- Mechanical position interlocking.
- Stable power supply to the loads because the ATyS S does not require power supply for the position to be maintained.
- Various power supply voltages are available: 12 or 24/48 VDC and 230 VAC or 2 x 230 VAC.



### Easy to use

- Manual emergency control: The product can be controlled quickly and safely using an emergency handle (motor installed or removed).
- Simple selection of the operating mode (Auto/Manual/Padlocked) using an integrated selector.



### Total integration

- Integrated and tested solution: components factory assembled and wired.
- Reliable product: compliance with IEC 60947-6-1, the standard governing transfer switches.



### Easy maintenance

- Self-cleaning sliding contacts.
- Easy replacement of the motor unit, even during on load operation.



### Cost-saving

- Low power consumption thanks to a switching principle based on stable positions: power is only required during transfer.
- Easy and fast installation: only four fixing points, three connectors and the power cables to connect.
- Shorter bridging bars that are consequently more economical than any other solution on the market.

### Compact design

> Combining two switches mounted back-to-back and being only 197 mm wide, the ATyS S offers significant space saving when compared with a side-by-side solution.

### Enclosed ATyS S



See "Enclosed transfer switches" pages.

## Expert Services

- > Study, definition, advice, implementation, maintenance and training...
- > Our Expert Services team offers customised support to make your project a success.



# ATyS S - ATyS d S

Remotely operated Transfer Switching Equipment  
from 40 to 125 A



atys-s\_018.psd

## Function

ATyS S products are 4 pole remotely operated transfer switches with positive break indication. They enable the on-load transfer of two three-phase supplies via remote volt-free contacts, from either an external automatic controller, using pulse logic, or a switch. They are intended for use in low voltage power supply systems where a brief interruption of the load supply is acceptable during transfer.

## Advantages

### Extensive power supply range

The ATyS S is available in four supply versions, each with a broad range (+/-30%).

The four versions are:

- 12 VDC power supply.
- 24/48 VDC power supply.
- 230 VAC single power supply.
- 2 x 230 VAC dual power supply.

### Safety and reliability

ATyS S products use stable position technology, ensuring constant pressure on the contacts and preventing premature faults. In addition, they do not require a power supply to maintain position, thus protecting their loads from voltage fluctuations.

### Easy integration

ATyS S products can be easily installed inside enclosures. Their design, and in particular their compact size, enables integration within most 200 mm deep enclosures.

### Simplified maintenance

Maintenance can be carried out easily under load, with manual operation still available.

The control and motorisation section can be replaced simply by removing 4 screws, with no work required on the installation cabling.

### ATyS d S: Dual power supply

In addition to the functions offered by the ATyS S, the ATyS d S incorporates supply redundancy without the need for additional wiring. This is obtained by integrating a double supply (2 independent supplies) directly within the product.

## The solution for

- > Genset < 90 kVA
- > Heating systems
- > Climate control
- > Ventilation systems
- > Telecommunications



## Strong points

- > Extensive power supply range
- > Safety and reliability
- > Easy integration
- > Simplified maintenance
- > ATyS d S: Dual power supply

## Conformity to standards

- > IEC 60947-6-1
- > IEC 60947-3
- > GB/T 14048-11



## Approvals and certifications



## Enclosed ATyS S



cof\_417.psd

See "Enclosed transfer switches".

## References

### ATyS S

Rating (A)	No. of poles	Power supply	ATyS S	Bridging bars	Terminal shrouds	Voltage tap	Terminal retainer	DIN rail
40 A	4 P	24/48 VDC	9506 4004	4 P 9509 4013	Source side 2 pieces 9594 4012	9599 4001	2 pieces 9599 4003	4 modules 9599 4002
	4 P	12 VDC	9505 4004					
	4 P	230 VAC	9503 4004					
63 A	4 P	24/48 VDC	9506 4006	4 P 9509 4013	Load side 2 pieces 9594 9012	9599 4001	2 pieces 9599 4003	4 modules 9599 4002
	4 P	12 VDC	9505 4006					
	4 P	230 VAC	9503 4006					
80 A	4 P	24/48 VDC	9506 4008	4 P 9509 4013	Source side 2 pieces 9594 4012	9599 4001	2 pieces 9599 4003	4 modules 9599 4002
	4 P	12 VDC	9505 4008					
	4 P	230 VAC	9503 4008					
100 A	4 P	24/48 VDC	9506 4010	4 P 9509 4013	Load side 2 pieces 9594 9012	9599 4001	2 pieces 9599 4003	4 modules 9599 4002
	4 P	12 VDC	9505 4010					
	4 P	230 VAC	9503 4010					
125 A	4 P	24/48 VDC	9506 4012	4 P 9509 4013	Source side 2 pieces 9594 4012	9599 4001	2 pieces 9599 4003	4 modules 9599 4002
	4 P	12 VDC	9505 4012					
	4 P	230 VAC	9503 4012					

### ATyS d S

Rating (A)	No. of poles	Power supply	ATyS d S	Bridging bars	Terminal shrouds	Voltage tap	Terminal retainer	DIN rail
40 A	4 P	2 x 230 VAC	9513 4004	4 P 9509 4013	Source side 2 pieces 9594 4012	9599 4001	2 pieces 9599 4003	4 modules 9599 4002
	4 P	2 x 230 VAC	9513 4006					
	4 P	2 x 230 VAC	9513 4008					
80 A	4 P	2 x 230 VAC	9513 4010	4 P 9509 4013	Load side 2 pieces 9594 9012	9599 4001	2 pieces 9599 4003	4 modules 9599 4002
	4 P	2 x 230 VAC	9513 4010					
	4 P	2 x 230 VAC	9513 4012					
100 A	4 P	2 x 230 VAC	9513 4012	4 P 9509 4013	Source side 2 pieces 9594 4012	9599 4001	2 pieces 9599 4003	4 modules 9599 4002
	4 P	2 x 230 VAC	9513 4012					
	4 P	2 x 230 VAC	9513 4012					
125 A	4 P	2 x 230 VAC	9513 4012	4 P 9509 4013	Load side 2 pieces 9594 9012	9599 4001	2 pieces 9599 4003	4 modules 9599 4002
	4 P	2 x 230 VAC	9513 4012					
	4 P	2 x 230 VAC	9513 4012					

## Accessories

### Bridging bars

#### Use

For bridging power terminals on the top or bottom side of the switch.

Rating (A)	No. of poles	Reference
40 ... 125	4 P	9509 4013



acess\_s\_021.eps

### Voltage tap

#### Use

Enables the required power supply for ATyS S 230 VAC and ATyS d S products to be tapped directly from the product's incoming power terminals. Can also be utilised in applications without neutral, to provide 400 VAC to the autotransformer.

Rating (A)	Reference
40 ... 125	9599 4001



atys-s\_022.eps

### Terminal retainer

#### Use

These clips have a dual function: - to prevent direct access to the power supply and control terminals and  
 - to secure these connector terminals.

Rating (A)	Pack	Reference
40 ... 125	2 pieces	9599 4003



atys-s\_021.eps

# ATyS S - ATyS d S

Remotely operated Transfer Switching Equipment

from 40 to 125 A

## Accessories (continued)

### Terminal shrouds

#### Use

IP2X protection against direct contact with terminals or connecting parts.

#### Terminal shrouds for the source side

Rating (A)	Pack	Reference
40 ... 125	2 pieces	9594 4012

#### Terminal shrouds for the load side

Rating (A)	Pack	Reference
40 ... 125	2 pieces	9594 9012



### Autotransformer 400/230 VAC

#### Use

For applications without neutral, this autotransformer provides the 230 VAC required to power these ATyS products.

#### Dimensions

75 x 80 x 72 mm

Rating (A)	Reference
40 ... 125	9599 4004

### DIN rail

#### Use

This 4-module DIN rail can be installed directly on the front of the ATyS S and can be utilised, for example, for the installation of a surge protection device.

Rating (A)	Reference
40 ... 125	9599 4002



acces\_417.eps

## Spares

### Manual emergency operation handle

#### Use

This handle can be used on the product whether the motor unit is mounted or not.

Rating (A)	Reference
40 ... 125	9599 5012



progn\_058.eps

### Connector kit

#### Use

This kit, including all the connector types for the different products, can be ordered in case of loss or breaking of one connector.

Rating (A)	Reference
40 ... 125	9509 0002



acces\_416.eps

## Characteristics according to IEC 60947-3 and IEC 60947-6-1

40 to 125 A

Thermal current $I_{th}$ at 40°C	40 A	63 A	80 A	100 A	125 A
Rated insulation voltage $U_i$ (V) (power circuit)	800	800	800	800	800
Rated impulse withstand voltage $U_{imp}$ (kV) (power circuit)	6	6	6	6	6
Rated insulation voltage $U_i$ (V) (control circuit)	300	300	300	300	300
Rated impulse withstand voltage $U_{imp}$ (kV) (control circuit)	4	4	4	4	4
Rated operational currents $I_e$ (A) according to IEC 60947-6-1					
Rated voltage	Utilisation category	A/B	A/B	A/B	A/B
415 VAC	AC-31 B	40	63	80	100
415 VAC	AC-32 B	40	63	80	80
Rated operational currents $I_e$ (A) according to IEC 60947-3					
Rated voltage	Utilisation category	A/B	A/B	A/B	A/B
415 VAC	AC-20 A / AC-20 B	40/40	63/63	80/80	100/100
415 VAC	AC-21 A / AC-21 B	40/40	63/63	80/80	100/100
415 VAC	AC-22 A / AC-22 B	40/40	63/63	80/80	100/100
415 VAC	AC-23 A / AC-23 B	-/40	-/63	-/63	-/63
Fuse protected short-circuit withstand (kA rms prospective)					
Prospective short-circuit current (kA rms)	50	50	50	25	15
Associated fuse rating (A)	40	63	80	100	125
Circuit breaker protected short-circuit withstand with any circuit breaker that ensures tripping in less than 0.3s <sup>(3)</sup>					
Rated short-time withstand current 0.3s $I_{cw}$ (kA rms)	3.5	3.5	3.5	3.5	3.5
Short-circuit capacity as per IEC 60947-6-1					
Rated short-time withstand current 0.03 s. (kA)	5	5	5	5	-
Rated short-circuit making capacity $I_{cm}$ (kA peak)	7.65	7.65	7.65	7.65	-
Short-circuit capacity as per IEC 60947-3 (without protection)					
Rated short-time withstand current 1 s. $I_{cw}$ (kA rms)	2.5	2.5	2.5	2.5	2.5
Rated peak withstand current (kA peak)	12	12	12	12	12
Connection					
Maximum Cu cable cross-section (mm <sup>2</sup> )	50	50	50	50	50
Tightening torque mini / maxi (Nm)	1.2/3	1.2/3	1.2/3	1.2/3	1.2/3
Switching time (Standard setting)					
I - 0 or II - 0 (ms)	500	500	500	500	500
I - II or II - I (ms)	1000	1000	1000	1000	1000
Duration of "electrical blackout" I - II (ms) minimum	500	500	500	500	500
Power supply					
Power supply 12 VDC min / max (VDC)	9/15	9/15	9/15	9/15	9/15
Power supply 24/48 VDC min / max (VDC)	17/62	17/62	17/62	17/62	17/62
Power supply 230 VAC min / max (VAC)	160/310	160/310	160/310	160/310	160/310
Control supply power demand					
Power supply 12 VDC inrush / nominal (VA)	200/40	200/40	200/40	200/40	200/40
Power supply 24/48 VDC inrush / nominal (VA)	200/40	200/40	200/40	200/40	200/40
Supply 230 VAC inrush / nominal (VA)	200/40	200/40	200/40	200/40	200/40
Mechanical characteristics					
Durability (number of operating cycles)	25 000	25 000	25 000	25 000	25 000
Weight ATyS S and ATyS d S 4 P (kg)	3	3	3	3	3

(1) Value for coordination with any circuit breaker that ensures tripping in less than 0.3s. For coordination with specific circuit-breaker references, higher short-circuit current values are available.  
 Please consult us.


# ATyS S - ATyS d S

Remotely operated Transfer Switching Equipment

from 40 to 125 A


## Terminals and connections

### ATyS S DC version

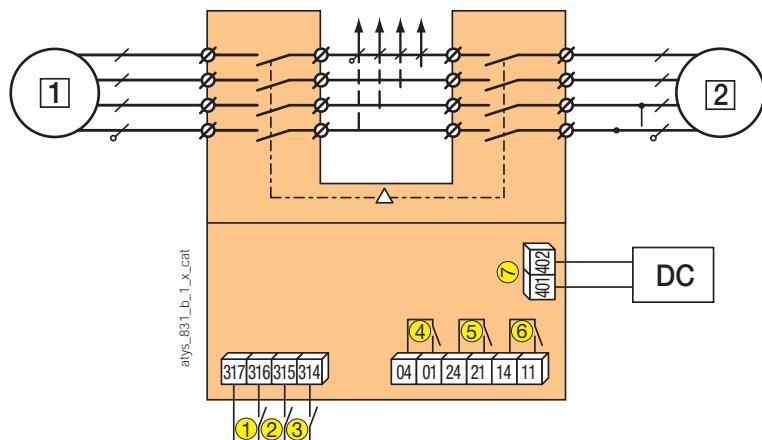


- [1] preferred source
- [2] alternate source
- 1: position 0 control
- 2: position I control
- 3: position II control
- 4: auxiliary contact, closed when the switch is in position 0
- 5: auxiliary contact, closed when the switch is in position II
- 6: auxiliary contact, closed when the switch is in position I
- 7: power supply 12 VDC (9-15 VDC) or 24 VDC / 48 VDC (17-62 VDC) depending on the version.

### ATyS S: 230 VAC

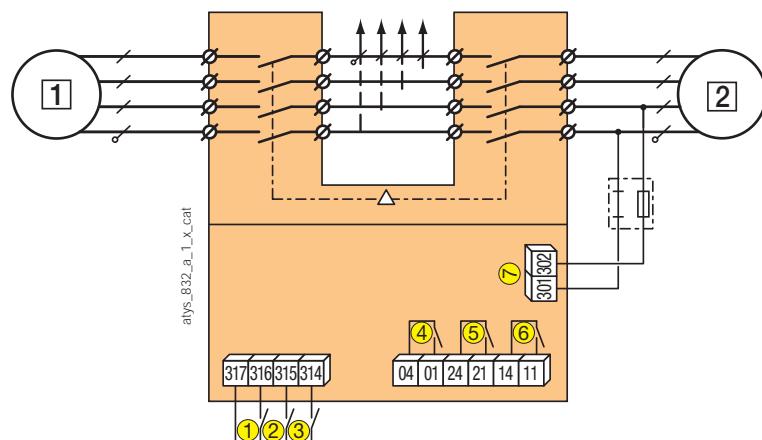


- [1] preferred source
- [2] alternate source
- 1: position 0 control
- 2: position I control
- 3: position II control
- 4: auxiliary contact, closed when the switch is in position 0
- 5: auxiliary contact, closed when the switch is in position II
- 6: auxiliary contact, closed when the switch is in position I
- 7: power supply kit: 230 VAC (160-310 VAC)

### ATyS d S: 2 x 230 VAC

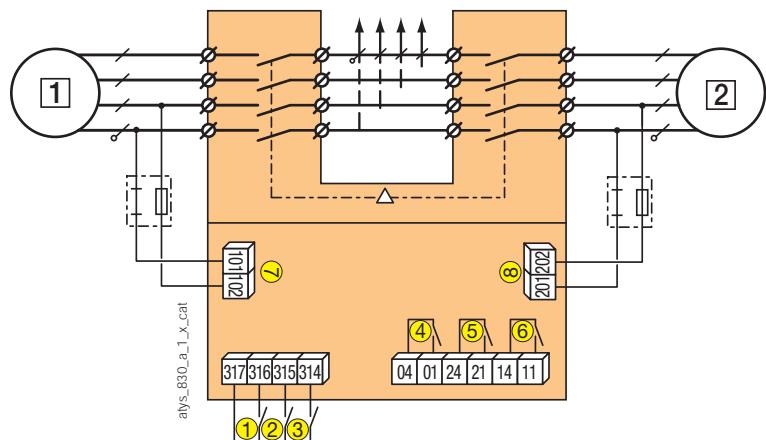


- [1] preferred source
- [2] alternate source
- 1: position 0 control
- 2: position I control
- 3: position II control
- 4: auxiliary contact, closed when the switch is in position 0
- 5: auxiliary contact, closed when the switch is in position II
- 6: auxiliary contact, closed when the switch is in position I
- 7: power supply kit I: 230 VAC (160-310 VAC)
- 8 : power supply kit II: 230 VAC (160-310 VAC)

## Dimensions

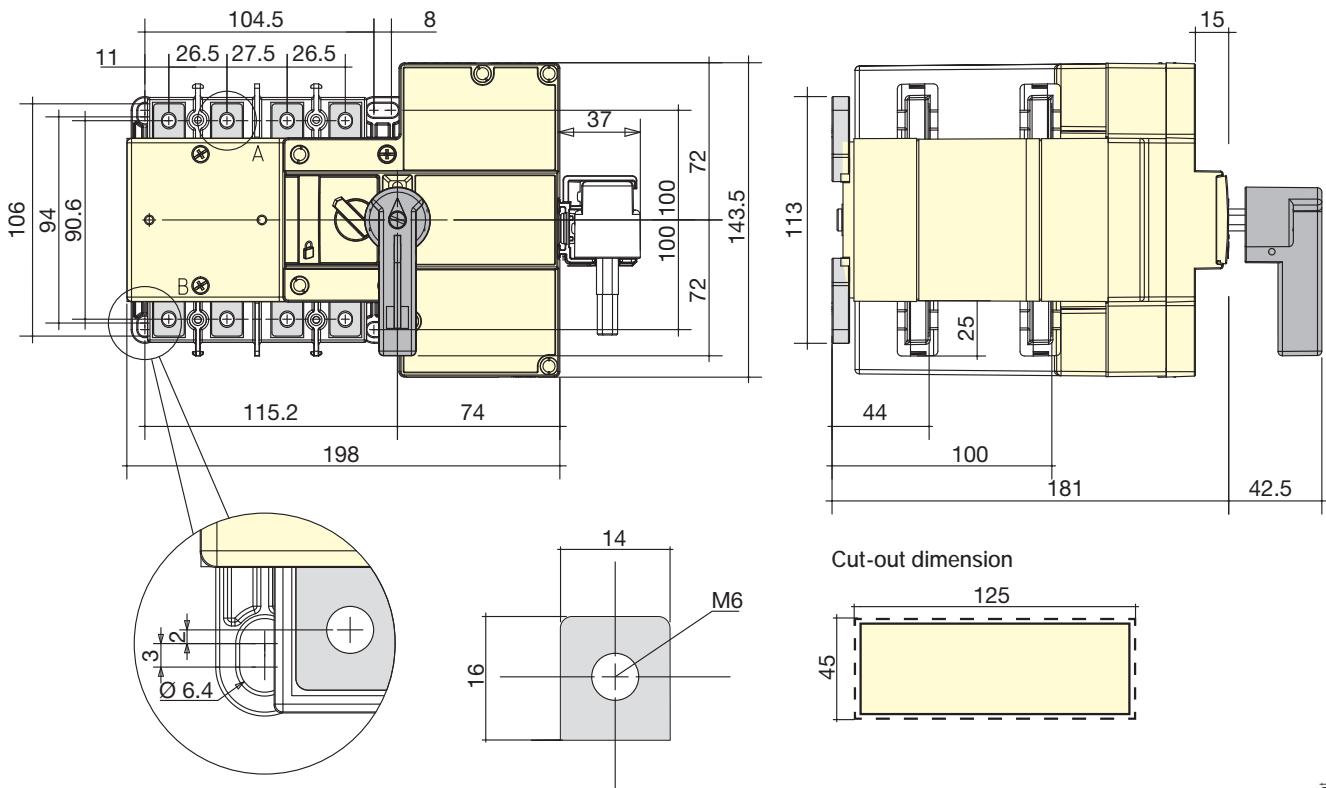

atys-s\_024\_a\_1\_x\_cat


## Connection terminal

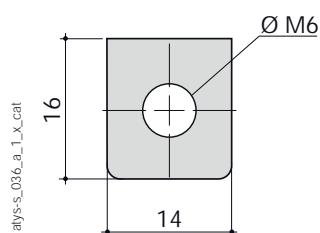

# The ATyS range: intuitive, reliable and robust solutions

A complete range of automatic and remotely operated transfer switches from 125 to 3200 A

To meet the increasing demands of its users, the ATyS range is constantly evolving to offer new functions. Three product versions are available to find the right solution perfectly adapted to your application.

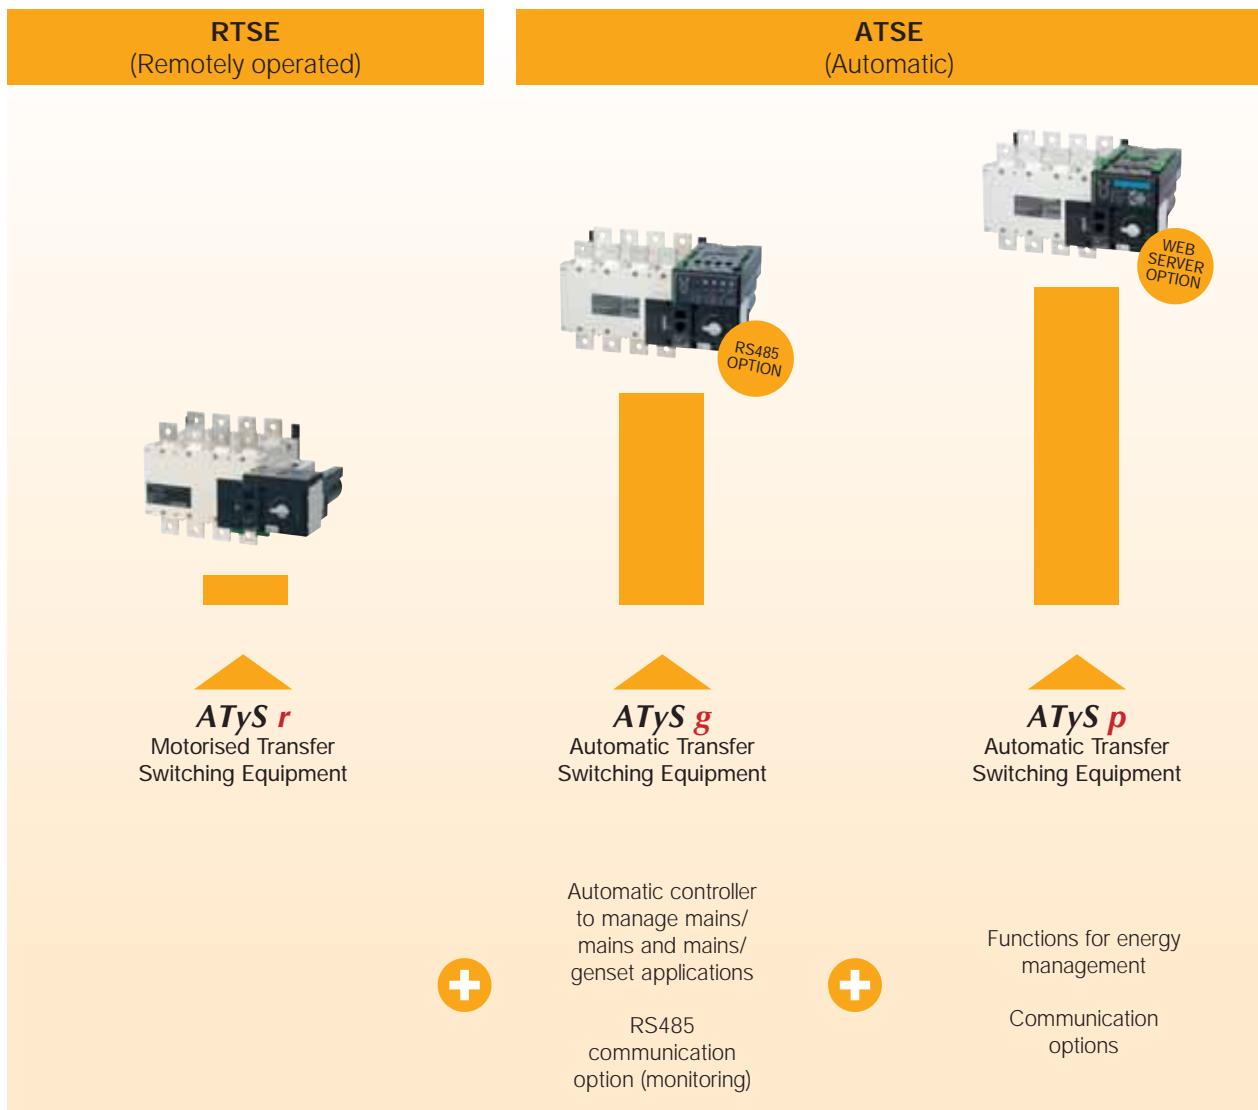

# The ATyS range: intuitive, reliable and robust solutions

## The advantages

### Safe operation

- Permanent indication of product availability (Watchdog relay).
- Positive break indication.
- Mechanical position interlocking.
- Padlocked mode to secure maintenance operations (lockout).
- Secure access to the product configuration.

### Robust integrated solution

#### A single product with all the functions:

- Integrated and tested solution: components factory assembled and wired.
- Greater reliability: compliance with IEC 60947-6-1, the standard governing transfer switches.

#### Proven SOCOMEC technology:

- Combination of two "back-to-back" (load break switch) PC class switches.
- Switching based on stable positions guaranteeing constant pressure on the contacts at all times.
- SIRCO contact technology used in numerous products for over 40 years.

### Intuitive use

- Manual emergency control: The product can be controlled **quickly and safely** using an emergency handle (motor installed or removed).
- User friendly selection of the operating mode (Auto/Manual) using an integrated selector.

### Improved on load characteristics

IEC 60947-6-1/GB 14048-11

- AC 31B - up to 3200 A
- AC 32B - up to 2000 A
- AC 33B - up to 1250 A

IEC 60947-3

- AC 23B - up to 1250 A

### Enclosed RTSE



See "Enclosed transfer switches".

### Enclosed ATSE



See "Enclosed transfer switches".

### Expert Services

- Study, definition, advice, implementation, maintenance and training...
- Our Expert Services team offers customised support to make your project a success.



# ATyS r

Remotely operated Transfer Switching Equipment  
from 125 to 3200 A



atys\_r67.eps

## Function

ATyS r are 3 or 4 pole remotely operated motorised transfer switches with positive break indication.

They enable the on-load transfer of two three-phase power supplies via remote volt-free contacts, from either an external automatic controller, using pulse logic, or a switch.

They are intended for use in low voltage power systems where interruption of the load supply is acceptable during transfer.

## Advantages

### Watchdog relay to check product availability

ATyS r products are equipped with a Watchdog relay which constantly monitors your product, thereby securing the installation.

This relay informs in real time the user of the product's availability, i.e. whether it is operational and ready for source switching.

### Integrated auxiliary contacts

As part of the product monitoring function, the ATyS r enable the transmission of information relating to their position. This is possible thanks to the standard integration of an auxiliary contact for each position.


### Extended power supply range

ATyS r products offer greater availability thanks to their extensive power supply range of 208 to 277 VAC ± 20%.

### More robust

The updated design includes metal mounting legs across the entire ATyS range, improving the overall robustness of the switches.

It also allows an easier and trouble-free mounting of the switches on a back plate with preassembled screws.

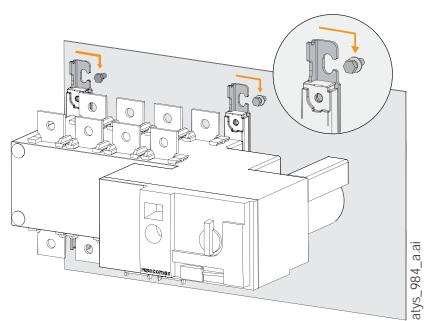

atys\_r984\_aai

## The solution for

- > Applications with an external ATS/AMF controller
- > Building Management Systems (BMS)



## Strong points

- > Watchdog relay to check product availability
- > Integrated auxiliary contacts
- > Extended power supply range
- > Robust design

## Conformity to standards

- > IEC 60947-6-1
- > IEC 60947-3
- > GB/T 14048.11



## Approvals and certifications<sup>(1)</sup>



(1) Product references on request.

## Compatible with



ATyS C25, ATyS C35, ATyS C55, ATyS C65  
ATS Controller

## Enclosed RTSE



See "Enclosed transfer switches".

## References

ATyS *r*

Rating (A) / Frame size	No. of poles	ATyS <i>r</i>	Bridging bars <sup>(4)</sup>	Terminal shrouds	Terminal screens	Auxiliary contact	3 position padlocking	Auto transformer
125 A / B3	3 P	9523 3012	4109 0019	3 P 2694 3014 <sup>(2)</sup> 4 P 2694 4014 <sup>(2)</sup>	3 P 1509 3012 4 P 1509 4012	1599 0502	9599 0003 <sup>(3)</sup>	400/230 VAC 1599 4064 <sup>(5)</sup>
	4 P	9523 4012						
160 A / B3	3 P	9523 3016	4109 0025	3 P 2694 3021 <sup>(2)</sup> 4 P 2694 4021 <sup>(2)</sup>	3 P 1509 3025 4 P 1509 4025	1599 0502	9599 0003 <sup>(3)</sup>	400/230 VAC 1599 4064 <sup>(5)</sup>
	4 P	9523 4016						
200 A / B3	3 P	9523 3020	4109 0039	3 P 2694 3021 <sup>(2)</sup> 4 P 2694 4021 <sup>(2)</sup>	3 P 1509 3025 4 P 1509 4025	1599 0532	9599 0004 <sup>(3)</sup>	400/230 VAC 1599 4064 <sup>(5)</sup>
	4 P	9523 4020						
250 A / B4	3 P	9523 3025	4109 0050	3 P 2694 3051 <sup>(2)</sup> 4 P 2694 4051 <sup>(2)</sup>	3 P 1509 3063 4 P 1509 4063	1599 0532	9599 0004 <sup>(3)</sup>	400/230 VAC 1599 4064 <sup>(5)</sup>
	4 P	9523 4025						
315 A / B4	3 P	9523 3031	4109 0063	3 P 2694 3051 <sup>(2)</sup> 4 P 2694 4051 <sup>(2)</sup>	3 P 1509 3063 4 P 1509 4063	1599 0532	9599 0004 <sup>(3)</sup>	400/230 VAC 1599 4064 <sup>(5)</sup>
	4 P	9523 4031						
400 A / B4	3 P	9523 3040	4109 0080	3 P 1509 3080 4 P 1509 4080	3 P 1509 3080 4 P 1509 4080	1599 0532	9599 0004 <sup>(3)</sup>	400/230 VAC 1599 4064 <sup>(5)</sup>
	4 P	9523 4040						
500 A / B5	3 P	9523 3050	4109 0120	3 P 1509 3160 4 P 1509 4160	3 P 1509 3160 4 P 1509 4160	1599 0532	9599 0004 <sup>(3)</sup>	400/230 VAC 1599 4064 <sup>(5)</sup>
	4 P	9523 4050						
630 A / B5	3 P	9523 3063	(1)	3 P 1509 3200 4 P 1509 4200	3 P 1509 3200 4 P 1509 4200	included	9599 0004 <sup>(3)</sup>	400/230 VAC 1599 4064 <sup>(5)</sup>
	4 P	9523 4063						
800 A / B6	3 P	9523 3080	4109 0160	3 P 1509 3200 4 P 1509 4200	3 P 1509 3200 4 P 1509 4200	1599 0532	9599 0004 <sup>(3)</sup>	400/230 VAC 1599 4064 <sup>(5)</sup>
	4 P	9523 4080						
1000 A / B6	3 P	9523 3100	(1)	3 P 1509 3200 4 P 1509 4200	3 P 1509 3200 4 P 1509 4200	1599 0532	9599 0004 <sup>(3)</sup>	400/230 VAC 1599 4064 <sup>(5)</sup>
	4 P	9523 4100						
1250 A / B6	3 P	9523 3120	(1)	3 P 1509 3200 4 P 1509 4200	3 P 1509 3200 4 P 1509 4200	1599 0532	9599 0004 <sup>(3)</sup>	400/230 VAC 1599 4064 <sup>(5)</sup>
	4 P	9523 4120						
1600 A / B7	3 P	9523 3160	(1)	3 P 1509 3200 4 P 1509 4200	3 P 1509 3200 4 P 1509 4200	1599 0532	9599 0004 <sup>(3)</sup>	400/230 VAC 1599 4064 <sup>(5)</sup>
	4 P	9523 4160						
2000 A / B8	3 P	9523 3200	(1)	3 P 1509 3200 4 P 1509 4200	3 P 1509 3200 4 P 1509 4200	1599 0532	9599 0004 <sup>(3)</sup>	400/230 VAC 1599 4064 <sup>(5)</sup>
	4 P	9523 4200						
2500 A / B8	3 P	9523 3250	(1)	3 P 1509 3200 4 P 1509 4200	3 P 1509 3200 4 P 1509 4200	1599 0532	9599 0004 <sup>(3)</sup>	400/230 VAC 1599 4064 <sup>(5)</sup>
	4 P	9523 4250						
3200 A / B8	3 P	9523 3320	(1)	3 P 1509 3200 4 P 1509 4200	3 P 1509 3200 4 P 1509 4200	1599 0532	9599 0004 <sup>(3)</sup>	400/230 VAC 1599 4064 <sup>(5)</sup>
	4 P	9523 4320						

(1) See "Copper bar connection pieces".

(2) For complete shrouding at front, rear, top and bottom, order quantity 4; if equipped with bridging bars order quantity 3.

For top and bottom shrouding for the front only, order quantity 2.

(3) Factory mounting only.

(4) For a 3 pole device order quantity 3 bridging bars, for a 4 pole device order quantity 4.

(5) Order 1 auto transformer per source without neutral line conductor.

# ATyS g

## Automatic Transfer Switching Equipment

from 125 to 3200 A



### Function

ATyS g are 3 or 4 pole automatic transfer switches, with positive break indication. They incorporate all the functions offered by the ATyS r, as well as functions intended for mains/mains and mains/genset applications.

In automatic mode they enable the monitoring of, and the on-load changeover between, two power supply sources, in accordance with the parameters configured via potentiometers and DIP switches. Remote monitoring of the ATyS g is possible with the optional RS485 communication module.

They are intended for use in low voltage power supply systems where a brief interruption of the load supply is acceptable during transfer.

### Advantages

#### Rapid commissioning

ATyS g switches offer significant time saving during commissioning (process takes 2 to 3 minutes). Owing to the design that allows commissioning through just four potentiometers and four DIP switches, a screwdriver is all that is required to configure the parameters.

For added simplicity, they also offer an autoconfiguration function which enables automatic adjustment of the rated voltage and frequency.

#### Specifically designed for mains/mains and mains/genset applications

The ATyS g's integrated controller has been designed to provide specific functions for these applications (genset startup, on-load or off-load tests...) together with the monitoring of the voltage and frequency of both sources for three-phase and single-phase networks. The generator supply must be connected to switch II, located at the rear.

#### The solution for

- > Mains/mains and mains/genset applications



#### Strong points

- > Rapid commissioning
- > ATS with integrated DPS and controller for functions dedicated to mains/mains or mains/genset applications

#### Conformity to standards

- > IEC 60947-6-1
- > IEC 60947-3
- > GB/T 14048.11



#### Approvals and certifications<sup>(1)</sup>



(1) Product references on request.

#### Enclosed RTSE



See "Enclosed transfer switches".

## References

### ATyS g

Rating (A) / Frame size	No. of poles	ATyS g	Bridging bars <sup>(3)</sup>	Voltage sensing and power supply kit	Terminal shrouds	Terminal screens	Auxiliary contact
125 A / B3	3 P	9553 3012	4109 0019	3 P 1559 3012 4 P 1559 4012	3 P 2694 3014 <sup>(2)</sup> 4 P 2694 4014 <sup>(2)</sup>	3 P 1509 3012 4 P 1509 4012	1599 0502
	4 P	9553 4012					
160 A / B3	3 P	9553 3016	4109 0025	3 P 1559 3025 4 P 1559 4025	3 P 2694 3021 <sup>(2)</sup> 4 P 2694 4021 <sup>(2)</sup>	3 P 1509 3025 4 P 1509 4025	1599 0502
	4 P	9553 4016					
200 A / B3	3 P	9553 3020	4109 0039	3 P 1559 3040 4 P 1559 4040	3 P 2694 3051 <sup>(2)</sup> 4 P 2694 4051 <sup>(2)</sup>	3 P 1509 3063 4 P 1509 4063	1599 0532
	4 P	9553 4020					
250 A / B4	3 P	9553 3025	4109 0050	3 P 1559 3063 4 P 1559 4063	3 P 2694 3080 4 P 2694 4080	3 P 1509 3080 4 P 1509 4080	included
	4 P	9553 4025					
315 A / B4	3 P	9553 3031	4109 0063	3 P 1559 3160 4 P 1559 4160	3 P 2694 3160 4 P 2694 4160	1509 3160 1509 4160	1599 0532
	4 P	9553 4031					
400 A / B4	3 P	9553 3040	(1)	3 P 1559 3200 4 P 1559 4200	3 P 1509 3200 4 P 1509 4200	3 P 1509 3200 4 P 1509 4200	included
	4 P	9553 4040					
500 A / B5	3 P	9553 3050	4109 0080	3 P 1559 3080 4 P 1559 4080	3 P 2694 3120 4 P 2694 4120	3 P 1509 3120 4 P 1509 4120	1599 0532
	4 P	9553 4050					
630 A / B5	3 P	9553 3063	4109 0120	3 P 1559 3160 4 P 1559 4160	3 P 2694 3160 4 P 2694 4160	1509 3160 1509 4160	1599 0532
	4 P	9553 4063					
800 A / B6	3 P	9553 3080	4109 0160	3 P 1559 3200 4 P 1559 4200	3 P 2694 3200 4 P 2694 4200	3 P 1509 3200 4 P 1509 4200	included
	4 P	9553 4080					
1000 A / B6	3 P	9553 3100	(1)	3 P 1559 3200 4 P 1559 4200	3 P 2694 3200 4 P 2694 4200	3 P 1509 3200 4 P 1509 4200	included
	4 P	9553 4100					
1250 A / B6	3 P	9553 3120	4109 0120	3 P 1559 3200 4 P 1559 4200	3 P 2694 3200 4 P 2694 4200	3 P 1509 3200 4 P 1509 4200	included
	4 P	9553 4120					
1600 A / B7	3 P	9553 3160	4109 0160	3 P 1559 3200 4 P 1559 4200	3 P 2694 3200 4 P 2694 4200	3 P 1509 3200 4 P 1509 4200	included
	4 P	9553 4160					
2000 A / B8	3 P	9553 3200	(1)	3 P 1559 3200 4 P 1559 4200	3 P 2694 3200 4 P 2694 4200	3 P 1509 3200 4 P 1509 4200	included
	4 P	9553 4200					
2500 A / B8	3 P	9553 3250	(1)	3 P 1559 3200 4 P 1559 4200	3 P 2694 3200 4 P 2694 4200	3 P 1509 3200 4 P 1509 4200	included
	4 P	9553 4250					
3200 A / B8	3 P	9553 3320	(1)	3 P 1559 3200 4 P 1559 4200	3 P 2694 3200 4 P 2694 4200	3 P 1509 3200 4 P 1509 4200	included
	4 P	9553 4320					

(1) See "Copper bar connection pieces".

(2) For complete shrouding at front, rear, top and bottom, order quantity 4; if equipped with bridging bars order quantity 3. For top and bottom shrouding for the front only, order quantity 2.

(3) For a 3 pole device order quantity 3 bridging bars, for a 4 pole device order quantity 4.

# ATyS p

## Automatic Transfer Switching Equipment from 125 to 3200 A



### Function

ATyS p are 3 or 4 pole automatic transfer switches with positive break indication. They incorporate all the functions offered by the ATyS t and g, as well as functions designed for **power management and functions communication**.

In automatic mode they enable the monitoring of, and the on-load changeover between, two power supply sources, in accordance with the parameters configured through LCD display, or via communication.

They are intended for use in low voltage power supply systems where a brief interruption of the load supply is acceptable during transfer.

### Advantages

#### Recording of events

ATyS p switches enable effective monitoring of your installation thanks to timestamped event recording.

Events can be retrieved and read via communication.

#### Optional communication modules

The ATyS p offers communication functions through the addition of optional modules, such as RS485 Modbus or Ethernet with embedded Webserver.

#### Configuration software

Software (Easyconfig) is available enabling the ATyS p parameters to be easily configured and the existing configuration to be saved and sent to other units.

#### Power measurements

ATyS p products are particularly suited to energy management and monitoring.

In addition to their integrated power and energy measurement functions (with a 2% accuracy level), programmable inputs/outputs can be utilised to control load shedding based on a load level or tariff.

#### Possibility to set periodic genset startup

ATyS p switches offer additional functions for maintenance. They include a programmable genset starting function which allows the starting dates and operating times to be configured.

### The solution for

- > Applications requiring power management and communication.



### Strong points

- > Optional communication modules
- > Recording of events
- > Configuration software
- > Power measurements
- > Possibility to set periodic genset startup

### Conformity to standards

- > IEC 60947-6-1
- > IEC 60947-3
- > GB/T 14048.11



### Approvals and certifications<sup>(1)</sup>



<sup>(1)</sup> Product references on request.

### Webserver


The Webserver function comprises HTML pages embedded in the Ethernet communication module.

These pages can be accessed via an internet browser, simply by entering the IP address.

The webserver offers the following functionalities:

- > Display of source status and switch position
- > Display of the main measurements
- > Extraction of the latest logged events
- > Display of the product configuration

## Front panel

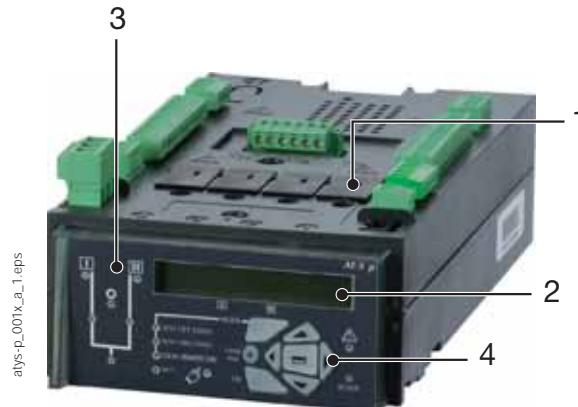

1. Slots for optional plug-in modules.
2. Backlit LCD display.
3. Source availability and position indication LEDs.
4. Parameter programming keypad.

## Communication and configuration

### Easyconfig

**Easyconfig software** is the ideal solution to save time and simplify complex configuration.

Allows configuration of the following parameters:

- application type,
- voltage/frequency thresholds,
- timers,
- inputs/outputs...



ays-p-064\_a\_en.eps

## Webserver

Thanks to optional modules, ATyS p can communicate in **Modbus** and **Ethernet** protocols.

The Ethernet communication module includes the **Webserver** function for access to the ATyS p via an internet browser.

The Webserver function enables:

- display of source status and switch position,
- display of voltage measurements,
- display of parameters,
- access to the list of logged events.



ays 850\_a

## References

## ATyS p

Rating (A) / Frame size	No. of poles	ATyS p	Bridging bars <sup>(3)</sup>	Voltage sensing and power supply kit	Terminal shrouds	Terminal screens	Optional modules	Auxiliary contact
125 A / B3	3 P	9573 3012	4109 0019	3 P 1559 3012 4 P 1559 4012	3 P 2694 3014 <sup>(2)</sup> 4 P 2694 4014 <sup>(2)</sup>	3 P 1509 3012 4 P 1509 4012		
	4 P	9573 4012						
160 A / B3	3 P	9573 3016		3 P 1559 3012 4 P 1559 4012		3 P 1509 3012 4 P 1509 4012		
	4 P	9573 4016						
200 A / B3	3 P	9573 3020		1559 3025 1559 4025		3 P 1509 3025 4 P 1509 4025		1599 0502
	4 P	9573 4020						
250 A / B4	3 P	9573 3025	4109 0025	3 P 1559 3040 4 P 1559 4040		3 P 1509 3025 4 P 1509 4025	RS485 MODBUS communication 4825 0092	
	4 P	9573 4025						
315 A / B4	3 P	9573 3031	4109 0039	3 P 1559 3040 4 P 1559 4040	3 P 2694 3021 <sup>(2)</sup> 4 P 2694 4021 <sup>(2)</sup>	3 P 1509 3025 4 P 1509 4025		2 inputs / 2 outputs 1599 2001
	4 P	9573 4031						
400 A / B4	3 P	9573 3040		3 P 1559 3063 4 P 1559 4063	3 P 2694 3051 <sup>(2)</sup> 4 P 2694 4051 <sup>(2)</sup>	3 P 1509 3063 4 P 1509 4063	Ethernet communication 4825 0203	
	4 P	9573 4040						
500 A / B5	3 P	9573 3050	4109 0050	3 P 1559 3063 4 P 1559 4063	3 P 2694 3051 <sup>(2)</sup> 4 P 2694 4051 <sup>(2)</sup>	3 P 1509 3063 4 P 1509 4063	Ethernet communication 4825 0203	
	4 P	9573 4050						
630 A / B5	3 P	9573 3063	4109 0063	3 P 1559 3080 4 P 1559 4080		3 P 1509 3080 4 P 1509 4080	Analogue outputs 4825 0093	
	4 P	9573 4063						
800 A / B6	3 P	9573 3080	4109 0080	3 P 1559 3080 4 P 1559 4080		3 P 1509 3080 4 P 1509 4080	Pulse outputs 4825 0090	1599 0532
	4 P	9573 4080						
1000 A / B6	3 P	9573 3100		3 P 1559 3120 4 P 1559 4120		3 P 1509 3160		
	4 P	9573 4100						
1250 A / B6	3 P	9573 3120	4109 0120	3 P 1559 3120 4 P 1559 4120		3 P 1509 4160		
	4 P	9573 4120						
1600 A / B7	3 P	9573 3160	4109 0160	3 P 1559 3160 4 P 1559 4160		3 P 1509 4160		
	4 P	9573 4160						
2000 A / B8	3 P	9573 3200		3 P 1559 3200 4 P 1559 4200		3 P 1509 3200 4 P 1509 4200	included	
	4 P	9573 4200						
2500 A / B8	3 P	9573 3250	(1)	3 P 1559 3200 4 P 1559 4200		3 P 1509 3200 4 P 1509 4200	included	
	4 P	9573 4250						
3200 A / B8	3 P	9573 3320						
	4 P	9573 4320						

(1) See "Copper bar connection pieces".

(2) For complete shrouding at front, rear, top and bottom, order quantity 4; if equipped with bridging bars order quantity 3. For top and bottom shrouding for the front only, order quantity 2.

(3) For a 3 pole device order quantity 3 bridging bars, for a 4 pole device order quantity 4.

## ATyS p

Rating (A) / Frame size	No. of poles	ATyS p	DC power supply	3 position padlocking	Key handle interlocking system	Door protective surround	Remote control interface
125 A / B3	3 P	9573 3012			Using lock RONIS EL11AP in position 0 9599 1006 <sup>(1)</sup>	1539 0012	
	4 P	9573 4012					
160 A / B3	3 P	9573 3016		9599 0003 <sup>(1)</sup>	Using lock RONIS EL11AP in position 0 9599 1006 <sup>(1)</sup>	1539 0012	
	4 P	9573 4016					
200 A / B3	3 P	9573 3020		12 VDC/230 VAC 1599 5012	Using lock RONIS EL11AP in position 0 9599 1006 <sup>(1)</sup>	1539 0012	
	4 P	9573 4020					
250 A / B4	3 P	9573 3025		24 VDC/230 VAC 1599 5112	Using lock RONIS EL11AP in position 0 9599 1006 <sup>(1)</sup>	1539 0012	
	4 P	9573 4025					
315 A / B4	3 P	9573 3031		48 VDC/230 VAC 1599 5212	Using lock RONIS EL11AP in position 0 9599 1006 <sup>(1)</sup>	1539 0012	
	4 P	9573 4031					
400 A / B4	3 P	9573 3040			Using lock RONIS EL11AP in position 0 9599 1006 <sup>(1)</sup>	1539 0012	
	4 P	9573 4040					
500 A / B5	3 P	9573 3050			Using lock RONIS EL11AP in position 0 9599 1006 <sup>(1)</sup>	1539 0012	
	4 P	9573 4050					
630 A / B5	3 P	9573 3063			Using lock RONIS EL11AP in position 0 9599 1006 <sup>(1)</sup>	1539 0012	
	4 P	9573 4063					
800 A / B6	3 P	9573 3080			Using lock RONIS EL11AP in position 0 9599 1006 <sup>(1)</sup>	1539 0012	
	4 P	9573 4080					
1000 A / B6	3 P	9573 3100			Using lock RONIS EL11AP in position 0 9599 1006 <sup>(1)</sup>	1539 0012	
	4 P	9573 4100					
1250 A / B6	3 P	9573 3120			Using lock RONIS EL11AP in position 0 9599 1006 <sup>(1)</sup>	1539 0012	
	4 P	9573 4120					
1600 A / B7	3 P	9573 3160		9599 0004 <sup>(1)</sup>	Using lock RONIS EL11AP in position 0 9599 1004 <sup>(1)</sup>	1539 0080	
	4 P	9573 4160					
2000 A / B8	3 P	9573 3200			Using lock RONIS EL11AP in position 0 9599 1004 <sup>(1)</sup>	1539 0080	
	4 P	9573 4200					
2500 A / B8	3 P	9573 3250			Using lock RONIS EL11AP in position 0 9599 1004 <sup>(1)</sup>	1539 0080	
	4 P	9573 4250					
3200 A / B8	3 P	9573 3320			Using lock RONIS EL11AP in position 0 9599 1004 <sup>(1)</sup>	1539 0080	
	4 P	9573 4320					

(1) Factory mounting only.

# ATyS range

**ATyS r, ATyS g, ATyS p**

from 125 to 3200 A

## Accessories

### Terminal shrouds

#### Use

IP2X protection against direct contact with terminals or connecting parts.

#### Advantages

Perforations allow remote thermographic inspection without the need to remove the shrouds.

Rating (A)	Frame size	No. of poles	Position	Reference
125 ... 200	B3	3 P	top / bottom / front (I) / rear (II)	2694 3014 <sup>(1)(2)</sup>
125 ... 200	B3	4 P	top / bottom / front (I) / rear (II)	2694 4014 <sup>(1)(2)</sup>
250 ... 400	B4	3 P	top / bottom / front (I) / rear (II)	2694 3021 <sup>(1)(2)</sup>
250 ... 400	B4	4 P	top / bottom / front (I) / rear (II)	2694 4021 <sup>(1)(2)</sup>
500 ... 630	B5	3 P	top / bottom / front (I) / rear (II)	2694 3051 <sup>(1)(2)</sup>
500 ... 630	B5	4 P	top / bottom / front (I) / rear (II)	2694 4051 <sup>(1)(2)</sup>

(1) For complete shrouding at front, rear, top and bottom, order quantity 4; if equipped with bridging bars order quantity 3.

(2) For top and bottom shrouding for the front only, order quantity 2.



acces\_206\_a\_2\_cat

### Terminal screens

#### Use

Upstream and downstream protection against direct contact with terminals or connection parts.

For upstream and downstream protection, order quantity 1.

Rating (A)	Frame size	No. of poles	Position	Reference
125 ... 200	B3	3 P	top / bottom	1509 3012
125 ... 200	B3	4 P	top / bottom	1509 4012
250 ... 400	B4	3 P	top / bottom	1509 3025
250 ... 400	B4	4 P	top / bottom	1509 4025
500 ... 630	B5	3 P	top / bottom	1509 3063
500 ... 630	B5	4 P	top / bottom	1509 4063
800 ... 1250	B6	3 P	top / bottom	1509 3080
800 ... 1250	B6	4 P	top / bottom	1509 4080
1600	B7	3 P	top / bottom	1509 3160
1600	B7	4 P	top / bottom	1509 4160
2000 ... 3200	B8	3 P	top / bottom	1509 3200
2000 ... 3200	B8	4 P	top / bottom	1509 4200



acces\_207\_a\_2\_cat

### Inter-phase barrier

#### Use

Safe isolation between the terminals, essential for use at 690 VAC or in a polluted or dusty atmosphere.

Rating (A)	Frame size	No. of poles	Reference
125 ... 200	B3	3 P	2998 0033
125 ... 200	B3	4 P	2998 0034
250 ... 400	B4	3 P	2998 0023
250 ... 400	B4	4 P	2998 0024
500 ... 630	B5	3 P	2998 0013
500 ... 630	B5	4 P	2998 0014
800 ... 3200	B6 ... B8	3/4 P	included

## Bridging bars

### Use


For bridging power terminals on the outgoing side of the switch.

Rating (A)	Frame size	Diameter (mm)	Reference <sup>(1)</sup>
125 ... 200	B3	20 x 2.5	4109 0019
250	B4	25 x 2.5	4109 0025
315 ... 400	B4	32 x 5	4109 0039
500	B5	32 x 5	4109 0050
630	B5	50 x 5	4109 0063
800 ... 1000	B6	50 x 6	4109 0080
1250	B6	60 x 8	4109 0120
1600	B7	90 x 10	4109 0160

(1) For a 3 pole device order quantity 3 bridging bars, for a 4 pole device order quantity 4.



acces\_205\_s\_2\_cat

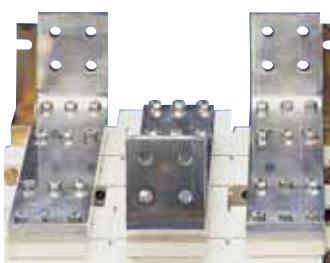

acces\_041\_a\_1\_cat

## Copper bar connection pieces

### Use

For ratings 2000 to 3200 A.


Enables:

- Flat connection: the connection pieces provide a link between the two power terminals of the same pole (Fig. 1).
- Edgewise connection: the connection pieces provide a link between the two power terminals of the same pole and an edgewise bar connection terminal.
- Top or bottom bridging between two poles (Fig. 3).

Once installed, the power terminal is connection ready.

For 3200 A rating, connection pieces (part A) are supplied as standard. Bolt sets must be ordered separately.


Fig. 1

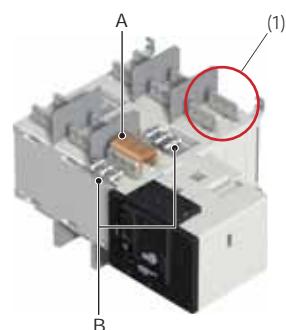

acces\_459\_a\_1\_x\_cat


(1) Single pole connection: 1 pole (top or bottom) comprises two power terminals which are to be linked with the copper connection kit.

Fig. 2

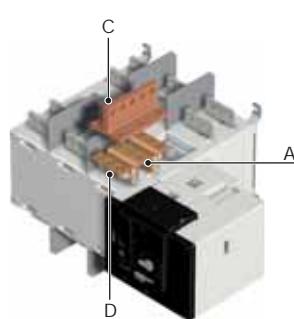

acces\_460\_a\_1\_x\_cat

Fig. 3

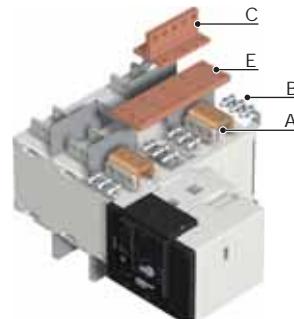

acces\_461\_a\_1\_x\_cat

Connection: the quantities given in the below table refer to the number of pieces required per pole, top or bottom.

Bridging connection: the quantities given refer to the number of pieces required to complete a single bridging connection between two poles.

Reference		2000 - 2500 A		3200 A		
		Fig. 1	Fig. 2	Fig. 3	Fig. 1	Fig. 2
		Connection		Bridging connection	Connection	
		Flat	Edgewise	I - II	Flat	Edgewise
Connection - part A	2619 1200	1	1	2 <sup>(2)</sup>	included	included
Bolt kit 35 mm - part B	2699 1201	1 <sup>(1)</sup>		2 <sup>(2)</sup>	1 <sup>(1)</sup>	
Bolt kit 45 mm - part B	2699 1200	1 <sup>(1)</sup>			1 <sup>(1)</sup>	
T + Bolt kit - part C	2629 1200		1	1		1
Bracket + bolt kit - part D	2639 1200		1			1
Bar + bolt kit - part E	4109 0320			1		1

(1) Choose the bolt length according to the thickness of the bars being connected; if bar thickness is greater than 20 mm, 45 mm bolts are required.

(2) For bridging connections, quantity 2 pieces are required for creating the link between the two power terminals of the same pole for switch bodies I and II.

The quantities of the applicable pieces then need to be multiplied by the number of connection points (power terminals) in order to determine the total quantity required of each part.

Example: For a 4 pole 2500 A SIRCOVER with upstream edgewise connection (Fig. 2) and downstream bridging (Fig. 3), the following quantities will be required:

Part	Upstream edgewise quantity	Downstream bridging quantity	Total quantity
A	8	8	16
B	0	8	8
C	8	4	12
D	8	0	8
E	0	4	4

# ATyS range

**ATyS r, ATyS g, ATyS p**

from 125 to 3200 A

## Accessories (continued)

### Autotransformer

#### Use

For applications without neutral, this autotransformer provides the 230 VAC required to power these ATyS products.

Specified protection for the autotransformer:

- Protection of the primary:  
fuse holder ref 57010020 + fuse ref 60130000
- Protection of the secondary:  
fuse holder ref 57010015 + fuse ref 60130001.

Rating (A)	Frame size	Reference
125 ... 3200	B3 ... B8	1599 4064

### DC power supply

#### Use

Allows an ATyS to be supplied from a 12 or 24 VDC source. To be positioned as close as possible to the DC power supply source.

Rating (A)	Frame size	Operating voltage	Reference
125 ... 1600	B3 ... B7	12 VDC / 230 VAC	1599 5012
125 ... 1600	B3 ... B7	24 VDC / 230 VAC	1599 5112
125 ... 1600	B3 ... B7	48 VDC / 230 VAC	1599 5212

### Voltage sensing and power supply kit


#### Use

For power supply and voltage measurement (4 wire, three-phase) for the ATyS g and p. Routing of the conductors is controlled, which means that no specific protective device is necessary for these connections.

The kit can be fitted on the top or bottom of the switch.

**Note: the 3-pole version does not integrate the power supply.**

125 to 630 A kit

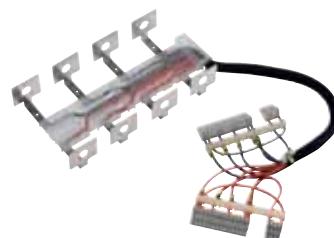

atys\_606\_a\_1\_cat

800 to 3200 A kit



atys\_603\_a\_2\_cat

#### For ATyS g and ATyS p - 3 pole

Rating (A)	Frame size	Reference
125 ... 200	B3	1559 3012
250	B4	1559 3025
315 ... 400	B4	1559 3040
500 ... 630	B5	1559 3063
800 ... 1000	B6	1559 3080
1250	B6	1559 3120
1600	B7	1559 3160
2000 ... 3200	B8	1559 3200

#### For ATyS g and ATyS p - 4 pole

Rating (A)	Frame size	Reference
125 ... 200	B3	1559 4012
250	B4	1559 4025
315 ... 400	B4	1559 4040
500 ... 630	B5	1559 4063
800 ... 1000	B6	1559 4080
1250	B6	1559 4120
1600	B7	1559 4160
2000 ... 3200	B8	1559 4200

## Voltage sensing tags

### Use



For use with ATyS r, g and p, the voltage sensing tags allow voltage to be tapped directly off of ATyS power terminals to provide a supply to, for example, a control circuit or source presence indicator lamps.

Voltage sensing tags are equipped with a Faston connector and can be mounted on the top or bottom side of the transfer switch.

With ATyS r, this accessory allows easy connection to an ATyS C25 controller via the ATyS C25 cable harness.

1 pack contains 8 voltage sensing tags.

Voltage sensing tags are integrated on ATyS  $\geq$  800A.

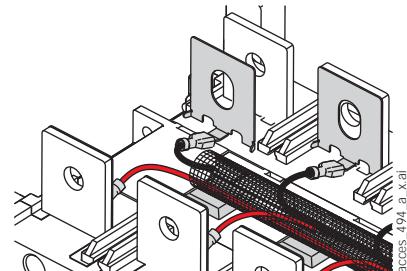

Rating (A)	Frame size	Reference
125 ... 200	B3	9599 4020
250 ... 400	B4	9599 4040
500 ... 630	B5	9599 4063

## ATyS C25 cable harness


### Use

The ATyS C25 cable harness is a fast and reliable solution for connecting an ATyS r transfer switch to a C25 controller in order to create an Automatic Transfer Switch. It is equipped with Faston voltage tap-offs and provides a safe connection between the controller and changeover switch for:

- monitoring availability of the incoming power sources,
- monitoring changeover switch status,
- providing an electrical interlock function,
- automatic control and transfer between power sources.

Provides a DPS auxiliary supply to the ATyS r. Cable harness length is approximately 2 metres. The cable harness is for use with 4 pole ATyS r only and requires neutral conductors to be on the right side of the transfer switch.

For ATyS r  $\leq$  630A it is necessary to order voltage sensing tags separately (required for voltage tap-off connections).

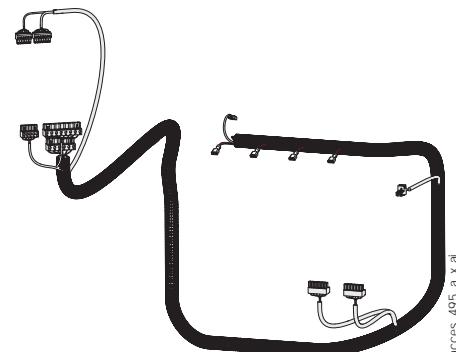

### For ATyS r connection to a C25 controller

Rating (A)	Frame size	Reference
125 ... 630	B3 ... B5	9529 4063
800 ... 3250	B6 ... B8	9529 4080

# ATyS range

**ATyS r, ATyS g, ATyS p**

from 125 to 3200 A

## Accessories (continued)

### Voltage relay

#### Use

The DS is a voltage relay for monitoring a single power supply.

If it detects a fault in the source, the fault relay contact closes.




atys\_762\_a\_1\_cat

### Door protective surround

#### Use

Door surround to provide a clean and safe finish to the panel's cut-out.

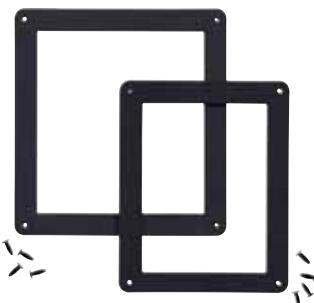

atys\_595\_a\_2\_cat

#### For ATyS

Rating (A)	Frame size	Reference
125 ... 630	B3 ... B5	1529 0012
800 ... 3200	B6 ... B8	1529 0080

#### For ATyS g and p

Rating (A)	Frame size	Reference
125 ... 630	B3 ... B5	1539 0012
800 ... 3200	B6 ... B8	1539 0080


### Auxiliary contact

#### Use

Pre-break and signalling of positions I and II: each reference provides 1 NO/NC auxiliary contact for positions I and II. Possibility to install up to 2 auxiliary contacts for each position. Suitable for use as a 1st or 2nd auxiliary contact.

Low level AC: contact us. ATyS are supplied with 1 NO aux contact for all three positions as standard which are located in the motor unit.

Rating (A)	Frame size	Nominal current (A)	Operating current $I_o$ (A)			
			250 VAC AC-13	400 VAC AC-13	24 VDC DC-13	48 VDC DC-13
125 ... 3200	B3 ... B8	16	12	8	14	6
Rating (A)		Type of mounting		Reference		
125 ... 630	B3 ... B5	Customer fit		1599 0502		
800 ... 1600	B6 ... B7	Customer fit		1599 0532		
2000 ... 3200	B8	-		2 AC per position fitted as standard		

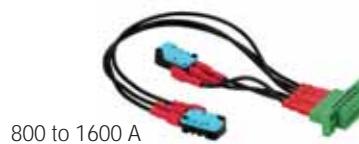

800 to 1600 A

acces\_396\_a

If additional auxiliary contacts are required please consult us.



125 to 630 A

acces\_397\_a

### 3 position padlocking (I - 0 - II)

#### Use

Enables the product to be padlocked in positions 0, I and II (factory fitted).

Rating (A)	Frame size	Reference
125 ... 630	B3 ... B5	9599 0003
800 ... 3200	B6 ... B8	9599 0004



atys\_867\_a

### Key handle interlocking system

#### Use

With the product in manual mode, it enables locking in position 0 using a RONIS EL11AP lock (factory fitted).

As standard, locking in position 0. With the 3 position padlocking accessory: key interlocking in I, 0 & II.

Locks (key N° random):

- RONIS EL11AP ref 4409 8511
- TRAYVOU XOP10 ref 4409 8601

Rating (A)	Frame size	Reference
125 ... 630	B3 ... B5	9599 1006
800 ... 3200	B6 ... B8	9599 1004




atys\_868\_a

## Current transformer

### Use - for ATyS p only

Used with ATyS p units, these current transformers enable information to be obtained on the load current.

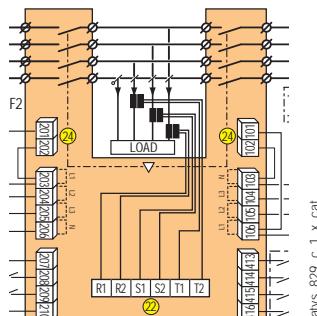

trafo\_077\_b\_1\_cat

## Plug-in optional modules

### Use - for ATyS g and ATyS p


#### Number of modules per device

ATyS g: Compatible with RS485 JBUS/MODBUS module only. One module maximum can be installed (can be fitted in any slot).

ATyS p: A maximum of four modules can be fitted. With Ethernet communication module installation, only 2 additional modules can be fitted.



atys\_016\_c\_1\_cat

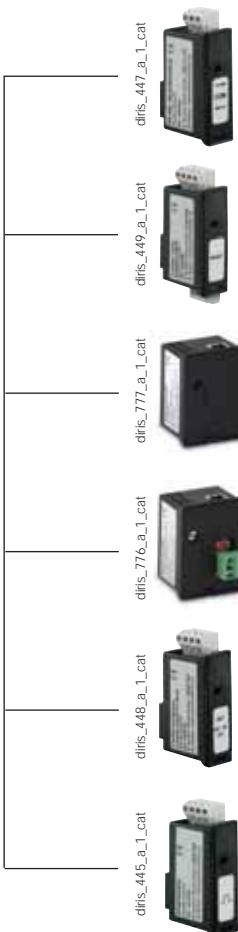

#### RS485 JBUS / MODBUS® communication

- RS485 link with JBUS / MODBUS® protocol (speed up to 38400 bauds).

#### 2 inputs - 2 outputs

- 2 inputs and 2 outputs (programmable) on each module.

#### Ethernet communication

- Ethernet link with MODBUS/TCP or JBUS/MODBUS RTU over TCP.
- Embedded Ethernet Webserver software.

#### Ethernet communication with RS485 JBUS/MODBUS gateway

- Ethernet link with MODBUS/TCP or JBUS/MODBUS RTU over TCP.
- Connect 1 to 247 RS485 JBUS/MODBUS slaves.
- Embedded Ethernet Webserver software.

#### Analogue outputs

- Allocate outputs to: 3I, In, 3V, 3U, F,  $\pm \Sigma P$ ,  $\pm \Sigma Q$ ,  $\Sigma S$ .

#### Pulse outputs

- 2 configurable pulse outputs (type, weight and duration) on  $\pm \text{kWh}$ ,  $\pm \text{kvarh}$  and  $\text{kVAh}$ .

#### Description of accessories

RS485 MODBUS communication

2 inputs - 2 outputs

Ethernet communication (embedded Ethernet Webserver software)

Ethernet communication + RS485 JBUS/MODBUS gateway (embedded Ethernet Webserver software)

Analogue outputs

Pulse outputs

#### Suitable for

ATyS g & p

ATyS p

ATyS p

ATyS p

ATyS p

ATyS p

4825 0092

1599 2001

4825 0203

4825 0204

4825 0093

4825 0090

# ATyS range

ATyS r, ATyS g, ATyS p

from 125 to 3200 A

## Accessories (continued)

### Remote interfaces

#### Use

To remotely display source availability and position indication typically used on the front of a panel when the product is enclosed.

Interfaces are powered from the ATyS transfer switch via the RJ45 connection cable.

Maximum cable length: 3 m.

#### D10 - for ATyS g

To display source availability and position indication on the front panel of an enclosure.

Protection degree: IP21

#### D20 - for ATyS p

In addition to the functions of the D10, the D20 displays measurements and enables control and configuration from the front of a panel.

Protection degree: IP21


#### Door mounting

2 holes Ø 22.5.

ATyS transfer switch via RJ45 cable, not isolated. Cable available as an accessory.



atys\_564\_d\_1.cat  
atys\_565\_d\_1.cat

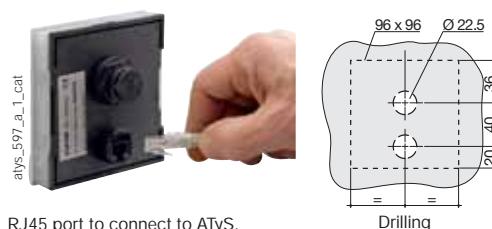

atys\_597\_a\_1.cat  
atys\_161\_a\_1.cat

RJ45 port to connect to ATyS.



acces\_209\_a\_2.cat

### Connecting cable for remote interfaces

#### Use

To connect between a remote interface (type D10 or D20) and a control product (ATyS g or p).

#### Characteristics

RJ45 8 straight-through, non insulated cables, length 3 m.

### Sealable cover

#### Use - for ATyS g

Prevents access to the configuration of ATyS g devices (seals supplied).

Rating (A)	Frame size	Reference
125 ... 3200	B3 ... B8	9599 0000



atys\_870\_a

### Auto/Manual key selector

#### Use

Replaces the standard Auto/Manual selector knob with a key selector.

Rating (A)	Frame size	Reference
125 ... 3200	B3 ... B8	9599 1007



atys\_869\_a


### Double power supply - DPS

#### Use

Allows an ATyS r to be supplied by two 230 VAC, 50/60 Hz networks.

	ATyS DPS	Modular DPS
Voltage (VAC)		
Min	166	200
Max	332	288
Current (A)		
Max Output	15	3.15
Connection (mm <sup>2</sup> )		
Max	2.5	6

Description	Suitable for ATyS r	Reference
Modular DPS	125 ... 1600 A	1599 4001
ATyS DPS	125 ... 3200 A	9539 2001

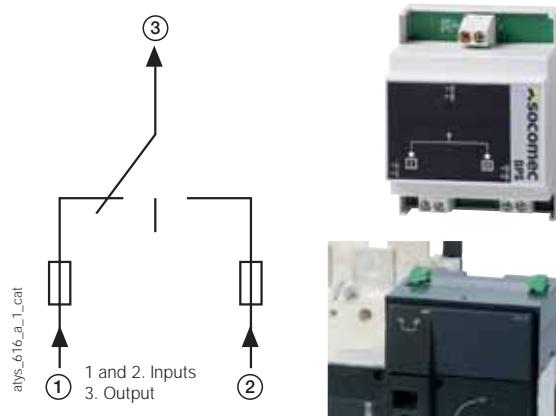

atys\_616\_a\_1.cat  
atys\_612\_a\_2.cat




atys-d\_001.psd  
atys-d\_001.cat

## Spares

### ATyS p front panel

This front panel is used, for the ATyS p only, if source 2 is connected to unit I and source 1 is connected to unit II. Positions I and II are reversed on the front panel.

Product model	Reference
ATyS p	9599 1008

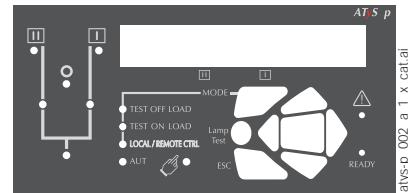

atys-p\_002\_a1x\_cat.ai

### Electronic module - controller

The electrical components of the ATyS g and p are easy to replace in case there is a problem, even when on-load.

Product model	Reference
ATyS g	9559 2001
ATyS p	9579 2001



atys-p\_001\_b

### Motorisation module

The motor units of the ATyS r, g and p are easy to replace in case there is a problem, even when on-load.

Rating (A)	Reference
125 ... 200	9509 5020
250 ... 400	9509 5040
500 ... 630	9509 5063
800 ... 1250	9509 5120
1600	9509 5160
2000 ... 3200	9509 5320



atys\_871\_a

### Switching module

If you need to replace just the switching part on an ATyS r, g or p, order SIRCOVER items.

Please refer to "SIRCOVER" pages.



sir\_151\_a

# ATyS range

ATyS r, ATyS g, ATyS p

from 125 to 3200 A

Characteristics according to IEC 60947-3 and IEC 60947-6-1

125 to 630 A

Thermal current $I_{th}$ to 40°C	125 A	160 A	200 A	250 A	315 A	400 A	500 A	630 A
Frame size	B3	B3	B3	B4	B4	B4	B5	B5
Rated insulation voltage $U_i$ (V) (power circuit)	800	800	800	1000	1000	1000	1000	1000
Rated impulse withstand voltage $U_{imp}$ (kV) (power circuit)	8	8	8	12	12	12	12	12
Rated insulation voltage $U_i$ (V) (control circuit)	300	300	300	300	300	300	300	300
Rated impulse withstand voltage $U_{imp}$ (kV) (control circuit)	4	4	4	4	4	4	4	4
Rated operational currents $I_e$ (A) according to IEC 60947-6-1								
Rated voltage	Utilisation category							
415 VAC	AC-31 B	125	160	200	250	315	400	500
415 VAC	AC-32 B			200	315	400	500	500
415 VAC	AC-33 B			200	200	200	400	400
Rated operational currents $I_e$ (A) according to IEC 60947-3								
Rated voltage	Utilisation category	A/B <sup>(1)</sup>						
415 VAC	AC-21 A / AC-21 B	125/125	160/160	200/200	250/250	315/315	400/400	500/500
415 VAC	AC-22 A / AC-22 B	125/125	160/160	200/200	250/250	315/315	400/400	500/500
415 VAC	AC-23 A / AC-23 B	125/125	160/160	200/200	200/200	315/315	400/400	500/500
500 VAC	AC-21 A / AC-21 B	125/125	160/160	200/200	250/250	315/315	400/400	500/500
500 VAC	AC-22 A / AC-22 B	125/125	160/160	200/200	200/250	200/315	200/400	500/500
500 VAC	AC-23 A / AC-23 B	80/80	80/80	80/80	200/200	200/200	200/200	400/400
690 VAC <sup>(3)</sup>	AC-21 A / AC-21 B	125/125	160/160	200/200	200/200	200/200	200/200	500/500
690 VAC <sup>(3)</sup>	AC-22 A / AC-22 B	125/125	125/125	125/125	160/160	160/160	400/400	400/400
690 VAC <sup>(3)</sup>	AC-23 A / AC-23 B	63/80	63/80	63/80	125/125	125/125	400/400	400/400
220 VDC	DC-21 A / DC-21 B	125/125	160/160	200/200	250/250	250/250	250/250	500/500
220 VDC	DC-22 A / DC-22 B	125/125	160/160	200/200	250/250	250/250	250/250	500/500
220 VDC	DC-23 A / DC-23 B	125/125	125/125	200/200	200/200	200/200	500/500	630/630
440 VDC <sup>(2)</sup>	DC-21 A / DC-21 B	125/125	125/125	125/125	200/200	200/200	200/200	500/500
440 VDC <sup>(2)</sup>	DC-22 A / DC-22 B	125/125	125/125	125/125	200/200	200/200	200/200	500/500
440 VDC <sup>(2)</sup>	DC-23 A / DC-23 B	125/125	125/125	200/200	200/200	200/200	500/500	630/630
Current rated as conditional short-circuit with fuse gG DIN, according to IEC 60947-3								
Prospective fuse protected short-circuit withstand at 415 VAC <sup>(6)</sup>	100	100	50	50	50	50	50	50
Prospective fuse protected short-circuit withstand at 690 VAC (kA rms)			50	50	50	50	50	50
Associated fuse rating (A)	125	160	200	250	315	400	500	630
Short-circuit withstand without protection as per IEC 60947-3								
Rated short-time withstand current 0.3s $I_{cw}$ at 415 VAC (kA rms)	12	12	12	15 <sup>(4)</sup>	15 <sup>(4)</sup>	15 <sup>(4)</sup>	17 <sup>(4)</sup>	17 <sup>(4)</sup>
Rated short-time withstand current 1s $I_{cw}$ at 415 VAC (kA rms)	7	7	7	8 <sup>(4)</sup>	8 <sup>(4)</sup>	8 <sup>(4)</sup>	11 <sup>(4)</sup>	10 <sup>(4)</sup>
Rated peak withstand current at 415 VAC (kA peak)	20	20	20	30	30	30	45	45
Connection								
Minimum Cu cable cross-section as per IEC 60947-1 (mm <sup>2</sup> )	35	35	50	95	120	185	2 x 95	2 x 120
Recommended Cu busbar cross-section (mm <sup>2</sup> )							2 x 32 x 5	2 x 40 x 5
Maximum Cu cable cross-section (mm <sup>2</sup> )	50	95	120	150	240	240	2 x 185	2 x 300
Maximum Cu busbar width (mm)	25	25	25	32	32	32	50	50
Min./max. tightening torque (Nm)	9/13	9/13	9/13	20/26	20/26	20/26	40/45	40/45
Power dissipation (W/pole)	1.9	3.2	4.1	5.9	7.8	15.1	17	32.4
Switching time (rated voltage, after receiving command)								
Transfer time I-II or II-I (s)	0.85	0.85	0.85	0.9	0.9	0.9	0.95	0.95
I-0 or II-0 (s)	0.55	0.55	0.55	0.5	0.5	0.5	0.55	0.55
Contact transfer time ("black-out" I-II) minimum (s)	0.3	0.3	0.3	0.4	0.4	0.4	0.4	0.4
Power supply								
Min./max. auxiliary power supply (VAC)	166/332	166/332	166/332	166/332	166/332	166/332	166/332	166/332
Control supply power demand								
Inrush / nominal power (VA) - ATyS r	184/92	184/92	184/92	276/115	276/115	276/115	276/150	276/150
Inrush / nominal power (VA) - ATyS g , p	206/114	206/114	206/114	298/137	298/137	298/137	298/172	298/172
Mechanical specifications								
Durability (number of operating cycles)	10,000	10,000	10,000	8,000	8,000	8,000	5,000	5,000
Weight ATyS r 3 P / 4 P (kg)	5.7/ 6.9	5.7/ 6.9	5.7/ 6.9	6.6/ 7.4	6.7/ 7.8	6.7/ 7.8	11.4/ 13.3	11.9/ 14.0
Weight ATyS g , p 3 P / 4 P (kg)	6.8/ 8.0	6.8/ 8.0	6.8/ 8.0	7.7/ 8.5	7.8/ 8.9	7.8/ 8.9	12.5/ 14.4	13.0/ 15.1

(1) Category with index A = frequent operation - Category with index B = infrequent operation. (3) Interphase barriers must be installed on the products.

(2) 3-pole device with 2 pole in series for the "+" an 1 pole for the "-".

4-pole device with 2 poles in series by polarity.

(4) Values given at 690 VAC.

## 800 to 3200 A

Thermal current $I_{th}$ at 40°C	800 A	1000 A	1250 A	1600 A	2000 A	2500 A	3200 A
Frame size	B6	B6	B6	B7	B8	B8	B8
Rated insulation voltage $U_i$ (V) (power circuit)	1000	1000	1000	1000	1000	1000	1000
Rated impulse withstand voltage $U_{imp}$ (kV) (power circuit)	12	12	12	12	12	12	12
Rated insulation voltage $U_i$ (V) (control circuit)	300	300	300	300	300	300	300
Rated impulse withstand voltage $U_{imp}$ (kV) (control circuit)	4	4	4	4	4	4	4
Rated operational currents $I_e$ (A) according to IEC 60947-6-1							
Rated voltage	Utilisation category						
415 VAC	AC-31 B	800	1000	1250	1600	2000	2500
415 VAC	AC-32 B	800	1000	1250	1250	2000	2000
415 VAC	AC-33 B	800	1000	1000	1000	1250	1250
Rated operational currents $I_e$ (A) according to IEC 60947-3							
Rated voltage	Utilisation category	A/B <sup>(1)</sup>					
415 VAC	AC-21 A / AC-21 B	800/800	1000/1000	1250/1250	1600/1600	-/2000	-/2500
415 VAC	AC-22 A / AC-22 B	800/800	1000/1000	1250/1250	1600/1600	-/2000	-/2500
415 VAC	AC-23 A / AC-23 B	800/800	1000/1000	1250/1250	1250/1250	-/1600	-/1600
500 VAC	AC-21 A / AC-21 B	800/800	1000/1000	1250/1250	1600/1600	-/2000	-/2000
500 VAC	AC-22 A / AC-22 B	630/630	800/800	1000/1000	1600/1600		
500 VAC	AC-23 A / AC-23 B	630/630	630/630	800/800	1000/1000		
690 VAC <sup>(3)</sup>	AC-21 A / AC-21 B	800/800	1000/1000	1250/1250	1600/1600	-/2000	-/2000
690 VAC <sup>(3)</sup>	AC-22 A / AC-22 B	630/630	800/800	1000/1000	1000/1000		
690 VAC <sup>(3)</sup>	AC-23 A / AC-23 B	630/630	630/630	800/800	800/800		
220 VDC	DC-21 A / DC-21 B	800/800	1000/1000	1250/1250	1250/1250		
220 VDC	DC-22 A / DC-22 B	800/800	1000/1000	1250/1250	1250/1250		
220 VDC	DC-23 A / DC-23 B	800/800	1000/1000	1250/1250	1250/1250		
440 VDC <sup>(2)</sup>	DC-21 A / DC-21 B	800/800	1000/1000	1250/1250	1250/1250		
440 VDC <sup>(2)</sup>	DC-22 A / DC-22 B	800/800	1000/1000	1250/1250	1250/1250		
440 VDC <sup>(2)</sup>	DC-23 A / DC-23 B	800/800	1000/1000	1250/1250	1250/1250		
Current rated as conditional short-circuit with fuse gg DIN, according to IEC 60947-3							
Prospective fuse protected short-circuit withstand at 415 VAC(kA rms)	50	50	100	100			
Prospective fuse protected short-circuit withstand at 690 VAC(kA rms)	50	50	50				
Associated fuse rating (A)	800	1000	1250	2x800			
Short-circuit withstand without protection as per IEC 60947-3							
Rated short-time withstand current 0.3s $I_{cw}$ at 415 VAC (kA rms)	64	64	64	78	78	78	78
Rated short-time withstand current 1s $I_{cw}$ at 415 VAC (kA rms)	35	35	35	50	50	50	50
Rated peak withstand current at 415 VAC (kA peak)	55	55	80	110	120	120	120
Connection							
Minimum Cu cable cross-section as per IEC 60947-1 (mm <sup>2</sup> )	2 x 185						
Recommended Cu busbar cross-section (mm <sup>2</sup> )	2 x 50 x 5	2 x 63 x 5	2 x 60 x 7	2 x 100 x 5	3 x 100 x 5	2 x 100 x 10	3 x 100 x 10
Maximum Cu cable cross-section (mm <sup>2</sup> )	4 x 185	4 x 185	4 x 185	6 x 185			
Maximum Cu busbar width (mm)	63	63	63	100	100	100	100
Min./max. tightening torque (Nm)	9/13	9/13	20/26	40/45	40/45	40/45	40/45
Power dissipation (W/pole)	41.7	46.9	93.3	122	178	255	330
Switching time (rated voltage, after receiving command)							
Transfer time I-II or II-I (s)	2.8	2.8	2.8	2.9	2.8	2.8	2.8
I-0 or II-0 (s)	1.4	1.4	1.4	1.4	1.8	1.8	1.8
Contact transfer time ("black-out" I-II) minimum (s)	1.4	1.4	1.4	1.5	1	1	1
Power supply							
Min./max. auxiliary power supply (VAC)	166/332	166/332	166/332	166/332	166/332	166/332	166/332
Control supply power demand							
Inrush / nominal power (VA) - ATyS r,	460/184	460/184	460/184	460/230	812/322	812/322	812/322
Inrush / nominal power (VA) - ATyS g , p	482/206	482/206	482/206	482/252	834/344	834/344	834/344
Mechanical specifications							
Durability (number of operating cycles)	4,000	4,000	4,000	3,000	3,000	3,000	3,000
Weight ATyS r 3 P / 4 P (kg)	27.9/ 32.2	28.4/ 32.9	28.9/ 33.6	33.1/ 39.4	50.7/ 61.6	50.7/ 61.6	61.0/ 75.3
Weight ATyS g, p 3 P / 4 P (kg)	29.0/ 33.3	29.5/ 34.0	30.0/ 34.7	34.2/ 40.5	51.8/ 62.7	51.8/ 62.7	62.1/ 76.4

(1) Category with index A = frequent operation - Category with index B = infrequent operation. (3) Interphase barriers must be installed on the products.

(2) 3-pole device with 2 pole in series for the "+" an 1 pole for the "-". (4) Values given at 690 VAC.

4-pole device with 2 poles in series by polarity.


# ATyS range

ATyS r, ATyS g, ATyS p

from 125 to 3200 A

## Connections and terminals


### ATyS r

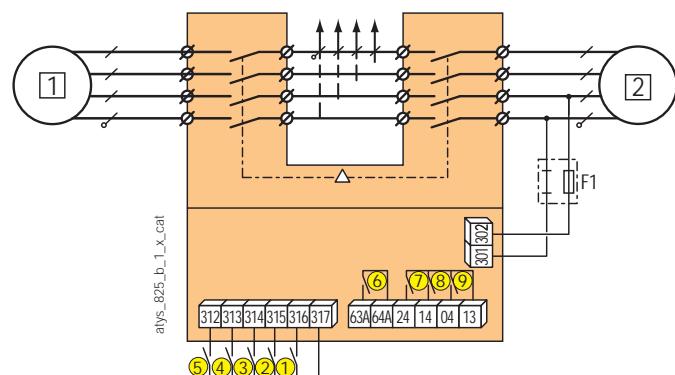

- [1] primary source (network or genset)
- [2] backup source (mains network or genset)

- 1: position 0 control (contact or logic if closed)
- 2: position I control
- 3: position II control
- 4: primary control position 0
- 5: closing this contact allows position control commands
- 6: product availability relay
- 7: auxiliary contact - closed when the switch is in position II
- 8: auxiliary contact - closed when the switch is in position I
- 9: auxiliary contact - closed when the switch is in position 0


### ATyS r with ATyS DPS

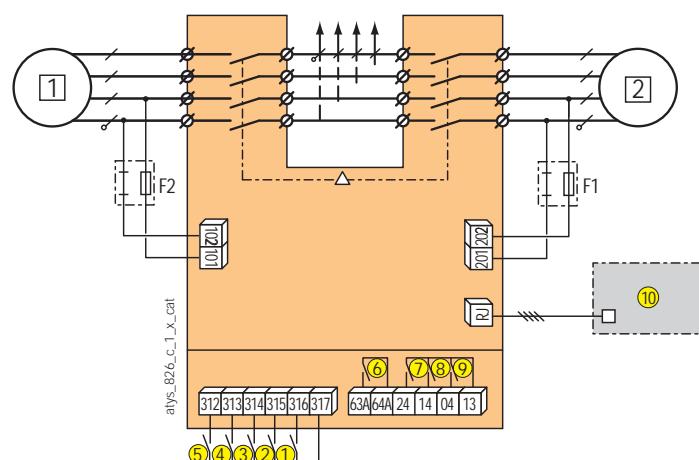

- [1] primary source (mains network or genset)
- [2] backup source (mains network or genset)

- 1: position 0 control (contact or logic if closed)
- 2: position I control
- 3: position II control
- 4: primary control position 0
- 5: closing this contact allows position control commands
- 6: product availability relay
- 7: auxiliary contact - closed when the switch is in position II
- 8: auxiliary contact - closed when the switch is in position I
- 9: auxiliary contact - closed when the switch is in position 0
- 10: D10 remote interface


### ATyS g

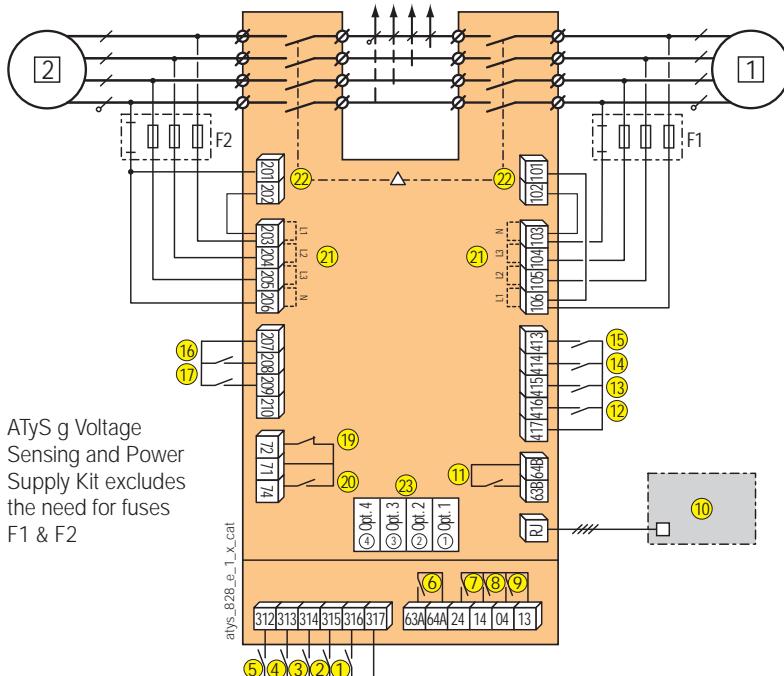

- [1] primary source (mains network)
  - [2] backup source (genset or network)
  - 1: position 0 control (contact or logic if closed)
  - 2: position I control
  - 3: position II control
  - 4: primary control position 0
  - 5: closing this contact allows position control commands
  - 6: Motor unit availability relay
  - 7: auxiliary contact - closed when the switch is in position II
  - 8: auxiliary contact - closed when the switch is in position I
  - 9: auxiliary contact - closed when the switch is in position 0
  - 10: D10 remote interface
  - 11: Electrical unit availability relay
  - 12: automatic operation inhibited
  - 13: confirm manual retransfer
  - 14: bypass for time delay 2AT
  - 15: M/G: priority test on load.  
M/M: with or without priority.
  - 16: remote test without load
  - 17: M/G: test on load
  - 18: M/M: preferred source selection
  - 19-20: genset start and stop commands
- |                 |                |                |
|-----------------|----------------|----------------|
| Order           | 71/72 (19)     | 71/74 (20)     |
| Genset start-up | Closed contact | Open contact   |
| Genset stop     | Open contact   | Closed contact |

- 21: voltage inputs
- 22: power inputs
- 23: 4 slots for optional RS485 communication module

### ATyS p

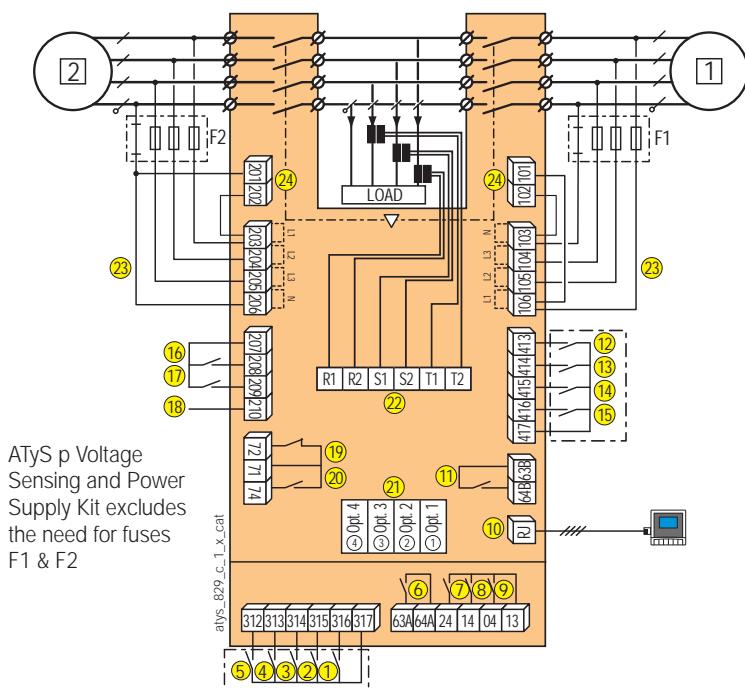

- [1] primary source (network or genset)
  - [2] backup source (network or genset)
  - 1: position 0 control (contact or logic if closed)
  - 2: position I control
  - 3: control position II
  - 4: primary control position 0
  - 5: closing this contact allows position control commands
  - 6: Motor unit availability relay
  - 7: auxiliary contact - closed when the switch is in position II
  - 8: auxiliary contact - closed when the switch is in position I
  - 9: auxiliary contact - closed when the switch is in position 0
  - 10: D20 remote interface
  - 11: Electrical unit availability relay
  - 12-17: programmable inputs
  - 18: auxiliary power supply for optional modules
  - 19-20: genset start and stop commands
- |                 |                |                |
|-----------------|----------------|----------------|
| Order           | 71/72 (19)     | 71/74 (20)     |
| Genset start-up | Closed contact | Open contact   |
| Genset stop     | Open contact   | Closed contact |

- 21 : 4 slots for optional modules
- 22: TI measurement connection
- 23 : voltage inputs
- 24 : power inputs


# ATyS range

ATyS r, ATyS g, ATyS p

from 125 to 3200 A


## Dimensions

125 to 630 A / B3 to B5

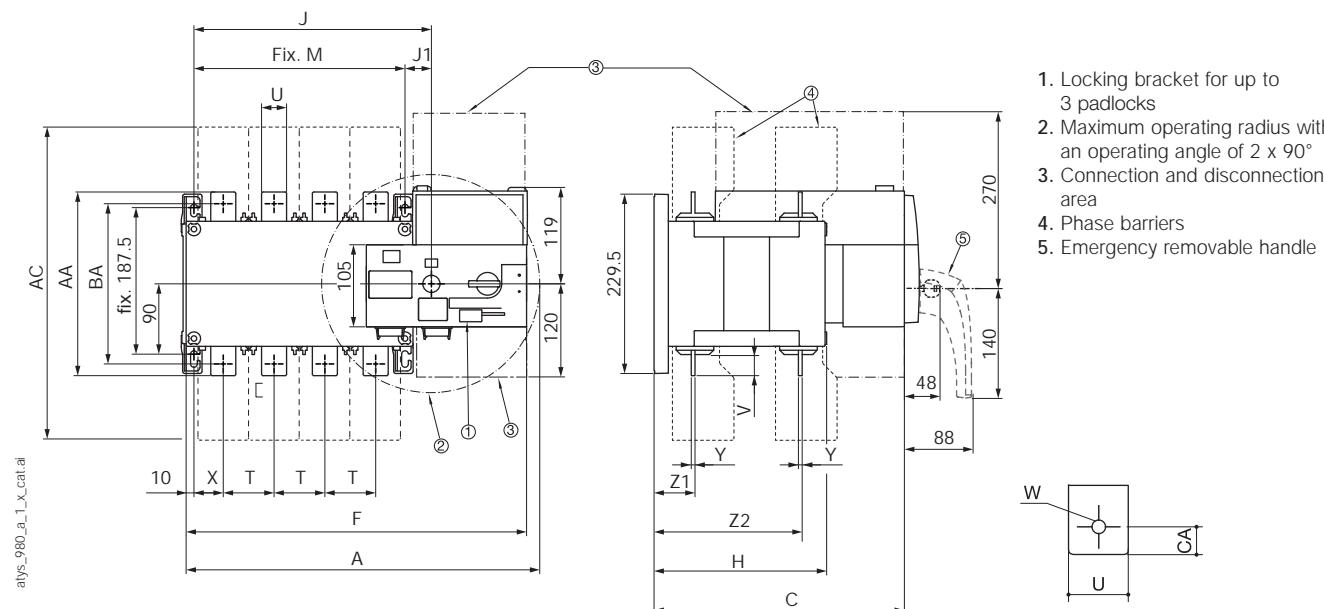

Rating (A) / Frame size	Overall dimensions			Terminal shrouds		Switch body				Switch mounting		Connection												
	A 3p.	A 4p.	C	AC	F 3p.	F 4p.	H	J 3p.	J 4p.	J1	M 3p.	M 4p.	T	U	V	W	X 3p.	X 4p.	Y	Z1	Z2	AA	BA	CA
125 / B3	304	334	244	233	286.5	317	151	154	184	34	120	250	36	20	25	9	28	22	3.5	38	134	135	115	10
160 / B3	304	334	244	233	286.5	317	151	154	184	34	120	250	36	20	25	9	28	22	3.5	38	134	135	115	10
200 / B3	304	334	244	233	286.5	317	151	154	184	34	120	250	36	20	25	9	28	22	3.5	38	134	135	115	10
250 / B4	345	395	244	288	328	378	152	195	245	35	160	210	50	25	30	11	33	33	3.5	39.5	133.5	160	130	15
315 / B4	345	395	244	288	328	378	152	195	245	35	160	210	50	35	35	11	33	33	3.5	39.5	133.5	160	130	15
400 / B4	345	395	244	288	328	378	152	195	245	35	160	210	50	35	35	11	33	33	3.5	39.5	133.5	170	140	15
500 / B5	394	454	321	402	377	437	221	244	304	34	210	270	65	32	50	14	42.5	37.5	5	53	190	260	220	20
630 / B5	394	454	321	402	377	437	221	244	304	34	210	270	65	45	50	13	42.5	37.5	5	53	190	260	220	20


800 to 1600 A / B6 to B7

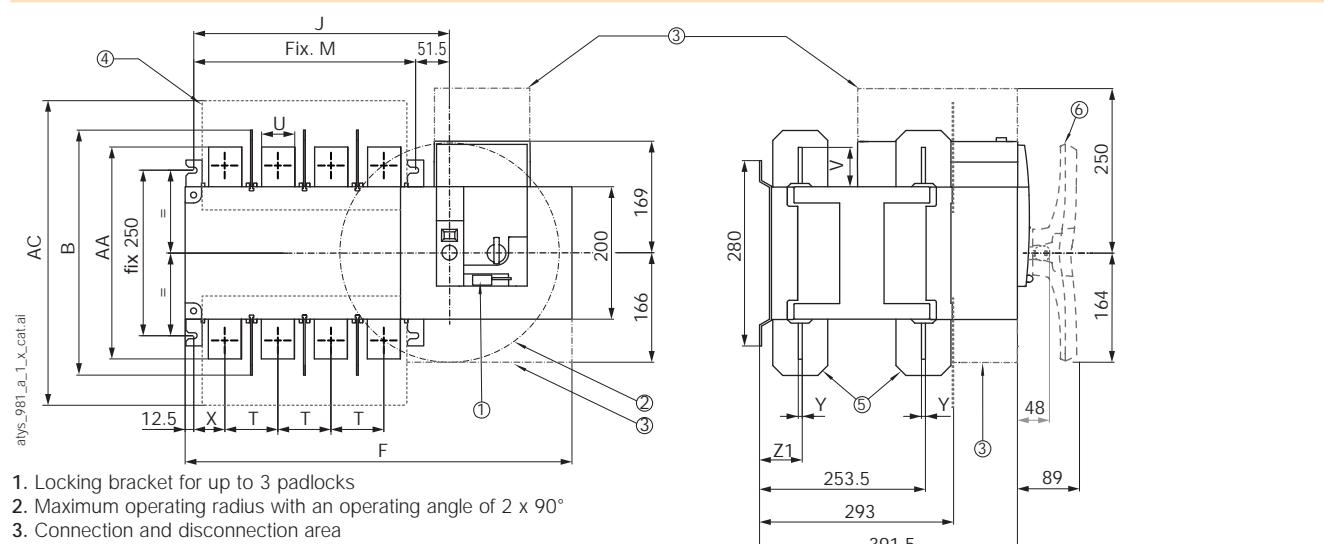

1. Locking bracket for up to 3 padlocks
2. Maximum operating radius with an operating angle of 2 x 90°
3. Connection and disconnection area
4. Terminal screens
5. Phase barriers
6. Emergency removable handle

Rating (A) / Frame size	Overall dimensions		Terminal shrouds		Switch body				Switch mounting		Connection									
	B	AC	F 3p.	F 4p.	J 3p.	J 4p.	M 3p.	M 4p.	T	U	V	X	Y	Z1	AA					
800 / B6	370	461	504	584	307	387	255	335	80	50	60.5	47.5	7	66.5	321					
1000 / B6	370	461	504	584	307	387	255	335	80	50	60.5	47.5	7	66.5	321					
1250 / B6	370	461	504	584	307	387	255	335	80	60	65	47.5	7	66.5	330					
1600/B7	380	531	596	716	399	519	347	467	120	90	44	53	8	67.5	288					

### 2000 to 3200 A / B8

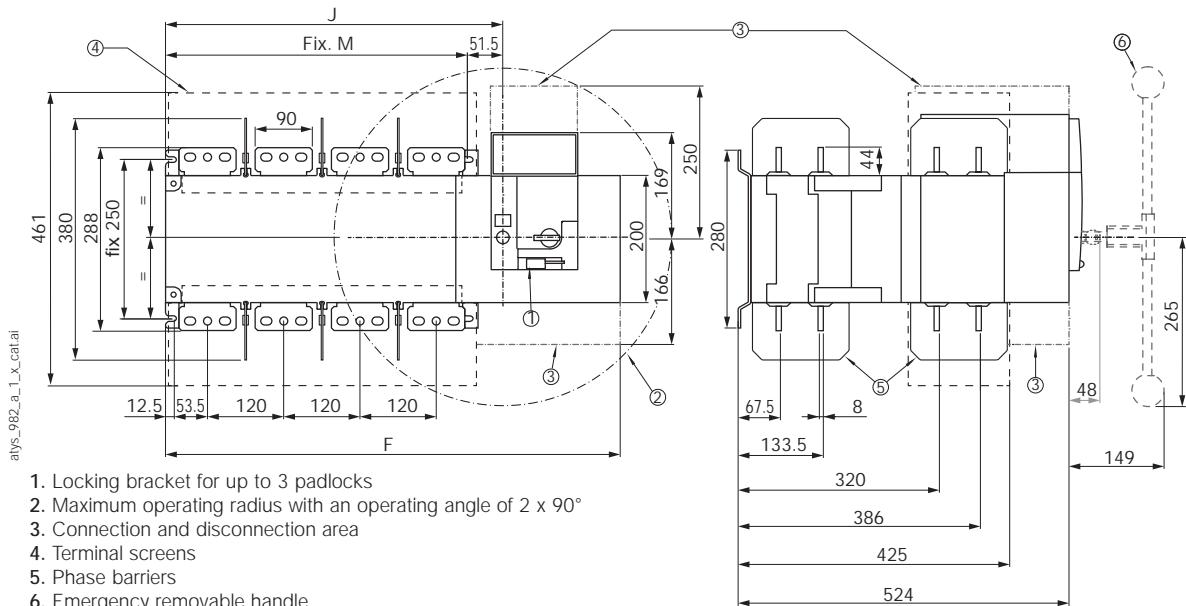


Rating (A)	Switch body				Switch mounting	
	F 3p.	F 4p.	J 3p.	J 4p.	M 3p.	M 4p.
2000 ... 3200	596	716	398.5	518.5	347	467


### Door cutout

#### 125 to 630 A / B3 to B5

ATyS r

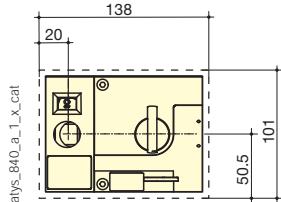


ATyS g, p

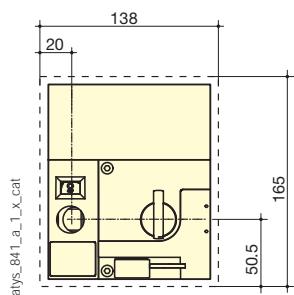


#### 800 to 1600 A / B6 to B7

ATyS r

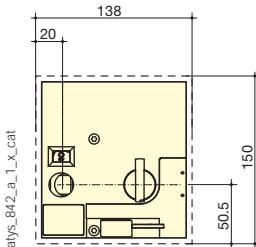


ATyS g, p

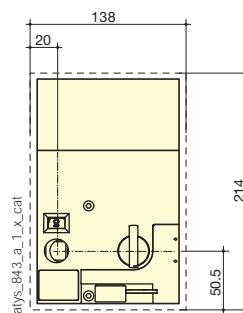


### Connection terminals


#### 800 to 1000 A / B6

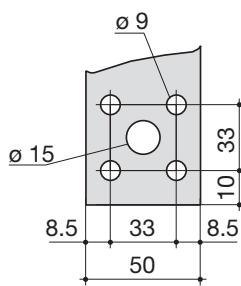

#### 1250 A / B6

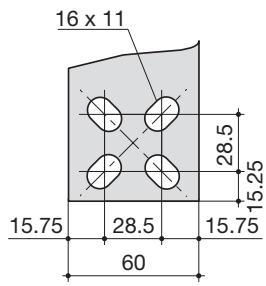

#### 1600 to 3200 A / B7 to B8

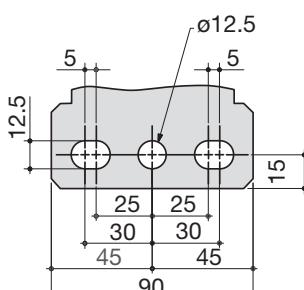

# ATyS d H

Remotely operated Transfer Switching Equipment  
from 4000 to 6300 A



## Function

The ATyS d H is a three-phase transfer switch, 3 and 4 poles, designed for low voltage high power applications that require high-performance and fast reliable switching. The open transition transfer is performed on-load in line with IEC 60947-6-1 standards (Class PC) with minimal power supply interruption to the load during transfer.

The ATyS d H is remote transfer switching equipment (RTSE) with an integrated dual power supply (DPS) that accepts remote orders through volt-free contacts.

## Advantages

### Ready for installation in the enclosure of your choice

The ATyS d H has been designed to facilitate installation. It is composed of two switches that are mounted one above the other with easily accessible power connections located at the rear. Furthermore the ATyS d H does not need any external bridging bars as the load side is connected within the product. This enables to save time during installation.

### High-performance switching

The ATyS d H offers high withstand short circuit current ratings of 143 kA  $I_{cm}$  (making) and 65 kA for 0.1sec  $I_{cw}$  (withstand). Further to its high short circuit withstand, the ATyS d H performance in terms of load switching capacity is AC-33IB ( $6 \times I_n \cos \theta 0.5$ ) without derating.

## References

Rating (A)	Number of poles	ATyS d H Reference	Control relay Reference
4000 A	3P	9533 3400	ATyS C55 1600 0055
	4P	9533 4400	
5000 A	3P	9533 3500	ATyS C65 1600 0065
	4P	9533 4500	
6300 A	3P	9533 3630	ATyS C65 1600 0065
	4P	9533 4630	

### The solution for

- > Data centre
- > Telecommunications
- > Industries



### Strong points

- > Ready for installation in the enclosure of your choice
- > High-performance switching
- > Safe on-load transfer: I-0-II



### Conformity to standards

- > IEC 60947-6-1

### Enclosed solution

- > Please contact your SOCOMEC office

### External automatic controller


- > The ATyS d H is an RTSE which is compatible with most building management systems. It may also be supplied as an ATSE by including an ATyS C55 / C65 controller with a door mounted external display.

### Characteristics according to IEC 60947-6-1

Thermal current $I_{th}$ at 40°C	4000 A	5000 A	6300 A
Rated operating voltage $U_e$ (V)	660		
Rated insulation voltage $U_i$ (V)	660		
Rated impulse withstand voltage $U_{imp}$ (kV)	12		
Rated short-circuit withstand at 660 VAC			
Rated short-time withstand current 0.1s $I_{cw}$ (kA rms)	65		
Rated peak withstand current (kA peak)	143		
Rated operational current $I_e$ (A), at 660 VAC - AC32B	4000	5000	6300
Rated operational current $I_e$ (A), at 660 VAC - AC33IB (6xIn cos Ø 0.5)	4000	5000	6300
Connection			
Rear connection with busbar	•	•	•
Power dissipation (W/pole)	128	200	317
Switching time			
I to 0 (ms)	≤ 150		
0 to I and 0 to II (ms)	≤ 90		
II to 0 (ms)	≤ 200		
I-0-II / II-0-I (s)	1.2		
Operating frequency	10 operations per hour		
Power supply			
VAC power supply (powered directly on terminals S1 and S2)	230		
Main coil operating current (peak during transfers)	65 A <sup>(1)</sup>		
Mechanical characteristics			
Durability (number of operating cycles)	3000		
Weight (kg) - Fixed 3/4P model	200 / 250	200 / 250	200 / 250

(1) Instantaneous value. For a complete operation, power should be available during 0.5 s.

### Dimensions

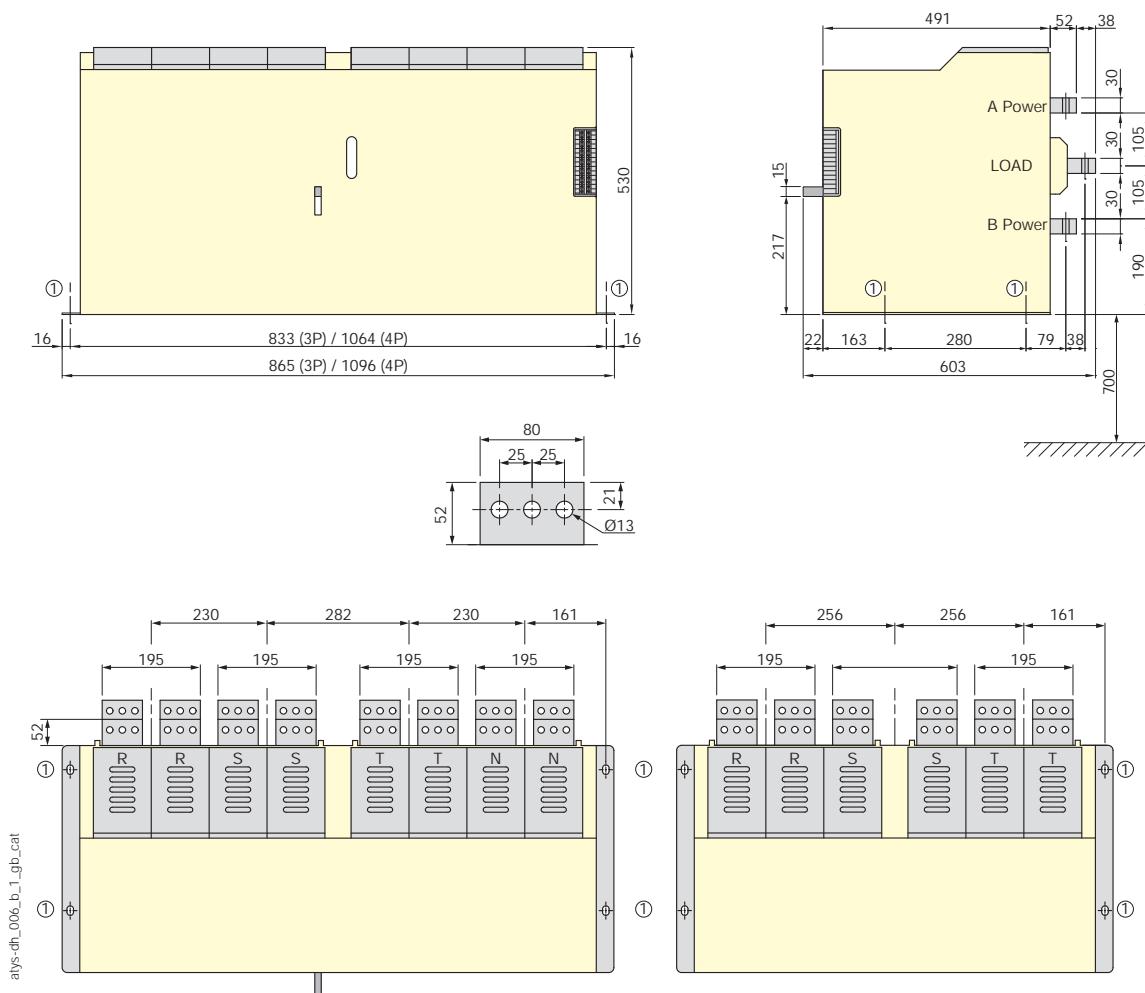

# ATyS C25

## ATS Controller simple functions



ATyS C25

### Function

ATyS C25 is an entry level ATSE controller with communications. It can be used to pilot a remotely operated transfer switch, such as ATyS r, ATyS S and ATyS d M, as well as contactors type transfer switches, for circuit breaker type transfer switches see ATyS C55 and ATyS C65. ATyS C25 ensure the automatic or remotely controlled transfer from one source to another with fixed timers and thresholds.

### Advantages

#### Flexible space saving

The ATyS C25 controller can be mounted on either a DIN rail or to the panel door, offering flexibility and optimising space.

#### Cost-effective

The ATyS C25 has an integrated DPS, for supplying the motorisation of the switch, and can be door mounted, therefore there's no need for an external DPS or display, reducing installation time and costs.

### General characteristics

- Self-powered from sensing.
- Voltage supply range (184 - 300 VAC).
- DC aux power supply (for optional use).
- Main/Main or Main/Genset networks.
- Fixed I/Os.
- RS485 Modbus communication.
- Voltage sensing on all phases.
- Three-phase + Neutral & Single-phase + Neutral networks.
- Phase rotation checking.
- Door or DIN rail mounting.

### The solution for

- > ATS panels
- > Compact transfer enclosures
- > Basic ATS controls



### Strong points

- > Self-supplied from sensing circuit
- > Integrated AC Double Power Supply
- > RS485 Communications
- > Multiple mounting options

### Conformity to standards

- > IEC 61010-2-201
- > IEC 60947-6-1
- > GB/T 14048.11 Annex C



### Compatible with



### References

Description	Reference
ATyS C25 – ATS controller	1600 0025
ATyS r - Remotely operated Transfer Switching Equipment	9523 xxxx <sup>(1)</sup>


(1) xxxx variable based on the number of poles and rating.

## Front panel



- 1. Controller status indication.
  - 2. Configuration dip-switches.
  - 3. Lamp test / Test on Load (3s).
  - 4. Position orders (in Manual).
  - 5. Auto/Manu mode selector.
  - 6. Mimic panel.

## Dimensions (mm)

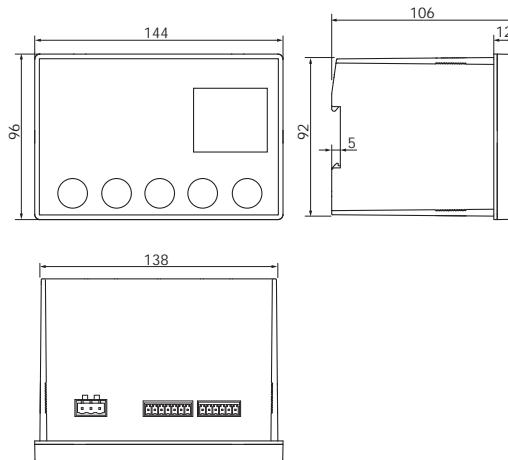

atysc\_001\_b\_1\_x\_cat.ai

## Characteristics


Electrical characteristics	
AC operating limits	184 <sup>(1)</sup> - 300 VAC
Optional DC supply	10-30 VDC
Frequency limits	45 - 65 Hz
Power consumption	< 10 W
Inputs	5 - fixed (auto inhibit & DC fire input, position indication I-0-II)
Outputs	4 - fixed (position control I-0-II & genset start)
Impulse withstand	6/4 kV <sup>(2)</sup>
Overvoltage category	CAT 3
Mechanical characteristics	
Weight	845 gr
Door cutout	138 x 92 mm
Operating temperature	-25 ... +70°C
Communications	
Interface type	RS485, 2 to 3 half duplex wires
Protocol	MODBUS RTU
Baudrate	2400-38400

Measurement characteristics	
Nominal voltage	DIP 1 (1PH+N / 3P+N)
Nominal frequency (fixed)	50 Hz
Voltage threshold settings	DIP 4
Frequency threshold settings	DIP 4
Voltage and frequency Hysteresis (fixed)	20% of $\Delta U/\Delta F$
Other settings	
ODT dead-band timer	DIP 5
FT Source 1 and 2 fail timer	DIP 6
RT Source 1 and 2 return timer	DIP 7&8
Source priority	DIP 2
Position Output signal	DIP 3

(1) 200 VAC in contactor mode.

(2) 6 kV tested between phases of a different source and 4 kV tested between phases of the same source.

## Terminals

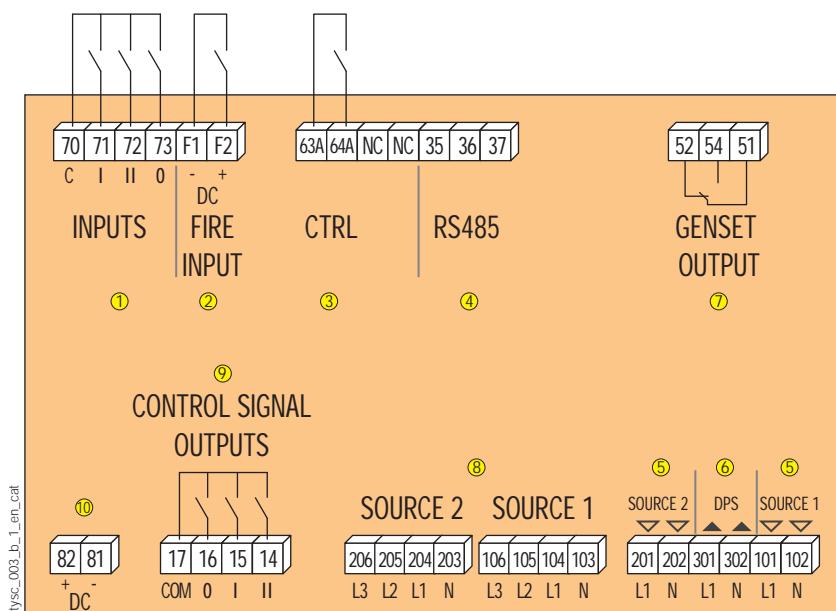

1. Switch position inputs
  2. DC fire input (forces 0 & inhibit)
  3. Control inputs
  4. RS485 communication
  5. DPS input (source 1 and 2)
  6. DPS output to motor
  7. Genset NO/NC output
  8. Voltage sensing S1 & S2
  9. Control outputs to transfer device
  10. DC aux power supply (for optional use)

# ATyS C35

## ATS Controller digital functions

**new**



ATyS C35

### Function

ATyS C35 is an ATS controller with a display screen and communication functionality. It is specifically designed to pilot Socomec remotely operated transfer switches, such as ATyS r, ATyS S and ATyS dM, and can also function with other brands using switch based, contactor based or circuit breaker based remote transfer switches.

ATyS C35 ensures the automatic or remote transfer in open transition from one source to another with programmable thresholds and timers. This controller also displays the information that it collects from the network and switch both on screen as well as on the LED synoptic, enabling users to keep track of the installation status.

### Advantages

#### Flexible space saving

The ATyS C35 controller can be mounted on either a DIN rail or to the panel door, offering flexibility and optimising space.

#### Cost-effective

The ATyS C35 has an integrated DPS, for supplying the motorisation of the switch, and can be door mounted, therefore there's no need for an external DPS or display, reducing installation time and costs.

#### Flexible configuration options

- Programmable thresholds and timers.
- 3 programmable inputs.
- Functional with PC, CB or CC.

#### Display and communications

- Displays voltages, frequencies and phase angle.
- Timer counters displayed on screen.
- RS485 Modbus communications for monitoring and programming.

### General characteristics

- Self-powered from sensing.
- Voltage supply range (184 - 300 VAC).
- DC aux power supply (for optional use).
- Main/Main or Main/Genset networks.
- Programmable inputs.
- RS485 Modbus communication.
- Voltage sensing on all phases.
- Three-phase + Neutral & Single-phase + Neutral networks.
- Phase rotation checking.
- Door or DIN rail mounting.

### References

Description	Reference
ATyS C35 – ATS controller	1600 0035
ATyS r - Remotely operated Transfer Switching Equipment	9523 xxxx <sup>(1)</sup>

(1) xxxx variable based on the number of poles and rating.

### The solution for

- › ATS panels
- › Compact transfer enclosures
- › Simple ATS controls



### Strong points

- › Self-supplied from sensing circuit
- › Integrated AC Double Power Supply
- › RS485 Communications
- › Multiple mounting options
- › LCD Display

### Conformity to standards

- › IEC 61010-2-201
- › IEC 60947-6-1
- › GB/T 14048.11 Annex C



### Compatible with




ATyS r  
Transfer Switching Equipment

## Front panel



1. Controller status indication.
2. Configuration dip-switches.
3. Dashboards / Test on Load (3s).
4. Position orders (in Manual).
5. Auto/Manu mode selector.
6. Mimic panel.

## Dimensions (mm)

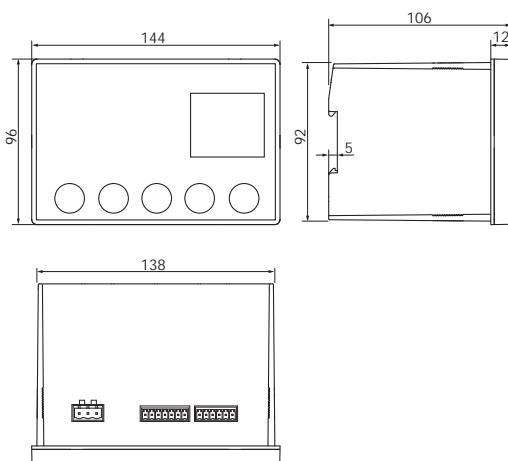


atysc\_001\_b\_1\_x.cat.ai

## Characteristics

Electrical characteristics		Mechanical characteristics	
AC operating limits	184 <sup>(1)</sup> - 300 VAC	Weight	845 gr
Optional DC supply	10-30 VDC	Door cutout	138 x 92 mm
Frequency limits	45 - 65 Hz	Operating temperature	-25 ... +70°C
Power consumption	< 10 W	Communications	
Inputs	4 fixed 3 programmable	Interface type	RS485. 2 to 3 half duplex wires
Outputs	4 fixed - 1 programmable <sup>(3)</sup>	Protocol	MODBUS RTU
External DPS max current (240 VAC)	6A AC1 - 1.5A AC15	Baud rate	2400-38400
Impulse withstand	6/4 kV <sup>(2)</sup>	(1) 200 VAC in contactor mode. (2) 6 kV tested between phases of a different source and 4 kV tested between phases of a the same source. (3) Only in main-main mode.	
Overvoltage category	CAT 3		

## Terminals

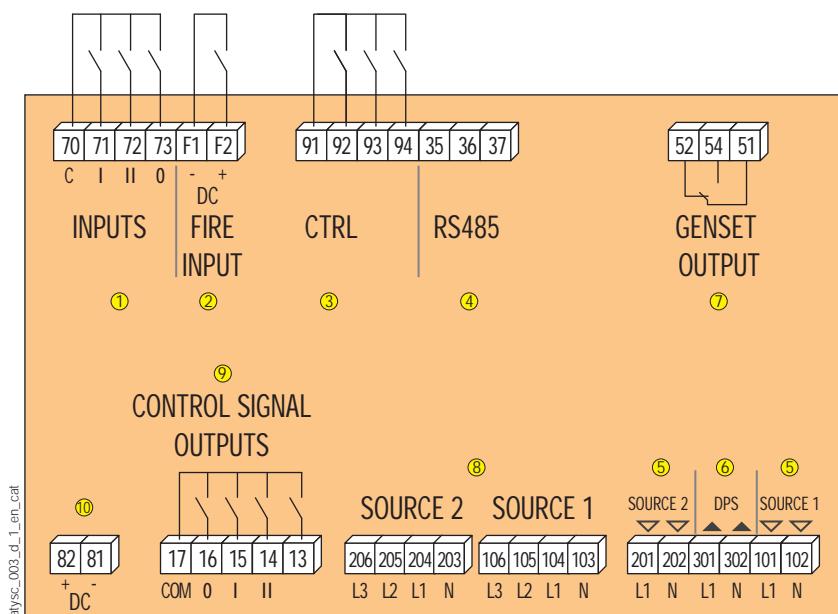

1. Switch position inputs
2. DC fire input (forces 0 & inhibit)
3. Control inputs
4. RS485 communication
5. DPS input (source 1 and 2)
6. DPS output to motor
7. Genset NO/NC output
8. Voltage sensing S1 & S2
9. Control outputs to transfer device
10. DC aux power supply (for optional use)

# ATyS C55

## ATS Controller smart functions



atysc\_017\_front.eps

### Function

ATyS C55 is a complete ATSE controller that can be used to pilot a remotely operated transfer switch of any technology: motorised switches (e.g. ATyS r, ATyS S or ATyS d M), circuit breakers or contactors. ATyS C55 ensure the automatic or remotely controlled transfer from one source to another, with configurable timers and thresholds, for any combination of sources: 2 transformers, 1 transformer and 1 genset or 2 gensets.

### Advantages

#### Fast commissioning

On initial power up, the ATyS C55's smart wizard will guide the operator through the commissioning process.

#### Versatile

The ATyS C55 is compatible with contactors, breakers and switches. It can also work for all type of 2-source applications combining mains and gensets.

### General characteristics

- Self-powered from sensing.
  - Wide voltage range (88-576VAC).
  - 24 VDC aux power supply (for optional use).
  - 2 latching relays.
  - Smart commissioning wizard.
  - IP65 degree of protection with gasket (accessory).
  - 1000 Alarms and Events.
  - 6 fully configurable I/O.
  - Genset scheduler.
  - Door or back plate mounting.
- Main/Main, Main/Genset and Genset/Genset applications.
  - Easyconfig configuration software.
  - RS485 Modbus communication.
  - Ethernet, SNMP, BACnet using DIRIS M-70 gateways. Includes Webserver.
  - A DIRIS Digiware D-70 gateway can be utilised as a remote display for multiple ATyS C55/C65 controllers; the D-70 also provides Ethernet, SNMP & BACnet connectivity.

### References

Description	Reference
ATyS C55 – ATS controller (includes mounting kits)	1600 0055
IP65 gasket for door cut-out <sup>(1)</sup>	1609 0001
DIRIS Digiware M-50 multi-protocol Ethernet gateway	4829 0221
DIRIS Digiware D-50 multipoint display, Ethernet output	4829 0204
DIRIS Digiware M-70 communication gateway for Ethernet & Webserver	4829 0222
DIRIS Digiware D-70 communication gateway for Ethernet & Webserver and multi-product display	4829 0203
Double power supply - DPS	1599 4001
ATyS r - Remotely operated Transfer Switching Equipment	9523 xxxx <sup>(2)</sup>

(1) The gasket provides an IP65 seal between the controller and the panel door; the front face (display & keys) is IP65 as standard.

(2) xxxx variable based on the number of poles and rating.

### The solution for

- > Commercial buildings
- > Applications:
  - Genset/Genset
  - Network/Genset
  - Network/Network
  - External/portable systems



### Strong points

- > Smart commissioning
- > Intuitive use
- > Hi-resolution LCD screen



### Conformity to standards


- > IEC 61010-2-201
- > IEC 60947-6-1
- > GB/T 14048.11 Annex C

### Communication gateways



DIRIS Digiware M-70 &amp; D-70


### Compatible with

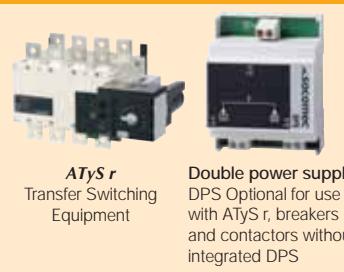ATyS r  
Transfer Switching  
EquipmentDouble power supply  
DPS Optional for use  
with ATyS r, breakers  
and contactors without  
integrated DPS

## Front panel



## Dimensions (mm)

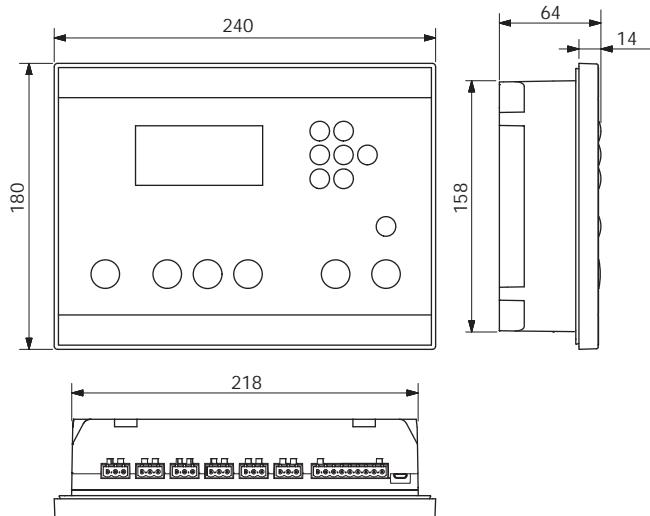

atysc\_006\_a1\_x.cat.ai

## Characteristics

### Electrical characteristics


AC operating limits	110 - 480 VAC ±20%
Optional DC supply	24 VDC
Frequency limits	45 - 65 Hz
Power consumption	< 10 W
Inputs	6, fully programmable
Outputs	6, fully programmable
Output relays	8 A AC15
EMC classification	Class A and B
Impulse withstand	8/6 kV <sup>(1)</sup>
Oversupply category	CAT 3

(1) 8 kV tested between phases of a different source and 6 kV tested between phases of a the same source.

### Mechanical characteristics

Weight	1080 gr
Door cutout	220 x 160 mm
Protection degree	IP65 with optional gasket
Operating temperature	-30 ... +70 °C
<b>Communications</b>	
Interface type	RS485. 2 to 3 half duplex wires
Protocol	MODBUS RTU
Baudrate	programmable 1200 - 115200 bps
<b>Display</b>	
Screen resolution	350 x 160 pixels
Event recorder	1000 events

## Terminals

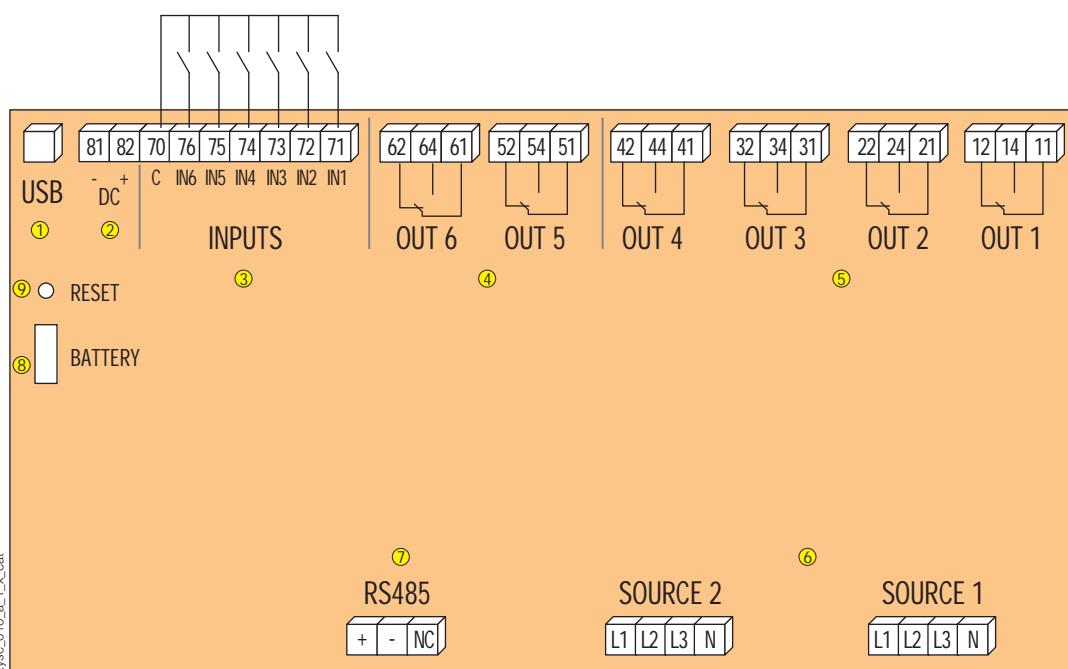

# ATyS C65

## ATS Controller

### connected functions



ATyS C65

#### Function

**ATyS C65** is an advanced ATSE controller offering all the functions of the ATyS C55 with the addition of current, power & energy monitoring, increased I/O capacity and functions, load shedding, lift control function, energy backup, increased number of events and alarms (measurement and combination alarms) and DIRIS Digiware module compatibility.

#### Advantages

##### Fast commissioning

On initial power up, the ATyS C65's smart wizard will guide the operator through the commissioning process.

##### User customisable

Front face LEDs, Load shedding, Genset schedulers and the lift control signal are just a few of the many customisable features available on ATyS C65.

##### Intuitive operation

- The high-resolution LCD screen provides several dashboards enabling easy monitoring of all parameters, including power and energy consumption of the loads.
- The integrated energy backup provides transitional power to the product enabling status indication (switch position, timer status, fault notifications) and communication to remain active with no supply present.
- Quick and easy access to main functions through the front face with direct key input.
- Complete configuration can be achieved through the front face or via software (EasyConfig).

#### General characteristics

- Self-powered from sensing.
- Wide voltage range (88 - 576 VAC).
- 24 VDC aux power supply (for optional use).
- 2 latching relays.
- Digiware IO-10: I/O extension up to 30 inputs and 18 outputs.
- Power & Energy metering with /1 A or /5 A current transformers.
- Energy backup.
- IP65 degree of protection (panel gasket included).
- 3000 Alarms and Events.
- Multiple fully configurable timers, thresholds and I/O.
- Easyconfig configuration software.
- Shock resistant IK08+.
- Digiware compatible (replaces U module).
- Ethernet, SNMP, BACnet using DIRIS M-70 gateway. Includes Webserver.
- A DIRIS Digiware D-70 gateway can be used as a remote display for multiple ATyS C55/C65 controllers; the D-70 also provides Ethernet, SNMP & BACnet connectivity.

#### References

Description	Reference
ATyS C65 – ATS controller (includes mounting kits) and IP65 gasket	1600 0065
DIRIS Digiware M-50 multi-protocol Ethernet gateway	4829 0221
DIRIS Digiware D-50 multipoint display, Ethernet output	4829 0204
DIRIS Digiware M-70 communication gateway for Ethernet & Webserver	4829 0222
DIRIS Digiware D-70 communication gateway for Ethernet & Webserver and multi-product display	4829 0203
Double power supply - DPS	1599 4001
ATyS r - Remotely operated Transfer Switching Equipment	9523 xxxx <sup>(1)</sup>

(1) xxxx variable based on the number of poles and rating.

#### The solution for

- > Life safety
- > Critical applications
- > Transfer panels with ACB



#### Strong points

- > Advanced I/O functions
- > Power monitoring
- > Energy backup

#### Conformity to standards

- > IEC 61010-2-201
- > IEC 60947-6-1
- > GB/T 14048.11 Annex C




#### Communication gateways




DIRIS Digiware M-70 &amp; D-70

#### Compatible with

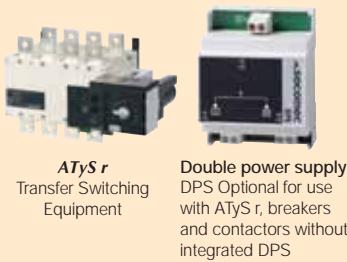ATyS r  
Transfer Switching  
EquipmentDouble power supply  
DPS Optional for use  
with ATyS r, breakers  
and contactors without  
integrated DPS


## Front panel

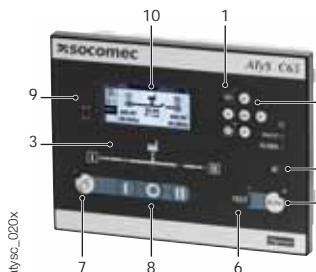

atysc\_020x

1. Dashboard displays.
2. Navigation keypad.
3. Mimic LED indication.
4. Lamp test button / LED info.
5. AUTO mode select.
6. TEST button.
7. CONTROL mode select.
8. Position orders (only in CONTROL mode).
9. Customisable LED.
10. Hi-res LCD screen.

## Dimensions (mm)

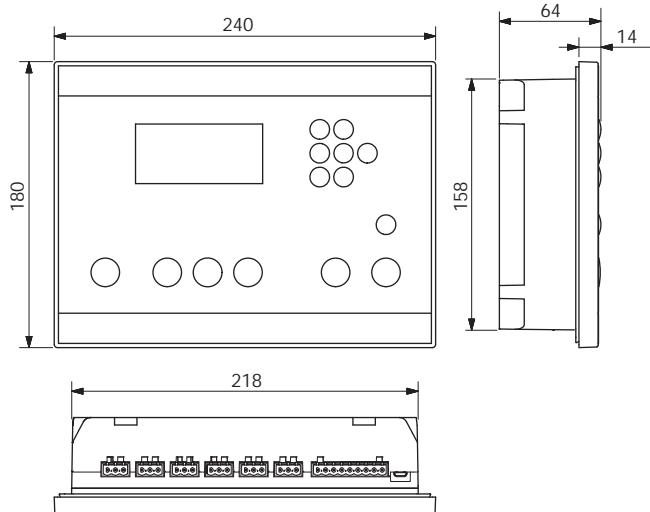


atysc\_006\_a\_1\_x\_cat.ai

## Characteristics

Electrical characteristics		Mechanical characteristics	
AC operating limits	110 - 480 VAC ±20%	Weight	1080 gr
Optional DC supply	24 VDC	Door cutout	220 x 160 mm
Frequency limits	45 - 65 Hz	Protection degree	IP65
Power consumption	< 10 W	Operating temperature	-30 ... +70 °C
Current transformers	1 or 5A	Communications	
Measurement type	true RMS (TRMS)	Interface type	RS485. 2 to 3 half duplex wires
Inputs	6, fully programmable	Protocol	MODBUS RTU
Outputs	6, fully programmable	Baudrate	programmable 1200 - 115200 bps
Output relays	8 A AC15	Digiware bus	RJ45 cable
I/O Extension (IO10)	up to 30 inputs and 18 outputs	Display	
EMC classification	class A and B	Screen resolution	350 x 160 pixels
Impulse withstand	8/6 kV <sup>(1)</sup>	Event recorder	3000 events
Overvoltage category	CAT 3	Energy backup	up to 30 seconds

(1) 8 kV tested between phases of a different source and 6 kV tested between phases of a the same source.


## Terminals

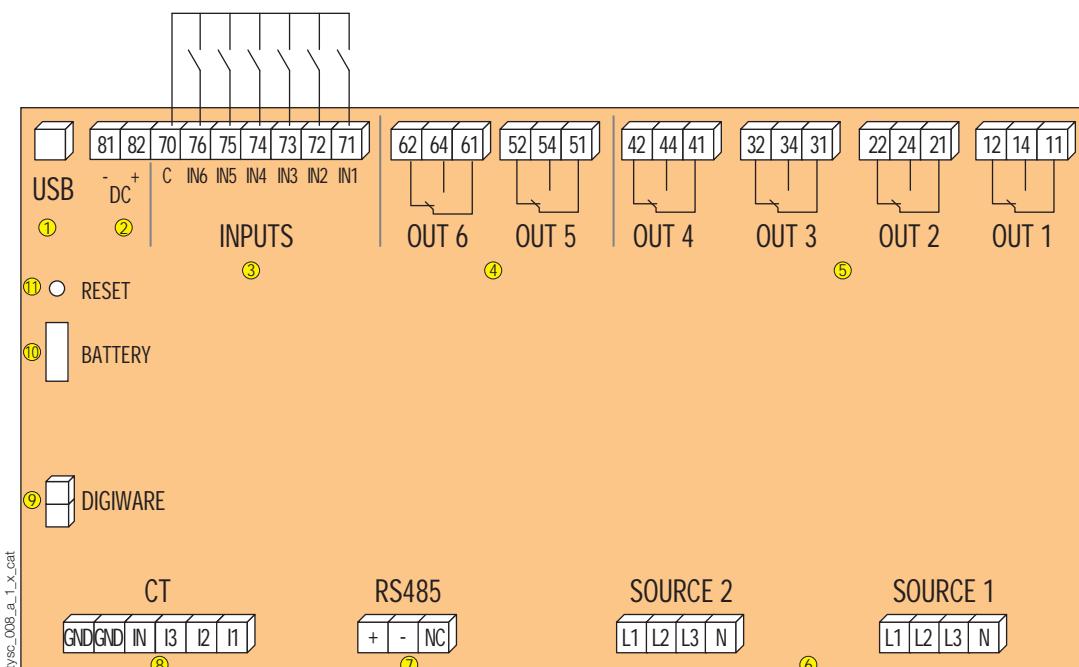

1. Configuration USB
2. 24 VDC aux power supply (for optional use)
3. 6 x inputs
4. 2 x latching relay outputs
5. 4 x relay outputs
6. Source sensing (110 - 480 ±20%)
7. RS485 communication
8. Current transformers (1 or 5 A)
9. Digiware RJ45 connectors
10. Replaceable RTC battery
11. Hard reset button


# The UL product range

A range of manual or remotely operated transfer switches up to 1200 A

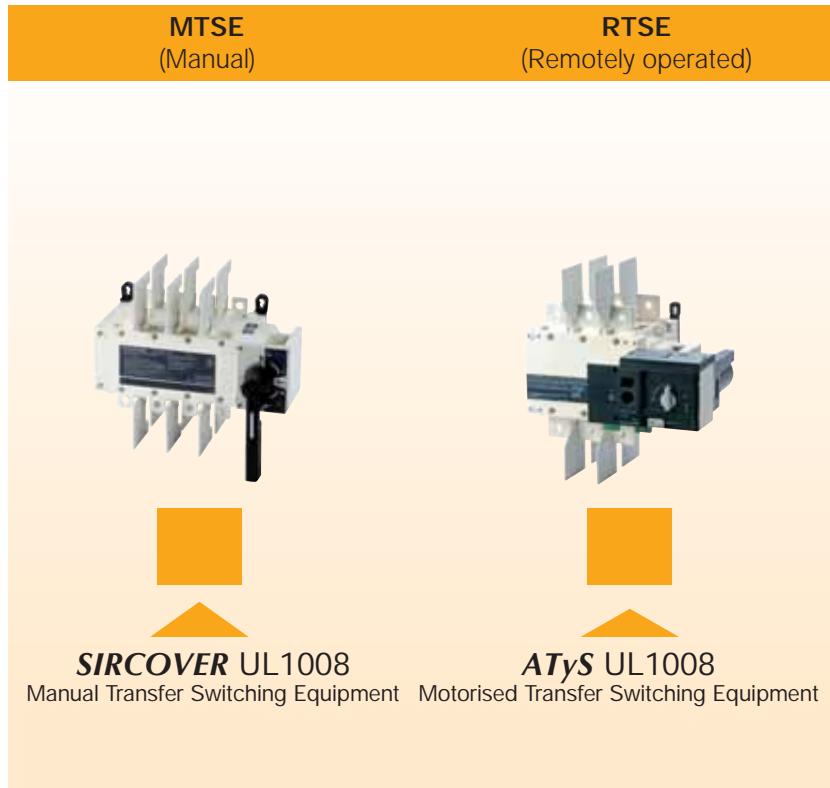

## Typical applications

The ATyS UL 1008 range provides safe transfer for mains/genset and genset/genset applications.

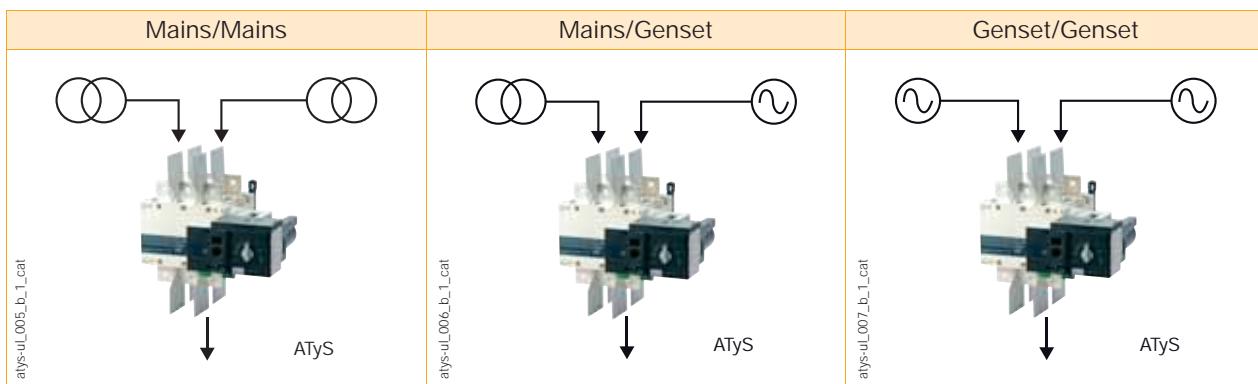

## Function

ATYS and SIRCOVER UL 1008 transfer switching equipment ensure:

- Maintenance free transfer switching equipment with a robust and reliable design.
- Power control and safety between a normal and an alternate source.
- Integrated and robust switch disconnection.
- A stable OFF position with integrated padlocking to facilitate safe downstream maintenance.
- Positive break indication with clear visible position indication I - 0 - II.
- An inherent failsafe mechanical interlock prevents asynchronous paralleling of the two sources.
- Stable positions (I - 0 - II) non-affected by typical vibration and shock.
- Constant pressure on the contacts non affected by network voltage perturbation.
- Quick, easy and extremely safe manual operation.

Further to the above the ATyS also includes:

- A simple and secure motorisation remote controls interface.
- Integrated switch position auxiliary contacts.
- An active "product availability" status feedback.
- Compatibility with virtually any make of ATS, AMF and Genset controller provided with volt-free contacts.

Power supply continuity for most electrically controlled total system optional standby power applications.

## SOCOME UL products

The ATYS UL is a full load break transfer switch where the main switching components are from proven technology devices (SIRCOVER - Manual Transfer Switches) also fulfilling requirements in UL 98 and IEC 60947-3 standards. The transfer is done in open transition with a minimum supply interruption during transfer ensuring full compliance with UL 1008 and IEC 60947-6-1 international TSE standards.

As a stand-alone product, the ATyS is a non-automatic power transfer switch (an electrically operated transfer switch that is not self-acting), generally used in applications where the load is non-emergency, does not require automatic transfer and where operating persons can be made available to initiate the transfer.

The electrical control of the ATyS UL may be direct through push-buttons and dry contacts fitted onto the enclosure door or through a dedicated local or remote ATS controller.

Your preferred brand of ATS controller, genset / AMF controller or power / building management system, may easily be paired with the ATyS to provide a complete automatic transfer switch to suit your needs.

ATyS have three stable positions (I-0-II) which can be selected remotely, via volt-free contacts, or directly, through use of the emergency operation handle; emergency operation requires no supply to be present. The OFF position provides disconnection of both supplies ensuring downstream isolation for safe maintenance.

## UL Applications

ATYS UL 1008 transfer switches are rated from 100 to 1200 A and designed for use in total system optional standby power applications for the safe transfer of a load supply between a normal and an alternate source.

Optional standby systems are those systems installed to provide an alternate source of power for structures for which a power outage could cause discomfort or interruption or damage to products or processes.



# Energy measurement & management

Integrated technologies .....	p. 224
Measurement and monitoring system for electrical installations AC selection guide	p. 226
Active energy meters and pulse concentrators selection guide .....	p. 272
Multifunction meters selection guide .....	p. 292
Current transformers selection guide .....	p. 328
Software solutions selection guide .....	p. 344

## Multi-circuit metering & measurement

### DIRIS Digiware AC



*DIRIS Digiware D*  
p. 232



*DIRIS Digiware C*  
p. 238



*DIRIS Digiware M*  
p. 242



*DIRIS Digiware U*  
p. 248



*DIRIS Digiware S*  
p. 250



*DIRIS Digiware I*  
p. 254

### DIRIS Digiware DC



*DIRIS Digiware R-60*  
p. 266



*DIRIS Digiware IO*  
p. 270

## Single-circuit metering, measurement & analysis



*COUNTIS E*  
p. 288



*MULTIS L50*  
p. 274



*DIRIS A*  
p. 294



*DIRIS B*  
p. 316

## Software suite

### Embedded web server *WEBVIEW*



p. 346

### Configuration software *Easy Config System*



p. 348

## Current sensors



AC current sensors  
*TE, TR, iTR, TF*  
p. 258

## Quality analyser



*DIRIS Q800*  
p. 324

## Measurement devices



Current  
transformers  
5 to 6000 A  
p. 330

# Integrated technologies

Groundbreaking technologies for greater simplicity and performance



## PreciSense

Products that are setting new standards in measurement accuracy

The PreciSense technology ensures 100% reliable accuracy across the global measurement chain.


Be guaranteed of the accuracy of your measurements:

- for the global measurement chain,
- for reliable measurements,
- for relevant corrective actions.

PreciSense offers the best accuracy on the market regardless of the type of current sensors used (solid core, split core, flexible or embedded in the DIRIS Digiware S module).



Discover the video



## VirtualMonitor

The simple and cost-saving solution for monitoring your protective devices

The VirtualMonitor technology enables an advanced monitoring of protective devices at all levels within the electrical installation.

Virtual Monitor:

- detects the position and status of the protective device,
- detects if the breaker has tripped,
- counts the number of operations and trips.

VirtualMonitor technology monitors the status of protective devices:

- On your entire electrical installation (without additional space).
- Remotely and in real-time.
- Without additional hardware or wiring (without adding auxiliary contacts).



## AutoCorrect

Software elimination of wiring errors

The AutoCorrect technology ensures that the measurement is properly wired at all times, thus avoiding on-site interventions.

AutoCorrect ensures the operation of the proper measuring system thanks to simple and rapid detection of wiring errors:

- automatic wiring control (voltage/current phase association),
- correction of errors with a single click,
- feature available off-load.

Error correction's are carried out without any physical modification to the wiring.



Discover the video



SIVV\_419\_A

PreciSense, VirtualMonitor and AutoCorrect technologies are embedded in Socomec's power monitoring solutions.

### Power metering and monitoring system for AC electrical installations

- DIRIS Digiware S with its 3 integrated sensors and DIRIS Digiware I associated with iTR sensors.



DIRIS\_DW\_184\_PSD

### Multifunction meters

- DIRIS A-40 with iTR sensors.



# Selection guide

## Power monitoring system AC

### **DIRIS Digiware AC**

Build your own AC system

System interface, displays and gateways  
(24 VDC)



**DIRIS Digiware D**  
display



**DIRIS Digiware M**  
gateway

or



**DIRIS Digiware C**  
RS485 interface

Voltage acquisition module



**DIRIS Digiware U**

+

Current acquisition module with integrated sensors



**DIRIS Digiware S**

+

Current acquisition modules



**DIRIS Digiware I-3x**  
3 inputs



**DIRIS Digiware I-4x**  
4 inputs



**DIRIS Digiware I-6x**  
6 inputs

+

Current sensors



**TE**  
Solid



**TR/iTR**  
Split-core



**TF**  
Flexible

+

Digital and analogue  
input/output modules



**DIRIS Digiware IO**

### Find the best DIRIS Digiware configuration!



The Socomec Meter Selector is your digital assistant, helping you find the best DIRIS Digiware configuration for your power monitoring projects, and all in just a few clicks!

- Fill in information regarding your project.
- Download the system diagram and bill of material.
- All your projects are archived in your personal account.

## Control and power supply interface

Application	Centralisation and display of data				Data centralisation	Repeater
						
<b>DIRIS Digiware</b>	<b>D-50</b> p. 232	<b>D-70</b> p. 232	<b>M-50</b> p. 242	<b>M-70</b> p. 242	<b>C-31</b> p. 238	<b>C-32</b> p. 238
Function						
Centralising measurement points	•	•	•	•	•	
High-resolution LCD display (configuration, selection and visualisation display of circuits)	•	•				
Repeater						•
Power supply						
24 VDC	•	•	•	•	•	•
Communication						
RS485 Modbus	Input/Output	Input/Output	Input/Output	Input/Output	Output	
Digiware bus	•	•	•	•	•	•
Bluetooth	•	•	•	•		
Ethernet	Modbus TCP BACnet IP SNMP	Modbus TCP BACnet IP SNMP	Modbus TCP BACnet IP SNMP	Modbus TCP BACnet IP SNMP		
Embedded web server	WEB-CONFIG	WEBVIEW-M	WEB-CONFIG	WEBVIEW-M		

## Voltage acquisition module

Application	Metering	Analysis
		
<b>DIRIS Digiware U</b>	<b>U-10</b> p. 248	<b>U-30</b> p. 248
Multi-measurement		
U12, U23, U31, V1, V2, V3, f	•	•
U system, V system		•
Ph/N unbalance		•
Ph/Ph unbalance		•
Quality analysis		
THDv1, THDv2, THDv3, THDu12, THDu23, THDu31		•
Crest factors V1, V2, V3, U12, U23, U31		•
Individual harmonics U & V (up to 63rd)		•
Voltage dips, interruptions and swells (EN50160)		•
Alarms		
On threshold		•
History		
Average values		•
Format		
Width/number of modules	18 mm / 1	18 mm / 1

# Selection guide

## Power monitoring system AC

### **DIRIS Digiware AC**

#### Current acquisition modules

Application	Metering	Analysis	Monitoring	Analysis	Metering	
						
<b>DIRIS Digiware I</b>	<b>I-30</b> <i>p. 254</i>	<b>I-31</b> <i>p. 254</i>	<b>I-35</b> <i>p. 254</i>	<b>I-43</b> <i>p. 254</i>	<b>I-45</b> <i>p. 254</i>	<b>I-60</b> <i>p. 254</i>
<b>I-61</b> <i>p. 254</i>						
Number of current inputs	3	3	3	4	4	6
<b>Metering</b>						
$\pm$ kWh, $\pm$ kvarh, kWh	•	•	•	•	•	•
Load curves		•	•		•	
Multi-tariff		•	•		•	
<b>Multi-measurement</b>						
I1, I2, I3, In, $\Sigma$ P, $\Sigma$ Q, $\Sigma$ S, $\Sigma$ PF	•	•	•	•	•	•
P, Q, S, PF per phase		•	•	•	•	
Predictive power			•		•	
Current unbalance (Inba, Idir, linv, lhom, Inb)			•		•	
Phi, cos Phi, tan Phi			•		•	
<b>Quality</b>						
THDi1, THDi2, THDi3, THDin			•	•	•	
Individual harmonics I (up to 63rd)			•		•	
Crest factors I1, I2, I3, In			•		•	
Overcurrents			•		•	
<b>Alarms</b>						
On threshold			•		•	
Inputs/outputs				2/2	2/2	
<b>History</b>						
Average values			•		•	
<b>Format</b>						
Width/number of modules	18 mm / 1	18 mm / 1	18 mm / 1	27 mm / 1.5	27 mm / 1.5	36 mm / 2
						36 mm / 2

Current acquisition module with integrated sensors


Application	Metering	Analysis
<b>DIRIS Digiware S</b>	<b>S-130</b> <i>p. 250</i>	<b>S-135</b> <i>p. 250</i>
Number of current inputs	3	3
Basic current $I_b$	10 A	10 A
Maximum current $I_{max}$	63 A	63 A
Load type accepted	1P + N 2P / 2P + N 3P / 3P + N	1P + N 2P / 2P + N 3P / 3P + N
Metering		
$\pm \text{kWh}, \pm \text{kvarh}, \text{kVAh}$	•	•
Multi-tariff (max 8)		•
Load curves		•
Multi-measurement		
$I_1, I_2, I_3, I_n, \Sigma P, \Sigma Q, \Sigma S, \Sigma PF$	•	•
P, Q, S, PF per phase		•
Predictive power		•
Current unbalance ( $I_{nba}, I_{nb}, I_{dir}, I_{inv}, I_{horn}$ )		•
Phi, cos Phi, tan Phi		•
Quality		
THDi1, THDi2, THDi3, THDin		•
Individual harmonics I (up to 63rd)		•
Crest factors U, V, I		•
K factor		•
Overscurrents		•
Alarms		
Thresholds and combinations		•
Load level		
Wiring errors		•
Protective device		•
Trends		
Average values		•
Format		
Width	54 mm	54 mm

# Selection guide



## Power monitoring system AC

### DIRIS Digiware AC

#### Current sensors

Suitable for new installations match the pitch of protective devices	Solid-core current sensors							
								
	<b>TE-18</b> <i>p. 258</i>	<b>TE-25</b> <i>p. 258</i>	<b>TE-35</b> <i>p. 258</i>	<b>TE-45</b> <i>p. 258</i>	<b>TE-55</b> <i>p. 258</i>	<b>TE-90</b> <i>p. 258</i>		
Nominal current $I_n$ (A)		5 ... 20	25 ... 63	40 ... 160	63 ... 250	160 ... 630	400 ... 1000	600 ... 2000
Real range covered (A)		0.1 ... 24	0.5 ... 75.6	0.8 ... 192	1.26 ... 300	3.2 ... 756	8 ... 1200	12 ... 2400
Aperture (mm)		Ø 8.4	Ø 8.4	13.5 x 13.5	21 x 21	31 x 31	41 x 41	64 x 64
Dimensions (mm)		28 x 20 x 45	28 x 20 x 45	25 x 32.5 x 65	35 x 32.5 x 71	45 x 32.5 x 86	55 x 32.5 x 100	90 x 126 x 24.6
Connection		RJ12	RJ12	RJ12	RJ12	RJ12	RJ12	RJ12

For currents above 2000 A, the 5A / RJ12 adapter provides compatibility with 1A or 5A secondary CTs.

Suitable for existing installations	Split-core current sensors				
					
	<b>TR/iTR-10</b> <i>p. 262</i>	<b>TR/iTR-14</b> <i>p. 262</i>	<b>TR/iTR-21</b> <i>p. 262</i>	<b>TR/iTR-32</b> <i>p. 262</i>	
Nominal current $I_n$ (A)		25 ... 63	40 ... 160	63 ... 250	160 ... 600
Real range covered (A)		0.5 ... 90	0.64 ... 120	1.26 ... 200	4 ... 720
Aperture (mm)		Ø 10	Ø 14	Ø 21	Ø 32
Dimensions (mm)		26 x 44 x 28	29 x 67 x 28	37 x 65 x 43	53 x 86 x 47
Connection		RJ12	RJ12	RJ12	RJ12

For currents above 600 A, the 5A / RJ12 adapter provides compatibility with 1A or 5A secondary CTs.

Suitable for existing installations with space constraints or with high currents	Flexible current sensors							
								
	<b>TF-40</b> <i>p. 264</i>	<b>TF-55</b> <i>p. 264</i>	<b>TF-80</b> <i>p. 264</i>	<b>TF-120</b> <i>p. 264</i>	<b>TF-200</b> <i>p. 264</i>	<b>TF-300</b> <i>p. 264</i>	<b>TF-600</b> <i>p. 264</i>	
Nominal current $I_n$ (A)		140 ... 400	150 ... 600	150 ... 600	400 ... 2000	600 ... 4000	1600 ... 6000	1600 ... 6000
Real range covered (A)		2 ... 480	3 ... 720	3 ... 720	8 ... 2400	12 ... 4800	32 ... 7200	32 ... 7200
Aperture (mm)		Ø 40	Ø 55	Ø 80	Ø 120	Ø 200	Ø 300	Ø 600
Connection		RJ12	RJ12	RJ12	RJ12	RJ12	RJ12	RJ12

## Input/output modules

Application	Metering/monitoring/control	
		
<b>DIRIS Digiware IO</b>	<b>IO-10</b> <i>p. 270</i>	<b>IO-20</b> <i>p. 270</i>
Number of digital inputs/outputs	4/2	
Number of analogue inputs		2
Format		
Width/number of modules	18 mm/1	18 mm/1

# DIRIS Digiware D

Multipoint display and communication gateway  
for the DIRIS Digiware system



**DIRIS Digiware D-50/D-70**  
Centralisation and display of data



Configuration  
with Easy Config System.

## Function

DIRIS Digiware D-50 and D-70 remote displays allow a local visualisation of the data from DIRIS Digiware modules and concentrate the 24 VDC power supply and communication in a single point.

The D-50 and D-70 also act as an Ethernet gateway for all products connected to the Digiware bus or the RS485 bus and have an embedded web server for configuring network parameters and remote viewing of measurement data.

## Advantages

### Plug & Play

- Digiware and RS485 to Ethernet direct gateway
- Auto detection of connected products. Easy setup
- 24 VDC SELV (Safety Extra Low Voltage) power supply

### Embedded web server

A WEB-CONFIG is integrated into the D-50 display to configure the communication architecture. WEBVIEW-M is integrated into the D-70 display and available without license fees to view measurements and consumption remotely.

### Cyber security

The D-50 and D-70 displays integrate advanced cyber security functions compliant with the IEC 62443 standard to guarantee the confidentiality, integrity and availability of data and reduce the risk of cyber attacks:

- personalised security policy (blocking or restriction of certain protocols and services),
- secure browsing in HTTPS by setting up TLS/SSL certificates,
- push data transfer (FTPS, SMTPS),
- setting up a firewall and whitelist rules to guard against denial of service attacks.

The D-50 and D-70 displays also offer:

- Bluetooth connectivity for collecting and viewing data from environmental sensors
- the memory extension of the connected devices,
- Automatic export of data to an FTP(S) server,
- notification by email in the event of an alarm on one of the connected products (SMTPS),
- automatic time setting of all system products via SNTP.

### Multi-circuit

Possibility of displaying the measurement data of up to 196 feeders on the same screen. Easy circuit selection, navigation and data display with 10 direct-access capacitive buttons.

### Advanced connectivity

- Ethernet output for communication using multiple protocols: Modbus TCP, BACnet IP and SNMP v1, v2, v3 (encrypted) to suit any power metering and monitoring application.
- Possibility of RS485 slave configuration, for example to communicate measurement data to a 2nd PLC.

### Email notifications

The D-50/D-70 display can send e-mail notifications in the event of an alarm.

## The solution for

- > Industry
- > Building
- > Infrastructure
- > Data centers



## Strong points

- > Plug & Play
- > Multi-circuit
- > Embedded Web server
- > Cyber security
- > Advanced Connectivity
- > Email notifications

## Compliance with standards

- > IEC 62974-1  
(Serveur d'énergie)
- > IEC 62443  
(Cyber sécurité)
- > UL 61010  
Guide FTRZ/PICQ  
Fichier E257746
- > FCC
- > IC



## Create your project

- > Find the best DIRIS Digiware configuration:  
[www.meter-selector.com](http://www.meter-selector.com)



Application	Control and power supply interface			
<b>DIRIS Digiware</b>	<b>D-50</b>	<b>D-70</b>	<b>D-50 Bluetooth</b>	<b>D-70 Bluetooth</b>
Digiware input	•	•	•	•
RS485 input	•	•	•	•
RS485 output	•	•	•	•
Ethernet output	Modbus BACnet IP SNMP v1, v2, v3			
Bluetooth			•	•
Webserver	WEB-CONFIG	WEBVIEW-M	WEB-CONFIG	WEBVIEW-M

## Functions



soft\_073\_b

### WEBVIEW-M

Embedded web server in the DIRIS Digiware D-70 display

WEBVIEW-M allows the display and remote monitoring of all the electric parameters measured by up to 32 devices. They are displayed in the form of overview screens, graphs or tables for clear and user-friendly analysis.

Access to WEBVIEW is made by a web browser on a PC or tablet and offers multiple features such as the automatic export of data via FTPS or e-mail notification in the presence of alarms (SMTPS).

The Photoview application is available via the WEBVIEW interface embedded in the DIRIS Digiware D-70 display. It allows the display of electrical quantities on a customised background picture such as a cabinet, a wiring diagram or the map of a site.

## Accessories

### DIN rail mounting kit

The accessory allows you to install the DIRIS Digiware D-50/D-70 display on a DIN rail.

This kit is not included with the displays and must be ordered separately.




# DIRIS Digiware D

Multipoint display and communication gateway  
for the DIRIS Digiware system

## Dimensions (mm)

DIRIS Digiware D-50/D-70

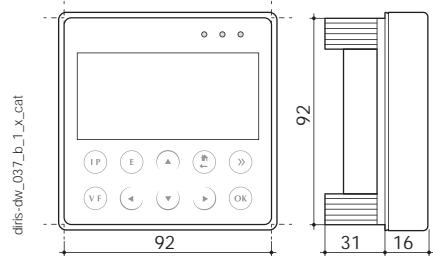

## Configuration


### Equipment consumption

Product	Power delivered (W)	Power consumed (W)
Power supply		
P15 100-240 VAC / 24 VDC	15	
P30 100-240 VAC / 24 VDC	20	
Cables		
50 metre package		1.5
System interfaces		
DIRIS Digiware D-50/D-70		2.5
DIRIS Digiware C-31		0.8
Module voltage		
DIRIS Digiware U-xx		0.72
DIRIS Digiware U-3xdc		0.6
Current modules		
DIRIS Digiware I-3x		0.52
DIRIS Digiware I-4x		1.125
DIRIS Digiware I-6x		0.7
DIRIS Digiware I-3xdc (+ 3 DC current sensors)		2
DIRIS Digiware S-xx		0.35
Input/output modules		
DIRIS Digiware IO-10/IO-20		0.5
Repeater		
DIRIS Digiware C-32		1.5

### Repeater

Whenever the power consumption is higher than 20 W or the distance is greater than 100 m, a DIRIS Digiware C-32 repeater is required.  
In a DIRIS Digiware system, a maximum of 2 repeaters may be used.

diris-dw\_039\_en

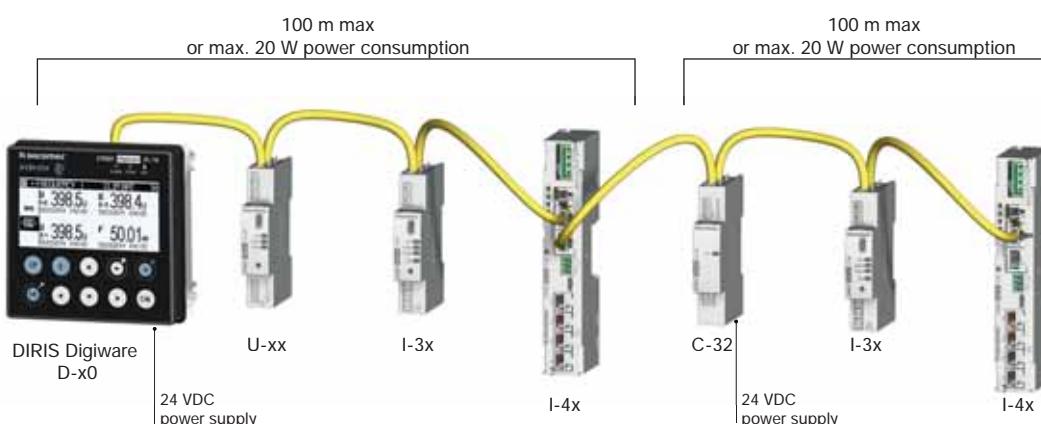

### Calculation rules for the max. number of products on the Digiware Bus

The total power consumed by the equipment connected to the Digiware Bus must not exceed the power from the 24 VDC supply.

The power supply must not exceed 20 W/70 °C or 27 W/40 °C.

Size with P15 power supply (ref: 4829 0120) delivering 15 W

For example, it is possible to use

- 1 DIRIS Digiware D-50 display (2.5 W)
  - 1 DIRIS Digiware voltage module U-xx (0.72 W)
  - 50 metres of cable (1.5 W)
- and
- 19 DIRIS Digiware current modules I-3x ( $19 \times 0.52 = 9.9$  W)  
⇒ Total power = 14.845 W
- or
- 9 DIRIS Digiware current modules I-4x ( $9 \times 1.125 = 10.125$  W)  
⇒ Total power = 14.345 W.


Size with a 24 VDC power supply delivering a maximum of 20 W  
(Power supply P30 ref: 4729 0603)

For example, it is possible to use

- 1 DIRIS Digiware D-50 display (2.5 W)
  - 1 DIRIS Digiware voltage module U-xx (0.72 W)
  - 50 metres of cable (1.5 W)
- and
- 29 DIRIS Digiware current modules I-3x ( $29 \times 0.52 = 15.1$  W)  
⇒ Total power = 19.82 W
- or
- 13 DIRIS Digiware current modules I-4x ( $13 \times 1.125 = 14.625$  W)  
⇒ Total power = 19.345 W.


## Connections

### RS485 slave mode

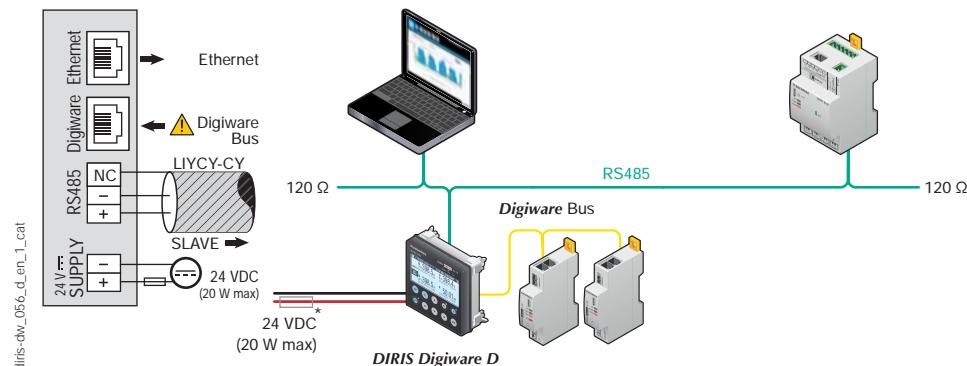

(\*) 1A / 24 VDC fuse protection is recommended if the 24 VDC power supply is not provided by Socomec.

### RS485 master mode

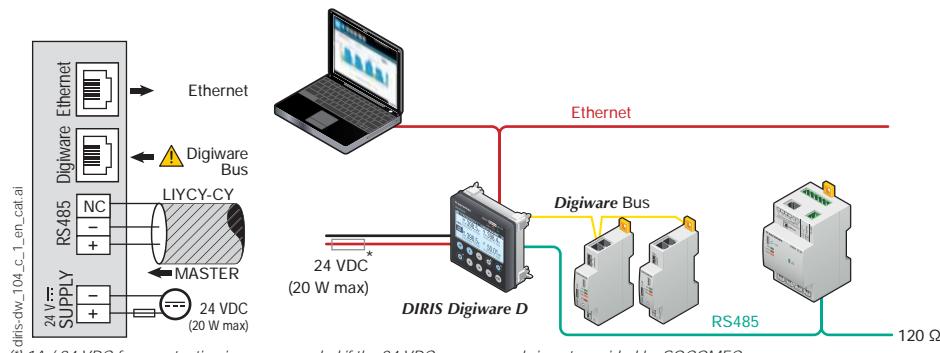

(\*) 1A / 24 VDC fuse protection is recommended if the 24 VDC power supply is not provided by SOCOMECE.

# **DIRIS Digiware D**

Multipoint display and communication gateway  
for the DIRIS Digiware system

## Technical characteristics

Mechanical characteristics	
Type of screen	Capacitive touch-screen technology, 10 keys
Screen resolution	350 x 160 pixels
Front panel protection index	IP65
Communication	
Ethernet RJ45 10/100 Mbs	Gateway function (D-50/D-70): Modbus TCP BACnet IP SNMP v1, v2, v3
RJ45 Digiware	Control and power supply interface function
RS485 2-3 wires	Modbus RTU communication function Configurable as input or output
USB	Upgrade and configuration via type B micro USB connector
Electrical characteristics	
Power supply	24 VDC ±15 %
Power consumption	2.5 VA
Battery lifetime	10 years

Environmental specifications	
Storage temperature	-20 to +70 °C
Operating temperature	-10 to +55 °C
Humidity	95% at 40 °C
Installation category, degree of pollution	CAT III, 2
Ports	
Digiware	Input
RS485	Input/Output
Ethernet	Output

## References

DIRIS Digiware		Reference
D-50	Multipoint display, Ethernet & RS485 output + WEB-CONFIG	4829 0204
D-70	Multipoint display, Ethernet & RS485 output + WEBVIEW-M	4829 0203
D-50 Bluetooth	Multipoint display, Ethernet & RS485 output + WEB-CONFIG + Bluetooth	4829 0206
D-70 Bluetooth	Multipoint display, Ethernet & RS485 output + WEBVIEW-M + Bluetooth	4829 0207
Power supply		Reference
P15	Power supply 100-240 VAC / 24 VDC 15 W	4829 0120
P30	Power supply 100-240 VAC / 24 VDC 20 W	4729 0603
Digiware connection cables		Reference
RJ45 cables for Digiware Bus	Length 0.06 m	4829 0189
	Length 0.10 m	4829 0181
	Length 0.20 m	4829 0188
	Length 0.50 m	4829 0182
	Length 1 m	4829 0183
	Length 2 m	4829 0184
	Length 3 m	4829 0190
	Length 5 m	4829 0186
	Length 10 m	4829 0187
	50 m reel + 100 connectors	4829 0185
Termination for Digiware Bus (supplied with interfaces D)		4829 0180
USB configuration cable		4829 0050
Accessories		To be ordered in multiples of
Repeater C-32		4
Fuse holder to protect voltage inputs (type RM) 1 pole + neutral		10
gG 10x38 0.5 A fuses		1
DIN rail mounting kit for D-50 and D-70 displays		1
Door mounting kit DIN 144 x 96 mm		1
IP 65 flexible cover for 144 x 96 mm door mounting frame		1

## Expert Services



EXPERT  
SERVICES

To ensure that you always have a functional and accurate energy monitoring system, Socomec offers many services:  
 • Device integration  
 • System audit  
 • Commissioning  
 • Training of your teams

Also, ideal for ISO 50001 sites (periodic verification):  
 • Verification of measurement consistency at 3%  
 • Verification of measurement accuracy to 0.2%

*For more information, consult your Socomec contact.*

# DIRIS Digiware C-31

Control and power supply interface



**DIRIS Digiware C-31**  
Centralisation



Configuration  
with Easy Config System.

## Function

For applications without a local display, DIRIS Digiware C-31 interface centralises all measurements and communicates data over RS485 to an external software or PLC. DIRIS Digiware C-31 interface is 24 VDC powered.

## Advantages

### Compact

Centralise your measurement data on 1 module without a local screen, for a complete system:

- single 24 VDC auxiliary power supply,
- a single RS485 communication.

### 24 VDC Safety Extra Low Voltage power supply

- No dangerous voltage,
- The power supply is transmitted to the whole system by the Digiware bus.

## The solution for

- > Industry
- > Building
- > Infrastructure
- > Data centers



## Strong points

- > Compact
- > 24 VDC SELV (Safety Extra Low Voltage) power supply

## Compliance with standards

- > IEC 61557-12



- > UL 61010  
Guide FTRZ/PICQ  
File E257746




## Create your project

- > Find the best DIRIS Digiware configuration:  
[www.meter-selector.com](http://www.meter-selector.com)



## Dimensions (mm)

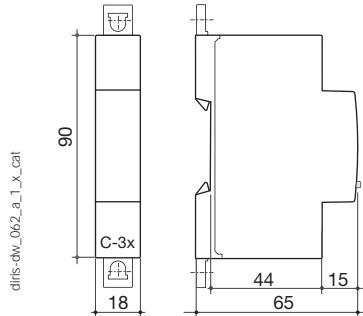

## Configuration


### Equipment consumption

Product	Power delivered (W)	Power consumed (W)
<b>Power supply</b>		
P15 100-240 VAC / 24 VDC	15	
P30 100-240 VAC / 24 VDC	20	
<b>Cables</b>		
50 metre package		1.5
<b>System interfaces</b>		
DIRIS Digiware D-50/D-70		2.5
DIRIS Digiware C-31		0.8
<b>Module voltage</b>		
DIRIS Digiware U-xx		0.72
DIRIS Digiware U-3xdc		0.6
<b>Current modules</b>		
DIRIS Digiware I-3x		0.52
DIRIS Digiware I-4x		1.125
DIRIS Digiware I-6x		0.7
DIRIS Digiware I-3xdc (+ 3 DC current sensors)		2
DIRIS Digiware S-xx		0.35
<b>Input/output modules</b>		
DIRIS Digiware IO-10/IO-20		0.5
<b>Repeater</b>		
DIRIS Digiware C-32		1.5

### Repeater

Whenever the power consumption is higher than 20 W or the distance is greater than 100 m, a DIRIS Digiware C-32 repeater is required. In a DIRIS Digiware system, a maximum of 2 repeaters may be used.

diris-dw\_039\_en

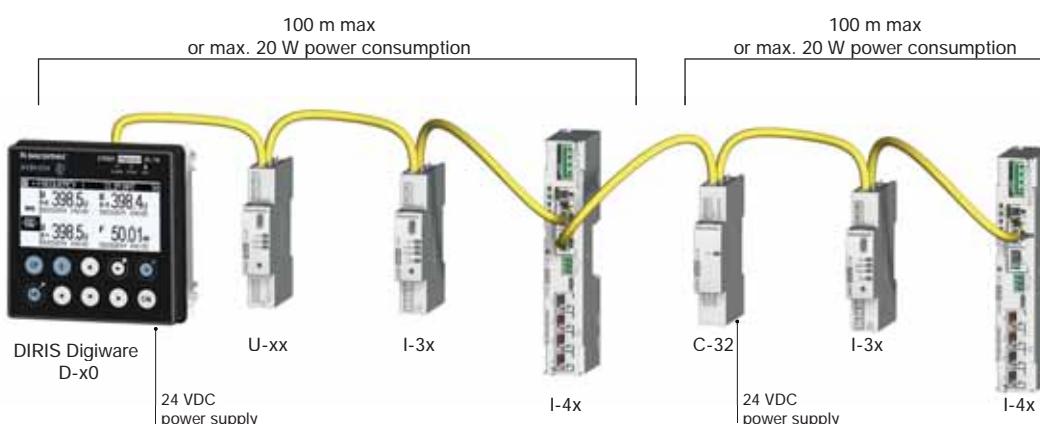

### Calculation rules for the max. number of products on the Digiware Bus

The total power consumed by the equipment connected to the Digiware Bus must not exceed the power from the 24 VDC supply.

The power supply must not exceed 20 W/70 °C or 27 W/40 °C.

**Size with P15 power supply (ref: 4829 0120) delivering 15 W**

For example, it is possible to use

- 1 DIRIS Digiware D-50 display (2.5 W)
- 1 DIRIS Digiware voltage module U-xx (0.72 W)
- 50 metres of cable (1.5 W)
- and
- 19 DIRIS Digiware current modules I-3x ( $19 \times 0.52 = 9.9$  W)  
⇒ Total power = 14.845 W

or

- 9 DIRIS Digiware current modules I-4x ( $9 \times 1.125 = 10.125$  W)  
⇒ Total power = 14.345 W.

**Size with a 24 VDC power supply delivering a maximum of 20 W (Power supply P30 ref: 4729 0603)**

For example, it is possible to use

- 1 DIRIS Digiware D-50 display (2.5 W)
- 1 DIRIS Digiware voltage module U-xx (0.72 W)
- 50 metres of cable (1.5 W)
- and
- 29 DIRIS Digiware current modules I-3x ( $29 \times 0.52 = 15.1$  W)  
⇒ Total power = 19.82 W

or


- 13 DIRIS Digiware current modules I-4x ( $13 \times 1.125 = 14.625$  W)  
⇒ Total power = 19.345 W.

# DIRIS Digiware C-31


Control and power supply interface

## Connections

### DIRIS Digiware C-31

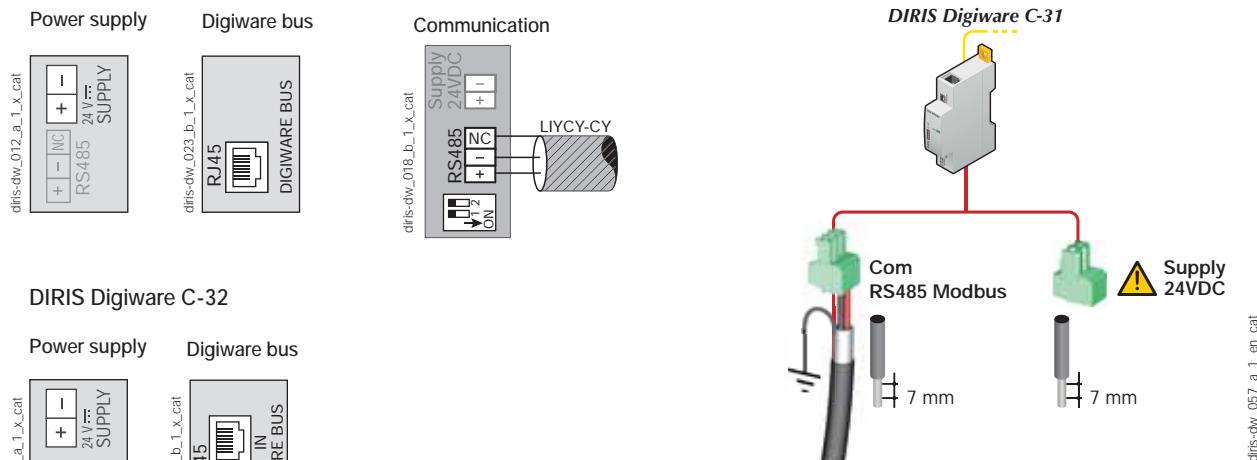

### DIRIS Digiware C-32

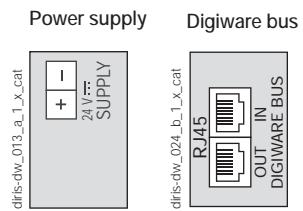

## Technical characteristics

Electrical characteristics		Mechanical features	
Input voltage	24 VDC ± 20% - 20 W max	Casing type	DIN-rail mounting module and base
Connection	Removable screw terminal block, 2 positions, stranded or solid 0.2-2.5 mm <sup>2</sup> cable	Casing protection index	IP20 / IK06
P15 power supply	Technical characteristics: 100-240 VAC/ 24 VDC - 0.63 A - 15 W Modular format - Dimensions (H x L): 90 x 36 mm	Front panel protection index	IP40 on the nose in modular assembly / IK06
Communication specifications		Environmental specifications	
Digiware Bus		Ambient operating temperature	-10 to +70 °C
Function	Connection between DIRIS Digiware modules	Storage temperature	-25 to +70 °C
Cable type	Specific SOCOMEC cable with RJ45 connections	Operating humidity	55 °C / 97% HR
RS485		Operating altitude	< 2000 m
Connection type	2 to 3 half duplex wires		
Protocol	Modbus RTU		
Baudrate	9600 to 115 200 bauds		
Function	Data configuration and reading		
Location	Single-point on DIRIS Digiware C		

## References

DIRIS Digiware		Reference
C-31	System interface - no display, RS485 output	4829 0101
C-32	Repeater	4829 0103

## Expert Services



EXPERT SERVICES

- To ensure that you always have a functional and accurate energy monitoring system, Socomec offers many services:
- Device integration
  - System audit
  - Commissioning
  - Training of your teams

Also, ideal for ISO 50001 sites (periodic verification):

- Verification of measurement consistency at 3%
- Verification of measurement accuracy to 0.2%

*For more information, consult your Socomec contact.*

# DIRIS Digiware M

Multi-protocol communication gateways  
for the DIRIS Digiware system



*DIRIS Digiware M-50 - M-70 gateway*

## Function

The DIRIS Digiware M-50 and M-70 communication gateways are the access point for the DIRIS Digiware system, centralising the 24 VDC power supply and communication in one single point.

The M-50 and M-70 act as the Ethernet gateway for all the devices connected on the Digiware or RS485 bus, and integrate a web server to configure the network parameters and to remotely display measurement data.

The M-50 and M-70 gateways offer a wide range of functionalities, including:

- Bluetooth connectivity to collect data from environmental sensors,
- memory extension for connected devices,
- automatic export of logged consumption and data to an FTP(S) server,
- notification emails if there is an alarm on one of the connected devices (SMTPL),
- automatic time synchronisation of all connected devices via SNTP.

## Advantages

### Plug & Play

- Direct Digiware and RS485 to Ethernet gateway.
- Automatic detection of connected devices.
- Easy setup.
- Safety Extra Low Voltage 24 VDC power supply.

### Advanced connectivity

- Ethernet output for communication using multiple protocols: Modbus TCP, BACnet IP and SNMP v1, v2, v3 (encrypted) to suit any metering and power monitoring application.
- Possible to configure as RS485 slave to communicate measurement data to a second PLC, for example.

### Embedded web server

A WEB-CONFIG is embedded in the M-50 gateway to configure the communication architecture.

WEBVIEW-M is embedded in the M-70 gateway and available without license fees to visualise measurements and consumption remotely.

## General characteristics

- 24 VDC power supply.
- Modbus RTU/TCP, BACnet IP, SNMP v1, v2, v3 & Traps, HTTPS, FTPS, SMTPL, SNTP, DHCP.
- Up to 32 devices (max. 196 circuits) displayed.
- Free embedded web-based software.

## The solution for

- > Data centre
- > Building
- > Industrial process



## Strong points

- > Plug & Play
- > Advanced connectivity
- > Embedded web server
- > Cyber security
- > Email notifications



RJ45 (Digiware bus) cables are available.

## Compliance with standards

- > IEC 62974-1  
(Energy Server)
- > IEC 62443  
(Cyber security)



- > UL 61010  
Guide FTRZ/PICQ  
File E257746



- > FCC
- > IC



## Create your project

- > Find the best DIRIS Digiware configuration:  
[www.meter-selector.com](http://www.meter-selector.com)




DIGITAL TOOL AVAILABLE

Application	Multi-protocol communication gateway	
	M-50	M-70
<b>DIRIS Digiware M</b>		
Digiware bus input	•	•
RS485	Input/output <sup>(1)</sup>	Input/output <sup>(1)</sup>
Ethernet output	•	•
Compatible protocols	Modbus RTU Modbus TCP BACnet IP SNMP v1, v2, v3, Traps	Modbus RTU Modbus TCP BACnet IP SNMP v1, v2, v3, Traps
Bluetooth	•	•
FTP(S) (automatic data export)	•	•
SMTP(S) (email notifications in case of alarm)	•	•
SNTP (time synchronisation)	•	•
Web Server	WEB-CONFIG	WEBVIEW-M

(1) The gateways can be configured as Modbus master (RS485 input) or slave (RS485 output).

## Architecture

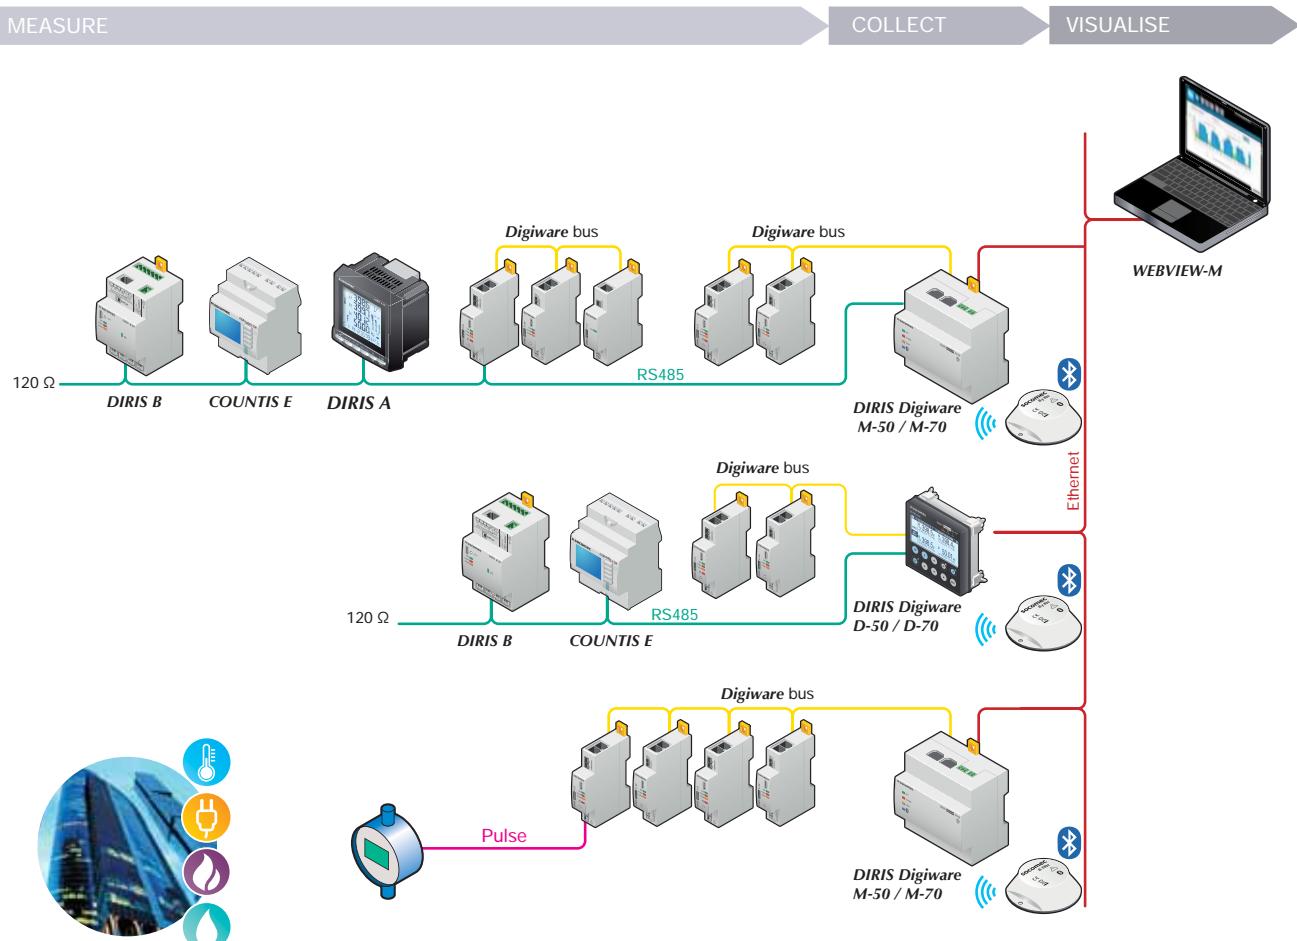

# **DIRIS Digiware M**

Multi-protocol communication gateways  
for the DIRIS Digiware system

## Embedded webserver

### WEB-CONFIG (M-50)

The M-50 gateway includes a WEB-CONFIG allowing you to:

- configure the device hierarchy and data access,
- block or restrict access to certain peripherals, protocols or services.

### WEBVIEW-M (M-70)

In addition to the WEB-CONFIG, the M-70 gateway allows a remote visualisation of data on the embedded WEBVIEW-M software, available without licence fees.

- Real-time measurements.
- On-going and terminated alarms.
- Consumption curves and load curves per load or usage.
- Photoview: displays electrical parameters on a customised background such as a site map, an electrical diagram or a panel picture to provide an overview of your electrical installation.

### Data storage

These gateways extend the memory of connected devices so you can log a year's worth of measurements, load curves and consumption curves.



## Configuration

### Device consumption

Device	Power supplied (W)
Power supply	
P15 100-240 VAC / 24 VDC	15
P30 100-240 VAC / 24 VDC	20
Device	Power consumed (W)
Cables	
50-metre package	1.5
System interfaces	
DIRIS Digiware C-31	0.8
DIRIS Digiware D-50/D-70	2.5
DIRIS Digiware M-50/M-70	2.5
Voltage module	
DIRIS Digiware U-xx	0.72
DIRIS Digiware U-3xdc	0.6
Current modules	
DIRIS Digiware I-3x	0.52
DIRIS Digiware I-4x	1.125
DIRIS Digiware I-6x	0.7
DIRIS Digiware I-3xdc (+ 3 DC current sensors)	2
DIRIS Digiware S-xx	0.35
Input/output modules	
DIRIS Digiware IO-10/IO-20	0.5
Repeater	
DIRIS Digiware C-32	1.5

### Repeater

With power consumptions higher than 20 W or distances greater than 100 m, a DIRIS Digiware C-32 repeater is required.  
 In a DIRIS Digiware system, a maximum of 2 repeaters may be used.

### Calculation rules for the max. number of devices on the Digiware bus

The total power consumed by the devices connected to the Digiware bus must not exceed the power from the 24 VDC supply.  
 The power supply must not exceed 20 W / 70°C or 27 W / 40°C.

#### Size with P15 power supply (ref: 4829 0120) delivering 15 W


For example, it is possible to use

- 1 DIRIS Digiware M-50 gateway (2.5 W)
  - 1 DIRIS Digiware voltage module U-xx (0.72 W)
  - 50 metres of cable (1.5 W)
  - and
  - 29 DIRIS Digiware current modules S-xx ( $29 \times 0.35 = 10.15$  W)  
 $\Rightarrow$  Total power = 14.87 W
- or
- 9 DIRIS Digiware current modules I-4x ( $9 \times 1.125 = 10.125$  W)  
 $\Rightarrow$  Total power = 14.845 W.

#### Size with a 24 VDC power supply delivering a maximum of 20 W (P30 ref. 4729 0603)

Possible options include:


- 1 DIRIS Digiware M-50 gateway (2.5 W)
  - 1 DIRIS Digiware voltage module U-xx (0.72 W)
  - 50 metres of cable (1.5 W)
  - and
  - 29 DIRIS Digiware current modules I-3x ( $30 \times 0.52 = 15.08$  W)  
 $\Rightarrow$  Total power = 19.8 W
- or
- 14 DIRIS Digiware current modules I-4x ( $13 \times 1.125 = 15.72$  W)  
 $\Rightarrow$  Total power = 19.345 W.

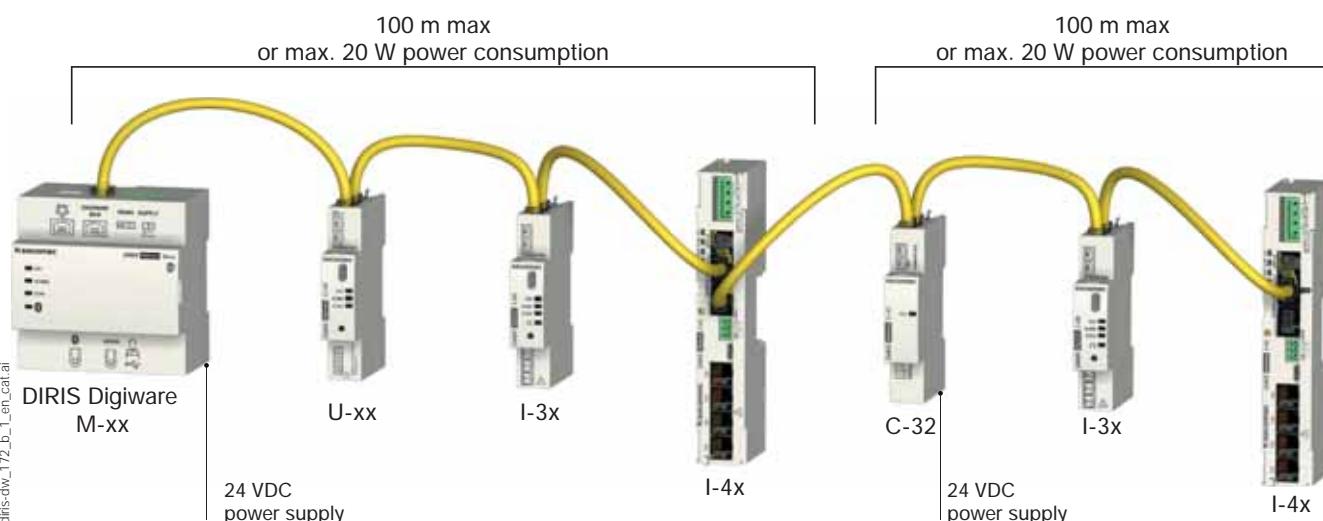

# DIRIS Digiware M

Multi-protocol communication gateways  
for the DIRIS Digiware system

## Dimensions (in/mm)

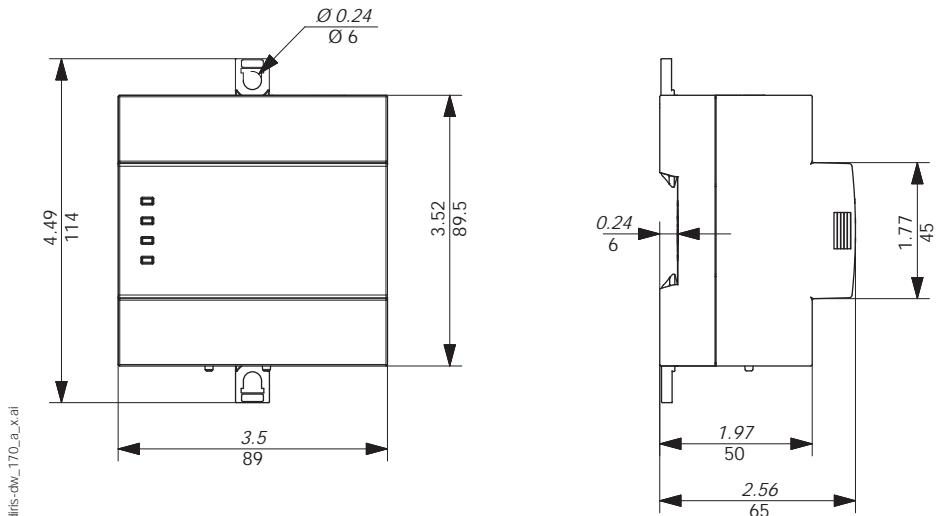

## Technical characteristics

### Electrical characteristics

Power supply	24 VDC ± 10 % - 20 W max
Power consumption	2.5 W
Battery life	10 years

### Mechanical characteristics

Casing type	DIN-rail or back plate mounting
Weight	166 g
Protection degree	IP40 on the nose in modular assembly

### Environmental characteristics

Ambient operating temperature	-10 ... +55°C
Storage temperature	-25 ... +70°C
Operating humidity	95% at 40°C
Operating altitude	< 2000 m

### Communication characteristics

Ethernet RJ45 10/100 Mbs	Gateway function (M-50/M-70): Modbus TCP BACnet IP SNMP v1, v2, v3, Traps
--------------------------	--

#### Digiware bus

Function	2 to 3 half duplex wires
Cable type	Specific Socomec cable with RJ45 connection

#### RS485

Connection type	24 VDC +10 % / -20%
Protocol	Modbus RTU
Baudrate	9600 bds (max. 10 devices) 38400 bds - 115200 bds (max. 32 devices)
Function	Communication with PMD and meters or energy management systems (in RS485 slave mode)

#### USB

Protocol	Modbus RTU over USB
Function	Configuration of gateway and connected PMDs/meters

## References

DIRIS Digiware		Reference
M-50	Multi-protocol Ethernet gateway	4829 0219
M-70	Multi-protocol Ethernet gateway with embedded WEBVIEW-M web server	4829 0220
M-50 Bluetooth	Multi-protocol Ethernet gateway (with Bluetooth connectivity)	4829 0221
M-70 Bluetooth	Multi-protocol Ethernet gateway with embedded WEBVIEW-M web server (with Bluetooth connectivity)	4829 0222
Power supply		Reference
P15	Power supply 100-240 VAC/ 24 VDC 15 W	4829 0120
P30	Power supply 100-240 VAC/ 24 VDC 20 W	4729 0603
Digiware connection cables		Reference
RJ45 cables for Digiware bus	Length 0.06 m	4829 0189
	Length 0.10 m	4829 0181
	Length 0.20 m	4829 0188
	Length 0.50 m	4829 0182
	Length 1 m	4829 0183
	Length 2 m	4829 0184
	Length 3 m	4829 0190
	Length 5 m	4829 0186
	Length 10 m	4829 0187
	50 m reel + 100 connectors	4829 0185
Terminal for Digiware bus (spare part ref. only as already supplied with M-50 and M-70 gateways)		4829 0180
USB configuration cable		4829 0050
Accessories		Available for order in multiples of
Fuse circuit breakers to protect voltage inputs (type RM) 1 pole + neutral		4
gG 10x38 0.5 A fuses		10

## Expert Services

Need help to integrate this system in your network?

No problem for our "Expert Services" team. They will fully integrate all your SOCOMEC devices, audit your system, commission selected equipment and train your staff on its use.

For further information, please contact your nearest SOCOMEC branch.

# DIRIS Digiware Uac

## Voltage acquisition module



DIRIS Digiware U-10ac/U-20ac/ U-30ac



Configuration  
with Easy Config System.

### Function

The **DIRIS Digiware Uac** module measures voltage for the entire system. This pools together all voltage measurements.

The Digiware RJ45 Bus allows you to pass voltage measurements as well as power supply and communication to all connected products.

### Advantages

- 1 single voltage measurement point for the entire system.
- Single point of protection for voltage measuring.
- A complete, dedicated solution:
  - metering,
  - monitoring voltage,
  - quality analysis of the supplied voltage.
- No hazardous voltage on cabinet doors.
- Adapted to all types of network: single-phase, three-phase.

### The solution for

- > Industry
- > Building
- > Infrastructure
- > Data center



### Strong points

- > 1 single voltage measurement point for the entire system
- > Plug & Play
- > Compact



RJ45 (Digiware Bus) cables are available.

### Conformity to standards

- > IEC 61557-12



- > ISO 14025



- > UL



### Create your project


- > Find the best DIRIS Digiware configuration:  
[www.meter-selector.com](http://www.meter-selector.com)



Application	Voltage measurement module	
	Metering	Analysis
<b>DIRIS Digiware Uac</b>	<b>U-10ac</b>	<b>U-30ac</b>
Multi-measurement		
U12, U23, U31, V1, V2, V3, f	•	•
U system, V system		•
Ph/N unbalance		•
Ph/Ph unbalance		•
Quality analysis		
THDv1, THDv2, THDv3, THDu12, THDu23, THDu31		•
Individual harmonics U & V (up to 63rd)		•
Voltage dips, swells and interruptions (EN 50160)		•
Alarms		
On threshold		•
History of average values		
45 days (max)		•
Format		
Width/number of modules	18 mm / 1	18 mm / 1

## Dimensions (mm)

### DIRIS Digiware Uac

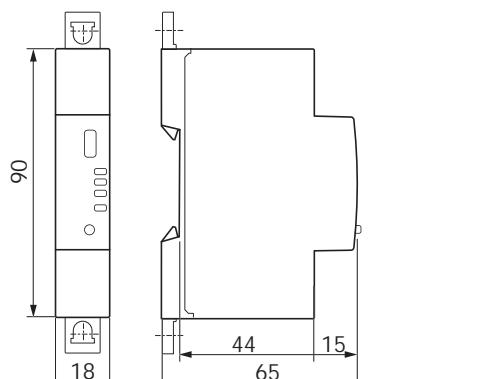

## Specifications

### Measuring characteristics

#### Voltage measurement - DIRIS Digiware Uac

Characteristics of the network measured	50-300 VAC (Ph/N) - 87-520 VAC (Ph/Ph) - CAT III
Frequency range	45 ... 65 Hz
Frequency accuracy	Class 0.02
Network type	Single-phase/ Two-phase / Two-phase with neutral / Three-phase / Three-phase with neutral
Measurement by voltage transformer	Primary: 400 000 VAC Secondary: 60, 100, 110, 173, 190 VAC
Input consumption	≤ 0.1 VA
Permanent overload	300 VAC Ph/N
Accuracy of voltage measurement	Class 0.2
Connection	Removable screw terminal block, 4 positions, stranded or solid 0.2 ... 2.5 mm² cable

### Communication specifications

#### USB

Protocol	Modbus RTU on USB
Function	Configuration of DIRIS Digiware U and I modules
Location	On each DIRIS Digiware U and I measurement module
Connection	Type B micro USB connector

## References

Digiware connection cables		Reference	DIRIS Digiware		Reference
RJ45 cables for Digiware Bus	Length 0.06 m	4829 0189	U-10ac	Metering	4829 0105
	Length 0.10 m	4829 0181	U-30ac	Analysis	4829 0102
	Length 0.20 m	4829 0188			
	Length 0.50 m	4829 0182			
	Length 1 m	4829 0183	Accessories		To be ordered in multiples of
	Length 2 m	4829 0184	Fuse holder to protect voltage inputs (type RM) 3 pole + neutral	3	5701 0019
	Length 3 m	4829 0190	gG 10x38 0.5 A fuses	10	6012 0000
	Length 5 m	4829 0186			
	Length 10 m	4829 0187			
	Reel 50 m + 100 connectors	4829 0185			
Replacement reference: Digiware bus terminating resistor (supplied with C and D devices)		4829 0180			
USB configuration cable		4829 0050			

# DIRIS Digiware S

Current acquisition module with integrated sensors



DIRIS Digiware S



Configuration  
with Easy Config System.

## Function

**DIRIS Digiware S** current acquisition modules have 3 integrated current sensors for the measurement of electrical circuits up to 63 A.

Positioned directly above or below the protective devices, they are associated with the DIRIS Digiware U voltage measurement module to measure consumption, and to monitor the electrical installation and the quality of the power supply.

## Advantages

### Plug & Play

- Save wiring time: the current sensors are integrated in the module.
- Quick RJ45 connection between modules.
- Positioning possible upstream or downstream of the protective device.

### Multi-circuit

Multiple DIRIS Digiware S modules can be used within the measurement system enabling the monitoring of a large number of loads.

### Compact


- A measurement module offering the best compactness/performance ratio of the market.
- Matches the pitch of the protective device.

### Accurate


- Class 0.5 for active energy in accordance with the IEC 61557-12 standard, allowing accurate measurements over a wide range of currents.

## Functional diagram

### Downstream

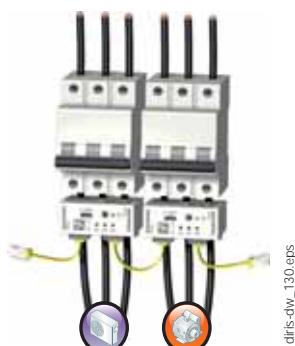

### Upstream

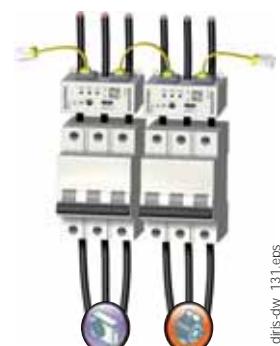

The DIRIS Digiware S measurement module can be mounted upstream or downstream of the protective device solving issues of space constraints.

## The solution for

Distribution boards in:

- > Data center
- > Building
- > Industry



## Strong points

- > Plug & Play
- > Multi-circuit
- > Compact



RJ45 (Digiware Bus) cables are available.

## Integrated technologies



PreciSense



AutoCorrect



VirtualMonitor

For more information see our website  
[www.socomec.com](http://www.socomec.com)

## Compliance with standards

- > IEC 61557-12



- > ISO 14025




- > UL 257746



Current measurement module with integrated sensors		
	Metering	Analysis
<b>Application</b>		
<b>DIRIS Digiware S</b>		
Number of current inputs	3	3
Basic current $I_b$	10 A	10 A
Maximum current $I_{max}$	63 A	63 A
Load type accepted	1P + N 2P / 2P + N 3P / 3P + N	1P + N 2P / 2P + N 3P / 3P + N
<b>Metering</b>		
$\pm \text{kWh}, \pm \text{kvarh}, \text{kVAh}$	.	.
Multi-tariff (max 8)	.	.
Load curves	.	.
<b>Multi-measurement</b>		
$I_1, I_2, I_3, I_n, \Sigma P, \Sigma Q, \Sigma S, \Sigma PF$	.	.
P, Q, S, PF per phase	.	.
Predictive power	.	.
Current unbalance ( $I_{nba}, I_{nb}, I_{dir}, I_{inv}, I_{hom}$ )	.	.
$\Phi_i, \cos \Phi_i, \tan \Phi_i$	.	.
<b>Quality</b>		
THDI1, THDI2, THDI3, THDin	.	.
Individual harmonics I (up to 63rd)	.	.
Crest factors U, V, I	.	.
K factor	.	.
Overcurrents	.	.
<b>Alarms</b>		
Thresholds and combinations	.	.
Wiring errors	.	.
Protective device	.	.
<b>Trends</b>		
Average values	.	.
<b>Format</b>		
Width	54 mm	54 mm


### Mounting accessories

Temporary MCB insert  
(for use during panel assembly)

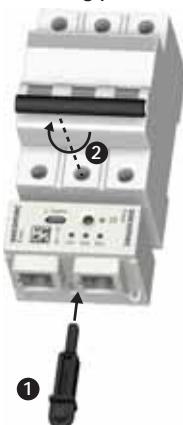

diris-dw\_137\_b\_x.ai

DIN rail and back plate mounting

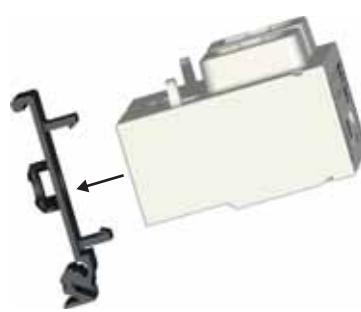


Cable tie tether



# DIRIS Digiware S

Current acquisition module with integrated sensors


## Dimensions (mm)

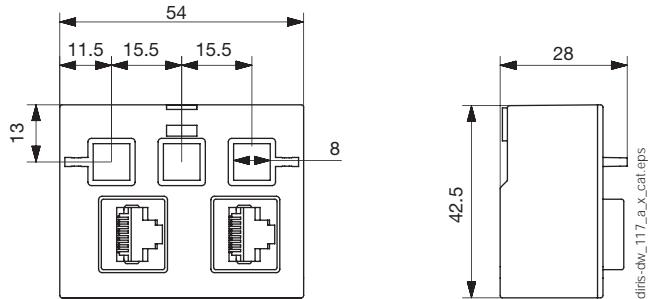


## Connections

Current is measured by the integrated inputs I01, I02 and I03 on the DIRIS Digiware S module.


### 3P+N - 3CT

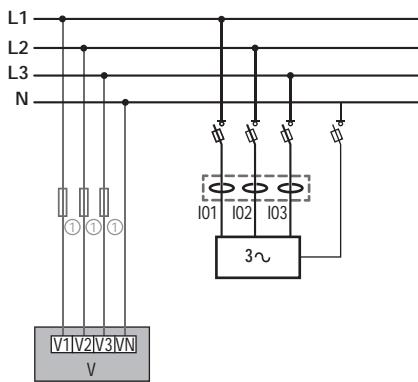


### 3P - 3 CT

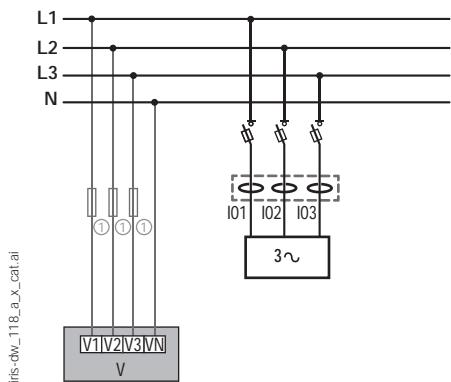


### 2P+N - 2CT & 2P+N - 1CT

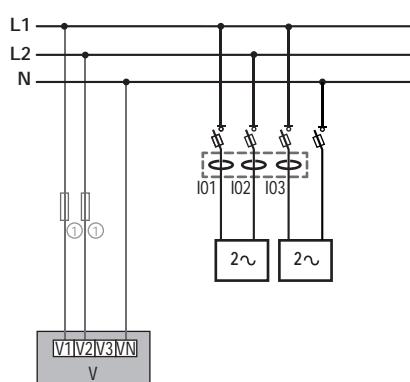


### 1P+N - 1 CT (3x)

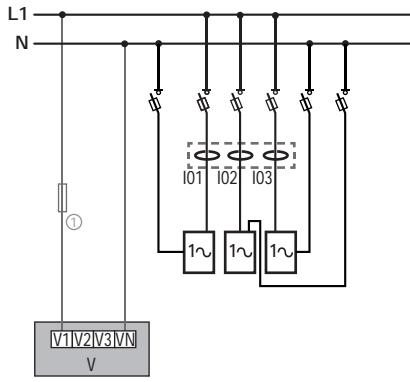

### 3P+N - 1CT (3x)

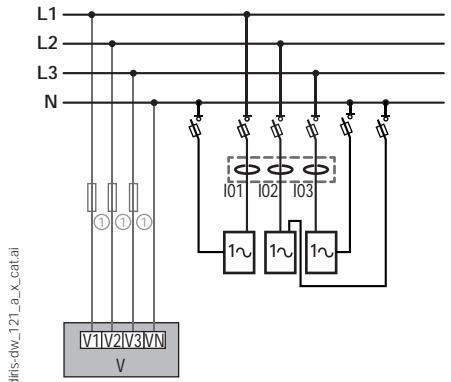

### 2P+N - 1CT (3x)

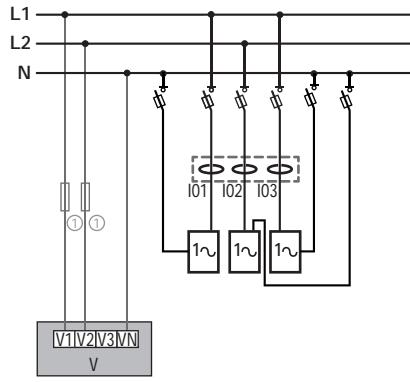

DIRIS Digiware S   Load

Fuses: 0.5 A gG/BS 88 2 A gG/0.5 A class CC

diris-dw\_118\_a\_x\_cat.ai   diris-dw\_119\_a\_x\_cat.ai   diris-dw\_120\_a\_x\_cat.ai  
diris-dw\_121\_a\_x\_cat.ai   diris-dw\_122\_a\_x\_cat.ai   diris-dw\_123\_a\_x\_cat.ai

## Technical characteristics

### Measurement characteristics

#### Measurement of current

Number of current inputs	3
Associated current sensors	Integrated in the product
Basic current Ib	10 A
Maximum current I <sub>max</sub>	63 A
Current measurement accuracy	Class 0.5 IEC 61557-12

#### Measurement of energy

Accuracy of active energy	Class 0.5 IEC 61557-12
Accuracy of reactive energy	Class 1 IEC 61557-12

### Mechanical characteristics

Casing type	DIN rail or back plate mounting
Casing protection index	IP20 / IK08
Weight	63 g
Module power consumption	0.35 VA

### Communication specifications

#### Digiware BUS

Function	Connection between DIRIS Digiware S, U, I modules and system interfaces
Cable type	Specific Socomec cable with RJ45 connections
<b>USB</b>	
Protocol	MODBUS RTU on USB
Function	Configuration of DIRIS Digiware modules
Location	On each DIRIS Digiware module
Connection	Type B micro USB connector

### Environmental specifications

Ambient operating temperature	-10 ... +55°C
Storage temperature	-25 ... +70°C
Operating humidity	40°C / 95% RH
Operating altitude	< 2000 m

## References

DIRIS Digiware S		Reference
S-130	Metering - 3 integrated current inputs	4829 0160
S-135	Analysis - 3 integrated current inputs	4829 0161
Accessories		Reference
DIN rail and back plate mounting clip (x10)		4829 0195
Temporary MCB insert (x10)		4829 0196

Digiware connection cables		Reference
RJ45 cables for Digiware Bus	Length 0.06 m <sup>(1)</sup>	4829 0189
	Length 0.10 m	4829 0181
	Length 0.20 m	4829 0188
	Length 0.50 m	4829 0182
	Length 1 m	4829 0183
	Length 2 m	4829 0184
	Length 3 m	4829 0190
	Length 5 m	4829 0186
	Length 10 m	4829 0187
	50 m reel + 100 connectors	4829 0185
Termination for Digiware Bus (supplied with interfaces C and D)		4829 0180
USB configuration cable		4829 0050

(1) The RJ45 6 cm cables can be used on 3-pole or 4-pole protective devices.

## Expert Services

### Require integration onto your network?


No problem for our "Expert Services" team. They will fully integrate all your SOCOMEC devices,

**audit** your system, **commission** selected equipment and **train** your staff on its use.

For further information, please contact your nearest SOCOMEC branch.

# DIRIS Digiware Iac

## Current acquisition modules

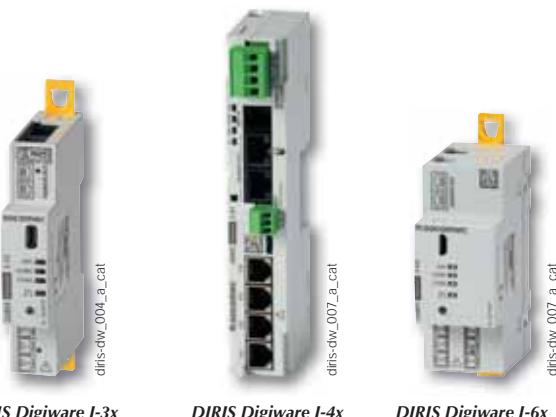

Configuration  
with Easy Config System.

### Function

**DIRIS Digiware Iac** modules measure consumption and monitor the system at the closest point to the loads. The flexibility of these modules allows you to allocate the loads to be measured or monitored through independent current inputs.

For example:

- 1 three-phase load,
- 3 single-phase loads.

The RJ45 and RJ12 connections allow you to connect modules very quickly and to automatically configure connected current sensors:

- communication address,
- load type,
- sensor type and ratio,
- automatic rating and verification of current travel direction.

Wiring errors are also prevented and installation is simplified.

### Advantages

- RJ45 and RJ12 rapid connection.
- Available with 3, 4 or 6 inputs.
- Single-output or multi-output for maximum optimisation of the number of products.
- Compact format: 1 or 2 modules sized for integration at the closest point to the loads.
- A complete, dedicated solution:
  - metering,
  - monitoring,
  - quality analysis.

- Compliant with standard IEC 61557-12, guaranteeing the quality and accuracy of the system:
  - class 0.5 for the 2 - 120% rated current global measurement chain  $I_n$  (with TE/ iTR/TF current sensors).

### The solution for

- > Industry
- > Building
- > Infrastructure
- > Data center



### Strong points

- > Multi-circuit
- > Plug and Play
- > Compact
- > High-precision measurement chain

### Integrated technologies



For more information see our website  
[www.socomec.com](http://www.socomec.com)

### Conformity to standards

- > IEC 61557-12



- > ISO 14025



- > UL



### Create your project

- > Find the best DIRIS Digiware configuration:  
[www.meter-selector.com](http://www.meter-selector.com)




Application	Current measurement modules						
	Metering	Analysis	Monitoring	Analysis	Metering		
<b>DIRIS Digiware Iac</b>	<b>I-30</b>	<b>I-31</b>	<b>I-35</b>	<b>I-43</b>	<b>I-45</b>	<b>I-60</b>	<b>I-61</b>
Number of current inputs	3	3	3	4	4	6	6
Metering							
± kWh, ± kvarh, kWh	•	•	•	•	•	•	•
Load curves		•	•		•		•
Multi-tariff		•	•		•		•
Multi-measurement							
I1, I2, I3, In, ΣP, ΣQ, ΣS, ΣPF	•	•	•	•	•	•	•
P, Q, S, PF per phase		•	•	•	•		•
Predictive power			•		•		
Current unbalance (Inba, Idir, linv, lhom, Inb)			•		•		
Phi, cos Phi, tan Phi			•		•		
Quality							
THDI1, THDI2, THDI3, THDin			•	•	•		
Individual harmonics I (up to 63rd)			•		•		
Overcurrents			•		•		
Alarms							
On threshold			•		•		
Inputs/outputs				2/2	2/2		
History of average values							
45 days (max)			•		•		
Format							
Width/number of modules	18 mm / 1	18 mm / 1	18 mm / 1	27 mm / 1.5	27 mm / 1.5	36 mm / 2	36 mm / 2

## Accessories

### Digiware plug-in connector

With the Digiware plug-in connector you can disconnect a DIRIS Digiware module from the Bus while ensuring the DIRIS Digiware system continues to run downstream.

This accessory is particularly useful in applications with retractable drawers or critical applications such as in data centres.

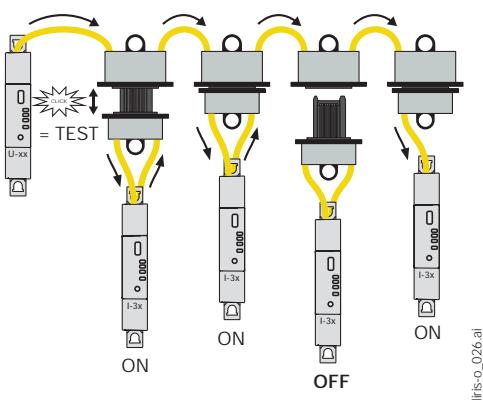


# DIRIS Digiware Iac


Current acquisition modules

## Dimensions (mm)

DIRIS Digiware I-3xac / I-6xac

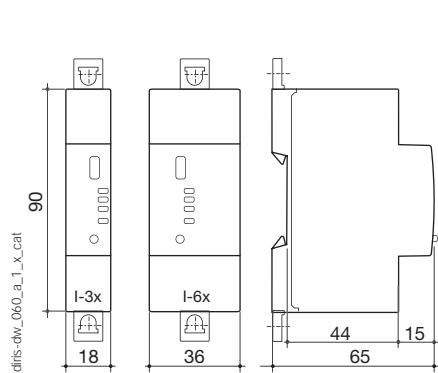

DIRIS Digiware I-4xac

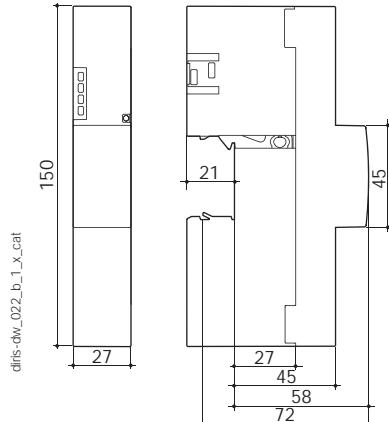

## Connections

### Associated current sensors

Various types of current sensors are connected to the DIRIS Digiware: closed (TE), split core (TR/TR) or flexible (TF). This range of sensors can be adapted to all types of new or existing installations. A rapid RJ12 connection makes wiring easy and reliable and prevents wiring errors. The DIRIS Digiware system automatically recognises the sensor size and type. This guarantees the overall accuracy of the DIRIS Digiware + current sensor measurement chain.


For more information see "TE, TR and TF sensors" pages.

## Network and connection examples

### I-3x

#### Three-phase


3P - 3CT (1 three-phase load)

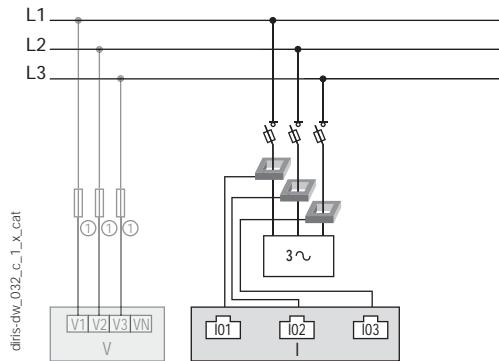

### I-4x

#### Three phase + neutral


3P+N - 4CT (1 three-phase load + Neutral measured)

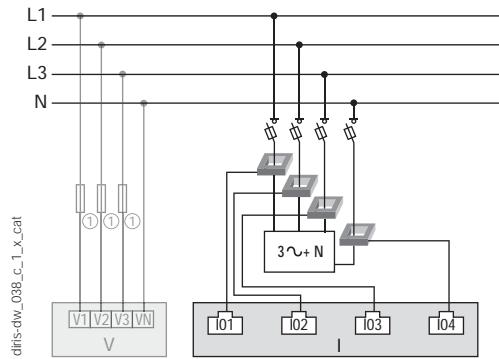

1. 0.5 A gG / 0.5 A class CC fuses.


### Three-phase

3P - 1CT (3 balanced, three-phase loads)

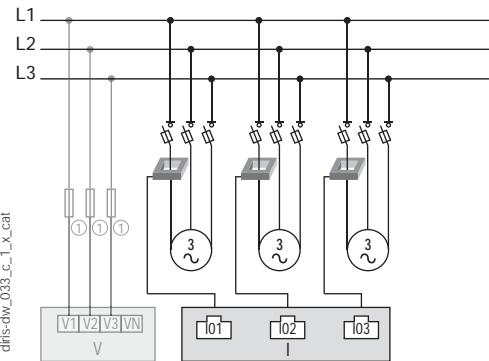

### Single-phase

1P+N-1CT (4 single-phase loads)

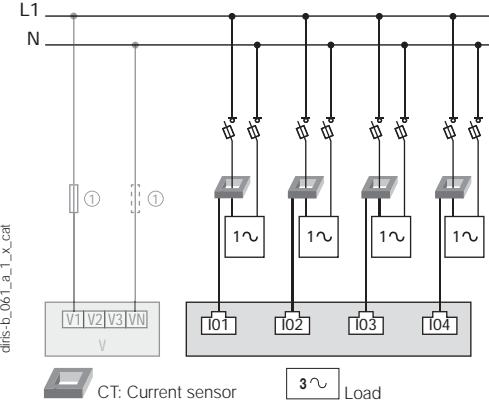

CT: Current sensor

3~ Load

## Specifications

### Measuring characteristics

Current measurement - DIRIS Digiware Iac	
Number of current inputs	I-3x: 3 / I-45: 4 / I-6x: 6
Associated current sensors	Solid TE, split-core TR / iTR, flexible TF current sensors
Accuracy of current measurement	0.2 DIRIS Digiware class only Class 0.5 with TE, iTR or TF sensors Class 1 with TR sensors
Connection	Specific Socomec cable with RJ12 connectors

### Inputs - DIRIS Digiware I-45ac

Number of inputs	2
Type / Power supply	Non-insulated input, internal polarisation 12 VDC max, 1mA
Input functions	Logic status, pulse meter, multi-tariff
Connection	Removable screw terminal block, stranded or solid 0.14-1.5 mm <sup>2</sup> cable

### Outputs - DIRIS Digiware I-45ac

Number of outputs	2
Relay type	230 VAC ±15 % - 1 A 30 VDC - 3 A
Function	Configurable alarm (current, power, etc.) when threshold is exceeded or remote controlled status
Connection	Removable screw terminal block, stranded or solid 0.2-2.5 mm <sup>2</sup> cable

### Communication specifications

USB	
Protocol	Modbus RTU on USB
Function	Configuration of DIRIS Digiware U and I modules
Location	On each DIRIS Digiware U and I measurement module
Connection	Type B micro USB connector

## References

DIRIS Digiware		Reference
I-30	Metering - 3 current inputs	4829 0110
I-31	Metering + load curve - 3 current inputs	4829 0111
I-35	Analysis - 3 current inputs	4829 0130
I-43	Monitoring - 2 inputs/ 2 outputs - 4 current inputs	4829 0129
I-45	Analysis - 2 inputs/ 2 outputs - 4 current inputs	4829 0131
I-60	Metering - 6 current inputs	4829 0112
I-61	Metering + load curve - 6 current inputs	4829 0113

Accessories		Reference
Digiware x 5 plug-in connector		4829 0605

Digiware connection cables		Reference
RJ45 cables for Digiware Bus	Length 0.06 m	4829 0189
	Length 0.10 m	4829 0181
	Length 0.20 m	4829 0188
	Length 0.50 m	4829 0182
	Length 1 m	4829 0183
	Length 2 m	4829 0184
	Length 3 m	4829 0190
	Length 5 m	4829 0186
	Length 10 m	4829 0187
	Reel 50 m + 100 connectors	4829 0185
Digiware bus terminating resistor (supplied with C and D devices)		4829 0180
USB configuration cable		4829 0050

(1) DIRIS D-30 display characteristics see "DIRIS B" pages.

## Expert Services

### Require integration onto your network?


No problem for our "Expert Services" team. They will fully integrate all your SOCOMEC devices, audit your system, commission selected equipment and train your staff on its use.

For further information, please contact your nearest SOCOMEC branch.

# TE sensors

## Solid current sensors

used with DIRIS Digiware, DIRIS A-40 and DIRIS B

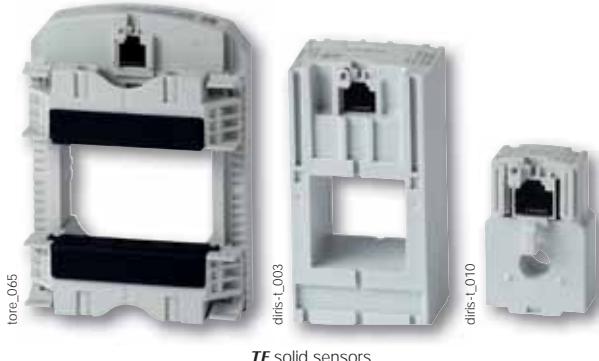

**TE** solid sensors

### Function

TE smart current sensors measure the load currents of an electrical system and send the data to meters and measurement hubs via an RJ12 plug-and-play output. Thanks to a wide measurement range, TE current sensors cover the full current range of 5 to 2000 A, with 7 references. TE solid current sensors can be connected to DIRIS Digiware, DIRIS A-40 and DIRIS B via a rapid RJ12 connection.

Numerous accessories are available to aid the installation of sensors in any type of cabinet.

### Advantages

#### Plug & Play

- A rapid RJ12 connection makes wiring easy and reliable and prevents wiring errors. This also allows automatic detection of the sensor type and size/transformation ratio.
- The sensors can be installed in both directions.

#### Accuracy as per standard IEC 61557-12

- Class 0.5 for the global measuring chain (measurement hub + TE current sensors) from 2 to 120% of the nominal current  $I_n$ .

#### Installation

- The TE solid sensor range is specially designed for new installations, and has the same pitch as the most common protective devices.

### The solution for

- > Industry
- > Building
- > Infrastructure
- > Data center



### Strong points

- > Plug & Play
- > Accuracy as per standard IEC 61557-12
- > Installation

### Conformity to standards

- > IEC 61557-12



- > ISO 14025



- > UL



### Create your project

- > Find the best DIRIS Digiware configuration: [www.meter-selector.com](http://www.meter-selector.com)



DIGITAL TOOL AVAILABLE

## Mounting

Linear assembly with the protective devices  
TE-25 / TE-35 / TE-45 / TE-55 / TE-90



DIN rail mounted




TE-90 clamps



Staggered assembly  
TE-18 / TE-35 / TE-45 / TE-55




Back-plate mounting

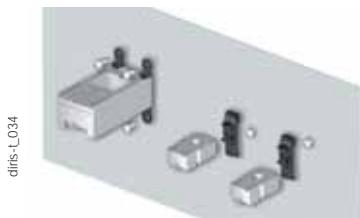

Cable mounting



Bar mounting

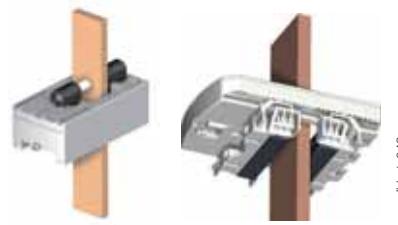

## Connections

TE / TR / iTR / TF current sensors



# TE sensors

## Solid current sensors

used with DIRIS Digiware, DIRIS A-40 and DIRIS B

### Mounting accessories

Mounting accessories delivered with TE sensors:

Switch mounting	TE-18	TE-25	TE-35 TE-45 TE-55	TE-90
	DIN rail and back-plate	1 pc		2 pcs
	DIN rail		2 pcs	2 pcs
	Back-plate		4 pcs	4 pcs
	Busbar			2 pcs

diris-L041\_a\_1.cat · diris-L042\_a\_ · 043\_a · 044\_a · 045\_a

### Compatible accessories

#### Adapter for CT with 5A secondary



diris-L041\_a\_1.cat

- With this adapter you can use a current transformer with a 1 A or 5 A output on DIRIS Digiware I, DIRIS B and DIRIS A-40.
- For use with 5 A CTs (measurement up to 10 000 A) or 1 A CTs (measurement up to 2000 A). The dimensions are the same as the TE-18.

#### Coupling link

- Associated with the TE range, this accessory is for inter-connecting the sensors when linear or staggered mounted.



diris-L020\_a\_1\_cat



diris-L046\_a\_1\_cat

#### Sealable cover

- Using a sealable cover guarantees the immunity of the sensor connection on TE/TR/iTR / TF current sensors.







### Dimensions (mm)

#### TE - Solid current sensors

TE-18

TE-25 / TE-35 / TE-45 / TE-55

TE-90

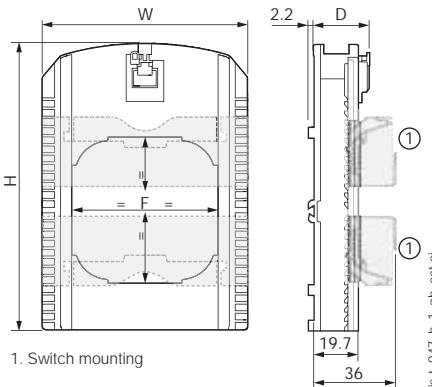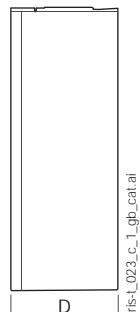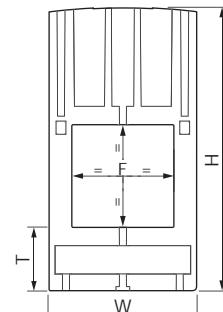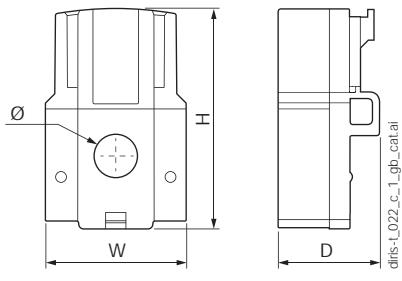

1. Switch mounting

diris-L047\_b\_1\_gb\_cat.ai

Model	Nominal current range (A)	Real range covered (A)	Pitch (mm)	H x W x D (mm)	F (mm)	T (mm)
TE-18	5 ... 20 / 25 ... 63	0.1 ... 24 / 0.5 ... 75	18	45 x 28 x 20	8.6	-
TE-25	40 ... 160	0.8 ... 192	25	65 x 25 x 32.5	13.5 x 13.5	17.5
TE-35	63 ... 250	1.26 ... 300	35	71 x 35 x 32.5	21 x 21	17.5
TE-45	160 ... 630	3.2 ... 756	45	86 x 45 x 32.5	31 x 31	19.5
TE-55	400 ... 1000	8 ... 1200	55	100 x 55 x 32.5	41 x 41	21.5
TE-90	600 ... 2000	12 ... 2400	90	126 x 90 x 24.6	64 x 64	-

## Specifications

### TE - Solid current sensors

Model	TE-18	TE-18	TE-25	TE-35	TE-45	TE-55	TE-90
Nominal current range $I_n$ (A)	5 ... 20	25 ... 63	40 ... 160	63 ... 250	160 ... 630	400 ... 1000	600 ... 2000
Real range covered (A)	0.1 ... 24	0.5 ... 75	0.8 ... 192	1.26 ... 300	3.2 ... 756	8 ... 1200	12 ... 2400
Max. current (A)	24	75.6	192	300	756	1200	2400
Weight (g)	24	24	69	89	140	187	163
Max. voltage (phase/neutral)			300 V			600 V	
Rated withstand voltage				3 kV			
Frequency				50/60 Hz			
Intermittent overload				10 x $I_n$ over 1 sec			
Measurement category				CAT III			
Protection degree				IP30 / IK06			
Operating temperature				-10 ... +70°C			
Storage temperature				-25 ... +85°C			
Relative humidity				95% RH non-condensing			
Altitude				< 2000 m			
Connection				Socomec RJ12 cable			

## References

Model	Nominal current range (A)	Real range covered (A)	Pitch (mm)	Reference
TE-18	5 ... 20	0.1 ... 24	18	4829 0500
TE-18	25 ... 63	0.5 ... 75	18	4829 0501
TE-25	40 ... 160	0.8 ... 192	25	4829 0502
TE-35	63 ... 250	1.26 ... 300	35	4829 0503
TE-45	160 ... 630	3.2 ... 756	45	4829 0504
TE-55	400 ... 1000	8 ... 1200	55	4829 0505
TE-90	600 ... 2000	12 ... 2400	90	4829 0506

Accessories		Reference
Coupling link (20 linear assembly parts and 10 for staggered assembly)		4829 0598
5 A CT adapter (max primary current 2000 A / 1 A or 10 000 A / 5 A)		4829 0599
Sealable caps (20 pieces)		4829 0600

RJ12 connection cables	Cable length (m)									
	0.1	0.2	0.3	0.5	1	2	3	5	10	50 m reel + 100 connectors
Number of cables	Reference	Reference	Reference	Reference	Reference	Reference	Reference	Reference	Reference	Reference
1	-	-	-	-	-	-	-	4829 0602	4829 0603	4829 0601
3	4829 0580	4829 0581	4829 0582	4829 0595	4829 0583	4829 0584	4829 0606	-	-	-
4	-	-	-	4829 0596	4829 0588	4829 0589	-	-	-	-
6	4829 0590	4829 0591	4829 0592	4829 0597	4829 0593	4829 0594	-	-	-	-

# TR/iTR sensors

## Split-core AC current sensors

used with DIRIS Digiware, DIRIS A-40 and DIRIS B



**TR** Split-core current sensors

### Function

The **split-core current sensors** in the TR and iTR ranges enable the current of an electrical installation to be measured. Used with power monitoring device DIRIS Digiware, DIRIS A-40, DIRIS B, they make it possible to perform measurements between 25 and 600 A, with guaranteed accuracy. The RJ12 connection provides quick connections, and the integrated intelligence prevents any configuration errors.

The sensors in the iTR range revolutionise the world of measurement and provide access to VirtualMonitor status monitoring technologies and to AutoCorrect automatic configuration.

### Advantages of the TR and iTR ranges

#### Smart sensors

- Sensors with an extended operational range.
- Automatic detection of rating.
- Secured disconnection of load.
- Quick connection via RJ12 and identification of cable by colour code.

#### Accurate

- Measurement precision guaranteed in acc. with standard IEC 61557-12 : class 0.5 (iTR) or 1 (TR) for the global measuring chain from 2 to 120% of In.

### Unique advantages of the iTR range

#### VirtualMonitor technology

VirtualMonitor provides monitoring of protective devices:

- Across the entire electrical installation.
- Remotely and in real-time.
- Without additional hardware or wiring (no auxiliary contacts needed).

#### AutoCorrect technology

AutoCorrect guarantees that your measurement system is working correctly:

- Automatic wiring control (current voltage phase association).
- Correction of errors.
- Feature available off load.

### The solution for

- > Retrofit applications
- > Industry
- > Building
- > Infrastructure
- > Data centers



### Strong points

- > Smart sensors
- > PreciSense technology:  
Accurate
- > Easy installation and configuration

### Integrated technologies<sup>(1)</sup>



(1) AutoCorrect and VirtualMonitor are only available with iTR sensors.

For more information see our website  
[www.socomec.com](http://www.socomec.com)

### Compliance with standards

- > IEC 61557-12



- > ISO 14025



- > UL



### Create your project

- > Find the best DIRIS Digiware configuration:  
[www.meter-selector.com](http://www.meter-selector.com)




## Installation

Cable mounting



## Dimensions (mm)

TR-10 / TR-14 / TR-21 / TR-32

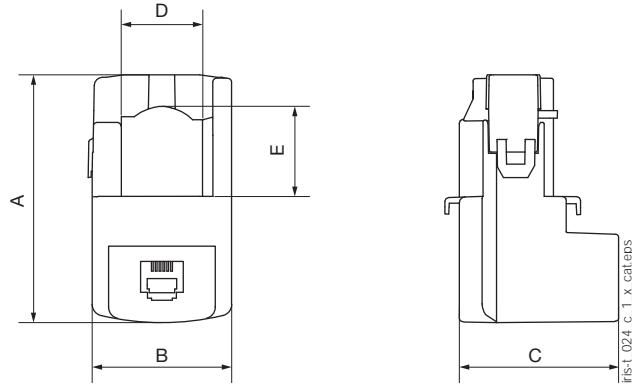

Model	Nominal current range (A)	Real range covered (A)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	$\varnothing$ (mm)
TR/iTR-10	25 ... 63	0.5 ... 75.6	44	26	28	-	-	10
TR/iTR-14	40 ... 160	0.8 ... 192	67	29	28	14	15	14
TR/iTR-21	63 ... 250	1.26 ... 300	65	37	43	21	23	21
TR/iTR-32	160 ... 600	3.2 ... 720	86	53	47	32	33	32

## Technical characteristics

Model	TR-10	iTR-10	TR-14	iTR-14	TR-21	iTR-21	TR-32	iTR-32
Nominal current range $I_n$ (A)	25 ... 63		40 ... 160		63 ... 250		160 ... 600	
Real range covered (A)		0.5 ... 75.6		0.8 ... 192		1.26 ... 300		3.2 ... 720
Max. current (A)		75.6		192		300		720
Weight (g)		74		117		211		311
Max. voltage (phase/neutral)					300 V			
Rated withstand voltage					3 kV			
Frequency					50/60 Hz			
Intermittent overload					10 x $I_n$ for 1 s			
Measurement category					CAT III			
Global class used with Diris Digiware/A-40/B-10/B-30	Class 1	Class 0.5	Class 1	Class 0.5	Class 1	Class 0.5	Class 1	Class 0.5
Protection degree					IP20 / IK07			
Operating temperature range				-10 to +70°C			-10° ... +55°C	
Storage temperature range					-25 to +85°C			
Relative humidity					95% RH non-condensing			
Altitude					< 2000 m			
Connection					Socomec RJ12 cable			

## References

Model	Nominal current range (A)	Real range covered (A)	$\varnothing$ (mm)	Reference	Model	Nominal current range (A)	Real range covered (A)	$\varnothing$ (mm)	Reference
TR-10	25 ... 63	0.5 ... 75	10	4829 0555	iTR-10	25 ... 63	0.5 ... 75	10	4829 0655
TR-14	40 ... 160	0.8 ... 192	14	4829 0556	iTR-14	40 ... 160	0.8 ... 192	14	4829 0656
TR-21	63 ... 250	1.26 ... 300	21	4829 0557	iTR-21	63 ... 250	1.26 ... 300	21	4829 0657
TR-32	160 ... 600	3.2 ... 720	32	4829 0558	iTR-32	160 ... 600	3.2 ... 720	32	4829 0658

RJ12 connection cables	Cable length (m)									
	0.1	0.2	0.3	0.5	1	2	3	5	10	50 m reel + 100 connectors
Number of cables	Reference	Reference	Reference	Reference	Reference	Reference	Reference	Reference	Reference	Reference
1	-	-	-	-	-	-	-	4829 0602	4829 0603	4829 0601
3	4829 0580	4829 0581	4829 0582	4829 0595	4829 0583	4829 0584	4829 0606	-	-	-
4	-	-	-	4829 0596	4829 0588	4829 0589	-	-	-	-
6	4829 0590	4829 0591	4829 0592	4829 0597	4829 0593	4829 0594	-	-	-	-

# TF sensors

## Flexible TF current sensors

used with DIRIS Digiware, DIRIS A-40 and DIRIS B



**TF** Flexible current sensors

diris-L077.eps

### Function

**TF flexible current sensors** measure the load currents of an electrical circuit and send the data to meters and Power Monitoring Devices or current modules via an RJ12 plug-and-play connection. Thanks to a wide measurement range, TF current sensors cover a wide current range from 100 to 6000 A, with only 7 references. TF flexible current sensors can be used with DIRIS Digiware I modules, DIRIS A-40 and DIRIS B.

### Advantages

#### Plug & Play

- A rapid RJ12 connection makes wiring easy and reliable and prevents wiring errors. This also allows automatic detection of the sensor type and rating.
- The sensors can be installed in both directions.

#### Accuracy according to IEC 61557-12

- Class 0.5 for the global measuring chain (PMD + TF current sensors) from 2 to 120% of the nominal current  $I_n$ .
- Accuracy is guaranteed regardless of the position of the conductor in the loop.

#### Safe locking mechanism<sup>(1)</sup>


- The locking system prevents the loop from opening, guaranteeing continuous functioning and accuracy even under harsh conditions.

### Installation

#### Cable mounting



#### Bar mounting



diris-L079.psd

#### Installation

- The TF flexible sensor range is specially designed for existing installations with strict integration constraints or with high-intensity currents.

#### Simplified installation

- The Rogowski integrator is directly integrated to the RJ12<sup>(1)</sup> cable enabling a quick and compact integration (no DIN rail assembly required) inside electrical panels.
- The integrator is self supplied by the PMD through the RJ12 cable and does not need any external power supply.

(1) Except for TF-55.

### The solution for

- > Industry
- > Building
- > Infrastructure
- > Data centers



### Strong points

- > Plug & Play
- > Accuracy according to IEC 61557-12
- > Safe locking mechanism
- > Installation
- > Simplified installation

### Integrated technologies



PreciSense  
For more information see our website  
[www.socomec.com](http://www.socomec.com)

### Compliance with standards

- > IEC 61557-12



- > ISO 14025



- > UL




### Create your project

- > Find the best DIRIS Digiware configuration:  
[www.meter-selector.com](http://www.meter-selector.com)



## Dimensions (mm)

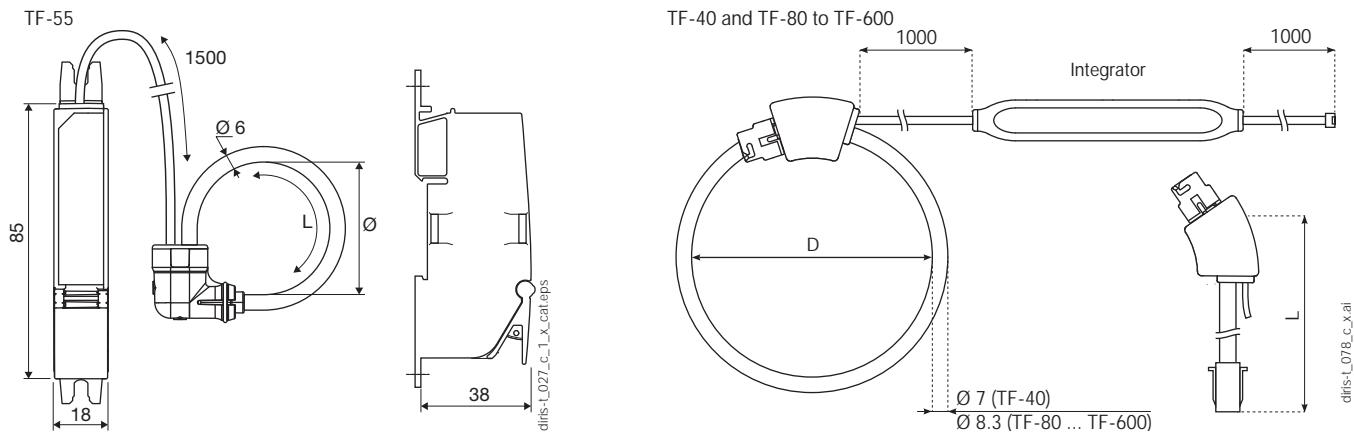

Model	Nominal current range (A)	Real range covered (A)	D = Ø loop (mm)	L = Loop length (mm)
TF-40	100 ... 400	2 ... 480	40	126
TF-55	150 ... 600	3 ... 720	55	173
TF-80	150 ... 600	3 ... 720	80	251
TF-120	400 ... 2000	8 ... 2400	120	377
TF-200	600 ... 4000	12 ... 4800	200	628
TF-300	1600 ... 6000	32 ... 7200	300	942
TF-600	1600 ... 6000	32 ... 7200	600	1885

Integrator dimensions: 128 x 19 x 15 mm

## Technical characteristics

Model	TF-40	TF-55	TF-80	TF-120	TF-200	TF-300	TF-600
Nominal current range $I_n$ (A)	100 ... 400	150 ... 600	150 ... 600	400 ... 2000	600 ... 4000	1600 ... 6000	1600 ... 6000
Real range covered (A)	2 ... 480	3 ... 720	3 ... 720	8 ... 2400	12 ... 4800	32 ... 7200	32 ... 7200
Weight (g)	114	114	130	142	164	193	274
Max. voltage (phase/neutral)				600 V			
Rated withstand voltage				3.6 kV			
Accuracy class			0.5 in association with DIRIS Digiware I, DIRIS A-40, DIRIS B based on IEC 61557-12				
Frequency				50 / 60 Hz			
Intermittent overload				10 x $I_n$ for 1 s			
Measurement category				CAT III			
Protection degree				IP30 / IK07			
Operating temperature				-10 to +70°C			
Storage temperature				-25 to +85°C			
Relative humidity				95% RH non-condensing			
Altitude				< 2000 m			
Connection			Socomec cable or equivalent RJ12 straight, twisted pair, unshielded, 600 V, -10 ... +70 °C				

## References

Model	Nominal current range (A)	Real range covered (A)	D = Ø loop (mm)	L = Loop length (mm)	Reference
TF-40	100 ... 400	2 ... 480	40	126	4829 0573
TF-55	150 ... 600	3 ... 720	55	173	4829 0570
TF-80	150 ... 600	3 ... 720	80	251	4829 0574
TF-120	400 ... 2000	8 ... 2400	120	377	4829 0575
TF-200	600 ... 4000	12 ... 4800	200	628	4829 0576
TF-300	1600 ... 6000	32 ... 7200	300	942	4829 0577
TF-600	1600 ... 6000	32 ... 7200	600	1885	4829 0578
Accessories					Reference
Female/female connector for extension of the RJ12 connection between PMD and TF sensor					4829 0670

RJ12 connection cables	Cable length (m)									
	0.1	0.2	0.3	0.5	1	2	3	5	10	50 m reel + 100 connectors
Number of cables	Reference	Reference	Reference	Reference	Reference	Reference	Reference	Reference	Reference	Reference
1	-	-	-	-	-	-	-	4829 0602	4829 0603	4829 0601
3	4829 0580	4829 0581	4829 0582	4829 0595	4829 0583	4829 0584	4829 0606	-	-	-
4	-	-	-	4829 0596	4829 0588	4829 0589	-	-	-	-
6	4829 0590	4829 0591	4829 0592	4829 0597	4829 0593	4829 0594	-	-	-	-

# DIRIS Digiware R-60

## Residual Current Monitoring module



DIRIS Digiware R-60



Configuration with  
Easy Config System software.

### Function

DIRIS Digiware R-60 modules combine residual current monitoring (RCM) with power metering and monitoring functions, for any combination of 1-phase, 2-phase or 3-phase circuits used in TN-S and TT earthing systems.

With six RJ12 channels, they can be connected to a mix of  $\Delta$ IC residual CTs and TE/TR/iTR/TF current sensors via RJ12 cables enabling quick connection and avoiding wiring errors.

### Advantages

#### 2 in 1

One DIRIS Digiware R-60 module can be connected to residual CTs and traditional TE/TR/iTR/TF current sensors to pool residual current and power monitoring.

#### Multi-circuit

One DIRIS Digiware R-60 module can monitor the residual current on up to 6 circuits.

The Digiware modular concept allows several R-60 modules to be added within a single system, making it easy to implement RCM for a large number of outgoing circuits instead of the main incomer only.

#### Plug & Play solution

The Digiware concept and the RJ45 bus allow:

- easy connection of R-60 modules to an existing DIRIS Digiware system,
- optimal scalability by adding additional modules when needed.

The connection to current sensors is quick and error-free thanks to colour coded RJ12 cables.

#### Smart alarming

DIRIS Digiware R-60 provides the most advanced RCM alarm features for preventive notifications:

- before the residual current device (RCD) trips,
- before leakage currents become hazardous for people and assets,
- if the RCD is defective.

The combination with Virtual Monitor technology specifies if the RCD has tripped on an overload or a high residual current.

#### Patented innovation

Thanks to an automatic learning sequence, launched for a chosen duration representative of the normal operation of the electrical installation, 6 dynamic residual current ( $I_{\Delta}$ ) thresholds are automatically set. This facilitates the determination of the maximum residual current not to be exceeded for each outgoing circuit.

### The solution for

- > Industries
- > Data centres



### Strong points

- > 2 in 1
- > Multi-circuit
- > Plug & play solution
- > Smart alarming
- > Patented innovation

### Compliance with standards

- > IEC 62020
- > IEC 61557-12



- > ISO 14025




### Create your project

- > Find the best  
DIRIS Digiware configuration:  
[www.meter-selector.com](http://www.meter-selector.com)



## Applications

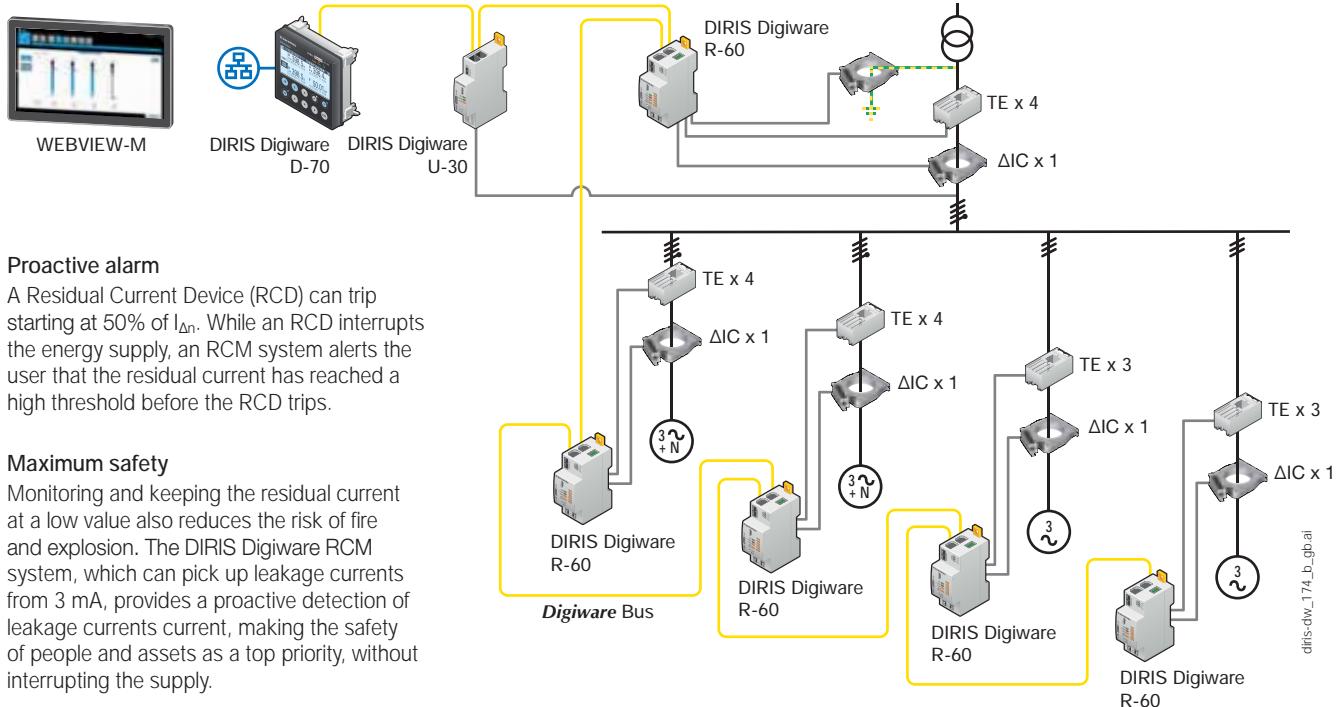


*According to IEC 60364-6 installation standards and many national transpositions, periodic insulation resistance testing is not necessary if permanently monitored by an RCM solution such as the DIRIS Digiware RCM system.*

## Measurements

<b>DIRIS Digiware R-60</b>	
<b>Residual Current Monitoring</b>	
$I_{\Delta}$	•
$I_{PE}$	•
<b>Metering</b>	
+/- kWh, +/- kvarh, kVAh	•
Multi-tariff (max 8)	•
Load curves	•
<b>Multi-measurement</b>	
$I_1, I_2, I_3, In, \Sigma P, \Sigma Q, \Sigma S, \Sigma PF$	•
P, O, S, PF per phase	•
<b>Alarms</b>	
Dynamic $I_{\Delta}$ and $I_{PE}$ thresholds	•
Overloaded neutral conductor	•
Protective device (opening, Trip, defective RCD)	•
$I_{\Delta}$ and $I_{PE}$ comparisons	•
<b>Trends</b>	
$I_{\Delta}$	•
$I_{PE}$	•
Load curves	•

## Front face

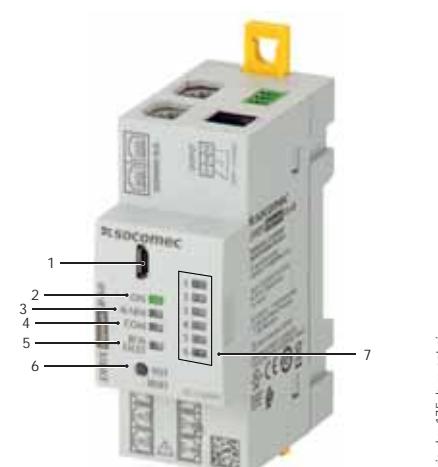

1. USB port for configuration.
2. ON LED. Lights when the device is active.
3. ALARM LED for system alarms (CT disconnected, etc.)
4. COM LED. Flashes when the communication bus is active.
5. RCM FAULT. Lights if there is an RCM alarm on any of the channel 1 through 6.
6. TEST / RESET button. Starts the auto test (long press) and resets alarms (short press). Used during auto-discovery process for the resolution of address conflicts.
7. Individual LED alarm signals for each channel 1 to 6.

# DIRIS Digiware R-60

Residual Current Monitoring module

## Connections

### Associated sensors

Various types of residual CTs and current sensors can be connected to the DIRIS Digiware R-60 module: ΔIC solid-core, ΔIP-R split-core residual CTs, and solid-core TE, split-core TR/iTR, flexible TF current sensors. This range of sensors can be adapted to all types of new or existing installations. A rapid RJ12 connection makes wiring easy and reliable and prevents wiring errors.

For more information: refer to the residual CTs and current sensors catalogue pages

#### TE solid current sensors



#### ΔIC solid-core residual CTs



#### TR/iTR split-core current sensors



#### TF Flexible current sensors




#### ΔIP-R split-core residual CTs



#### Connection examples

##### RCM ( $I_{\Delta}$ ) – 3 x 3-Ph load


Load current monitoring – L1, L2, L3, upstream

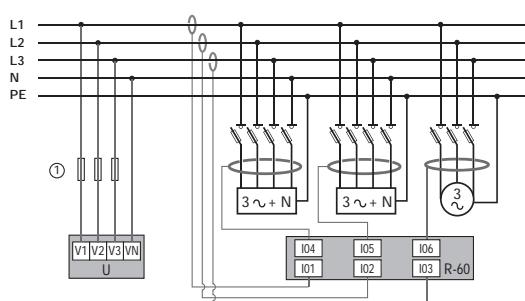

diris-dw\_176\_b\_1.x.cat.ai

##### RCM ( $I_{\Delta}$ ) – 3 x 3-Ph load


Load current monitoring – 3 x 3-Ph balanced loads

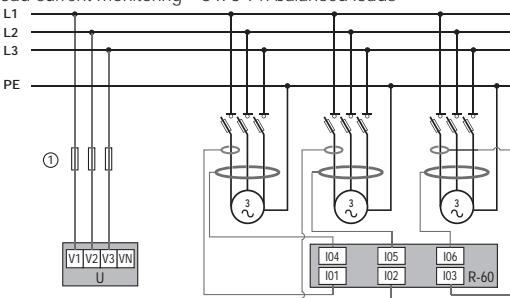

diris-dw\_180\_a\_1.x.cat.ai

##### RCM ( $I_{\Delta} + I_{PE}$ ) – 1 x 3-Ph load


Load current monitoring – 1 x 3-Ph load (L1, L2, L3, N)

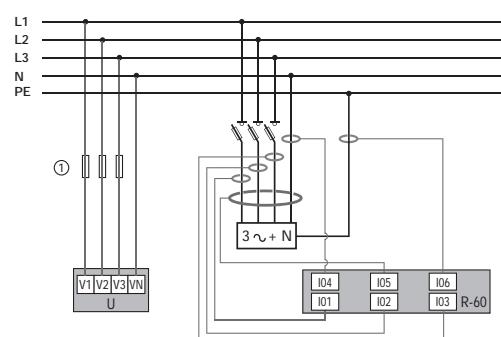

diris-dw\_179\_a\_1.x.cat.ai

##### RCM ( $I_{\Delta}$ ) – 3 x 1-Ph load

Load current monitoring – 3 x 1-Ph loads

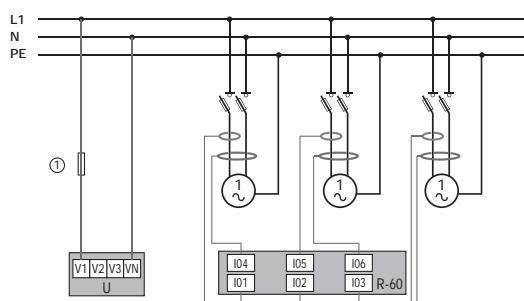

diris-dw\_181\_a\_1.x.cat.ai

Balanced load


Unbalanced load

Current sensor


2 A gG

Residual CT

## Dimensions (mm)

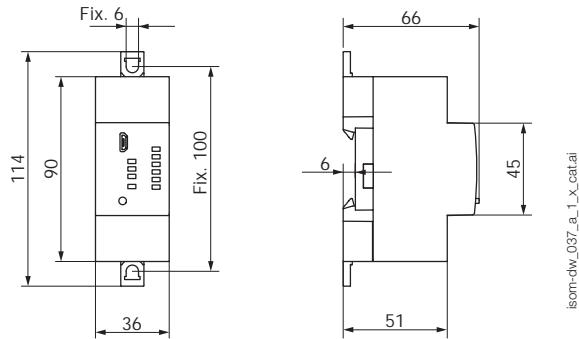

## Terminals and wiring

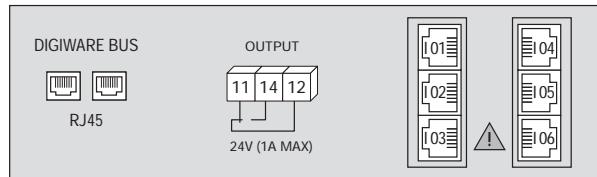

isom-dw\_037\_a\_1\_x\_cat.ai

DIGIWARE BUS: RJ45 bus to connect to other Digiware modules

11 - 12 - 14: alarm relay output  
I01 - I02 - I03 - I04 - I05 - I06: RJ12 connection of residual CTs (via the T-10 adaptor) and current sensors

## Technical characteristics

### Measurement characteristics

RCM type	Type A according to IEC 62020
Number of RJ12 channels	6
Residual CTs connection	RJ12 cables via Digiware T-10 adaptor
Current sensors connection	RJ12 cables
Current measurement accuracy	Class 0.5 according to IEC 61557-12
Active energy accuracy	Class 0.5 according to IEC 61557-12
Reactive energy accuracy	Class 1 according to IEC 61557-12

### Digital output characteristics

Number of contacts	1
Contact type	Changeover switch
Nominal voltage	24 VAC / 24 VDC
Max current	1 A
Default mode	Normally open

### Mechanical characteristics

Mounting type	DIN rail or back plate
Casing protection index	IP20
Weight	103 g

### Electrical characteristics

Auxiliary power supply	24 VDC with Digiware bus
R-60 consumption	0.5 W

### Communication characteristics

Digiware bus	
Function	Connection between Digiware modules
Cable type	Specific Socomec RJ45 cable
USB	
Protocol	Modbus RTU on USB
Function	Configuration of DIRIS Digiware modules
Cable type	Type B micro USB connector

### Environmental characteristics

Operating temperature	-10 ... +55°C
Storage temperature	-25 ... +70°C
Operating humidity	55°C / 97% RH
Operating altitude	<2000 m

## References

Module		Reference
DIRIS Digiware R-60		4829 0114
Accessories		Reference
DIRIS Digiware T-10 RJ12 adaptor		4829 0620

RJ12 connection cables	Cable length (m)									
	0.1	0.2	0.3	0.5	1	2	3	5	10	50 m reel + 100 connectors
Number of cables	Reference	Reference	Reference	Reference	Reference	Reference	Reference	Reference	Reference	Reference
1	-	-	-	-	-	-	-	4829 0602	4829 0603	4829 0601
3	4829 0580	4829 0581	4829 0582	4829 0595	4829 0583	4829 0584	4829 0606	-	-	-
4	-	-	-	4829 0596	4829 0588	4829 0589	-	-	-	-
6	4829 0590	4829 0591	4829 0592	4829 0597	4829 0593	4829 0594	-	-	-	-

## Expert Services

### Require integration onto your network?

No problem for our "Expert Services" team. They will fully integrate all your SOCOMEC devices,

audit your system, commission selected equipment and train your staff on its use.

For further information, please contact your nearest SOCOMEC branch.

# DIRIS Digiware IO

Digital and analogue input/output modules



**DIRIS Digiware IO-10**  
4 digital inputs/2 digital outputs

**DIRIS Digiware IO-20**  
2 analogue inputs



Configuration  
with Easy Config System.

## Function

DIRIS Digiware IO modules enrich the measurement system with multiple features:

- DIRIS Digiware IO-10 modules have 4 digital inputs and 2 digital outputs.
- The 4 digital inputs can be used to monitor the status of third-party devices (position of protective devices, trip counter) or to collect pulses from multi-fluid meters.
- The 2 digital outputs allow the remote control of third-party equipment signal. Alarms can be configured and assigned to the digital outputs.

- Thanks to their 2 analogue inputs, DIRIS Digiware IO-20 modules can collect data from analogue sensors (pressure, humidity, temperature...).

All the information reported by the IO-10 and IO-20 modules can be viewed on DIRIS Digiware D-xx displays and on Webview, the web server embedded in DIRIS G gateways and in the DIRIS Digiware D-70 display unit.

## Advantages

### Plug & Play

The IO modules can be easily added anywhere within the measurement system thanks to a quick RJ45 connection.

### Multifunction

The combination of voltage measuring modules, current measuring modules, and input/output modules makes DIRIS Digiware a complete and versatile system.

### Integrated

All the reported information is accessible from the displays, from WEBVIEW or any other centralised management software.

### Compact

The modular format allows the quick connection of a large number of IO-10 and IO-20 modules.

## The solution for

- > Industry
- > Building
- > Data center



## Strong points

- > Plug & Play
- > Multifunction
- > Integrated
- > Compact

## Compliance with standards

- > IEC 61557-12
- > IEC 61010



- > ISO 14025



- > UL




## Create your project


- > Find the best DIRIS Digiware configuration:  
[www.meter-selector.com](http://www.meter-selector.com)



## Application diagram

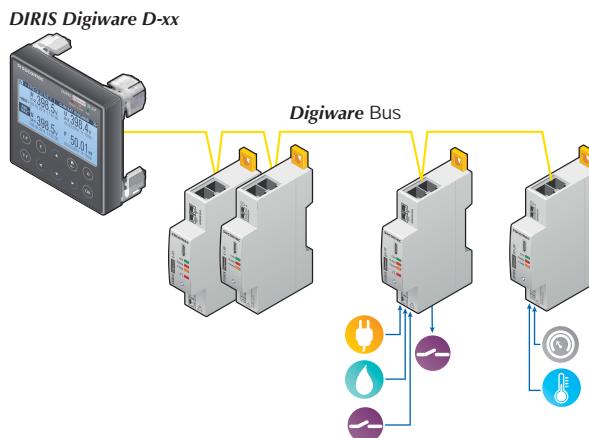

## Dimensions (mm)


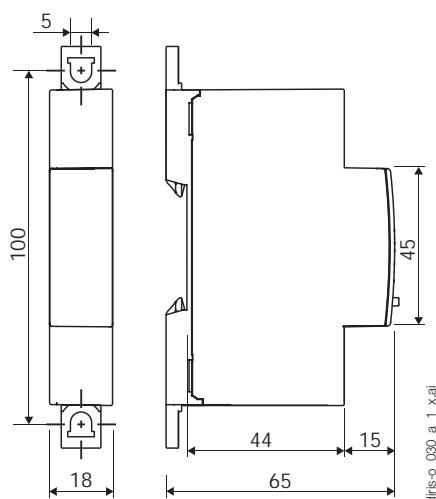


## Connections

### DIRIS Digiware IO-10

Digital inputs/outputs



Digiware Bus

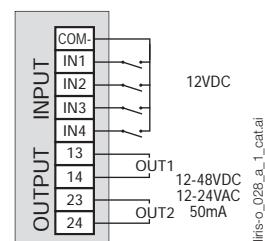

### DIRIS Digiware IO-20

Analogue inputs

Digiware Bus

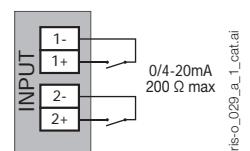

## Technical characteristics

### Measuring characteristics

#### Digital inputs/outputs- DIRIS Digiware IO-10

Number of inputs	4
Type/power supply	Insulated input, internal polarisation 12 VDC max., 3 mA
Input function	- Status of third-party devices - Monitoring of protective devices (ON/OFF, Trip) - Pulse counter
Number of outputs	2
Type	Insulated output, 48 VDC max., 50 mA and 24 VAC max.
Output function	- Remote control of devices - Alarm signal linked to the inputs (exceeding threshold, status...)
Input/output connection	Removable screw terminal block, 9 positions (5 dedicated to inputs, 4 dedicated to outputs) Stranded or solid 0.14 to 1.5 mm <sup>2</sup> cable

#### Analogue inputs - DIRIS Digiware IO-20

Number of inputs	2
Type/power supply	0/4-20 mA, 200 Ω max
Accuracy	0.5% full scale
Function	Connection of analogue sensors (pressure, humidity, temperature...) with choice of interpolation (linear or quadratic)
Input connection	Removable screw terminal block 2x2 positions, Stranded or solid 0.14 to 1.5 mm <sup>2</sup> cable

## References

Digiware connection cables		Reference
RJ45 cables for Digiware Bus	Length 0.06 m	4829 0189
	Length 0.10 m	4829 0181
	Length 0.20 m	4829 0188
	Length 0.50 m	4829 0182
	Length 1 m	4829 0183
	Length 2 m	4829 0184
	Length 3 m	4829 0190
	Length 5 m	4829 0186
	Length 10 m	4829 0187
	Reel 50 m + 100 connectors	4829 0185
	Termination for Digiware Bus (supplied with interfaces C and D)	4829 0180
	USB configuration cable	4829 0050

DIRIS Digiware input/output modules		Reference
IO-10	4 digital inputs/2 outputs module	4829 0140
IO-20	2 analogue input module	4829 0145

# Selection guide

## Active energy meters and pulse concentrators

### COUNTIS E

Which type  
of network?

Which load  
current?

Network - Input current	Single-phase Direct up to 40 A		Single-phase Direct up to 80 A		Three-phase Direct up to 80 A					
										
Active energy meters: COUNTIS E	<b>E00/E02</b> <i>p. 274</i>	<b>E03/E04</b> <i>p. 274</i>	<b>E05/E06</b> <i>p. 274</i>	<b>E11/E12</b> <i>p. 276</i>	<b>E13/E14</b> <i>p. 276</i>	<b>E15/E16</b> <i>p. 276</i>	<b>E17/E18</b> <i>p. 276</i>	<b>E21/E22</b> <i>p. 278</i>		
Main specifications										
MID: EN 50470 module B + D certification	• (E02)	• (E04)	• (E06)	• (E12)	• (E14)	• (E16)	• (E18)	• (E22)		
RS485 Modbus		•			•			•		
M-Bus			•			•				
Ethernet Modbus TCP/RTU							•			
Width	1 module	1 module	1 module	2 modules	2 modules	2 modules	4 modules	4 modules		
Input voltage	230 VAC	230 VAC	230 VAC	230 VAC	230 VAC	230 VAC	230 ... 400 VAC	230 ... 400 VAC		
Functions										
Total/partial energy kWh	•/•	•/•	•/•	•/•	•/•	•/•	•/•	•/•		
Active power / Reactive power	•/•	•/•	•/•	•/•	•/•	•/•	•/•	•/•		
Dual tariff for kWh	•	•	•	•	•	•	•	•		
Total/partial energy kvarh	•/•	•/•	•/•	•/•	•/•	•/•	•/•	•/•		
kVA	via COM		via COM		•	•	•	•		
Load curve										
Measurement (I, V, P, Q, S, F and PF)	•	•	•	•	•	•	•	•		
CT connection indication										
Birectional (energy consumption and production)	•	•	•	•	•	•	•	•		
Integrated web server						•				
Compatibility with Webview		•			•	•		•		
Accuracy										
Active energy (IEC 62053-21)	class 1	class 1	class 1	class 1	class 1	class 1	class 1	class 1		
Reactive energy (according to IEC 62053-23)	class 2	class 2	class 2	class 2	class 2	class 2	class 2	class 2		
Active energy (EN 50470)	class B (E02)	class B (E04)	class B (E06)	class B (E12)	class B (E14)	class B (E16)	class B (E18)	class B (E22)		
Characteristics										
Metrological LED	•	•	•	•	•	•	•	•		
Pulse output	100 Wh	100 Wh	100 Wh	100 Wh	100 Wh	100 Wh		100 Wh		
Sealing cover (MID version only)	• (E02)	• (E04)	• (E06)	• (E12)	• (E14)	• (E16)	• (E18)	• (E22)		
Phase/neutral inversion protection								• (E24)		
										
Pulse concentrator					<b>COUNTIS ECi2</b> <i>p. 286</i>	<b>COUNTIS ECi3</b> <i>p. 286</i>				
Case	4 modules				4 modules					
Logical inputs	7				7					
Analogue inputs					2					
ON/OFF output (alarm)	1				1					
Partial, total, daily, weekly or monthly kWh or other types of data (liters, m³...)	•				•					
Load curve from 8 to 30 minutes	•				•					
RS485 Modbus	•				•					

Which accuracy?

MID certification?

Communication or pulse output?

View data on the web server?

Three-phase Direct up to 80 A	Three-phase Direct up to 100 A	Three-phase CT 1/5 A	Three-phase CT/5 A							
										
<b>E25/E26</b> p. 278	<b>E27/E28</b> p. 278	<b>E30/E31/E32</b> p. 280	<b>E33/E34</b> p. 280	<b>E35/E36</b> p. 280	<b>E41/E42</b> p. 282	<b>E43/E44</b> p. 282	<b>E45/E46</b> p. 282	<b>E47/E48</b> p. 282	<b>E50</b> p. 284	<b>E53</b> p. 284

• (E26)	• (E28)	• (E32)	• (E34)	• (E36)	• (E42)	• (E44)	• (E46)	• (E48)		
			•			•				•
•				•			•			
4 modules	4 modules	7 modules	7 modules	7 modules	4 modules	4 modules	4 modules	4 modules	96x96	96x96
230 ... 400 VAC	86 ... 520 VAC	86 ... 520 VAC								

•/•	•/•	•/• (E31)	•/via COM (E34)	•/via COM (E36)	•/•	•/•	•/•	•/•	•/•	•/•
•/•	•/•	•/-	•/via COM	•/via COM	•/•	•/•	•/•	•/•	•/•	•/•
•	•	• (E31/E32)	up to 4 via com	up to 4 via com	•	up to 4 via com	up to 4 via com	up to 4 via com	•	•
•/•	•/•		via COM	via COM	•/•	•/•	•/•	•/•	•	•
•	•		via COM	via COM	•	•	•	•	•	•
			via COM	via COM		via COM	via COM	via COM		
•	•		via COM	via COM	•	•	•	•	•	•
					•	•	•	•		
•	•		• (E33)	• (E35)	•	•	•	•		
			•							

class 1	class 1	class 1								
class 2	class 2				class 2	class 2	class 2	class 2	class 2	class 2
class B (E26)	class B (E28)	class B (E32)	class B (E34)	class B (E36)	class C (E42)	class C (E44)	class C (E46)	class C (E48)		

•	•	•	•	•	•	•	•	•		
100 Wh	100 Wh				configurable	configurable	configurable	configurable		
• (E26)	• (E28)	• (E32)	• (E34)	• (E36)	• (E42)	• (E44)	• (E46)	• (E48)		
		•	•	•				•	•	•

# COUNTIS E0x

Active energy meters for electrical distribution  
single-phase - direct 40 A



COUNTIS E04 - MID

## Function

The COUNTIS E0x is a modular electrical power meter. It shows kWh and kVArh readings and other measurements on its backlit LCD. These devices connect directly to a 40 A circuit. The COUNTIS E0x is fully integrated into the SOCOMEC monitoring ecosystem (Webview, screens, gateways, configuration software, etc.). COUNTIS E02, E04 and E06 are MID-certified.

## Advantages

### Compact

Only one module wide.

### Communication via RS485 MODBUS, M-BUS or pulse output

COUNTIS E0x units have either one pulse output or an RS485 (MODBUS) or M-BUS communication output.

The pulse output transmits the consumption reading in kWh to a remote system (PC/BMS) so you can use it for billing purposes, to save energy and manage your energy costs.

### B+D module, MID-certified


COUNTIS E units meet MID standards and ensure accurate and reliable metering (all crucial prerequisites of power-billing applications).

The "module B+D" certification proves that an external laboratory has verified the design and production process of these devices.

### Socomec monitoring ecosystem: user software, remote displays

Inherent compatibility with energy management systems and Socomec gateways (Webview, screens, gateways, etc.).

## Functional diagram

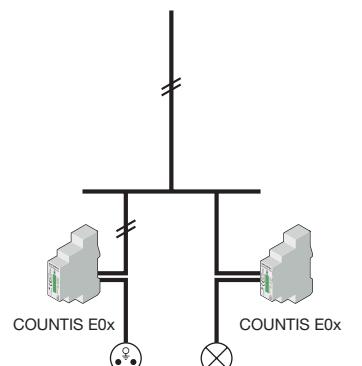

count\_211\_a\_1\_x\_cat.eps

## Common characteristics

- Compact
- Measurement accuracy: 1%.
- Displayed on backlit screen.
- Multiple measurements on-screen.

Models	Specific features
E00	Output (pulses)
E02	Pulse output + MID
E03	Dual-tariff + pulse output + communication via RS485 MODBUS
E04	Dual-tariff + pulse output + communication via RS485 MODBUS + MID
E05	Dual-tariff + pulse output + communication via M-BUS
E06	Dual-tariff + pulse output + communication via M-BUS + MID

## The solution for

- > Data centre
- > Building
- > Industrial process



## Strong points

- > Compact
- > Communication via RS485 MODBUS, M-BUS or pulse output
- > B+D module, MID-certified
- > Socomec monitoring ecosystem: user software, remote displays

## MID certification

- > COUNTIS E units meet MID standards and provide accurate and reliable metering for power-billing applications.
- > The COUNTIS E MID has tamper-proof accessories to prevent fraud.



## Compliance with standards

- > IEC 62053-21 Class 1
- > IEC 62053-23 Class 2
- > IEC 62053-31
- > IEC 62052-11
- > EN 50470-1
- > EN 50470-3




## Associated current transformers




See "Current transformers".

## Front panel

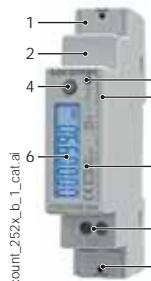

1. Neutral terminal with terminal shroud (COUNTIS E02/E04/E06).
2. M-Bus/MODBUS connection.
3. Metrological LED.
4. Navigation button.
5. Serial number.
6. Backlit LCD.
7. MID marking (COUNTIS E02/E04/E06).
8. Pulse output.
9. Voltage and current terminals.




## Dimensions (mm)

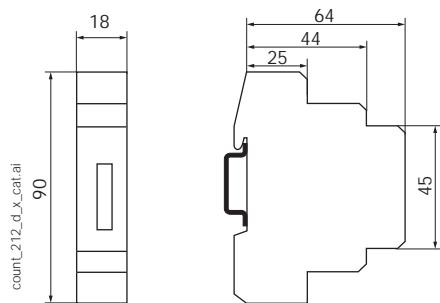

Type	Modular
Number of modules	1
Dimensions W x H x D	18 x 90 x 64 (mm)
Casing protection degree	IP 20
Front panel protection degree	IP 51 <sup>(1)</sup>
Display type	LCD 7 digits with backlighting
Cross-section of rigid connecting cable	1.5 to 6 mm <sup>2</sup>
Cross-section of flexible connecting cable	1.5 to 6 mm <sup>2</sup>
Weight	100 g E03/E04 80 g E00/E02/E05/E06

(1) Cabinet installations require a protection degree of at least IP51.

## Connections

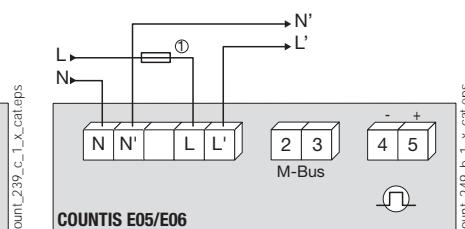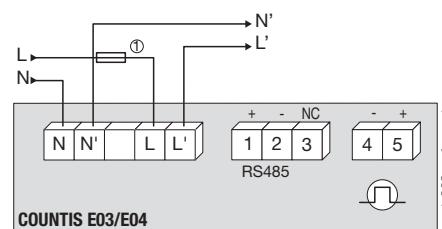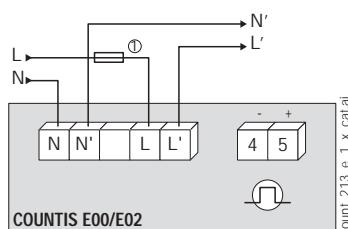

N - L: network input.

N' - L': network output.

1. 0.5 A gG / 0.5 A class CC fuses.

## References

Type	COUNTIS E00	COUNTIS E02	COUNTIS E03	COUNTIS E04	COUNTIS E05	COUNTIS E06
Direct 40 A	Reference 4850 3058					
Direct 40 A - MID		4850 3059				
Direct 40 A - Dual-tariff + communication via RS485 MODBUS			4850 3039			
Direct 40 A - Dual-tariff + communication via RS485 MODBUS + MID				4850 3040		
Direct 40 A - Dual-tariff + communication via M-BUS					4850 3041	
Direct 40 A - Dual-tariff + communication via M-BUS + MID						4850 3042
<b>Accessories</b>	<b>Available for order in multiples of</b>				<b>Reference</b>	
10x 1U sealing kits	6				4850 305U	
Fuse disconnect switches for voltage input protection (RM type) 1-pole	10				5702 5001	
gG 14x51 40 A fuses					6022 0040	

# COUNTIS E1x

Active energy meters for electrical distribution  
Single-phase - direct 80 A



COUNTIS E14 - MID

## Function

The COUNTIS E1x is a modular electrical power meter. It shows kWh, kVArh and kVA readings and other measurements on its backlit LCD. These devices are suited to single-phase power metering with a direct connection up to 80 A.

The COUNTIS E1x is fully integrated into the SOCOMEC monitoring ecosystem (Webview, screens, gateways, configuration software, etc.).

## Advantages

### Communication via RS485 (MODBUS), M-Bus, Ethernet or pulse outputs

COUNTIS E1x units have either one pulse output or one RS485 (MODBUS), M-Bus or Ethernet Modbus TCP communication output.

### Multi-tariff

Allows you to assign energy metering to different time slots (every hour, off-peak hours) or different sources (normal, replacement) to accurately monitor energy consumption.


### B+D module, MID-certified

COUNTIS E units meet MID standards and ensure accurate and reliable metering, all crucial prerequisites of power-billing applications. The "module B+D" certification proves that an external laboratory has verified the design and production process of these devices.

### Socomec monitoring ecosystem: user software, remote displays

Inherent compatibility with energy management systems and Socomec gateways (Webview, screens, gateways, etc.).

## Functional diagram

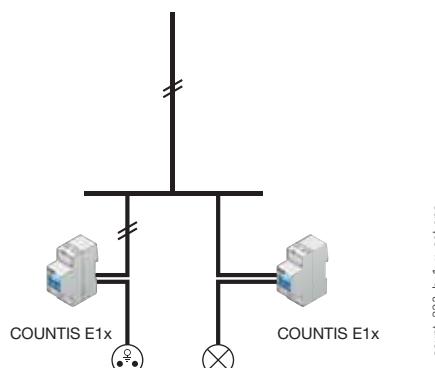

## Common characteristics

- Measurement accuracy: 1%.
- Displayed on backlit screen.
- Multiple measurements on-screen.
- Compact.

Models	Specific features
E11	Dual-tariff + pulse output
E12	Dual-tariff + pulse output + MID
E13	Dual-tariff + pulse output + communication via RS485 MODBUS
E14	Dual-tariff + pulse output + communication via RS485 MODBUS + MID
E15	Dual-tariff + pulse output + communication via M-BUS
E16	Dual-tariff + pulse output + communication via M-BUS + MID
E17	Dual tariff + Ethernet
E18	Dual-tariff + Ethernet + MID

## The solution for

- > Data centre
- > Building
- > Industrial process



## Strong points

- > Communication via RS485 (MODBUS), M-Bus, Ethernet or pulse outputs
- > Multi-tariff
- > B+D module, MID-certified
- > Socomec monitoring ecosystem: user software, remote displays

## MID certification

- > COUNTIS E units meet MID standards and provide accurate and reliable metering for power-billing applications.
- > The COUNTIS E MID has tamper-proof accessories to prevent fraud.



## Compliance with standards

- > IEC 62053-21 Class 1
- > IEC 62053-23 Class 2
- > IEC 62053-31
- > IEC 62052-11
- > EN 50470-1
- > EN 50470-3




## Associated current transformers




See "Current transformers".

## Front panel

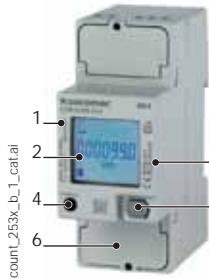

1. Serial number.
2. Backlit LCD.
3. MID marking (COUNTIS E12/E14/E16/E18).
4. Metrological LED.
5. Navigation button.
6. Voltage, current, neutral terminals with terminal shrouds (COUNTIS E12/E14/E16/E18).

## Dimensions (mm)

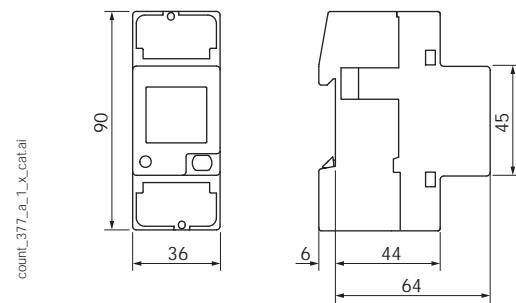


Type	Modular
Number of modules	2
Dimensions W x H x D	36 x 90 x 64 mm
Casing protection degree	IP 20
Front panel protection degree	IP 51 <sup>(1)</sup>
Display type	Backlit LCD
Cross-section of rigid connecting cable	1.5 to 35 mm <sup>2</sup>
Cross-section of flexible connecting cable	1.5 to 35 mm <sup>2</sup>
Weight	215 g E13/E14/E17/E18 205 g E11/E12/E15/E16

(1) Cabinet installations require a protection degree of at least IP51.

## Electrical characteristics

Measurement of currents			
Type	Single-phase - direct 80 A		
Input consumption	Max. 0.5 VA		
Inrush current ( $I_{fstd}/cf$ )	20 mA		
Minimum current ( $I_{min}$ )	0.25 A		
Transient current ( $I_{ftr}/cf$ )	0.5 A		
Reference current ( $I_{ref}$ )	5 A		
Permanent overload ( $I_{max}$ )	80 A		
Transient overload	$30 I_{max}$ over 10 ms		
Voltage measurement			
Measurement range	230 to 240 V ± 20%		
Consumption (VA)	3.5 VA max. E13/E14/E17/E18 7.5 VA max. E11/E12/E15/E16		
Permanent overload	290 V phase-neutral		
Power monitoring accuracy			
Active (according to IEC 62053-21)	Class 1		
Active (according to EN 50470)	Class B		
Reactive (according to IEC 62053-22)	Class 2		
Power supply			
Self-powered	Yes		
Frequency	50/60 Hz		
Output (pulses)			
Type of optical coupler (IEC 62053-31)	250 V AC/DC - 100 mA (E11/E12) 27 V DC - 27 mA (E13/E14/E15/E16)		
Number	1		
Fixed pulses	100 Wh		
Pulse duration	50 ± 2 ms ON time 30 ± 2 ms OFF time		
Environment			
Operating temperature	-25 to 55°C		
Storage temperature	-25 to 75°C		
Relative humidity	80%		
Communication	COUNTIS E13/14	COUNTIS E15/E16	COUNTIS E17/E18
Link	RS485	Wired	RJ45
Type	2 half duplex 2-3 half duplex (E13/E14)		Bi-directional mode (full duplex)
Protocol	MODBUS® RTU	M-BUS	MODBUS TCP, HTTP, NTP, DHCP
Baudrate	1200 to 115200 bauds	300 to 9600 bauds	10/100 Mbps

## Connections

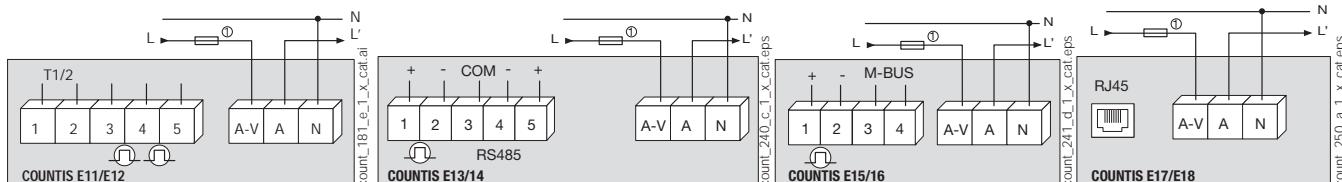

## References

Type	COUNTIS E11 Reference	COUNTIS E12 Reference	COUNTIS E13 Reference	COUNTIS E14 Reference	COUNTIS E15 Reference	COUNTIS E16 Reference	COUNTIS E17 Reference	COUNTIS E18 Reference
Direct 80 A - Dual-tariff	4850 3060							
Direct 80 A - Dual-tariff + MID		4850 3061						
Direct 80 A - Dual-tariff + MODBUS communication via RS485			4850 3043					
Direct 80 A - Dual-tariff + MODBUS communication via RS485 + MID				4850 3044				
Direct 80 A - Dual-tariff + communication via M-BUS					4850 3045			
Direct 80 A - Dual-tariff + communication via M-BUS + MID						4850 3046		
Direct 80 A - Dual-tariff + communication via Ethernet Modbus TCP							4850 3047	
Direct 80 A - Dual-tariff + communication via Ethernet Modbus TCP + MID								4850 3048
Accessories	Available for order in multiples of					Reference		
10x sealing kits, 2U						4850 3060		
Fuse disconnect switches for voltage input protection (RM type) 1-pole						5703 5001		
gG 22x58 80 A fuses						6032 0080		

# COUNTIS E2x

Active energy meters for electrical distribution  
three-phase - direct 80 A



COUNTIS E24 - MID

## Function

The COUNTIS E2x is a modular electrical power meter. It shows kWh, kVArh and kVa readings and other measurements on its backlit LCD. These devices are intended for three-phase networks and accommodate a direct connection up to 80 A.

The COUNTIS E2x is fully integrated into the SOCOMEC monitoring ecosystem (Webview, screens, gateways, configuration software, etc.).

## Advantages

### Communication via RS485 (MODBUS), M-Bus, Ethernet or pulse outputs

COUNTIS E2x units have either one pulse output or one RS485 (MODBUS), M-Bus or Ethernet Modbus TCP communication output.

### Multi-tariff

Allows you to assign energy metering to different time slots (every hour, off-peak hours) or different sources (normal, replacement) to accurately monitor energy consumption.


### B+D module, MID-certified

COUNTIS E units meet MID standards and ensure accurate and reliable metering (crucial prerequisites of power-billing applications). The "module B+D" certification proves that an external laboratory has verified the design and production process of these devices.

### Socomec monitoring ecosystem: user software, remote displays

Inherent compatibility with energy management systems and Socomec gateways (Webview, screens, gateways, etc.).

## Functional diagram

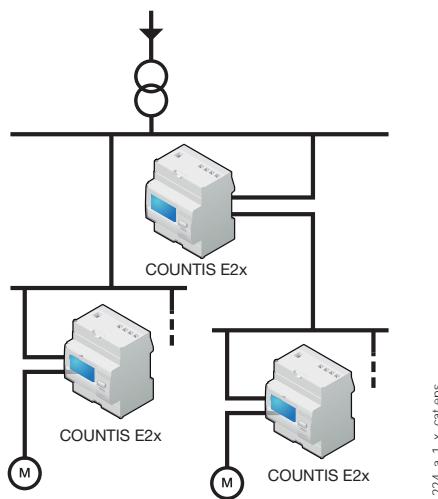

## Common characteristics

- Measurement accuracy: 1%.
- Displayed on backlit screen.
- Multiple measurements on-screen.

Models	Specific features
E21	Dual-tariff + pulse output
E22	Dual-tariff + pulse output + MID
E23	Dual-tariff + pulse output + communication via RS485 MODBUS
E24	Dual-tariff + pulse output + communication via RS485 MODBUS + MID
E25	Dual-tariff + pulse output + communication via M-BUS
E26	Dual-tariff + pulse output + communication via M-BUS + MID
E27	Dual-tariff + pulse output + Ethernet
E28	Dual-tariff + pulse output + Ethernet + MID

## The solution for

- > Data centre
- > Building
- > Industrial process



## Strong points

- > Communication via RS485 (MODBUS), M-Bus, Ethernet or pulse outputs
- > Multi-tariff
- > B+D module, MID-certified
- > Socomec monitoring ecosystem: user software, remote displays

## MID certification

- > COUNTIS E units meet MID standards and provide accurate and reliable metering for power-billing applications.
- > The COUNTIS E MID has tamper-proof accessories to prevent fraud.



## Compliance with standards

- > IEC 62053-21 Class 1
- > IEC 62053-23 Class 2
- > IEC 62053-31
- > IEC 62052-11
- > EN 50470-1
- > EN 50470-3




## Associated current transformers




See "Current transformers".

## Front panel

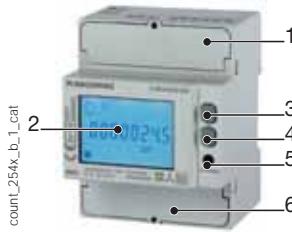

1. Neutral terminal.
2. Backlit LCD.
3. Navigation button.
4. ENTER key.
5. 5. Metrological LED.
6. Current/voltage terminals with terminal shrouds (COUNTIS E02/E04/E06).



## Dimensions (mm)

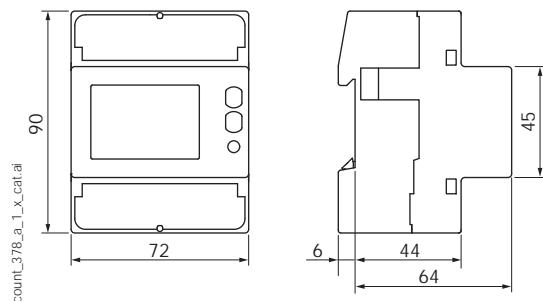

Type	Modular
Number of modules	4
Dimensions W x H x D	72 x 90 x 64 mm
Casing protection degree	IP 20
Front panel protection degree	IP 51 <sup>(1)</sup>
Display type	Backlit LCD, 8 digits
Cross-section of rigid connecting cable	1.5 to 35 mm <sup>2</sup>
Cross-section of flexible connecting cable	1.5 to 35 mm <sup>2</sup>
Weight	440 g

(1) Cabinet installations require a protection degree of at least IP51.

## Connections

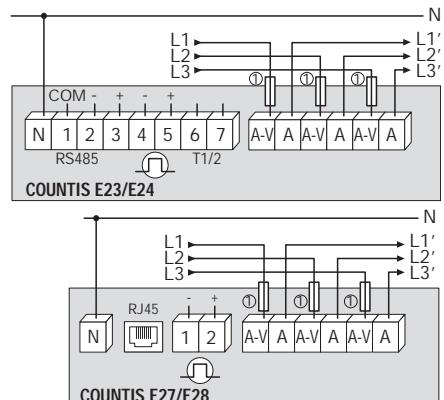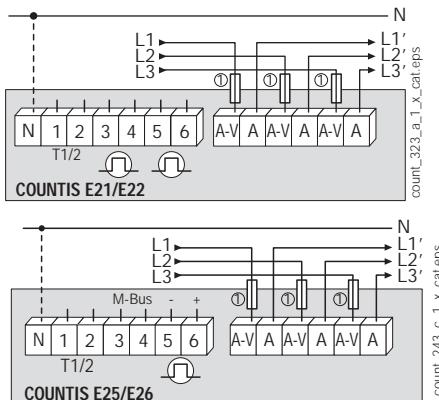

**IMPORTANT:** Neutral connection is mandatory on COUNTIS E23/E24/E27/E28 (neutral is represented by the solid line in the image opposite).

Neutral is optional on COUNTIS E21/E22/E25/E26 (neutral is represented by the dashed line in the image opposite).

1. 0.5 A gG / 0.5 A class CC fuses.

## References

Type	COUNTIS E21 Reference	COUNTIS E22 Reference	COUNTIS E23 Reference	COUNTIS E24 Reference	COUNTIS E25 Reference	COUNTIS E26 Reference	COUNTIS E27 Reference	COUNTIS E28 Reference
Direct 80 A - Dual-tariff	4850 3062							
Direct 80 A - Dual-tariff + MID		4850 3049						
Direct 80 A - Dual-tariff + MODBUS communication via RS485			4850 3050					
Direct 80 A - Dual-tariff + MODBUS communication via RS485 + MID				4850 3051				
Direct 80 A - Dual-tariff + communication via M-BUS					4850 3052			
Direct 80 A - Dual-tariff + communication via M-BUS + MID						4850 3053		
Direct 80 A - Dual-tariff + communication via Ethernet Modbus TCP							4850 3054	
Direct 80 A - Dual-tariff + Ethernet Modbus TCP + MID								4850 3055
<b>Accessories</b>	<b>Available for order in multiples of</b>						<b>Reference</b>	
Panel mounting kit, 4 modules							192J 8015	
10x sealing kits, 4U							4850 309U	
Fuse disconnect switches for voltage input protection (RM type) 3-pole							5703 5003	
gG 22x58 80 A fuses							6032 0080	

# COUNTIS E3x

Active energy meters for electrical distribution  
three-phase - direct 100 A



COUNTIS E32 - MID

## Function

The COUNTIS E3x is a modular electrical power meter. It shows power readings (kWh and kW) on its backlit LCD. These devices are intended for three-phase power metering and accommodate a direct connection up to 100 A.

The COUNTIS E3x is fully integrated into the SOCOMEC monitoring ecosystem (Webview, screens, gateways, configuration software, etc.).

COUNTIS E32, E34 and E36 are also MID-certified.

## Advantages

**Communication via RS485 (MODBUS or M-BUS) or pulse outputs**

COUNTIS E3x units have either one pulse output or one RS485 MODBUS or M-BUS communication output.


### Connection error detection

The devices are protected against phase/neutral inversion and detect wiring errors. Easy to install and commission – reduces costs and ensures the proper functioning of the devices.

### B+D module, MID-certified

COUNTIS E units meet MID standards and ensure accurate and reliable metering (crucial prerequisites of power-billing applications). The "module B+D" certification proves that an external laboratory has verified the design and production process of these devices.

## Functional diagram

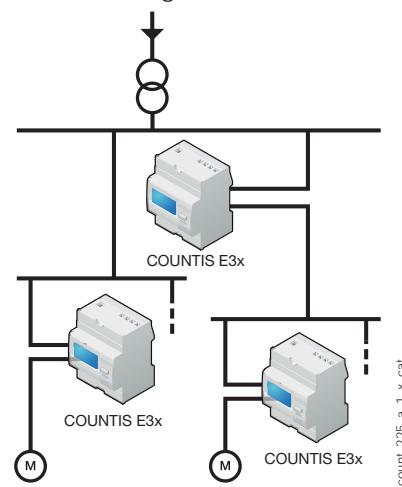

### Multi-power monitoring and load curves

Shows electrical readings (I, U, V, P, Q, S, PF) and the load curve over a 7-day period via the communication methods.

### Socomec monitoring ecosystem

Inherent compatibility with energy management systems and Socomec gateways (Webview, screens, gateways, etc.).

## General characteristics

- Measurement accuracy: 1%
- Backlit LCD.
- Detects connection errors.

Models	Main specifications
E30	Output (pulses)
E31	Dual-tariff (2 partial meters) + pulse output
E32	Dual-tariff + MID + pulse output
E33	Dual-tariff + communication via RS485 MODBUS
E34	Dual-tariff + communication via RS485 MODBUS + MID
E35	Dual-tariff + communication via M-BUS
E36	Dual-tariff + communication via M-BUS + MID

## The solution for

- > Data centre
- > Building
- > Industrial process



## Strong points

- > Communication via RS485 (MODBUS or M-BUS) or pulse outputs
- > Connection error detection
- > B+D modules are MID-certified, providing multi-power monitoring and load curves
- > Socomec monitoring ecosystem: user software, remote displays



## MID certification

- > COUNTIS E units meet MID standards and provide accurate and reliable metering for power-billing applications.
- > The COUNTIS E MID has tamper-proof accessories to prevent fraud.



## Compliance with standards

- > IEC 62053-21 Class 1
- > IEC 62053-31
- > IEC 62053-11
- > EN 50470-1
- > EN 50470-3

## Associated current transformers




See "Current transformers".

## Front panel




1. Terminal shrouds (COUNTIS E32, E34 and E36).
2. Backlit LCD.
3. MID-marking (COUNTIS E32, E34 and E36).
4. Serial number (COUNTIS E32, E34 and E36).
5. Navigation button.
6. Reset button.
7. Metrological LED.

## Dimensions (mm)

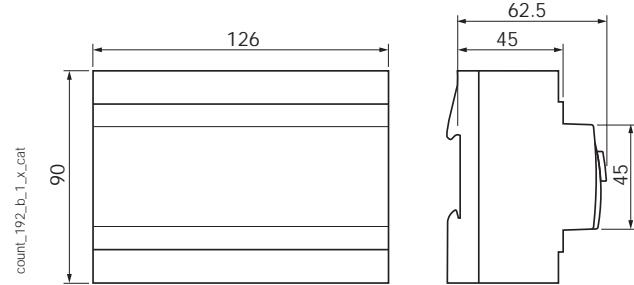

Type	Modular
Number of modules	7
Dimensions W x H x D	126 x 90 x 62.5 mm
Casing protection degree	IP20
Front panel protection degree	IP51
Display type	Backlit LCD
Cross-section of rigid connecting cable	2.5 to 35 mm <sup>2</sup>
Cross-section of flexible connecting cable	2.5 to 35 mm <sup>2</sup>
Weight	490 g

## Connections

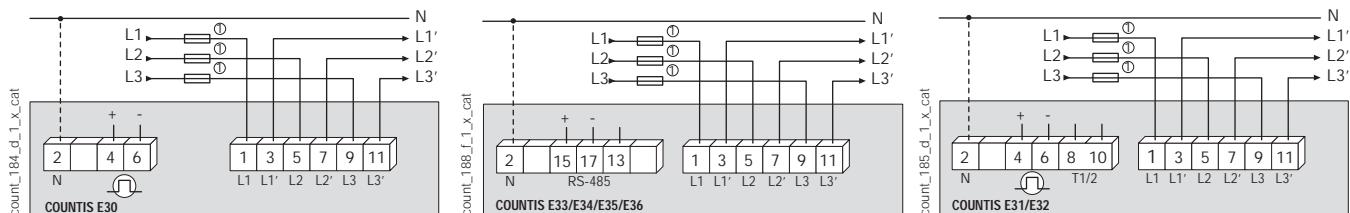

1. Max. 100 A gG / Am fuse

IMPORTANT: Neutral is optional on COUNTIS E3x (neutral is represented by the dashed line in the image opposite).

## References

Type	COUNTIS E30 Reference	COUNTIS E31 Reference	COUNTIS E32 Reference	COUNTIS E33 Reference	COUNTIS E34 Reference	COUNTIS E35 Reference	COUNTIS E36 Reference
Direct 100 A	4850 3005						
Direct 100 A - Dual tariff		4850 3006					
Direct 100 A - Dual-tariff + MID			4850 3007				
Direct 100 A - Dual-tariff + MODBUS communication via RS485 <sup>(1)</sup>				4850 3012			
Direct 100 A - Dual-tariff + MODBUS communication via RS485 + MID <sup>(1)</sup>					4850 3013		
Direct 100 A - Dual-tariff + communication via M-BUS <sup>(1)</sup>						4850 3025	
Direct 100 A - Dual-tariff + communication via M-BUS + MID <sup>(1)</sup>							4850 3026

(1) 4-tariff via RS485 communication.

Accessories	Available for order in multiples of	Reference
10x sealing kits, 4U		4850 307U
Fuse disconnect switches for voltage input protection (RM type) 3-pole	2	5703 5003
gG 22x58 100 A fuses	10	6032 0100

# COUNTIS E4x

## Active energy meters for electrical distribution

three-phase – connect to current transformers up to 12000 A



count\_347.psd

### Function

The COUNTIS E4x is a modular electrical power meter. It shows kWh, kVArh and kVA readings and other measurements on its backlit LCD. These devices are intended for three-phase power metering via CT, they are suitable for applications up to 12000 A.

The COUNTIS E4x is fully integrated into the SOCOMEC monitoring ecosystem (Webview, screens, gateways, configuration software, etc.). COUNTIS E42, E44, E46 and E48 are MID-certified.

### Advantages

**Communication via RS485 (MODBUS), M-Bus, Ethernet or pulse outputs**

COUNTIS E4x have either one or two pulse output(s), or one RS485 (MODBUS), M-BUS or Ethernet Modbus TCP communication output.


#### B+D module, MID-certified

COUNTIS E units meet MID standards and ensure accurate and reliable metering (crucial prerequisites of power-billing applications). The "module B+D" certification proves that an external laboratory has verified the design and production process of these devices.

#### Bi-directional, multi-reading and load-curve metering

In bi-directional mode, the device can measure both consumed and generated energy at the same time. Shows electrical readings (I, U, V, P, Q, S, PF) and the load curve over a 7-day period via the communication methods.

### Functional diagram

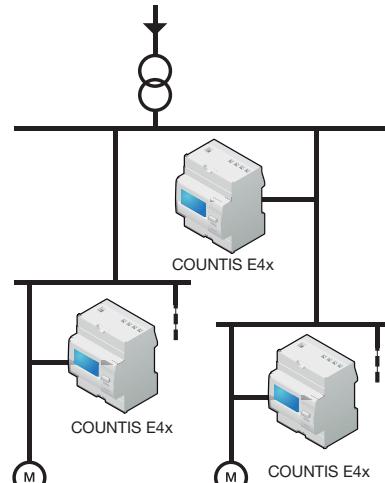

### Socomec monitoring ecosystem

Inherent compatibility with energy management systems and Socomec gateways (Webview, screens, gateways, etc.).

#### Multi-tariff

Allows you to assign energy metering to different time slots (every hour, off-peak hours) or different sources (normal, replacement) to accurately monitor energy consumption.

### General characteristics

- Measurement accuracy: 1% / 0.5% (MID).
- Backlit LCD.
- Multiple measurements on-screen.

Models	Specific features
E41	Dual-tariff + pulse output
E42	Dual-tariff + pulse output + MID
E43	4-tariff + pulse output + communication via RS485 MODBUS
E44	4-tariff + pulse output + communication via RS485 MODBUS + MID
E45	4-tariff + pulse output + communication via M-BUS
E46	4-tariff + pulse output + communication via M-BUS + MID
E47	4-tariff + pulse output + Ethernet
E48	4-tariff + pulse output + Ethernet + MID

### The solution for

- > Data centre
- > Building
- > Industrial process



### Strong points

- > Communication via RS485 (MODBUS), M-Bus, Ethernet or pulse outputs
- > B+D module, MID-certified
- > Bi-directional, multi-reading and load-curve metering
- > Socomec monitoring ecosystem: user software, remote displays
- > Multi-tariff



### MID certification

- > COUNTIS E units meet MID standards and provide accurate and reliable metering for power-billing applications.
- > The COUNTIS E MID has tamper-proof accessories to prevent fraud.

### Compliance with standards

- > IEC 62053-21 Class 1
- > IEC 62053-23 Class 2
- > IEC 62053-31
- > IEC 62053-11
- > EN 50470-1
- > EN 50470-3



### Associated current transformers



See "Current transformers".

## Front panel



1. Terminal shroud (COUNTIS E42, E44, E46 and E48).
2. Backlit LCD.
3. Navigation button.
4. ENTER key.
5. Metrological LED.
6. Current/voltage terminals and terminal shrouds (COUNTIS E42/E44/E46/E48).

## Dimensions (mm)





Type	Modular
Number of modules	4
Dimensions W x H x D	72 x 90 x 64 mm
Casing protection degree	IP20
Front panel protection degree	IP51
Display type	Backlit LCD, 8 digits
Cross-section of rigid connecting cable	1.5 to 6 mm <sup>2</sup>
Cross-section of flexible connecting cable	1.5 to 6 mm <sup>2</sup>
Weight	322 g

## Connections

## We recommend:

- Connecting CT secondaries is strictly prohibited with IT earthing arrangements; it is, however, optional in TT/TN earthing arrangements.
  - When disconnecting the COUNTIS device, it is essential to short-circuit the secondaries of each current transformer. This operation can be carried out automatically by a PTI, which can be found in the SOCOMEC catalogue.
- Contact us

**IMPORTANT:** Neutral connection is mandatory on COUNTIS E43/E44/E47/E48 (neutral is represented by the solid line in the image opposite). Neutral is optional on COUNTIS E41/E42/E45/E46 (neutral is represented by the dashed line in the image opposite).

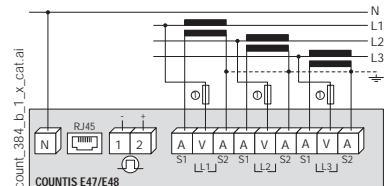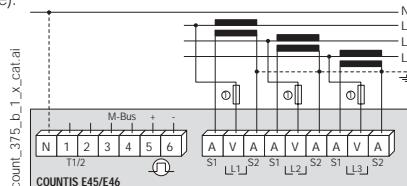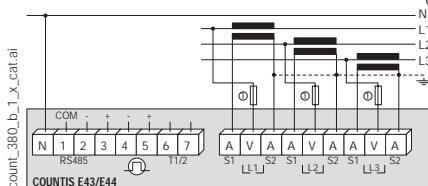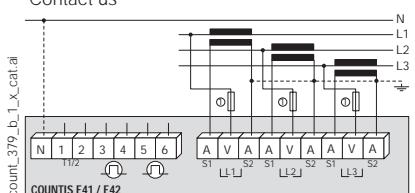

1. 0.5 A GGD / 0.5 A class CC fuses.

## References

Type	COUNTIS E41 Reference	COUNTIS E42 Reference	COUNTIS E43 Reference	COUNTIS E44 Reference	COUNTIS E45 Reference	COUNTIS E46 Reference	COUNTIS E47 Reference	COUNTIS E48 Reference
Via CT - Dual-tariff	4850 3063							
Via CT - Dual-tariff + MID		4850 3064						
Via CT - Dual-tariff + MODBUS communication via RS485 <sup>(1)</sup>			4850 3065					
Via CT - Dual-tariff + MODBUS communication via RS485 + MID <sup>(1)</sup>				4850 3066				
Via CT - Dual-tariff + communication via M-BUS <sup>(1)</sup>					4850 3067			
Via CT - Dual-tariff + communication via M-BUS + MID <sup>(1)</sup>						4850 3068		
Via CT - Dual-tariff + communication via Ethernet Modbus CTP <sup>(1)</sup>							4850 3056	
Via CT - Dual-tariff + communication via Ethernet Modbus CTP + MID <sup>(1)</sup>								4850 3057

(1) 4-tariff via RS485 communication.

Accessories	Available for order in multiples of	Reference
Panel mounting kit, 4 modules		19J 8015
10x sealing kits, 4U		4850 309U
Fuse disconnect switches for voltage input protection (RM type) 3-pole	2	5701 0018
gG 10x38 0.5 A fuses	10	6012 0000

# COUNTIS E5x

## Active energy meters for electrical distribution

three-phase – connect to current transformers up to 6000 A – door-mounted



**COUNTIS E53** - up to 6000 A (via CT)

### Function

The COUNTIS E5x is an active and reactive plug-in electrical energy meter intended for three-phase networks. It accommodates CT wiring up to 6000 A.

The COUNTIS E5x is fully integrated into the SOCOMEC monitoring ecosystem (Webview, screens, gateways, configuration software, etc.).

The user can configure the CT connection by using the keyboard and the display.

### Advantages

#### RS485 (MODBUS) communication or pulse outputs

As an easy way to centralise your consumption readings, the COUNTIS E5x is equipped with either a pulse output or an RS485 MODBUS communication output.

#### Detection of connection errors

The COUNTIS E5x is protected against phase/neutral inversion and has an integrated test mode to detect wiring errors. Any installation errors can be corrected without having to re-arrange the wiring.

Easy to install and commission – reduces costs and ensures the proper functioning of the devices.


#### Large backlit screen

With its multi-display screen and hotkeys, the COUNTIS E5x is easy to use. It shows you your consumption and a wide range of electrical readings: I, U, V, S, FP, etc.

#### Multi-power monitoring and meter readings on-screen

- Multi-power monitoring:
  - Currents: realtime: I<sub>1</sub>, I<sub>2</sub>, I<sub>3</sub>
  - Voltages: realtime: V<sub>1</sub>, V<sub>2</sub>, V<sub>3</sub>, U<sub>12</sub>, U<sub>23</sub>, U<sub>31</sub>, F
  - Power: realtime 3P, 3Q, 3S, average, maximum: 3P
  - Power factor: realtime: 3PF

### Functional diagram

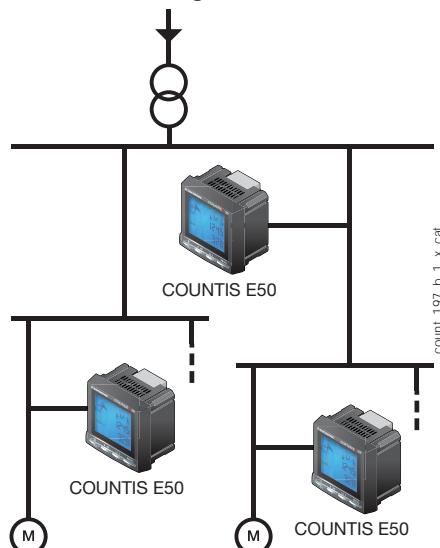

- Metering:
  - Active power: ± kWh
  - Reactive power: ± kvarh
  - Apparent power: kVAh

#### Socomec monitoring ecosystem: user software, remote displays

Inherent compatibility with energy management systems and Socomec gateways (Webview, screens, gateways, etc.).

### General characteristics

- Measurement accuracy: 0.5%.
- Large backlit screen.
- Shows multi-measurement and meter readings on-screen.
- Connection guaranteed.

### The solution for

- > Data centre
- > Building
- > Industrial process



### Strong points

- > RS485 (MODBUS) communication or pulse outputs
- > Detection of connection errors
- > Large backlit screen
- > Multi-power monitoring and meter readings on-screen
- > Socomec monitoring ecosystem: user software, remote displays



### Compliance with standards

- > IEC 62053-23 Class 2
- > IEC 62053-22 Class 0.5S
- > IEC 61557-12

### Measurement index

- > 210

### Related software

- > We offer a range of specially designed application tools, to help you make the most of your Socomec metering and monitoring devices.

### Associated current transformers



See "Current transformers".


Models	Model-related specifications
E50	Pulse output
E53	RS485 MODBUS communication

## Front panel



1. Backlit LCD
2. Button to show energy values and test mode
3. Button to show power readings and power factor
4. Button to show currents and voltages
5. Enter button for programming mode

## Case

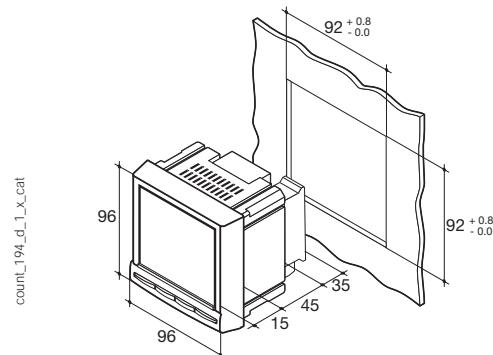

Type	Plug-in
Dimensions W x H x D	96 x 96 x 60 mm
Casing protection degree	IP30
Front panel protection degree	IP52
Display type	LCD with blue backlighting
Cross-section of cables for voltage and other terminals	0.5 to 2.5 mm <sup>2</sup>
Cross-section of cables for current	1.5 to 6 mm <sup>2</sup>
Weight	370 g

(1)  $I_{\min} \leq 0.5 * I_{\text{ref}}$ (2) Guaranteed accuracy index between  $I_{(t)}$  and  $I_{(\max)}$ .(3)  $I_{(\text{ref})} = I_{(b)}$  (base current) =  $10 * I_{(t)}$  for direct connection COUNTIS devices.

## Electrical characteristics

## Measurement of currents

Type	Three-phase on CT/5A up to 6000 A
Input consumption	< 0.6 VA
Startup current ( $I_{\text{st}}$ )	40 mA
Minimum current ( $I_{\min}$ )	50 mA <sup>(1)</sup>
Transition current ( $I_{\text{tr}}$ )	250 mA <sup>(2)</sup>
Reference current ( $I_{\text{ref}}$ )	5 A <sup>(3)</sup>
Permanent overload ( $I_{(\max)}$ )	6 A
Intermittent overload	50 A for 1 s

## Voltage measurement

Range of measurement	86 to 520 VAC
Input consumption	< 0.1 VA
Permanent overload	800 VAC

## Power accuracy

Reactive (according to IEC 62053-23)	Class 2
Active (according to IEC 62053-22)	Class 0.5s

## Power supply

Self-powered	No
Auxiliary power supply $U_s$	110 to 400 VAC / 125 to 350 VDC +/-10 %
Frequency	45 to 65 Hz

## Output (pulses)

Number	1
Type	100 VDC - 0.5 A - 10 VA
Max. number of actions	$\leq 10^8$

## Operating conditions

Operating temperature	-10 to 55°C
Storage temperature	-20 to 85°C
Relative humidity	95%

## Communication

Link	RS485
Type	2 to 3 half duplex wires
Protocol	MODBUS® RTU
MODBUS® speed	1400 to 38400 bauds

## References

Type	COUNTIS E50 Reference	COUNTIS E53 Reference
Output (pulses)	4850 3010	4850 3011
MODBUS RS485 communication <sup>(1)</sup>		
COUNTIS software		

(1) 4-tariff via RS485 communication.

## Accessories

Available for order in multiples of	Reference
4	5701 0018
6	5701 0017
10	6012 0000

## Connection


## Recommendation:

- With an IT arrangement, you are recommended not to earth CT secondaries.

- When disconnecting the COUNTIS device, the secondary of each current transformer must be short-circuited. This operation can be carried out automatically by a PTI, which can be found in the SOCOMEC catalogue. Contact us.

## Low voltage balanced network



3/4 wires with 1 CTs

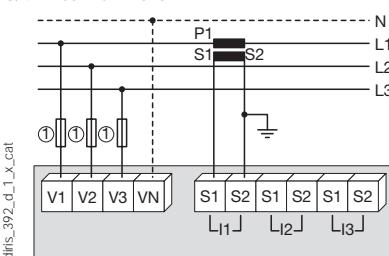

The use of 1 CT reduces the accuracy of the phase from which the current is derived by 0.5% (using a vector calculation).

## Low voltage unbalanced network


3/4 wires with 3 CTs

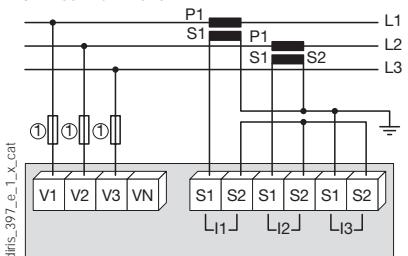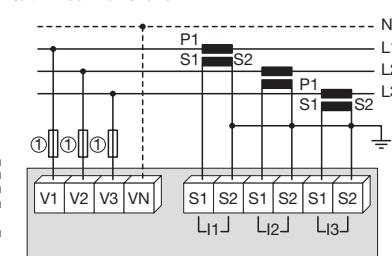


The use of 2 CTs reduces the accuracy of the phase from which the current is derived by 0.5% (using a vector calculation).

## Additional information

Communication via RS485 link

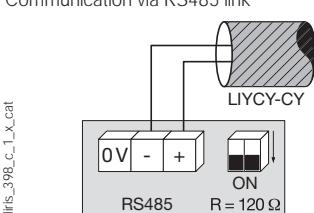

## AC and DC auxiliary power supply



1. 0.5 A gG / 0.5 A class CC fuses.

# COUNTIS ECix

## multifluid pulse concentrator




count\_207.psd

### Function

The COUNTIS ECix is a multifluid pulse concentrator which communicates via an RS485 link using MODBUS protocol. It enables pulses from water, gas, compressed air, electricity meters and, for the COUNTIS ECi3, the output of analogue sensors (light, temperature, wind etc.) to be registered and stored. All data, ie. total and partial meters and load curves (available for all logical and analogue inputs) can be centralised via RS485 communication using MODBUS protocol.

### Principle diagram

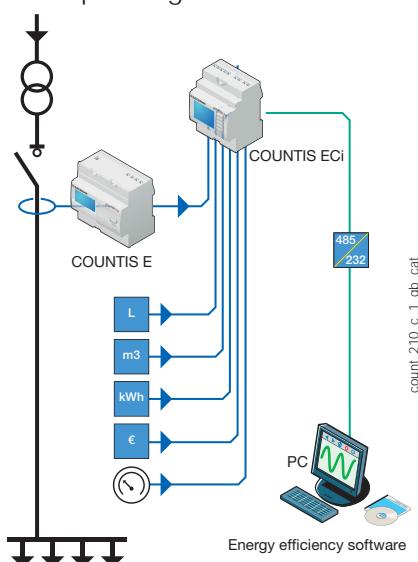

### The solution for

- > Data centres
- > Industry
- > Infrastructure



### Strong points

- > Up to 7 multifluid meters and 2 analogue sensors
- > Load curves
- > RS485 MODBUS communication
- > Improved customisation

### Management software

- > To get the most effective use from your Socomec measurement and metering devices, we offer a range of dedicated software tools.

### Advantages

#### Up to 7 multifluid meters and 2 analogue sensors

- 7 digital inputs + 2 analogue inputs.
- Total, partial and programmable metering (day, week, month, year).

#### Load curves

Load curves are available for each of the 7 logical inputs.

A history of average values are available for the 2 analogue inputs (ECi3).

#### RS485 MODBUS communication


- Centralisation and transmission of pulse and analogue data to a supervision station.
- Remote configuration of COUNTIS ECI device.

#### Improved customisation

- Selection of the measuring unit: kWh, m<sup>3</sup>, liters.
  - Selection of the currency unit: €, K€, £, \$.
- Values can be displayed in the unit of your choice and energy costs can be directly calculated.

Models	Key characteristics
ECi2	7 insulated inputs
ECi3	7 insulated inputs + 2 analogue inputs.


## Front panel

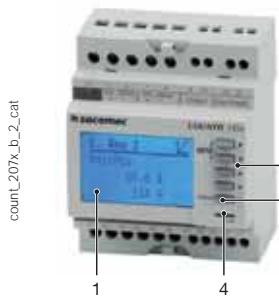

1. Backlit LCD display.
2. Navigation keys.
3. Validation pushbutton in programming mode.
4. Communication status indicator (COM).


count\_207x.b\_2.cat

## Dimensions (mm)

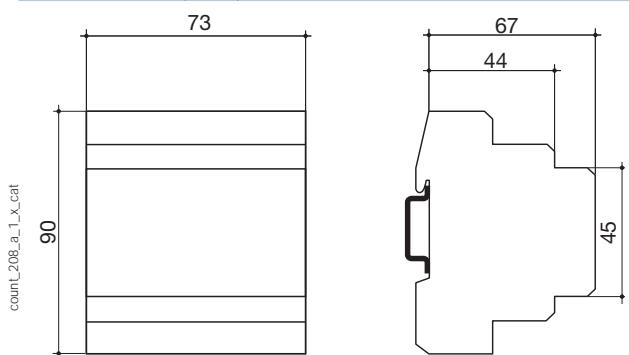

Type	modular
Number of modules	4
Dimensions W x H x D	73 x 90 x 67 mm
Case degree of protection	IP20
Front degree of protection	IP51
Display type	backlit LCD display
Terminal blocks type	fixed
Rigid cable cross-section	1 ... 10 mm <sup>2</sup>
Flexible cable cross-section	0.5 ... 6 mm <sup>2</sup>
Weight	215 g

## Connection

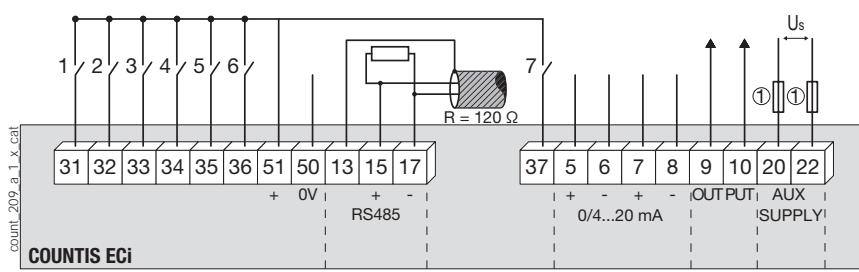

1. 0.5 A gG fuses.

- 31 : logical input n°1.
- 32 : logical input n°2.
- 33 : logical input n°3.
- 34 : logical input n°4.
- 35 : logical input n°5.
- 36 : logical input n°6.
- 37 : logical input n°7.
- 13-15-17 : RS485 link.
- 5-6 : Analogue input n°1.
- 7-8 : Analogue input n°2.
- 9-10 : output.
- 20-22 : power supply  
U=110...400 VAC ± 10 %.
- 51-50 : Inputs internal/  
external power supply.

## References

Auxiliary power supply U <sub>s</sub>	COUNTIS ECi2 Reference	COUNTIS ECi Reference
230 / 400 VAC	4853 0000	
230 / 400 VAC + 2 analogue inputs		4853 0001
Accessories	To be ordered in multiples of	Reference
Door mounting kit		192J 8015
Fuse disconnect switches to protect the 1-pole + neutral auxiliary power supply (RM type)	6	5701 0017
gG 10x38 0,5 A fuses	10	6012 0000

# MULTIS L50

## Digital panel meter

three-phases - via CT up to 6000 A dimensions 96 x 96 mm



*MULTIS L50*

### Function

The MULTIS L50 is a panel mounted digital meter displaying multi-measurement and energy values directly on its large backlit LCD display. It is designed for utilisation on three-phase or single-phase networks with connection via CT and is suitable for applications of up to 6000 A. The product can be configured by the user via the keypad and the display.

### Advantages


#### Easy to use

Thanks to its large backlit LCD display and its multiple viewing screens with direct pushbutton access, MULTIS L50 provide clear readings and are easy to use. They directly display a number of multi-measurement and metering values.

#### Advanced functionalities

The MULTIS L50 offers input/output functions as standard and has a pulse output or RS485 MODBUS communication output.

### Principle diagram

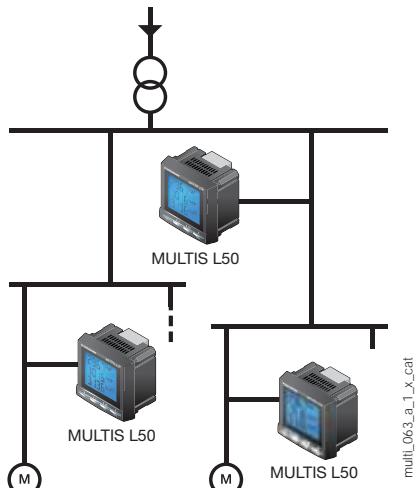

*multi\_076.eps*

### The solution for

- > Industry
- > Infrastructure



### Strong points

- > Large backlit LCD display
- > Direct display of multimeasurement and metering values
- > RS485 MODBUS communication
- > Inputs/Output for control/command or pulses

### Conformity to standards

- > IEC 62053-21 class 1
- > IEC 62053-23 class 2



## Functions

### Multi-measurement

- Currents
  - instantaneous: I1, I2, I3, In
  - maximum average: I1, I2, I3, In
- Voltages & frequency
  - instantaneous: V1, V2, V3, U12, U23, U31, F
- Power
  - instantaneous: 3P, ΣP, 3Q, ΣQ, 3S, ΣS
  - maximum average: ΣP, ΣQ, ΣS
  - unbalance: U unb
- Power factors
  - instantaneous: 3PF, Σ

### Metering

- Active energy: ± kWh
  - Reactive energy: ± kvarh
  - Hours:
- Harmonic analysis**
- Total harmonic distortion (level 51)
    - Currents: thd I1, thd I2, thd I3
    - Phase-to-neutral voltage: thd V1, thd V2, thd V3
    - Phase-to-phase voltage: thd U12, thd U23, thd U31

### Communications<sup>(1)</sup>

RS485 with MODBUS protocol

### Output

- Remote command of device
- Pulse report

### Inputs

- Remote status device


(1) Available as an option (see the following pages).

## Front panel



1. Backlit LCD display.
2. Direct access key for currents (instantaneous and max. values), current THD.
3. Direct access key for voltages, frequency and voltage THD.
4. Pushbutton for active, reactive, and apparent power (instantaneous and max. values) and power factor.
5. Direct access key for energies, hour meter and programming menu.

## Case

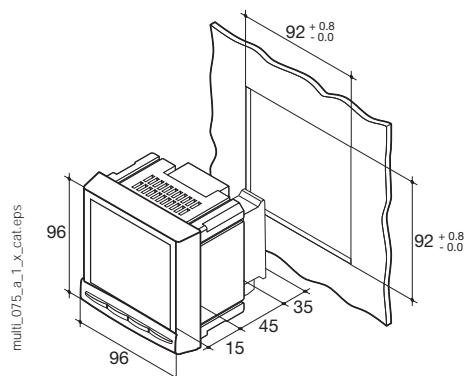


Type	panel mounting
Dimensions W x H x D	96 x 96 x 60 mm
Case degree of protection	IP30
Front degree of protection	IP52
Display type	backlit LCD display
Terminal block type	fixed or plug-in
Voltage and other connection cross-section	0.2 ... 2.5 mm <sup>2</sup>
Current connection cross-section	0.5 ... 6 mm <sup>2</sup>
Weight	400 g

## Plug-in modules

## MULTIS L50

drfs\_773

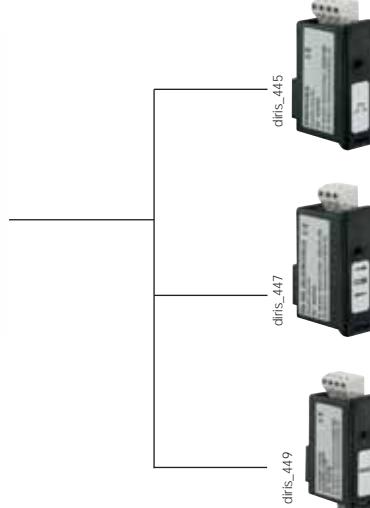

## 1 Output

- 1 output assignable to:
- Pulses: configurable (type, weight, duration) in kWh or kvarh.
  - Remote command of device.

## Communication

RS485 link with JBUS / MODBUS protocol  
(speed up to 38400 bauds)

## 3 inputs, 1 output

- 3 inputs assignable to:
- Remote status device.
- 1 output assignable to:
- Pulses: configurable (type, weight, duration) in kWh or kvarh.
  - Remote command of device.

## Accessories

## Current transformers



## IP65 protection

Panel mounting kit  
for a 144 x 96 mm cut-out

# MULTIS L50

Digital panel meter


three-phases - via CT up to 6000 A dimensions 96 x 96 mm

## Electrical characteristics

Current measurement (TRMS)	
Via CT primary	9 999 A
Via CT secondary	5 A
Measurement range	0 ... 11 kA
Input consumption	0.6 VA
Measurement updating period	1 s
Accuracy	1%
Permanent overload	6 A
Intermittent overload	10 $I_n$ for 1 s
Voltage measurements (TRMS)	
Direct measurement between phases	50 ... 500 VAC
Direct measurement between phase and neutral	28 ... 289 VAC
Input consumption	$\leq 0.1$ VA
Measurement updating period	1 s
Accuracy	1%
Permanent overload	800 VAC
Power measurement	
Measurement updating period	1 s
Accuracy	1%
Power factor measurement	
Measurement updating period	1 s
Accuracy	1%
Frequency measurement	
Measurement range	45 ... 65 Hz
Measurement updating period	1 s
Accuracy	0.1 %

Energy accuracy	
Active (according to IEC 62053-21)	Class 1
Reactive (according to IEC 62053-23)	Class 2
Auxiliary power supply	
Alternating voltage	110 ... 250 VAC
AC tolerance	$\pm 10$ %
Direct voltage	120 ... 250 VDC
DC tolerance	$\pm 10$ %
Frequency	50 / 60 Hz
Consumption	10 VA
Pulse or alarm output	
Number	1
Type	100 VDC - 0.5 A - 10 VA
Max. number of operations	$\leq 10^8$
Inputs	
Number	3
Power supply	10 ... 30 VDC
Minimum signal width	10 ms
Minimum duration between 2 pulses	18 ms
Type	Phototransistors
Communication	
Link	RS485
Type	2 ... 3 half duplex wires
Protocol	MODBUS RTU
MODBUS® speed	1400 ... 38400 bauds
Operating conditions	
Operating temperature	- 10 ... + 55 °C
Storage temperature	- 20 ... + 85 °C
Relative humidity	95 %


## Terminals

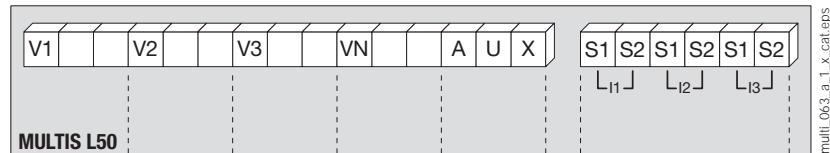

S1 - S2: current inputs.

AUX: auxiliary power supply U<sub>s</sub>.  
V1, V2, V3 & VN: voltage inputs.


### Communication module

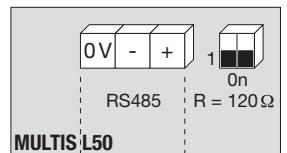

RS485 link.


R = 120 Ω: selectable internal resistance for RS485 end of line termination.

### Output or alarm module

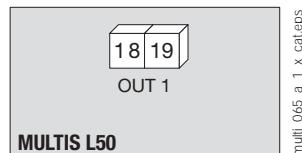

18 - 19: output n°1

### 3 inputs, 1 output module

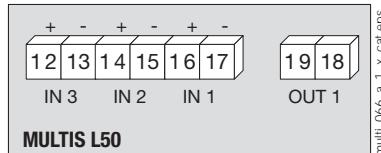

MULTIS L50


## Connection

### Recommendation:

- For IT earthing systems, it is recommended that the CT secondary is not connected to earth.
- When disconnecting the DIRIS, the secondary of each current transformer must be short-circuited. This operation can be carried out automatically by a SOCOMECH PTI, an accessory which is included in this catalogue. Please consult us.


### Low voltage balanced network

#### 3/4 wires with 1 CT

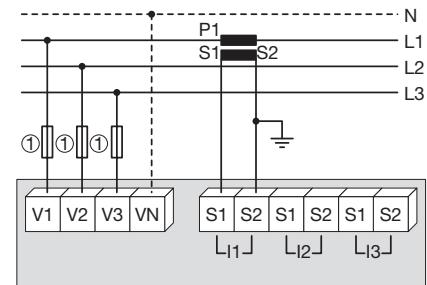


Use of 1 CT reduces by 0.5% the accuracy of the phases, the current of which is worked out by vector calculation.  
1. Fuses 0.5 A gG / 0.5 A class CC.

#### Single-phase

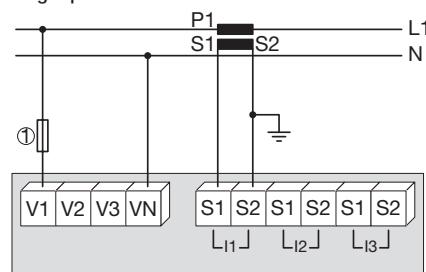

1. Fuses 0.5 A gG / 0.5 A class CC.


#### Two-phase

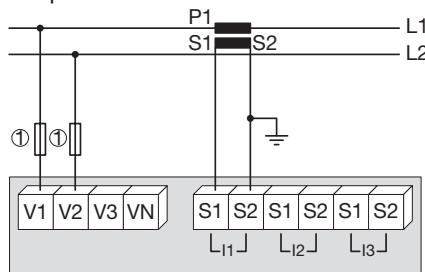

1. Fuses 0.5 A gG / 0.5 A class CC.


### Low voltage unbalanced network

#### 3/4 wires with 3 CTs

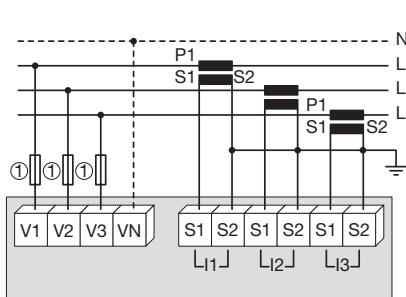

1. Fuses 0.5 A gG / 0.5 A class CC.


#### 3 wires with 2 CTs

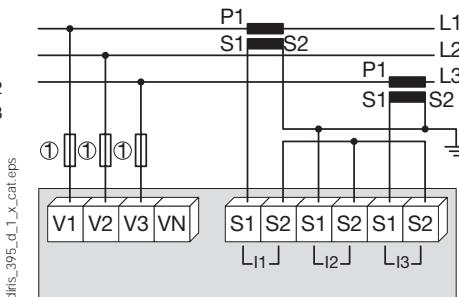

Use of 2 CTs reduces by 0.5% the accuracy of the phases, the current of which is worked out by vector calculation.

1. Fuses 0.5 A gG / 0.5 A class CC.

#### 3 wires with 2 CTs

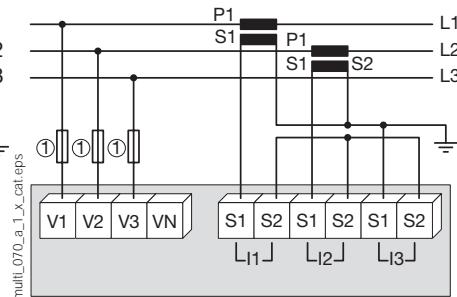


Use of 2 CTs reduces by 0.5% the accuracy of the phases, the current of which is worked out by vector calculation.


1. Fuses 0.5 A gG / 0.5 A class CC.

### Additional information

#### Communication via RS485 link

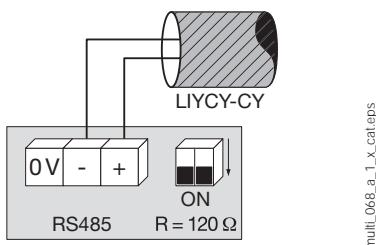

#### AC & DC auxiliary power supply

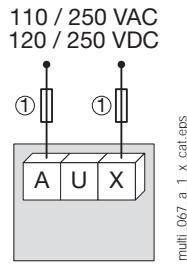

1. Fuses 0.5 A gG / 0.5 A class CC.

### References

Basic device	MULTIS L50
MULTIS L50	Reference 19J 9120
Optional plug-in modules	Reference
1 output	4825 0080
RS485 MODBUS® communication	4825 0082
3 inputs, 1 output	4825 0083
Accessories	
Description of accessories	To be ordered in multiples of
IP65 protection	1
Panel mounting kit for a 144 x 96 mm cut-out	1
Fuse holder for the protection of voltage inputs (type RM) 3 poles	4
Fuse holder for the protection of the auxiliary supply (type RM) 1 pole + neutral	6
Fuse type gG 10x38 0.5 A	10
Ferrite to be associated with communication modules	1
Current transformer range	1
	See "TE sensors" pages

### Expert Services

- > Study, definition, advice, implementation, maintenance and training... Our experts "Expert Services" offer complete support for the success of your project.



# Selection guide

## Multifunction meters

### **DIRIS**

Which  
application?

Which  
functions?



**DIRIS A-10**  
*p. 294*

**DIRIS A-14 DIN**  
*p. 298*

**DIRIS A-14 96 x 96**  
*p. 298*

		Functions			CURRENT TRANSFORMERS		
General characteristics	Remote display						
	Number of loads	1		1		1	
	Mounting	DIN		DIN or 96*96		DIN or 96*96	
	Power supply	AC		AC		AC	
	All In One	•		•		•	
	Optional modules						
	Ethernet (Modbus TCP/Bacnet IP)	o / -		o / -		o / -	
	RS485 (Modbus/Bacnet MSTP)	• / -		• / -		• / -	
	Profibus DPV1						
	Webserver / File export	o / -		o / o		o / o	
	Max. number of inputs (digital/analogue)	1 / -					
	Max. number of outputs (digital/analogue)	1 / -					
Manage energy consumptions	4-quadrant energy metering	•		•		•	
	Load curves (local memory)			•		•	
	Rebilling of energy (MID approved)			•		•	
	Multi-tariff management	2		4		4	
Monitor the electrical installation	Instantaneous, average, min and max values	•		•		•	
	Voltage unbalance measurement						
	Neutral current (measured/calculated)	- / •		- / •		- / •	
Check the power quality	Harmonic analysis (THD / Individual)	• / -		• / -		• / -	
	Dip and swell detection						
	Overcurrent detection						
	1/2 cycle RMS curves on events						
Manage the loads	Operating hours	•					
	Number of operations (info/alarm)						
	Protective device monitoring (on/off/tripped)	•					
	Predictive power analysis and load shedding						

•: integrated in the product.

o: optional via DIRIS Digiware M-50/M-70 or modules.

Which dimensions?

Which communication protocol?

Which options?

				
<b>DIRIS A-20</b> <i>p. 302</i>	<b>DIRIS A-30/A-41</b> <i>p. 306</i>	<b>DIRIS B-10</b> <i>p. 316</i>	<b>DIRIS B-30</b> <i>p. 316</i>	<b>DIRIS A-40</b> Modbus <i>p. 312</i>
<b>CURRENT TRANSFORMERS</b>				
1	1	•	•	1
96 x 96	96 x 96	DIN	DIN	96 x 96
AC	AC/DC	AC	AC	AC/DC
•	•			•
o/-	o/-	•/0	•/0	-/-
•/-	•/-	•/0	•/0	•/-
	0	0	0	•
o/o	Via DIRIS G	o/o	o/o	o/o
3/-	6/4	2/2		3/-
1/-	6/4	2/2		2/-
•	•	•	•	•
	0	•	•	•
•	•	8	8	4
	•	•	•	•
	•	•	•	•
-/•	• (with A-41)	•/•	•/•	-/•
•/-	•/•	•/-	•/•	•/•
			•	•
			•	•
•	•	•	•	•
•/-	•/-	•/-	•/•	•/•
•	•	•	•	•
	•	•	•	•

# DIRIS A-10

## Multifunction meters - PMD measuring and monitoring - modular format

### Function

The DIRIS A-10 is a modular multifunction meter for measuring electrical values in low voltage networks with connection to current transformers.

It allows all electrical parameters to be displayed and utilised for communication and/or output functions.

### Advantages

#### Easy to use

Five direct access pushbuttons enable all measurements to be clearly viewed on its backlit LCD display.

#### Integrated temperature sensor

It allows variations in temperature to be detected.

#### Detects wiring errors

An integrated test function can be utilised to detect incorrect wiring and to automatically correct CT installation errors.

#### Compliant with IEC 61557-12

IEC 61557-12 is a high-level standard for all PMDs (Performance Monitoring Devices) that are designed to measure and monitor electrical parameters in distribution networks.

Compliance with IEC 61557-12 ensures a high level of equipment performance, in terms of metrology, and the mechanical and environmental aspects (EMC, temperature, etc.).

### Functions

#### Multi-measurement

- Currents
  - instantaneous: I<sub>1</sub>, I<sub>2</sub>, I<sub>3</sub>, I<sub>n</sub>
  - maximum average: I<sub>1</sub>, I<sub>2</sub>, I<sub>3</sub>, I<sub>n</sub>
- Voltages & frequency
  - instantaneous: V<sub>1</sub>, V<sub>2</sub>, V<sub>3</sub>, U<sub>12</sub>, U<sub>23</sub>, U<sub>31</sub>, F
- Power
  - instantaneous: 3P, ΣP, 3Q, ΣQ, 3S, ΣS
  - maximum average: ΣP, ΣQ, ΣS
- Power factors
  - instantaneous: 3PF, ΣPF

#### Metering

- Active energy: +/- kWh
- Reactive energy: +/- kVarh
- Hours: ⏳



DIRIS A-10




### The solution for

- > Industry
- > Infrastructures
- > Tertiary



### Principle diagram

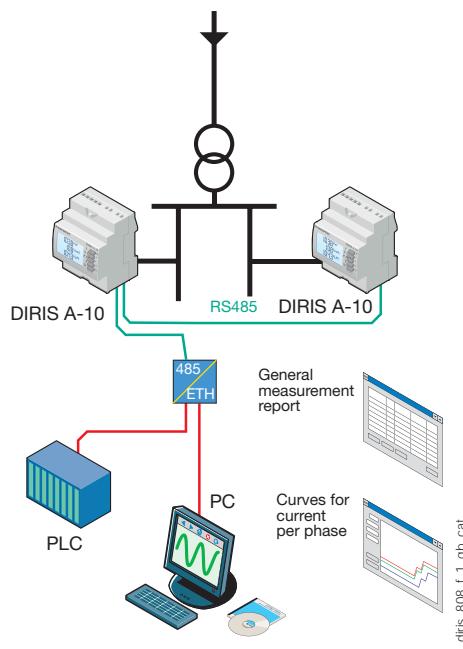

### Strong points

- > Easy to use
- > Integrated temperature sensor
- > Detects wiring errors
- > Compliant with IEC 61557-12



### Conformity to standards

- > IEC 61557-12
- > IEC 62053-22 class 0.5S
- > IEC 62053-23 class 2
- > UL



### Associated with current transformers



See "Current transformers".

#### Harmonic analysis

- Total harmonic distortion (level 51)
- Currents: thd I<sub>1</sub>, thd I<sub>2</sub>, thd I<sub>3</sub>
- Phase-to-neutral voltage: thd V<sub>1</sub>, thd V<sub>2</sub>, thd V<sub>3</sub>
- Phase-to-phase voltage: thd U<sub>12</sub>, thd U<sub>23</sub>, thd U<sub>31</sub>

#### Dual tariff function

Selection of one out of 2 billing tariffs

#### Events

Alarms on all electrical values

#### Communications<sup>(1)</sup>

RS485 with MODBUS protocol

#### Input


- Tariff selection
- Remote device status

#### Output

- Remote command of device
- Alarm report
- Pulse report


(1) Available on specific version (see the following pages).

## Front panel

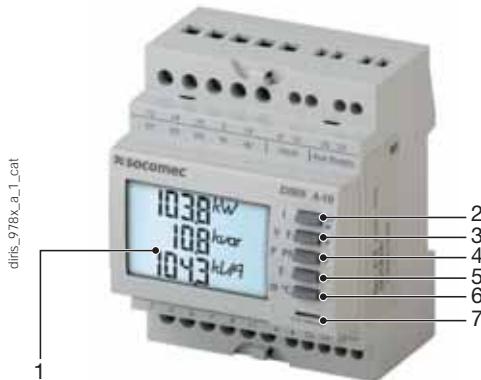

1. Backlit LCD display.
2. Direct access key for currents (instant and maximum), current THD and test function.
3. Direct access key for voltages, frequency and voltage THD.
4. Direct access key for active, reactive and apparent power (instantaneous and max. values) and power factor.
5. Direct access key for energies.
6. Pushbutton for hour meter, temperature and programming menu access.
7. Metrological LED.

## Case

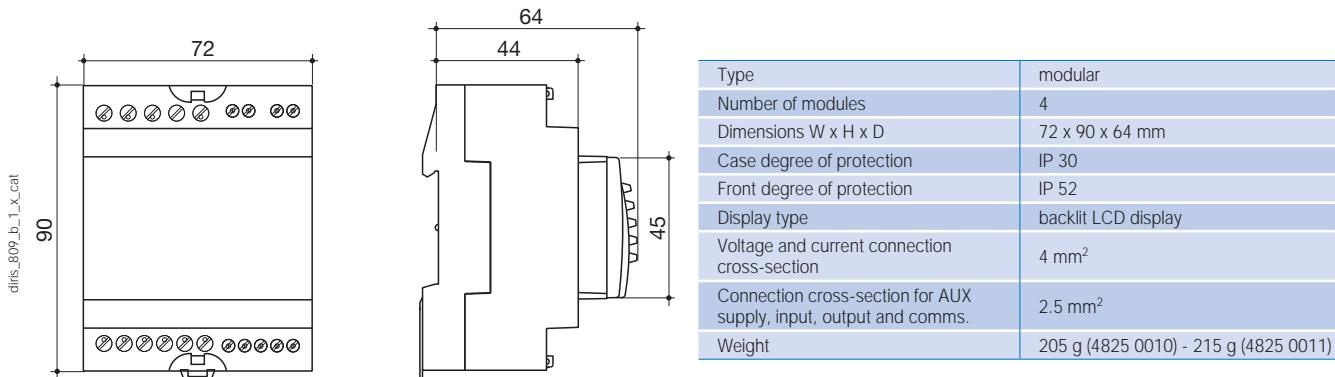

## Electrical characteristics

Current measurement (TRMS)	
Via CT primary	9 999 A
Via CT secondary	5 A
Measurement range	0 ... 11 kA
Input consumption	0.6 VA
Measurement updating period	1 s
Accuracy	0.2 %
Permanent overload	6 A
Intermittent overload	10 I <sub>h</sub> for 1 s
Voltage measurements (TRMS)	
Direct measurement between phases	50 ... 500 VAC
Direct measurement between phase and neutral	28 ... 289 VAC
Input consumption	≤ 0.1 VA
Measurement updating period	1 s
Accuracy	0.2 %
Power measurement	
Measurement updating period	1 s
Accuracy	0.5 %
Power factor measurement	
Measurement updating period	1 s
Accuracy	0.5 %
Frequency measurement	
Measurement range	45 ... 65 Hz
Measurement updating period	1 s
Accuracy	0.1 %

Energy accuracy	
Active (according to IEC 62053-22)	Class 0.5 S
Reactive (according to IEC 62053-23)	Class 2
Auxiliary power supply	
Alternating voltage	110 ... 277 VAC
AC tolerance	± 15 %
Frequency	50 / 60 Hz
Consumption	< 3 VA
Digital output (pulses)	
Number	1
Optocoupler type (IEC 62053-31)	Class A and B (10 ... 30 VDC, 27mA)
Input (tariff)	
Number	1
Type	0 VAC: T1 / 200-277 VAC: T2
Communication	
Link	RS485
Type	2 ... 3 half duplex wires
Protocol	MODBUS RTU
MODBUS® speed	2400 ... 38400 bauds
Operating conditions	
Operating temperature	- 10 ... + 55 °C
Storage temperature	- 20 ... + 70 °C
Relative humidity	85 %

# DIRIS A-10

Multifunction meters - PMD

measuring and monitoring - modular format


## Connection

### Recommendation:

- For IT earthing systems, it is recommended that the CT secondary is not connected to earth.
- When disconnecting the DIRIS, the secondary of each current transformer must be short-circuited. This operation can be carried out automatically by a SOCOMEC PTI, an accessory which is included in this catalogue. Please consult us.
- It is recommended that the earthing point for the DIRIS A-10 and the current transformer secondaries are not earthed at the same time.


### Low voltage balanced network

3/4 wires with 1 CT

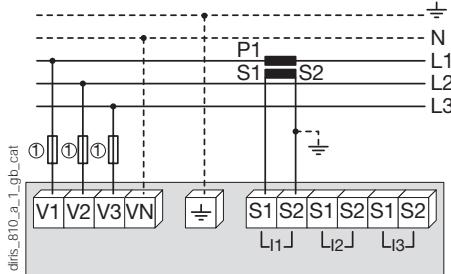


1. Fuses 0.5 A gG / 0.5 A class CC.

Single-phase

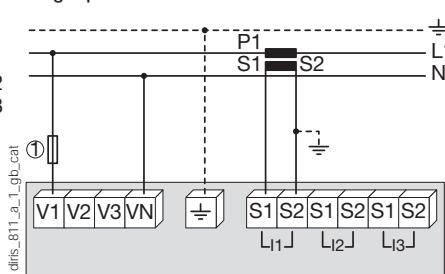

1. Fuses 0.5 A gG / 0.5 A class CC.


Two-phase

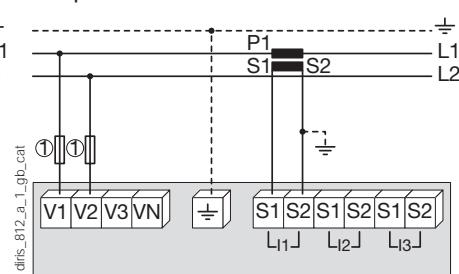

1. Fuses 0.5 A gG / 0.5 A class CC.


### Low voltage unbalanced network

3/4 wires with 3 CTs

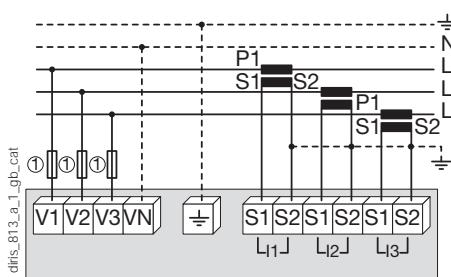

1. Fuses 0.5 A gG / 0.5 A class CC.


3 wires with 2 CTs

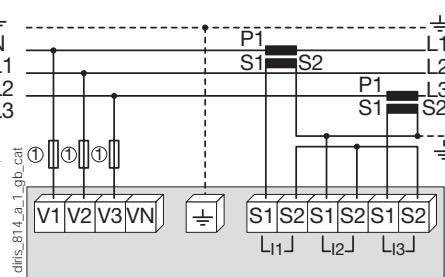

Use of 2 CTs reduces by 0.5% the accuracy of the phases, the current of which is worked out by vector calculation.

1. Fuses 0.5 A gG / 0.5 A class CC.

3 wires with 2 CTs

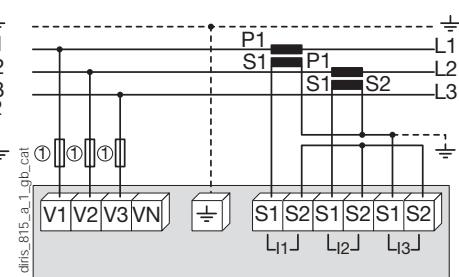

Use of 2 CTs reduces by 0.5% the accuracy of the phases, the current of which is worked out by vector calculation.


1. Fuses 0.5 A gG / 0.5 A class CC.

## Additional information


Communication via RS485 link

AC auxiliary power supply

dfris\_820.a\_1\_x.cat

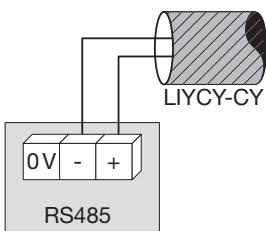


dfris\_821.e\_1\_x.cat

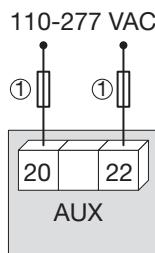

1. Fuses 0.5 A gG / 0.5 A class CC.


## Terminals

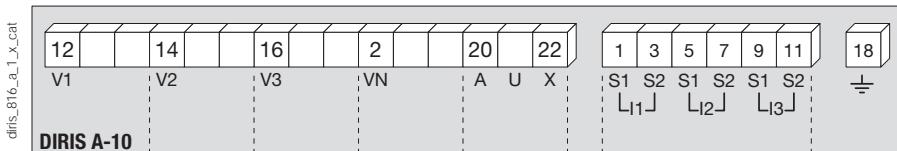

AUX: auxiliary power supply  $U_s$ .  
V1, V2, V3 & VN: voltage inputs.

S1 - S2: current inputs.


## Communication terminals



RS485 link.

diris\_816\_a\_1x.cat


## Pulse or alarm output terminals

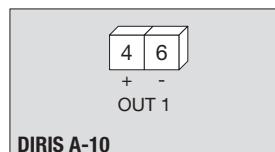

4 - 6: output n°1

diris\_819\_b\_1x.cat

## Input terminals

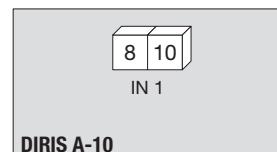

8 - 10: input n°1

diris\_818\_a\_1x.cat

## References

Basic device Description	DIRIS A-10	DIRIS A-10 Reference
DIRIS A-10		4825 0400
DIRIS A-10 with RS485 MODBUS communication		4825 0401
Accessories	To be ordered in multiples of	Reference
Fuse disconnect switches for the protection of voltage inputs (type RM) 3 poles	4	5701 0018
Fuse disconnect switches for the protection of the auxiliary supply (type RM) 1 pole + neutral	6	5701 0017
Fuses type gG 10x38 0.5 A	10	6012 0000
Current transformer range	1	See "Current transformers" pages
Management software for DIRIS		4825 0088
Door mounting kit		See "Current transformers" pages
Automatic CT short-circuiting device		

## Expert Services

- > Study, definition, advice, implementation, maintenance and training... Our experts "Expert Services" offer complete support for the success of your project.



# DIRIS A14

## PMD - MID multifunction measuring unit measuring and monitoring - modular format

Single-circuit metering,  
measurement & analysis



DIRIS A14 panel mounted



DIRIS A14 DIN rail mounted

### Function

The DIRIS A14 is an MID approved multifunction meter - for measuring electrical values in low voltage networks.

It allows all electrical parameters to be displayed and utilised for communication and/or output functions.

### Advantages

#### Single-phase and three-phases MID certified

DIRIS A14 products with MID certification provide the guaranteed accuracy required for applications in which sub-billing of the electrical energy consumed is necessary, whether on a three-phase or single-phase network. "Module B+D" certification guarantees that the design and manufacturing process of products are approved by an accredited laboratory.

#### Bi-directional metering (four quadrants)

This function is for metering energy production or energy consumption.


#### Multi-measurement and load curve

Display of electrical values ( $I$ ,  $U$ ,  $V$ ,  $\Sigma P$ ,  $\Sigma Q$ ,  $\Sigma S$ ,  $PF$ ) and  $P+$  load curve over a 7 day period via communication.

#### IEC 61557-12 measuring method

IEC 61557-12 is a high-level standard covering all PMDs (Performance Monitoring Devices). By using the measuring method of IEC 61557-12 ensures a high level of equipment performance, in terms of metrology.

### Functional diagram

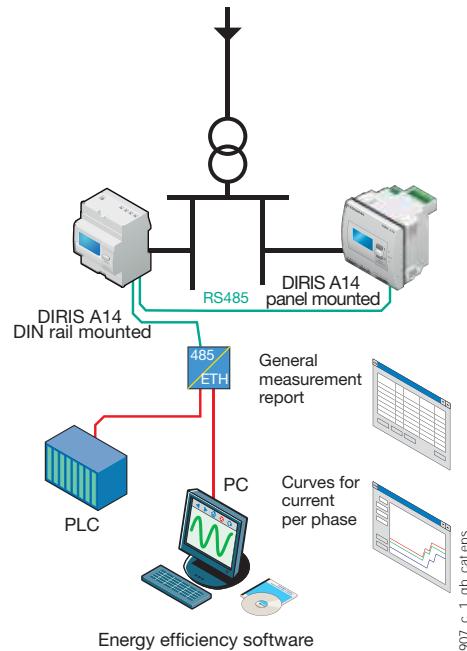

### Functions

#### Multi-measurement

- Currents
  - instantaneous:  $I_1$ ,  $I_2$ ,  $I_3$ ,  $I_n$
  - maximum average:  $I_1$ ,  $I_2$ ,  $I_3$ ,  $I_n$
- Frequency
- Voltages
  - instantaneous:  $V_1$ ,  $V_2$ ,  $V_3$ ,  $U_{12}$ ,  $U_{23}$ ,  $U_{31}$ ,  $F$
- Powers
  - instantaneous:  $\Sigma P$ ,  $\Sigma Q$ ,  $\Sigma S$
  - maximum average:  $\Sigma P$ ,  $\Sigma Q$ ,  $\Sigma S$
- Power factor ( $\cos \phi$ )
  - instantaneous:  $\Sigma \cos \phi$
  - maximum average:  $\Sigma \cos \phi$

#### Total and partial metering

- Active energy: + kWh, - kWh
- Reactive energy: + kvarh, - kvarh

#### Harmonic analysis (via communication)

- Total harmonic distortion (rank 63)
  - Currents: thd  $I_1$ , thd  $I_2$ , thd  $I_3$
  - Phase-to-neutral voltage: thd  $V_1$ , thd  $V_2$ , thd  $V_3$
  - Phase-to-phase voltage: thd  $U_{12}$ , thd  $U_{23}$ , thd  $U_{31}$

#### Multi tariff function (via communication)

- Selection of one out of 4 billing tariffs

### The solution for

- > Industry
- > Infrastructures
- > Data centers



### Strong points

- > Single-phase and three-phases MID certified
- > Bi-directional metering
- > Multi-measurement and load curves
- > IEC 61557-12 measuring method
- > Detection of connection errors

### Compliance with standards

- > IEC 61557-12
- > IEC 62053-23 class 2
- > EN50470-1
- > EN50470-3 class C



### Associated with current transformers



See "Current transformers".


#### Events (via communication)

- Active energy consumption: day n-1 / week n-1 / month n-1
- Active power load curves: P 10 minutes over 7 days with time-log

#### Communications

- RS485 with MODBUS protocol

## Front panel

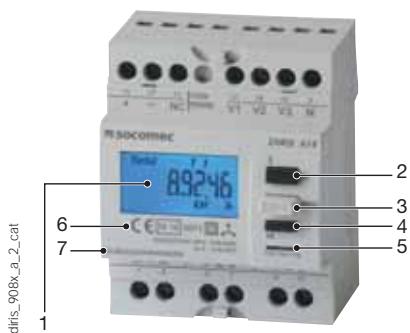


1. Backlit LCD display
2. Direct access for energies and validation key
3. Programming key
4. Navigation key for measurements
5. Metrological LED
6. MID marking
7. Serial Number




## Case

## DIRIS A14 DIN rail mounted

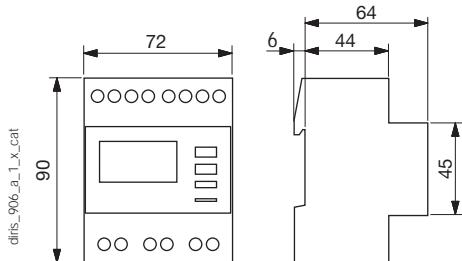

	DIRIS A14 DIN rail mounted	DIRIS A14 door mounted
Type	modular	Recessed
Number of modules	4	-
Dimensions W x H x D	72 x 90 x 64 mm	96 x 96 x 69.5 mm
Case degree of protection	IP20	
Front degree of protection	IP51	
Display type	Backlit LCD	
Rigid cable cross-section	1.5 ... 10 mm <sup>2</sup>	
Flexible cable cross-section	1 ... 6 mm <sup>2</sup>	
Weight	240 g	450 g

## DIRIS A14 door mounted

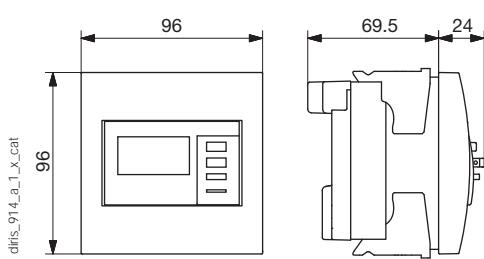

## Electrical characteristics

Current measurement (TRMS)	
Via CT primary	10 ... 2500 A
Via CT secondary	5 A
Input consumption	0.6 VA
Startup current (Ist)	5 mA
Minimum current (Imin)	50 mA
Transmission current (Itr)	250 mA
Reference current (Iref)	5 A
Measurement updating period	1 s
Accuracy	0.5%
Permanent overload	6 A
Intermittent overload	120 A for 0.5 s
Voltage measurements (TRMS)	
Direct measurement (four phases)	50 ... 460 VAC
Input consumption	2 VA
Measurement updating period	1 s
Accuracy	0.2%
Permanent overload	480 V (phase-to-phase measurement)
Power measurement	
Measurement updating period	1 s
Accuracy	0.5%
Power factor measurement ( $\cos \phi$ )	
Measurement updating period	1 s
Accuracy	0.01

Energy accuracy	
Active (according to IEC 62053-22)	Class 0.5 S
Reactive (according to IEC 62053-23)	Class 2
Active (according to EN 50470)	Class C
Metrological LED (EA*, EA*)	
Pulse weight	10000 pulses/kWh
Colour	Red
Auxiliary power supply	
Self-powered	Yes
Frequency	50 / 60 Hz
Communication	
Link	RS485
Type	2 to 3 half duplex wires
Protocol	MODBUS® RTU
MODBUS® speed	4800 ... 38400 bauds
Operating conditions	
Operating temperature	-10 ... +55°C
Storage temperature	-20 ... +70°C
Relative humidity	95% non-condensing

# DIRIS A14

PMD - MID multifunction measuring unit

measuring and monitoring - modular format

## Connection

### Low voltage balanced network

Recommendation:


- For IT earthing systems, it is recommended that the CT secondary is not connected to earth.

- When disconnecting the DIRIS, the secondary of each current transformer must be short-circuited.

This operation can be carried out automatically by a SOCOMEC PTI, which can be found in the SOCOMEC catalogue: please consult us.


### Low voltage unbalanced network

#### 3/4 wires with 3 CTs

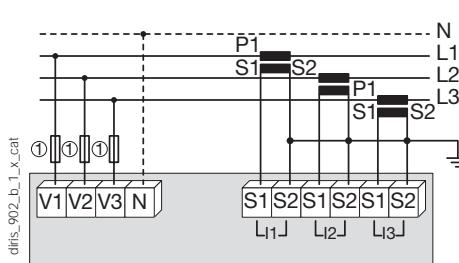


1. 0.5 A gG / 0.5 A class CC fuses.

#### Single-phase

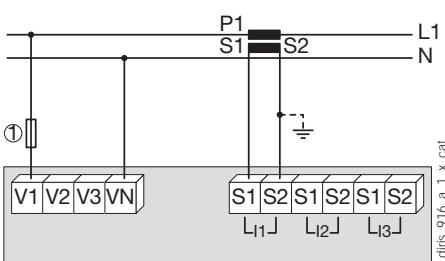


1. 0.5 A gG / 0.5 A class CC fuses.

#### 3 wires with 2 CTs

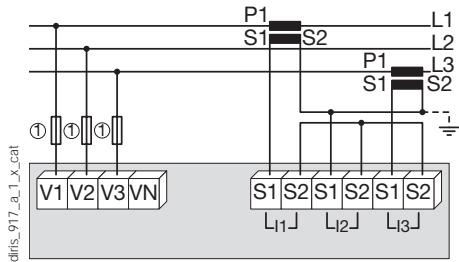

1. 0.5 A gG / 0.5 A class CC fuses.

#### 3 wires with 2 CTs

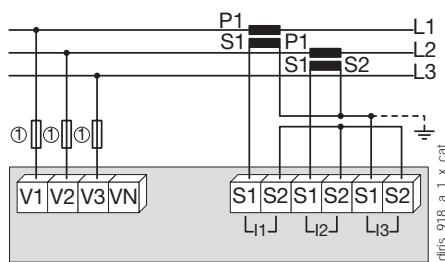


1. 0.5 A gG / 0.5 A class CC fuses.

### Additional information


Communication via RS485 link

diris\_903\_a\_1\_x\_cat

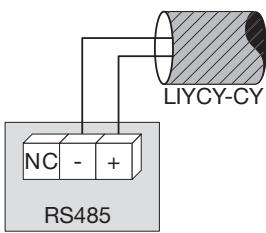


## Terminals


### Communication Module



RS485 link.

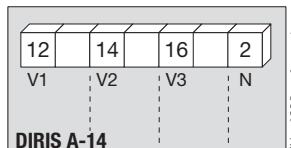

V1, V2, V3 & N: voltage inputs.

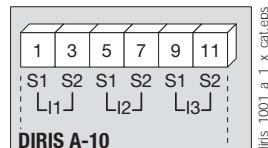

S1 - S2: current inputs.

## References

Basic device	DIRIS A14
Description	Reference
DIRIS A14 MID DIN rail mounted	4825 0020
DIRIS A14 MID door mounted	4825 0021
Accessories	To be ordered in multiples of
Fuse disconnect switches for the protection of voltage inputs (type RM)	4
Fuse disconnect switches to protect the 1-pole + neutral auxiliary power supply (RM type)	6
gG 10x38 0,5 A fuses type	10
Automatic CT short-circuiting device	See "Current transformers" pages

## Expert Services

- > Study, definition, advice, implementation, maintenance and training... Our experts "Expert Services" offer complete support for the success of your project.



# DIRIS A-20

Multifunction measuring unit - PMD  
measurement and monitoring - door mounting



DIRIS A-20

diris\_981\_front.eps

## Function

**DIRIS A-20** units are performance metering and monitoring devices that provide the user with all of the measurements needed to complete energy efficient projects successfully and to provide assured monitoring of electrical distribution.

All of this information can be used and analysed remotely with the help of energy efficiency software programs.

## Advantages

### User-friendly operation

With its large backlit multiple-display screen with 4 hot keys, the DIRIS A-20 is easy to use.

### Compliant with IEC 61557-12

Reference standard for PMDs (Performance metering & monitoring devices), IEC 61557-12 guarantees performance levels and satisfactory performance from the PMDs under the environmental conditions typical of industrial and tertiary applications.


### Detects wiring errors

The DIRIS A-20 is equipped with an error correction function for CT connection.

### Customisable

Additional communication and input/output modules can extend the basic functional scope of this product. Equipped with additional modules, the DIRIS A-20 can provide the user with flexibility and expandability throughout the service life of the product.

## Functional diagram

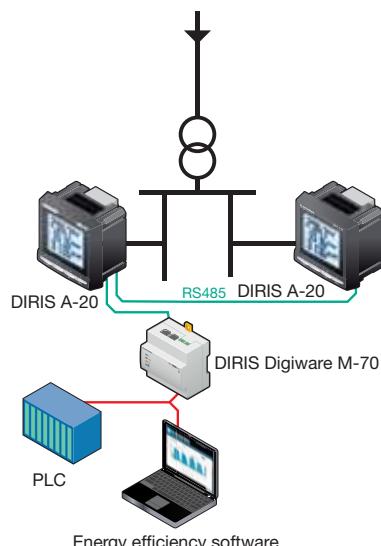

DIRIS\_576\_L1\_en\_cat

## The solution for

- > Industry
- > Infrastructure
- > Building



## Strong points

- > User-friendly operation
- > Compliant with IEC 61557-12
- > Detects wiring errors
- > Customisable



## Compliance with standards

- > IEC 61557-12
- > IEC 62053-22 class 0.5S
- > IEC 62053-23 class 2
- > UL



## Related software

- > To use Socomec PMDs effectively, we can offer you several dedicated software tools.  
See "Easy Config System" pages.

## Functions

### Multi-measurement

- Currents
  - Instantaneous: I<sub>1</sub>, I<sub>2</sub>, I<sub>3</sub>, I<sub>n</sub>
  - Maximum average: I<sub>1</sub>, I<sub>2</sub>, I<sub>3</sub>, I<sub>n</sub>
- Voltages & frequency
  - Instantaneous: V<sub>1</sub>, V<sub>2</sub>, V<sub>3</sub>, U<sub>12</sub>, U<sub>23</sub>, U<sub>31</sub>, F
- Powers
  - Instantaneous: 3P, ΣP, 3Q, ΣQ, 3S, ΣS
  - Maximum average: ΣP, ΣQ, ΣS
- Power factors
  - Instantaneous: 3PF, ΣPF

### Metering

- Active energy: +/- kWh
  - Reactive energy: +/- kvarh
  - Hours: ⏳
- Harmonic analysis**
- Total harmonic distortion (rank 51)
    - Currents: thd I<sub>1</sub>, thd I<sub>2</sub>, thd I<sub>3</sub>
    - Phase-to-neutral voltage: thd V<sub>1</sub>, thd V<sub>2</sub>, thd V<sub>3</sub>
    - Phase-to-phase voltage: thd U<sub>12</sub>, thd U<sub>23</sub>, thd U<sub>31</sub>

### Events

Alarms on all electrical parameters

### Communications<sup>(1)</sup>

RS485 with MODBUS protocol

### Output

- Equipment control
- Alarm report
- Pulse report

### Input

- Information report from a dry external contact


(1) Available as an option (see the following pages).

## Front panel



1. Backlit LCD display
2. Pushbutton for currents (instantaneous and maximum), THD currents and the connection correction function.
3. Pushbutton for voltages, frequency and THD voltages.
4. Pushbutton for power (instantaneous and maximum), active, reactive and effective, power factor.
5. Pushbutton for energy sources and timer counter.

## Case

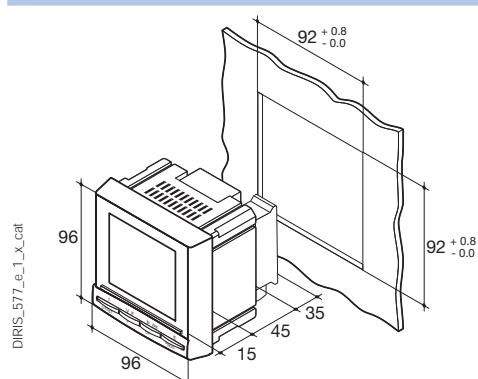


Type	Plug-in
Dimensions W x H x D	96 x 96 x 60 mm
Case degree of protection	IP30
Front degree of protection	IP52
Display type	Backlit LCD
Type of terminal strips	Fixed or removable
Section for connection of voltages and other terminals	0.2 ... 2.5 mm <sup>2</sup>
Section for connection of currents	0.5 ... 6 mm <sup>2</sup>
Weight	400 g

## Plug-in optional modules

## DIRIS® A-20

DIRIS\_773\_a\_1\_cat

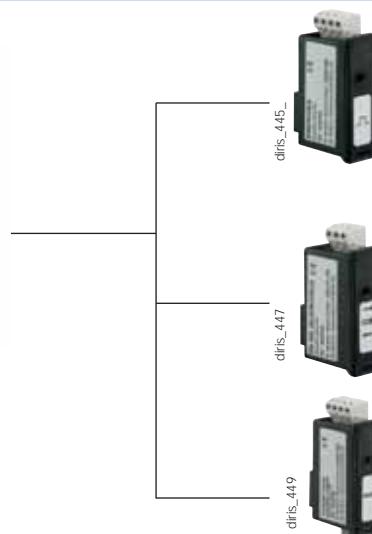

## 1 output

- 1 output that can be configured for:
- pulses: configurable (type, weight, duration) to kWh or kVarh.
  - Monitoring: 3I, In, 3V, 3U, F, ΣP, ΣQ, ΣS, ΣPFL/C, THD 3I, THD 3V, THD 3U and timer meter.
  - Equipment control

## Communication

RS485 link with MODBUS protocol (speed up to 38 400 baud).

## 3 inputs , 1 output

- 3 inputs can be configured into:
- Information report from an external contact.
- 1 output that can be configured for:
- pulses: configurable (type, weight, duration) to kWh or kVarh.
  - Monitoring: 3I, In, 3V, 3U, F, ΣP, ΣQ, ΣS, ΣPFL/C, THD 3I, THD 3V, THD 3U and timer meter.
  - Equipment control

## Accessories

## Current transformer

See "Current transformers" pages.

## IP65 protection

trafo\_024



DIRIS\_720



# DIRIS A-20


Multifunction measuring unit - PMD  
measurement and monitoring - door mounting

## Electrical characteristics

Current measurement (TRMS)	
Via CT primary	9 999 A
Via CT secondary	5 A
Measurement range	0 ... 11 kA
Input consumption	0.6 VA
Measurement updating period	1 s
Accuracy	0.2%
Permanent overload	6 A
Intermittent overload	10 $I_n$ over 1 sec
Voltage measurements (TRMS)	
Direct measurement between phases	50 ... 500 VAC
Direct measurement between phase and neutral	28 ... 289 VAC
Input consumption	$\leq 0.1$ VA
Measurement updating period	1 s
Accuracy	0.2%
Power measurement	
Measurement updating period	1 s
Accuracy	0.5%
Power factor measurement	
Measurement updating period	1 s
Accuracy	0.5%
Frequency measurement	
Measurement range	45 ... 65 Hz
Measurement updating period	1 s
Accuracy	0.1%

Energy accuracy	
Active (according to IEC 62053-22)	Class 0.5 S
Reactive (in acc. with CEI 62053-23)	Class 2
Auxiliary power supply	
Alternative voltage	110 ... 400 VAC
AC tolerance	$\pm 10\%$
DC voltage	120 ... 289 VDC
DC tolerance	$\pm 20\%$
Frequency	50 / 60 Hz
Power consumption	10 VA
Pulse or alarm output	
Number	1
Type	100 VDC - 0,5 A - 10 VA
Max. number of manoeuvres	$\leq 10^8$
Inputs	
Number	3
Power supply	10 ... 30 VDC
Minimum width of signal	10 ms
Minimum length between 2 pulses	18 ms
Type	Optical couplers
Communication	
Link	RS485
Type	2 to 3 half duplex wires
Protocol	MODBUS® in RTU mode
MODBUS® speed	1400 ... 38400 baud
Operating conditions	
Operating temperature range	- 10 ... + 55°C
Storage temperature	- 20 ... + 85°C
Relative humidity	95%


## Terminals

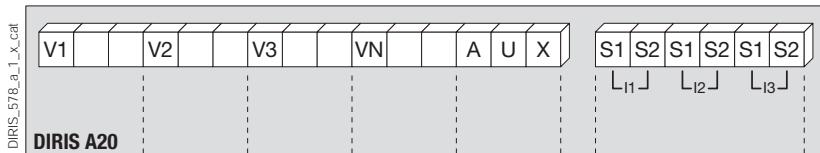


S1 - S2: current inputs.

AUX: auxiliary power supply  $U_s$ .  
V1, V2, V3 & VN: voltage inputs.


### Module communication

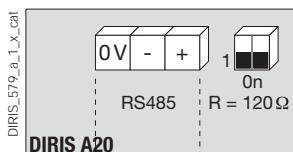

### Output or alarm module

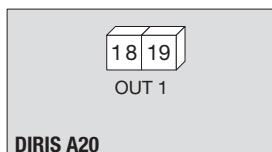

### Module with 3 inputs, 1 output

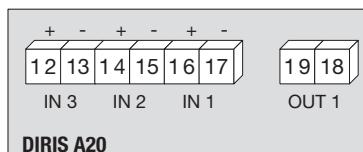


## Connection

### Low voltage balanced network


#### Recommendation

- For IT earthing systems, it is recommended that the CT secondary is not connected to earth.
- When disconnecting the DIRIS, the secondary of each current transformer must be short-circuited. This operation can be carried out automatically by a SOCOMEC PTI, which can be found in the SOCOMEC catalogue: please consult us.


#### 3/4 wires with 1 CT

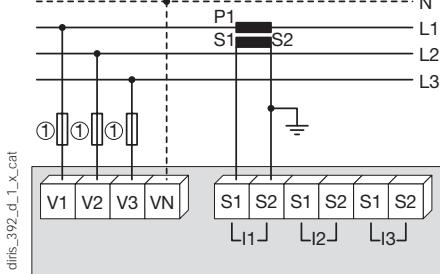

#### Single-phase

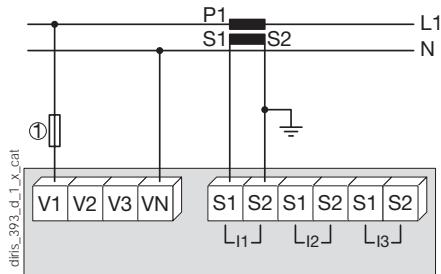

#### Two-phase

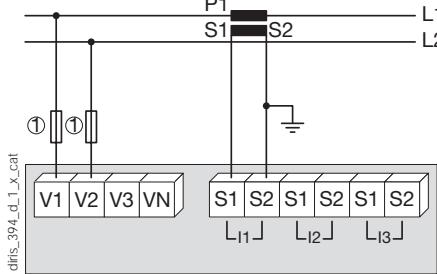

The 1CT solution reduces by 0.5% the accuracy of the phase for which the current is deduced by a vector calculation.


1. 0.5 A gG / 0.5 A class CC fuses.

1. 0.5 A gG / 0.5 A class CC fuses.

1. 0.5 A gG / 0.5 A class CC fuses.


### Low voltage unbalanced network

3/4 wires with 3 CTs

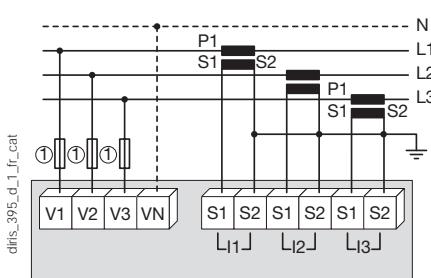


1. 0.5 A gG / 0.5 A class CC fuses.

3 wires with 2 CTs

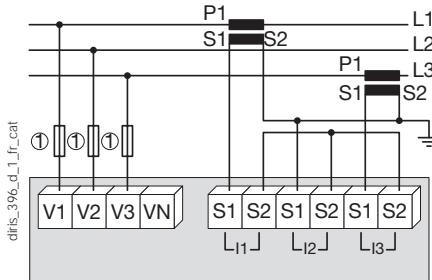

The 2CT solution reduces by 0.5% the accuracy of the phase for which the current is deduced by a vector calculation.  
1. 0.5 A gG / 0.5 A class CC fuses.


3 wires with 2 CTs

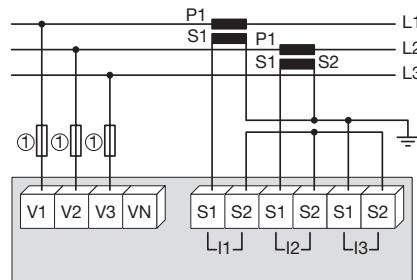


The 2CT solution reduces by 0.5% the accuracy of the phase for which the current is deduced by a vector calculation.  
1. 0.5 A gG / 0.5 A class CC fuses.

### Additional information

Communication via RS485 link

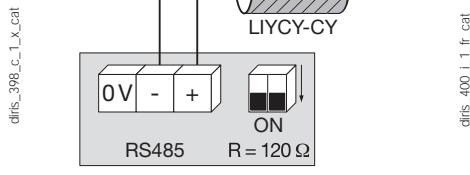

AC and DC auxiliary power supply

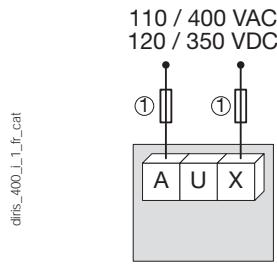

1. 0.5 A gG / 0.5 A class CC fuses.

### References

Basic device	DIRIS A-20
Auxiliary power supply U <sub>s</sub>	Reference 4825 0402
110 ... 400 VAC / 120 ... 350 VDC	
Options	
Plug-in modules	Reference 4825 0080
On/Off output.	4825 0082
RS485 MODBUS® communication	4825 0083
3 inputs, 1 output	
Accessoires	To be ordered in multiples of
Protection IP65	1
Plug-in kit for cutout 144 x 96 mm	1
3-pole fuse disconnect switches to protect input voltages (RM type)	4
1-pole + neutral fuse disconnect switches to protect the auxiliary supply (RM type)	6
gG 10x38 0.5 A fuses	10
Ferrite for use with communication modules	1
Current transformer range	1
Software associated with DIRIS	See "Easy Config System" pages
Automatic CT short-circuiting device	See "Current transformers" pages

### Expert Services

- > Study, definition, advice, implementation, maintenance and training... Our experts "Expert Services" offer complete support for the success of your project.



# DIRIS A-30/A-41

## Multifunction measuring unit - PMD

measurement and advanced monitoring - door mounting



DIRIS A-30

### Function

The DIRIS A-30 and A-41 are power monitoring devices that provide the user with all of the measurements needed to complete energy efficiency projects and to assure the monitoring of electrical distribution.

All the information can be used and analysed remotely using energy efficiency software packages.

### Advantages

#### User-friendly operation

With its large backlit multiple-display screen with 6 hot keys, the DIRIS A-30 is easy to use.

#### Detects wiring errors


The DIRIS A-30 is provided with a correction function for TC wiring errors.

#### Customisable

The DIRIS A-30 can be equipped with additional modules that give the user flexibility throughout the service life of the product.

Communication modules and additional digital or analogue inputs/outputs can be used to increase its range of functionality.

### Functional diagram

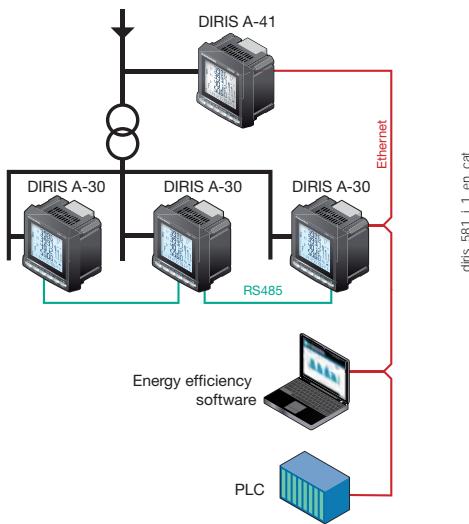

### Compliant with IEC 61557-12

Reference standard for PMDs (Performance metering & monitoring devices), IEC 61557-12 guarantees performance levels and satisfactory performance from the PMDs under the environmental conditions typical of industrial and tertiary applications.

### Functions

#### Multi-measurement

- Currents
  - instantaneous: I<sub>1</sub>, I<sub>2</sub>, I<sub>3</sub>, I<sub>n</sub>, I<sub>system</sub>
  - average/max average: I<sub>1</sub>, I<sub>2</sub>, I<sub>3</sub>, I<sub>n</sub>
- Voltages & frequency
  - instantaneous: V<sub>1</sub>, V<sub>2</sub>, V<sub>3</sub>, U<sub>12</sub>, U<sub>23</sub>, U<sub>31</sub>, F, V<sub>system</sub>, U<sub>system</sub>
  - average/max average: V<sub>1</sub>, V<sub>2</sub>, V<sub>3</sub>, U<sub>12</sub>, U<sub>23</sub>, U<sub>31</sub>, F
- Powers
  - instantaneous: 3P,  $\Sigma P$ , 3Q,  $\Sigma Q$ , 3S,  $\Sigma S$
  - max average:  $\Sigma P$ ,  $\Sigma Q$ ,  $\Sigma S$
  - predictive: ( $\Sigma P$ ), ( $\Sigma Q$ ), ( $\Sigma S$ )
- Power factors
  - instantaneous: 3PF,  $\Sigma PF$
  - average/max average:  $\Sigma PF$

#### Metering

- Active energy: +/- kWh
- Reactive energy: +/- kvarh
- Effective power: kWh
- Hours:

#### Harmonic analysis

- Level of harmonic distortion
- Currents: thd I<sub>1</sub>, thd I<sub>2</sub>, thd I<sub>3</sub>, thd I<sub>n</sub>
- Phase-to-neutral voltage: thd V<sub>1</sub>, thd V<sub>2</sub>, thd V<sub>3</sub>
- Phase-to-phase voltage: thd U<sub>12</sub>, thd U<sub>23</sub>, thd U<sub>31</sub>

#### Individual harmonics up to 63rd

- Currents: H<sub>11</sub>, H<sub>12</sub>, H<sub>13</sub>, H<sub>ln</sub>
- Phase-to-neutral voltage: HV<sub>1</sub>, HV<sub>2</sub>, HV<sub>3</sub>,
- Phase-to-phase voltages: HU<sub>12</sub>, HU<sub>23</sub>, HU<sub>31</sub>

#### Load curve <sup>(1)</sup>

- Active & reactive power:  $\Sigma P +/- ; \Sigma Q +/-$
- Voltages & frequency: V<sub>1</sub>, V<sub>2</sub>, V<sub>3</sub>, U<sub>12</sub>, U<sub>23</sub>, U<sub>31</sub>, F

#### Events <sup>(1)</sup>

- Alarms on all electrical parameters.

### The solution for

- > Industry
- > Building
- > Infrastructures



### Strong points

- > User-friendly operation
- > Detects wiring errors
- > Customisable
- > Compliant with IEC 61557-12

### Compliance with standards

- > IEC 61557-12
- > IEC 62053-22 class 0.5 S
- > IEC 62053-23 class 2
- > UL



## Front panel



1. Backlit LCD display
2. Pushbutton for currents and for connection correction function
3. Pushbutton for voltages and frequency.
4. Pushbutton for active, reactive and effective powers and for power factor.
5. Pushbutton for maximum and average values for currents and power levels.
6. Pushbutton for harmonics.
7. Pushbutton for electrical energy meters, timers and impulse counters

## Plug-in modules

<b>DIRIS® A-30</b>	dfis_773_a	<b>Pulse outputs</b> 2 configurable pulse outputs (type, weight and run) on $\pm \text{kWh}$ , $\pm \text{kvarh}$ and $\text{kVAh}$ .
<b>DIRIS® A-41*</b>	dfis_774_a	<b>MODBUS® communication</b> RS485 link with MODBUS® protocol (speed up to 38400 baud).
	dfis_775_a_1_cat	<b>PROFIBUS® DP communication</b> SUB-D9 link with PROFIBUS® DP protocol (speed up to 12 Mbaud).
	dfis_448_a_1_cat	<b>Analogue outputs</b> You can connect a maximum of 2 modules, i.e. 4 analogue outputs. 2 outputs can be allocated to: 3I, In, 3V, 3U, F, $\pm \Sigma P$ , $\pm \Sigma Q$ , $\Sigma S$ , $\Sigma PFL/C$ , Isys, Vsys, Usys, Ppred, Qpred, Spred, T°C internal, T°C 1, T°C 2, T°C 3 and to 30 VDC power supply.
	dfis_449_a_1_cat	<b>2 inputs - 2 outputs</b> You can connect a maximum of 3 modules, i.e. 6 inputs / 6 outputs. 2 outputs can be allocated to: <ul style="list-style-type: none"> <li>- monitoring: 3I, In, 3V, 3U, F, <math>\pm \Sigma P</math>, <math>\pm \Sigma Q</math>, <math>\Sigma S</math>, <math>\Sigma PFL/C</math>, THD 3I, THD In, THD 3V, THD 3U, Ppred, Qpred, Spred, T°C internal, T°C 1, T°C 2, T°C 3 and of time counter,</li> <li>- remote control,</li> <li>- timed remote control,</li> <li>- 2 inputs for pulse counting.</li> </ul>
	dfis_682_a_1_cat	<b>Storage capability</b> <ul style="list-style-type: none"> <li>• Memory function up to max. 62 days for P+, P-, Q+, Q- with a TOP for internal or external synchronisation of 5, 8, 10, 15, 20, 30 and 60 minutes.</li> <li>• Memory function for the last 10 timed and dated alarms.</li> <li>• Memory function for the last min and max instantaneous values for 3U, 3V, 3I, In, F, <math>\Sigma P \pm</math>, <math>\Sigma Q \pm</math>, <math>\Sigma S</math>, THD 3U, THD 3V, THD 3U, THD 3V, THD 3I, THD In.</li> <li>• Memory function of average values 3U, 3V et F as a function of synchronisation (maximum 60 days).</li> </ul>
	dfis_777_a_1_cat	<b>Ethernet communication</b> <ul style="list-style-type: none"> <li>• Ethernet link with MODBUS/TCP or MODBUS RTU over TCP.</li> </ul>
	dfis_776_a_1_cat	<b>Ethernet communication with RS485 MODBUS gateway</b> <ul style="list-style-type: none"> <li>• Ethernet link with MODBUS/TCP or MODBUS RTU over TCP.</li> <li>• Connect 1 to 247 RS485 MODBUS slaves.</li> </ul>

\* With current measurement module for Neutral as standard.

# DIRIS A-30/A-41

Multifunction measuring unit - PMD

measurement and advanced monitoring - door mounting

## Accessories

Current transformer


See "Current transformers" pages.

IP65 protection



## Terminals


DIRIS A-30

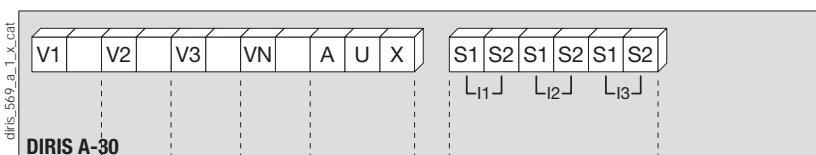

S1 - S2: current inputs

AUX: auxiliary power supplies U<sub>s</sub>  
V1 - V2 - V3 - VN: voltage inputs


DIRIS A-41

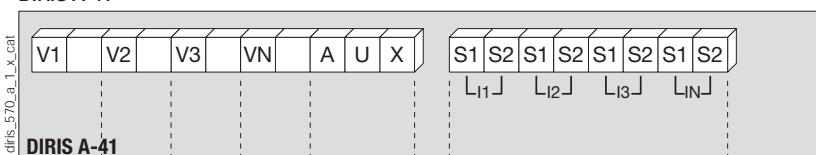

S1 - S2: current inputs

AUX: auxiliary power supplies U<sub>s</sub>  
V1 - V2 - V3 - VN: voltage inputs


Communication module

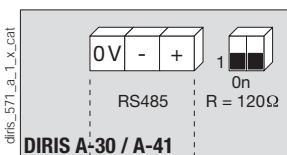

RS485 link.

R = 120 Ω : internal resistance for the RS485 link.


Pulse output module

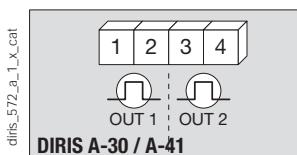

1 - 2: pulse output n°1.

3 - 4: relay output n°2.


Analogue output module

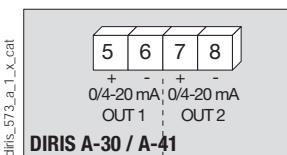

5 - 6: analogue output n°1.

7 - 8: analogue output n°2.

2 input / 2 output module

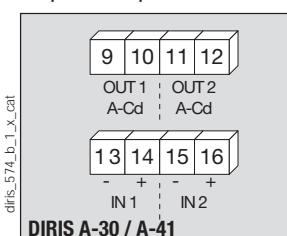


9 - 10: relay output n°1.

11 - 12: relay output n°2.

13 - 14: optical input n°1.


15 - 16: optical input n°2.

Memory module

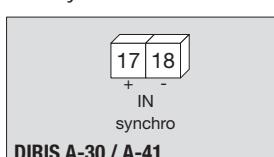

17 - 18: synchronisation input.

Temperature module

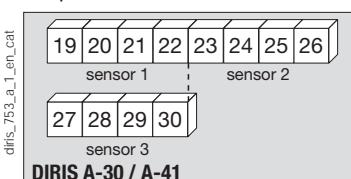

Probe 1      Probe 2      Probe 3


19: red      23: red      27: red

20: red      24: red      28: red


21: white      25: white      29: white

22: white      26: white      30: white

Ethernet module



Ethernet module + RS485 MODBUS gateway

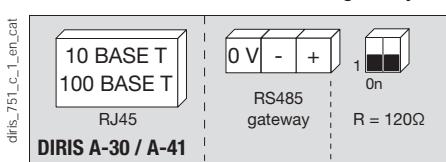

## Electrical characteristics


Measurement of currents on insulated inputs (TRMS)	
Via CT primary	9,999 A
Via CT secondary	1 or 5 A
Measurement range	0 ... 11 kA
Input consumption	$\leq 0,1$ VA
Measurement updating period	1 s
Accuracy	0.2%
Permanent overload	6 A
Intermittent overload	10 $I_n$ for 1 s
Voltage measurements (TRMS)	
Direct measurement between phases	50 to 1039 VAC
Direct measurement between phase and neutral	28 to 600 VAC
VT primary measurement	500,000 VAC
VT secondary measurement	60, 100, 110, 173, 190 VAC
Frequency	50 / 60 Hz
Input consumption	$\leq 0,1$ VA
Measurement updating period	1 s
Accuracy	0.2%
Current - voltage product	
Limitation for TC 1 A	10,000,000
Limitation for TC 5 A	10,000,000
Power measurement	
Measurement updating period	1 s
Accuracy	0.5%
Power factor measurement	
Measurement updating period	1 s
Accuracy	0.5%
Frequency measurement	
Measurement range	45 ... 65 Hz
Measurement updating period	1 s
Accuracy	0.1%
Energy accuracy	
Active (according to IEC 62053-22)	Class 0.5 S
Reactive (according to IEC 62053-23)	Class 2
Auxiliary power supply	
Alternative voltage	110 ... 400 VAC
AC tolerance	$\pm 10\%$
Direct current	120 ... 350 VDC / 12 ... 48 VDC
DC tolerance	$\pm 20\% / -6 \dots +20\%$
Frequency	50 / 60 Hz
Power consumption	$\leq 10$ VA

Module 2 inputs - 2 outputs: outputs (alarms / control)	
Number of relays	2 <sup>(1)</sup>
Type	250 VAC - 5 A - 1150 VA
Module 2 inputs - 2 outputs: optical coupler inputs	
Number	2 <sup>(1)</sup>
Power supply	10 ... 30 VDC
Minimum width of signal	10 ms
Minimum length between 2 pulses	18 ms
Type	Optical couplers
Pulse output module	
Number of relays	2
Type	100 VDC - 0.5 A - 10 VA
Max. number of manoeuvres	$\leq 10^8$
Analogue output module	
Number of outputs	2 <sup>(2)</sup>
Type	Insulated
Scale	0 / 4 ... 20 mA
Load resistance	600 $\Omega$
Maximum current	30 mA
MODBUS communication module	
Link	RS485
Type	2 to 3 half duplex wires
Protocol	MODBUS® RTU
MODBUS® speed	4800 to 38400 baud
PROFIBUS DP communication module	
Link	SUB-D9
Protocol	PROFIBUS® DP
PROFIBUS® speed	9.8 kbaud ... 12 Mbaud
Ethernet communication module	
Connection technology	RJ45
Baud rate	10 base T / 100 base T
Protocol	MODBUS TCP or MODBUS RTU on TCP
Temperature module (inputs)	
Type	PT100
Connection	2, 3 or 4 wires
Dynamic	- 20°C ... 150°C
Accuracy	$\pm 1$ digit
Maximum length	300 cm
Operating conditions	
Operating temperature range	-10 to +55°C
Storage temperature	-20 to 85°C
Relative humidity	95%

(1) Max. 3 modules / DIRIS.

(2) Max. 2 modules / DIRIS.

## Case

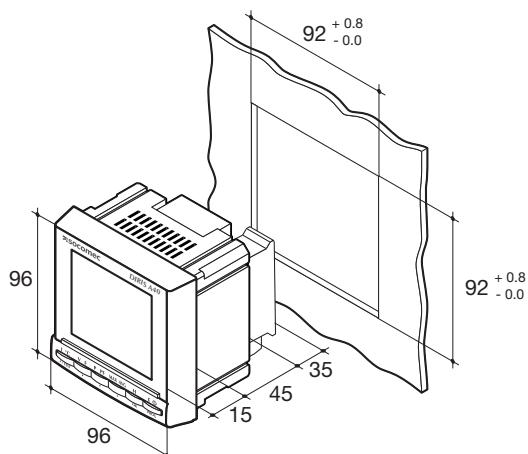

dfirs\_582\_f\_1\_x\_cat

Type	Panel mounting
Dimensions W x H x D	96 x 96 x 60 mm
Case degree of protection	IP30
Front degree of protection	IP52
Display type	Backlit LCD display
Type of terminal strips	Fixed or detachable
Section of connection for voltages and other terminals	0,2 ... 2,5 mm <sup>2</sup>
Section of connection for currents	0,5 ... 6 mm <sup>2</sup>
Weight	400 g

# DIRIS A-30/A-41

Multifunction measuring unit - PMD

measurement and advanced monitoring - door mounting


## Connections

### Balanced low-voltage network for DIRIS A-30

**Recommendation:** When disconnecting the DIRIS, the secondary of each current transformer must be short-circuited. This operation can be carried out automatically by a SOCOMEC PTI, which can be found in the SOCOMEC catalogue: please consult us.

In TNC mode, it is advisable to connect the DIRIS A-30/A-41 to earth using the functional earth module.


3/4 wires with 1 CT

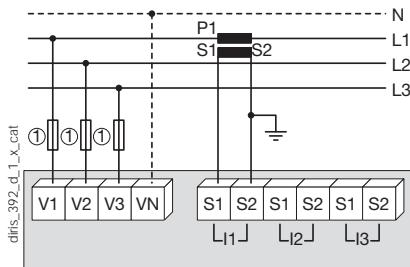

The use of 1 TC reduces by 0.5% the accuracy of the phases, the current for which is worked out by vector calculation.


1. 0.5 A gG / 0.5 A class CC fuses.

Single-phase

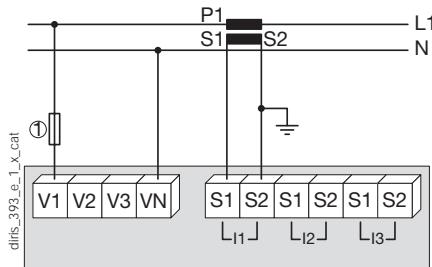

1. 0.5 A gG / 0.5 A class CC fuses.


Two-phase

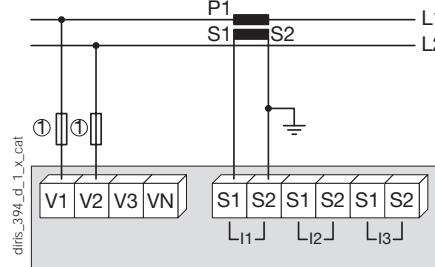

1. 0.5 A gG / 0.5 A class CC fuses.


### Balanced low-voltage network for DIRIS A-30

3/4 wires with 3 CTs

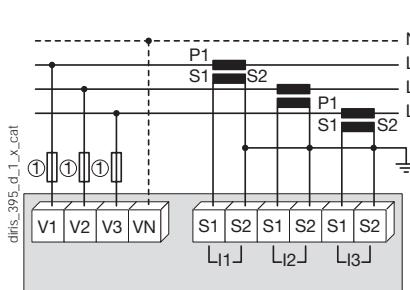

1. 0.5 A gG / 0.5 A class CC fuses.


3 wires with 2 CTs

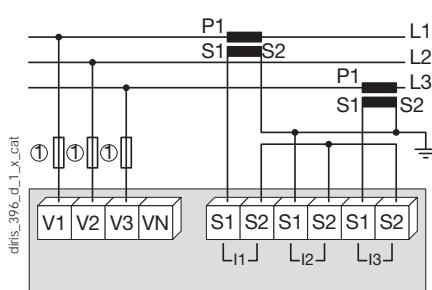

The use of 2 TC reduces by 0.5% the accuracy of the phase, the current for which is worked out by vector calculation.

1. 0.5 A gG / 0.5 A class CC fuses.

3 wires with 2 CTs

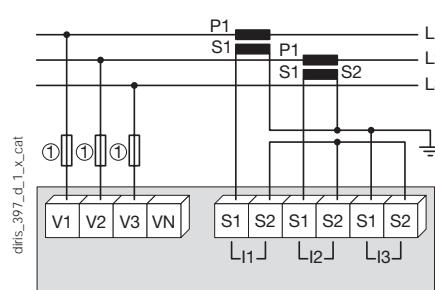


The use of 2 TC reduces by 0.5% the accuracy of the phase, the current for which is worked out by vector calculation.

1. 0.5 A gG / 0.5 A class CC fuses.

### Balanced low-voltage network for DIRIS A-41


4 wires with 4 CTs

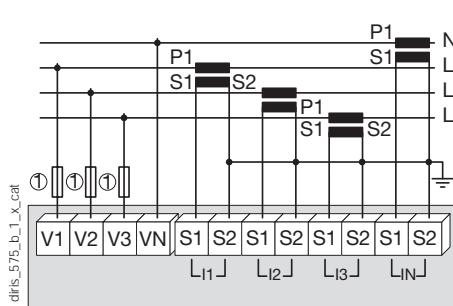


1. 0.5 A gG / 0.5 A class CC fuses.

## Additional information


### Communication via RS485 link

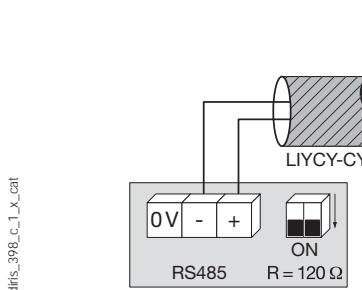

### Connection of potential transformer for HV networks

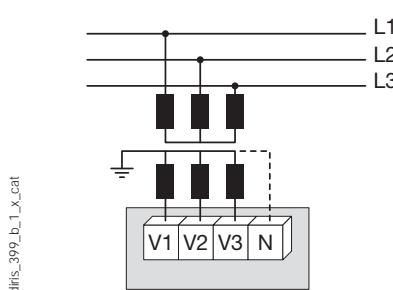

### AC and DC auxiliary power supply

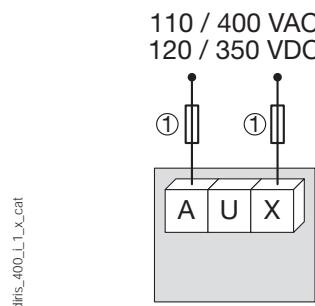

1. 0.5 A gG / 0.5 A class CC fuses.

## References

Basic device	DIRIS A-30		DIRIS A-41
Auxiliary power supply $U_s$	Reference		With CT on the neutral Reference
110 ... 400 VAC / 120 ... 350 VDC	4825 0403		4825 0404
12 ... 48 VDC	4825 0405		4825 0406

Options	Reference		Reference
Plug-in modules <sup>(1)</sup>			
Pulse outputs	4825 0090		4825 0090
RS485 MODBUS® communication	4825 0092		4825 0092
PROFIBUS® DP communication	4825 0205		4825 0205
Analogue outputs	4825 0093		4825 0093
2 inputs - 2 outputs	4825 0094		4825 0094
Storage capability	4825 0097		4825 0097
Ethernet communication <sup>(2)</sup>	4825 0203		4825 0203
Ethernet communication + RS485 gateway <sup>(2)</sup>	4825 0204		4825 0204
Temperature inputs.	4825 0206		4825 0206

(1) Ease of integration of additional functions (maximum 4 slots on A-30 and 3 on A-41).

(2) Dimensions: 2 slots.

Accessories	To be ordered in multiples of	Reference	To be ordered in multiples of	Reference
IP65 protection.	1	4825 0089	1	4825 0089
Integration kit for 144 x 96 mm cutout	1	4825 0088	1	4825 0088
Fuse holders to protect voltage inputs (type RM) 3 pole	4	5701 0018	4	5701 0018
Fuse holders to protect the auxiliary power supply (type RM) 1 pole + neutral	6	5701 0017	6	5701 0017
gG 10x38 0.5 A fuses	10	6012 0000	10	6012 0000
Range of current transformers	1	See "Current transformers" pages	1	See "Current transformers" pages
Ferrite for use with communication modules	1	4899 0011		4899 0011
PT100 temperature probe, M6 screw	1	4825 0208	1	4825 0208
PT100 temperature probe, M6 lug	1	4825 0209	1	4825 0209
Associated DIRIS software		See "Easy Config System" pages		
Automatic CT short-circuiting device		See "Current transformers" pages		

## Expert Services

- > Study, definition, advice, implementation, maintenance and training... Our experts "Expert Services" offer complete support for the success of your project.



# DIRIS A-40

## Multifunction measuring unit - PMD

measurement, monitoring and event analysis with smart sensors - door mounting



**DIRIS A-40**

### Function

The **DIRIS A-40** is a panel-mounted power monitoring device (PMD). It is designed for measuring, monitoring and reporting electrical energy.

The DIRIS A-40 offers a range of functions for measuring voltage, current, power, energy and quality.

It allows the analysis of a single-phase or three-phase load.

### Advantages

#### Assisted configuration

The configuration wizard guides the user step by step. It also detects and corrects configuration errors. This cuts the commissioning time in half and always delivers a reliable result.

#### Smart sensors

Three current sensor formats (solid-core TE, split-core TR/iTR and Rogowski coil TF) allow integration of the DIRIS A-40 into new and existing electrical installations.

#### Connected to the Cloud

The range comprises IoT ready connected products that enable data to be exported automatically for remote operation without any limit on time, distance and time in storage.

#### Compliant with IEC 61557-12

Reference standard for PMDs (Performance metering & monitoring devices), IEC 61557-12 standard guarantees performance levels and satisfactory performance from the PMDs under the environmental conditions typical of industrial and tertiary applications.

### The solution for

- > Industry
- > Building
- > Infrastructure



### Strong points

- > Assisted configuration
- > Connected to the Cloud
- > Compliant with IEC 61557-12
- > Smart sensors

### Integrated technologies



For more information see our website  
[www.socomec.com](http://www.socomec.com)

### Conformity to standards

- > IEC 61557-12
- > UL E257746
- > EN 50160



### Functions

#### Multi-measurement

- Currents
  - I1, I2, I3, In, Isystem
- Voltages & frequency
  - V1, V2, V3, VN, Vsystem, U12, U23, U31, Usystem, f
- Powers
  - P1, P2, P3, SP, Q1, Q2, Q3, ΣQ, S1, S2, S3, ΣS
  - Predictive powers ΣP, ΣQ, ΣS
- Power factor
  - PF1, PF2, PF3, ΣPF
- Cos φ & tangent φ
  - Instantaneous values per phase

#### Metering

- Active energy: +/- kWh
- Reactive energy: +/- kvarh
- Apparent power: kVAh
- Multi-tariff (8 max.)
- Hour Meter

#### Quality

- Voltage Unbalance
  - Vdir, Vinv, Vhom, Udir, Uinv, Unba, Vnba, Vnb, Unb
- Current unbalance
  - Idir, Inv, Ihom, Inba, Inb
- Total harmonic distortion
  - Currents THD1, THD2, THD3, THDIN, TDDI
  - Phase-to-neutral voltage THDv1, THDv2, THDv3
  - Phase-to-phase voltage THDu12, THDu23, THDu31
- Individual harmonics up to 63rd
  - Currents: HI1, HI2, HI3, HIn
  - Phase-to-neutral voltage: HV1, HV2, HV3
  - Phase-to-phase voltage: HU12, HU23, HU31
- Kfactor & Crest factor
- Events according to EN 50160
  - Voltage dips, outages, interruptions, swells
- Waveform capture
  - Automatic waveform captures when event occurs, and manual recording of the waveform
  - Available through communication

#### Monitoring of protection

- Auxiliary contact monitoring
- Report and alarm on trips
- Number of operations

#### Load curves and historical records (max. 130 days)

- Active, reactive and apparent power
- Currents, voltages and frequency

#### Alarms

- Alarms for all electrical values, events and input status changes, possibility of logical combination
- Time-stamping of events

#### Communication

- DIRIS A-40 RS485 Modbus as standard
- DIRIS A-40 Ethernet Modbus
- DIRIS A-40 PROFIBUS DPV1

#### Inputs

- 3 digital inputs
  - Power supplied from DIRIS A-40 or an external source
  - Function: logic status, status of circuit breaker, counting of pulses or synchronization multifluid metering
- 2 logical outputs
  - Function: Command, energy pulse output, load shedding, alarm

## Functions

### Monitoring

- Real-time measurement of electrical values.
- View data as graphs or tables.
- Power quality analysis of the utility supply and of loads.



### Metering

- Measurement of active, reactive and apparent energies.
- Historical record of measurements.
- Graphic display on monthly, weekly, daily or hourly basis.




### Alarming


- Display of alarms.
- History of alarms.




## Terminals

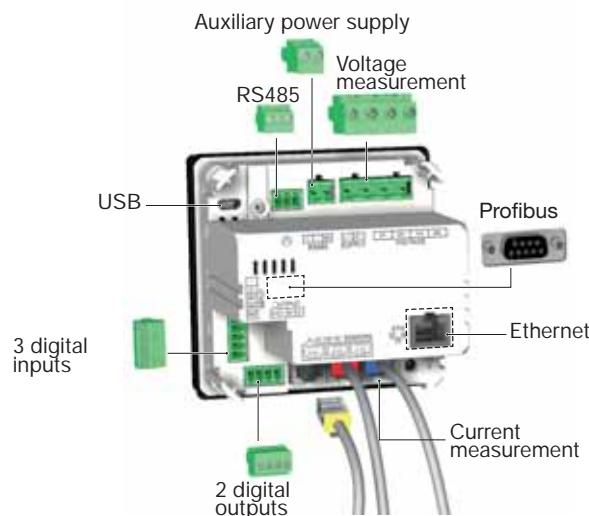


## Dimensions (mm)

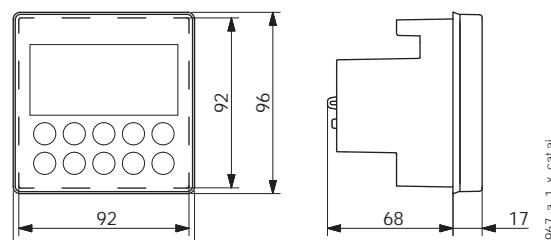


### Current measurement




### 3 inputs supplied by the product




### 3 inputs with external power supply




### Voltage connections inc auxiliary power supply

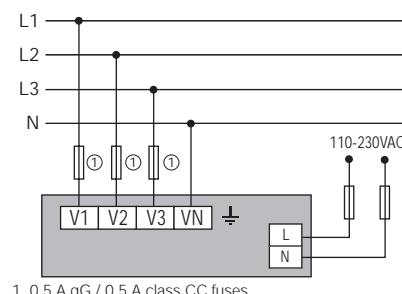

### RS485



### 2 outputs



### Earth



# DIRIS A-40

## Multifunction measuring unit - PMD

measurement, monitoring and event analysis with smart sensors - door mounting

### Connections

#### Associated current sensors

Various types of current sensors can be connected to the DIRIS A-40: solid-core (TE), split-core (TR/iTR) or Rogowski (TF). This range of sensors is suitable for all types of new or existing installations. A quick RJ12 connection makes wiring easy and reliable and prevents wiring errors. The DIRIS A-40 automatically recognizes the sensor size and type. This guarantees the overall accuracy of the DIRIS A-40 + current sensor measurement chain.

For more information: see "TE, TR/iTR, TF sensors" pages.

TE solid current sensors




TE / TR/iTR / TF current sensors



#### Network and connection examples


##### Three-phase + Neutral

3P+N - 3 CT (1 three-phase load + calculated Neutral)

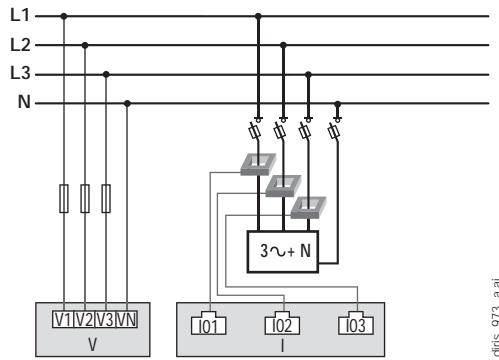


##### Three-phase

3P - 1CT (1 balanced three-phase load)

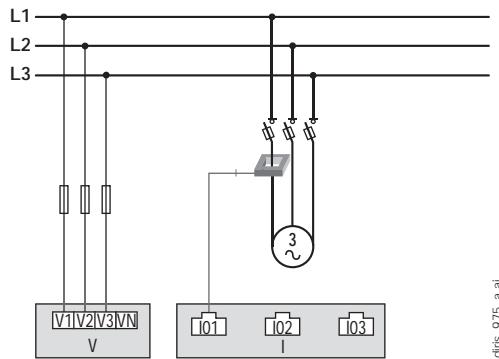

##### Three-phase

3P - 3CT (1 three-phase load)

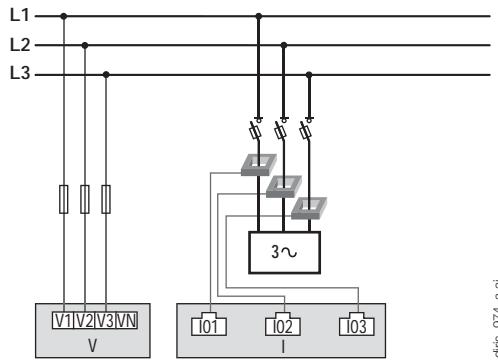

1. 0.5 A gG / 0.5 A class CC fuses.

If self-supplied, a fuse must always be added to the Neutral.

CT: Current sensor

Load

## DIRIS A-40 characteristics

## Electrical characteristics

Auxiliary power supply	
Alternative voltage	110/400 VAC or 120/300 VDC - Cat III
Frequency	50/60 Hz
Power consumption	5VA AC / 1,5VA DC (48250500) 8VA AC / 2,5VA DC (48250501 & 48250502)
Connection	Removable spring-cage terminal block, 2x 2 positions, 0.5 - 2.5 mm <sup>2</sup> solid cable or 0.25 - 1.5 mm <sup>2</sup> stranded cable with end piece

## Measurement characteristics

Power and energy measurement	
Accuracy	Class 0.2 DIRIS A-40 only
Active energy and active power	Class 0.5 with TE, TF or iTR sensors Class 1 with TR sensors
Accuracy of reactive energy	Class 2 with TE, TR/iTR or TF sensors
Power factor measurement	
Accuracy	Class 0.5 with TE, TF or iTR sensors Class 1 with TR sensors
Voltage measurement	
Characteristics of the network measured	50-300VAC (Ph/N) - 87-520VAC (Ph/Ph) - CAT III
Frequency range	45 to 65Hz
Frequency accuracy	Class 0.02
Network type	Single-phase/ Two-phase / Two-phase with neutral / Three-phase / Three-phase with neutral
Measurement by voltage transformer	Primary: 400 000 VAC Secondary: 60, 100, 110, 173, 190 VAC
Input consumption	≤ 0.1 VA
Accuracy of voltage measurement	Class 0.2
Connection	Removable spring-cage terminal block, 4 positions, 0.5 - 2.5 mm <sup>2</sup> solid cable or 0.25 - 1.5 mm <sup>2</sup> stranded cable with end piece
Current measurement	
Number of current inputs	3
Associated current sensors	Solid TE, split-core TR/iTR, flexible TF current sensors
Accuracy	0.2 DIRIS A-40 class only Class 0.5 with TE, TF or iTR sensors Class 1 with TR sensors
Connection	Specific Socomec cable with RJ12 connectors

## Input characteristics

Number	3
Type / Power supply	Optocoupler with internal (12 VDC ± 10%) or external (12-24 VDC ± 20%) polarisation
Input function	Logic status, status of circuit breaker, synchronization topography, multifluid pulse metering
Connection	Removable screw terminal block, 5 positions, stranded or solid 0.14 - 1.5 mm <sup>2</sup> cable

## Output characteristics

Number	2
Type	Optocoupler 30 Vd.c. max 20mA max - SELV
Output function	Command, energy pulse output, load shedding, alarm
Connection	Removable screw terminal block, 4 positions, stranded or solid 0.14 - 1.5 mm <sup>2</sup> cable

## Communication characteristics

DIRIS A-40 RS485	
Link	RS485
Connection type	2 to 3 half duplex wires
Protocol	Modbus RTU
Baud rate	1200 to 115 200 baud
USB	Configuration of DIRIS A-40

## References

DIRIS A-40 monitoring devices		Reference
DIRIS A-40	RS485 Modbus - 3 inputs / 2 outputs	4825 0500
DIRIS A-40	Ethernet Modbus TCP or BACnet IP - webserver - RS485 Modbus - 3 inputs / 2 outputs	4825 0501
DIRIS A-40	Profibus DPV1 - RS485 Modbus - 3 inputs / 2 outputs	4825 0502
Accessories		
Fuse disconnect switches to protect voltage inputs (RM type)		To be ordered in multiples of 4
Fuse disconnect switches to protect the 1-pole + neutral auxiliary power supply (RM type)		6
gG 10x38 0.5 A fuses		10
To be ordered in multiples of		
		Reference
		5701 0018
		5701 0017
		6012 0000

# DIRIS B

## Multifunction measuring unit - PMD

measurement, monitoring and event analysis with smart sensors - modular format



Configuration  
with Easy Config System.

### Function

The **DIRIS B** is a power monitoring device in a modular format that communicates via RS485. The 4 RJ12 independent current inputs of the device allow it to manage several types and number of circuits: for example, 4 single-phase loads or 1 three-phase load + 1 single-phase load.

The DIRIS B is connected to current sensors (RJ12 connection) that are suitable for all types of installation: solid TE, split-core TR/TR, and flexible TF current sensors.

### Advantages

#### Plug & Play

A rapid RJ12 connection makes wiring easy and reliable and prevents wiring errors. Automatically addressing and configuring the product (communication address, load type, type and ratio of current sensor) allow you to simplify implementation and to save time.

#### Class 0.5 in accordance with IEC 61557-12

- Class 0.2 for the meter alone.
- Class 0.5 from 2% to 120% of nominal current for the global measurement chain (associated with TE/iTR/TF current sensors).

#### Multi-circuit

- 4 current measurement inputs allow you to configure multiple circuits in order to optimise the number of measurement devices per installation.

#### Communication

- The DIRIS B can be connected to:
  - a remote DIRIS D-30 screen for displaying measurement and metering data,
  - DIRIS Digiware M-50/M-70 gateways for centralisation and communication of data via Ethernet. DIRIS Digiware M-70 embeds WEBVIEW-M, a webserver for remote visualisation of measurement data,
  - optional modules for more communication options including a second RS485 port or PROFIBUS DP protocol. Digital or Analog input/output, as well as temperature input modules can also be connected.

#### The solution for

- > Industry
- > Building
- > Infrastructure
- > Local authority



#### Strong points

- > Plug & Play
- > Global accuracy class 0.5 in accordance with IEC 61557-12
- > Multi-circuit
- > Communication

#### Integrated technologies



For more information see our website  
[www.socomec.com](http://www.socomec.com)

#### Conformity to standards

- > UL E257746
- > IEC 61557-12
- > EN 50160
- > ISO 14025



Application	Local metering	Local analysis
		
<b>DIRIS B</b>	<b>B-10 RS485</b>	<b>B-30 RS485</b>
Number of current inputs	4	4
<b>Metering</b>		
± kWh, ± kvarh, kWh	•	•
Load curves		•
Multi-tariff	•	•
<b>Multi-measurement</b>		
U12, U23, U31, V1, V2, V3, f	•	•
U system, V system	•	•
I1, I2, I3, In, ΣP, ΣQ, ΣS, ΣPF	•	•
P, Q, S, PF per phase	•	•
Predictive power	•	•
Ph/N unbalance	•	•
Ph/Ph unbalance	•	•
Current unbalance (Inba, Idir, linv, lhom, lnb)	•	•
Phi, cos Phi, tan Phi	•	•
<b>Quality analysis</b>		
THDv1, THDv2, THDv3, THDu12, THDu23, THDu31	•	•
THDi1, THDi2, THDi3, THDin	•	•
Individual harmonics U & V (up to 63 <sup>rd</sup> )		•
Individual harmonics I (up to 63 <sup>rd</sup> )		•
Crest factor I1, I2, I3, In		•
Crest factor V1, V2, V3, U12, U23, U31		•
Voltage dips, interruptions, swells (EN 50160)		•
Overcurrents		•
<b>Alarms</b>		
On threshold		•
Inputs/outputs		•
<b>History of average values</b>		
45 days (max)		•
<b>Communication</b>		
RS485 Modbus	•	•
2 inputs (status/pulse)	•	•

## Accessories

### DIRIS B sealing cover

- Prevents access to the cabling of the monitoring device.



diris-b-039.eps

### USB configuration cable (2 m)

- Advanced configuration of DIRIS B gateways can be achieved using the EASY CONFIG software via Ethernet or direct USB connection.

# **DIRIS B**

Multifunction measuring unit - PMD

measurement, monitoring and event analysis with smart sensors - modular format

## DIRIS D-30 display

DIRIS D-30



Connection



## Optional modules

DIRIS O



### Optional modules (4 max.)\*

- Digital inputs/outputs
- Analogue inputs/outputs
- Temperature inputs
- Communication protocols

\* maximum 4 optional modules with maximum 1 temperature module and 1 communication module (Modbus, PROFIBUS).



**DIRIS O-iod**

- 2 digital inputs centralises the metering pulses or the input status changes of the auxiliary contacts.
- 2 digital outputs can be connected to configurable alarms warning of exceeded thresholds (power, current, etc.) or can be piloted remotely.



**DIRIS O-ioa**

- 2 inputs (4-20 mA) centralise analogue sensors (pressure, humidity, temperature, etc.)
- 2 outputs (4-20 mA) report the measurements (power, currents, etc.) to PLCs.



**DIRIS O-it**

- 3 temperature inputs to be connected to PT100 or PT1000 sensors.
- Ambient air temperature.



**DIRIS O-m**

- Provides a second RS485 Modbus communication port to the DIRIS B for simultaneous sending of information via RS485 to two supervision stations.




**DIRIS O-p**


- Adds a PROFIBUS DPV1 communication port to the DIRIS B.

## DIRIS B terminals


diris-d\_027\_b\_1\_gb\_cat

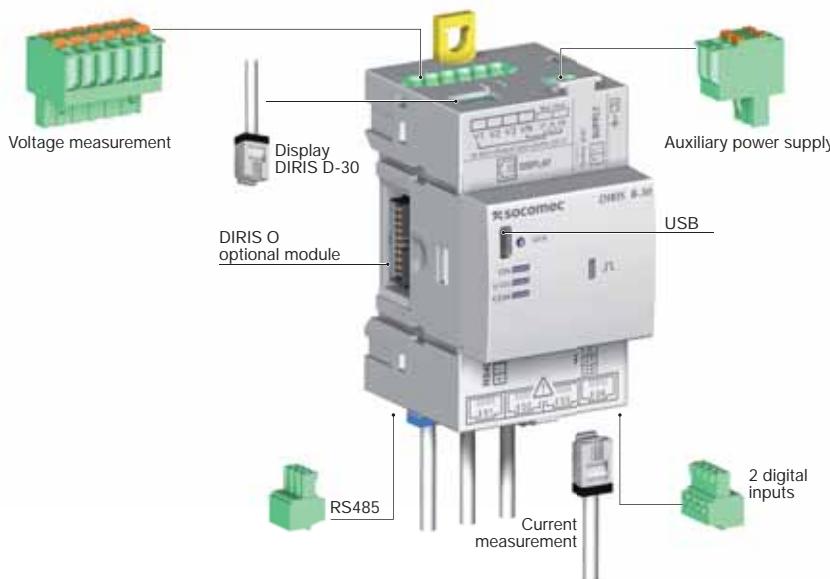


## Current measurement



## Voltage measurement and auxiliary power supply




## 2 inputs supplied by the product




## Self supply

Easy connection of the power supply from the measurement terminal (specific terminals)

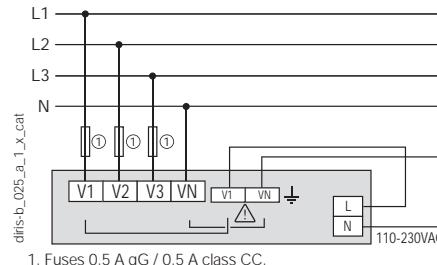


1. Fuses 0.5 A gG / 0.5 A class CC.

## Separate power supply

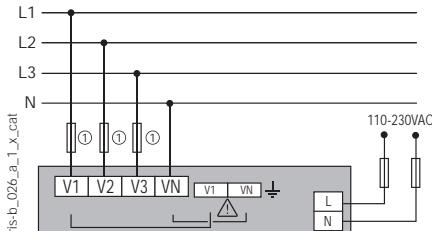


1. Fuses 0.5 A gG / 0.5 A class CC.

## 2 inputs with external power supply




## RS485


RJ9 for DIRIS D-30  
(self-supply and data)

## Terminals of optional DIRIS O modules


## Optional module power supply




## DIRIS O-iod




## DIRIS O-ioa




## DIRIS O-it



## DIRIS O-m RS485



## DIRIS O-p

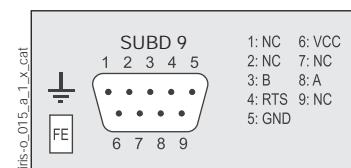

# DIRIS B

## Multifunction measuring unit - PMD

measurement, monitoring and event analysis with smart sensors - modular format

## Connections

### Associated current sensors

Various types of current sensors can be connected to the DIRIS B: solid-core TE, split-core TR/iTR, flexible TF current sensors. This range of sensors can be adapted to all types of new or existing installations. A rapid RJ12 connection makes wiring easy and reliable and prevents wiring errors. The DIRIS B automatically recognises the type of sensor used and its current rating. This guarantees the overall accuracy of the DIRIS B + current sensor measurement chain.

For more information: see "TE, TR/iTR, TF sensors" pages.

TE solid-core current sensors



TR/iTR split-core current sensors




TE / TR / iTR / TF current sensors



## Network and connection examples

### Three-phase + neutral


3P+N - 4CTs (measurement for 1 three-phase load + Neutral)

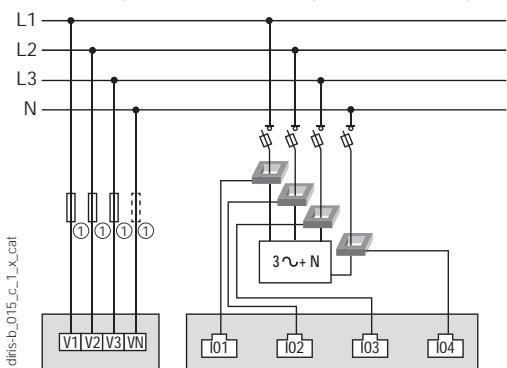

1. Fuses 0.5 A gG / 0.5 A class CC.

### Three-phase

3P+N - 3CTs & 1P+N - 1CT (1 three-phase load & 1 single-phase load)

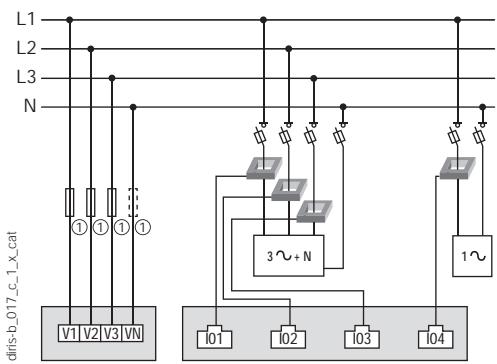


1. Fuses 0.5 A gG / 0.5 A class CC.

In case of self-supply, a fuse must be added on the neutral.

### Three-phase


3P - 2CTs (2 three-phase loads without neutral)

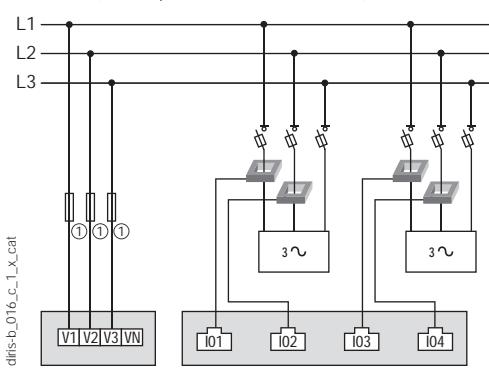

1. Fuses 0.5 A gG / 0.5 A class CC.

### Single-phase

1P+N-1CT (4 single-phase loads)

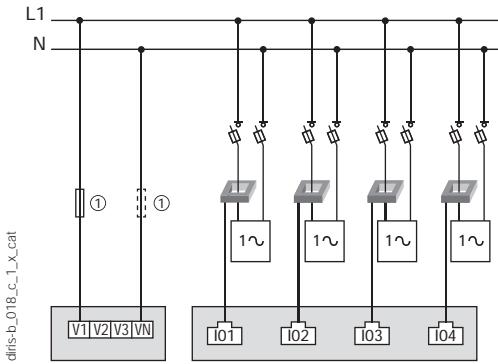



1. Fuses 0.5 A gG / 0.5 A class CC.

CT: Current sensors



3~ Load

## Dimensions (mm)

DIRIS B

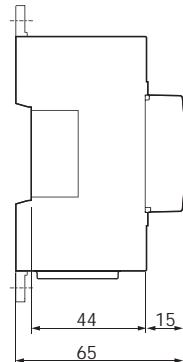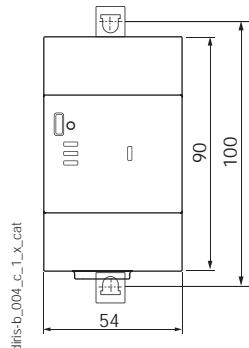


DIRIS O optional modules

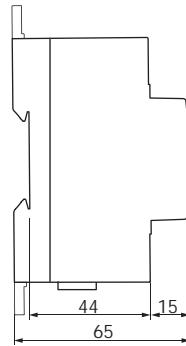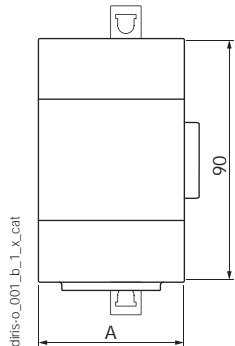


DIRIS O optional modules	A (mm)
DIRIS O-iod - DIRIS O-ia - DIRIS O-it	45
DIRIS O-m - DIRIS O-p	54

DIRIS D-30

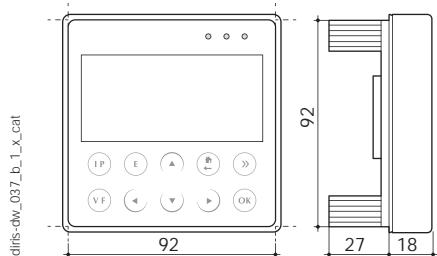

## Communication architecture

Example of communication architecture with  
DIRIS Digiware M-70 gateway and WEBVIEW-M  
embedded web server.

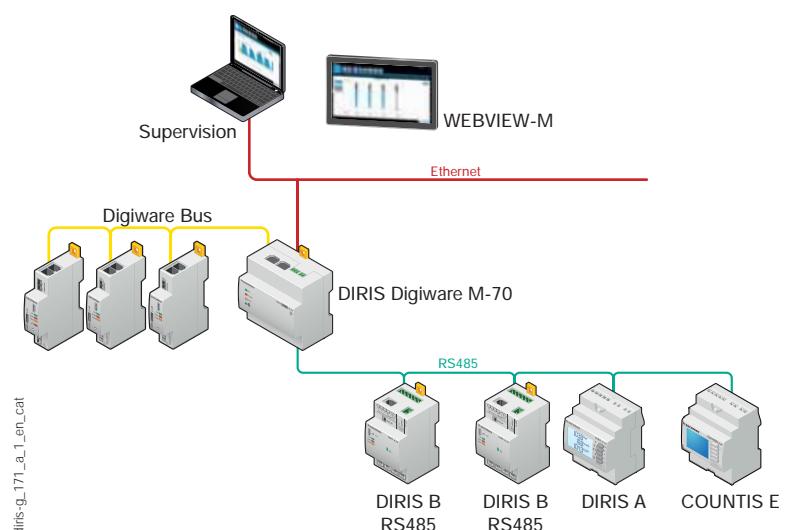

# DIRIS B

## Multifunction measuring unit - PMD

measurement, monitoring and event analysis with smart sensors - modular format

### DIRIS B characteristics

#### Electrical characteristics

Auxiliary power supply	
AC voltage	110-230 VAC ±15 % (Ph/N ou Ph/Ph) Cat III
Frequency	50/60 Hz
Consumption	< 2 VA without display < 6VA with display
Connection	Removable spring-cage terminal, 2 x 2 positions, 0.5 ... 2.5 mm <sup>2</sup> solid cable or 0.25 ... 1.5 mm <sup>2</sup> stranded cable with ferrule

#### Measurement characteristics

##### Energy and power measurement

Accuracy	Class 0.2 DIRIS B alone
Active energy and active power	Class 0.5 with TE, iTR or TF current sensors Class 1 with TR current sensors
Reactive energy accuracy	Class 2 with TE, TR or TF current sensors

##### Power factor measurement

Accuracy	Class 0.5 with TE, iTR or TF current sensors Class 1 with TR current sensors
----------	---

##### Voltage measurement

Network characteristics measured	50-300VAC (Ph/N) - 87-520VAC (Ph/Ph) - CAT III
Frequency range	45 ... 65Hz
Frequency accuracy	Class 0.02
Network type	Single-phase / Two-phase / Two-phase with neutral / Three-phase / Three-phase with neutral
Measurement by voltage transformer	Primary: 400 000 VAC Secondary: 60, 100, 110, 173, 190 VAC
Input consumption	≤ 0.1 VA
Permanent overload	300VAC Ph/N
Voltage measurement accuracy	Class 0.2
Connection	Removable spring-cage terminal, 2 x 6 positions, 0.5 ... 2.5 mm <sup>2</sup> solid cable or 0.25 ... 1.5 mm <sup>2</sup> stranded cable with ferrule

##### Current measurement

Number of current inputs	4
Associated current sensors	Solid TE , split-core TR/iTR , flexible TF current sensors
Accuracy	Class 0.2 DIRIS B alone Class 0.5 with TE, iTR or TF current sensors Class 1 with TR current sensors
Connection	RJ12 connectors with specific SOCOMEC cable

##### Input characteristics

Number	2
Type / Power supply	Optocoupler internal polarisation (12 VDC ± 10 %) or external polarisation (10-30 VDC ± 10%)
Input function	Logic status, pulse meter or synchronisation pulse status (input 1)

##### Communication characteristics

###### DIRIS B RS485

Link	RS485
Connection type	2 ... 3 half duplex wires
Protocol	Modbus RTU
Speed	1200 ... 115200 bauds
USB	DIRIS B RS485 configuration

##### Environment characteristics

Operating temperature	-10 ... +70 °C
Storage temperature	-25 ... +85 °C
Operating humidity	55 °C / 97% relative humidity
Operating altitude	2000 m
Vibration	1G from 10 to 100Hz

### DIRIS D-30 display characteristics

#### Mechanical characteristics

Screen type	Capacitive touch-screen technology, 10 keys
Screen resolution	350 x 160 pixels
Single product connection	
RJ9	Self-supply and data
Micro-USB	Updating
Degree of protection	IP65 (front face)

#### Environment

Storage temperature (°C)	-20 ... +70°C
Operating temperature (°C)	-20 ... +70°C
Humidity	95 % to 40°C
Installation category	CAT III
Degree of pollution	2

### DIRIS O optional modules characteristics

#### Power supply<sup>(1)</sup>

AC voltage	110-230 VAC ±15 %
Frequency	50/60 Hz

(1) No power supply on DIRIS O-it.

#### DIRIS O-iod - 2 digital inputs/2 digital outputs

Number of inputs	2 per optional modules - max. 4 optional modules
Type	Optocoupler internal polarisation (12 VDC ± 10 %) or external polarisation (10-30 VDC ± 10%)
Function	Logic status or pulse meter
Number of outputs	2 per optional modules - max. 4 optional modules
Type	Relay / 230 VAC ±15 % - 1 A
Function	Configurable alarm (current, power...) on threshold overruns or remote controlled status
Inputs/Outputs connection	Removable screw terminal, 4 positions, 0.14 to 1.5 mm <sup>2</sup> stranded or solid cable

#### DIRIS O-ioa - 2 analogue inputs/2 analogue outputs

Number of inputs	2 per optional modules - max. 4 optional modules
Type	4-20 mA
Function	Connection of analogue sensors (pressure, humidity, temperature...)
Number of outputs	2 per optional modules - max. 4 optional modules
Type	4-20 mA
Function	Transmission of measurement image (current, power...) to PLCs

#### DIRIS O-it - 3 temperature inputs

Number of inputs	3 external inputs + 1 measurement for ambient temperature
Dynamic	-20 ... 150 °C
Type	PT100 or PT1000
Function inputs 1, 2 and 3	Temperature measurement

#### DIRIS O-m - RS485 communication

Link	RS485 2 ... 3 half duplex wires
Protocol	Modbus RTU
Speed	1200 ... 115200 bauds
Connection	Removable screw terminal, 3 positions, 0.14 to 1.5 mm <sup>2</sup> stranded or solid cable

#### DIRIS O-p - PROFIBUS communication

Protocol	PROFIBUS DPV1
----------	---------------

## References

DIRIS B monitoring devices		Reference
DIRIS B-10	RS485 - Modbus - 230 VAC	4829 0010
DIRIS B-30	RS485 - Modbus - 230 VAC	4829 0000
DIRIS O optional modules		Reference
DIRIS O-iod	2 digital inputs / 2 digital outputs	4829 0030
DIRIS O-ioa	2 analogue inputs/2 analogue outputs 4-20 mA	4829 0031
DIRIS O-it	3 temperature inputs PT 100 / PT 1000	4829 0032
DIRIS O-m	RS485 Modbus communication	4829 0033
DIRIS O-p	PROFIBUS communication	4829 0034
Accessories		To be ordered in multiples of
DIRIS D-30 - Single-point display		4829 0200
RJ9 cable for DIRIS D-30 display - 1.5 m		4829 0280
RJ9 cable for DIRIS D-30 display - 3 m		4829 0281
DIRIS B sealing cover for I/O terminals		4829 0049
USB configuration cable		4829 0050
Fuse disconnect switches to protect voltage inputs (RM type)	4	5701 0018
Fuse disconnect switches to protect the 1-pole + neutral auxiliary power supply (RM type)	6	5701 0017
gG 10x38 0.5 A fuses	10	6012 0000

# DIRIS Q800

## Electrical network analyser

quality analysis of electrical energy and power grids



### Function

The **DIRIS Q800** is a multifunction network analyser for all energy efficiency projects. It helps to actively ensure the electrical system runs continuously and at optimised rates.

As such, with this system you can:

- Improve the efficiency of your facility.
- Reduce production losses.
- Optimise running costs.
- Reduce maintenance costs.

To achieve these objectives, the DIRIS Q800 does the following:

- Measures electrical parameters and status (via auxiliary contacts).
- Analyses the quality of energy according to class A IEC 61000-4-30:2015 Ed.3.
- Measures differential current.
- GPS synchronisation.
- Sends an email in the event of an alarm.

### Advantages

#### Large colour touchscreen

The 192 x 144 mm color touchscreen is tactile, easy to operate and provides intuitive navigation.

#### Regulatory compliance

By its compliance with IEC 61000-4-30:2015 Ed.3 Class A for all electrical parameters and IEC 62586-2, you have the assurance of a certified and high quality product.

#### Multiple communication channels

With its multiple communication options, the DIRIS Q800 can be integrated into any type of communication infrastructure:

- 1 rear Ethernet port for permanent cable connection.
- 1 front Ethernet for local diagnostics.
- 1 Wifi port.
- 1 RS485 port.
- 1 USB port.
- GPS synchronisation.
- Built-in Webserver.
- Protocols: HTTP, HTTPS, FTP, NTP, MODBUS, PQDIF, SMTP.

### The solution for

- Industry
- Infrastructure
- Healthcare buildings
- Data centers



### Strong points

- Large colour touchscreen
- High performance and accuracy
- Regulatory compliance
- Multiple communication channels

### Compliance with standards

- IEC 61000-4-30 :2015 Ed.3 class A
- IEC 62586-1
- IEC 62586-2
- IEC 62053-22
- IEC 62053-24
- EN 50160



## Functions

### Measurements

- Measures across 4 quadrants
- Voltage by phase, current by phase, frequency.
- Neutral current, differential current.
- Neutral/earth voltage.
- Active, reactive and apparent power.
- Cos phi and power factor.
- THD and spectral analysis up to the 63<sup>rd</sup> for current and voltage.
- Flicker (Pst, Plt).
- Voltage and current unbalance.
- Remote control signals.
- Current and Power Demand: average and maximum (timestamped)


### Logging

- EN 50160 events ½ period (10 ms): voltage dips, voltage cutouts, voltage surges.
- Current events 1/2 period (10 ms): inrush
- Data exported automatically via FTP.
- EN 50160 reports with CBEMA / ITIC curves for PQ events.
- Transients (20 micro seconds).

### Inputs/outputs

- 4 digital inputs.
- 4 digital outputs.
- 4 analogue outputs.

## Dimensions (mm)

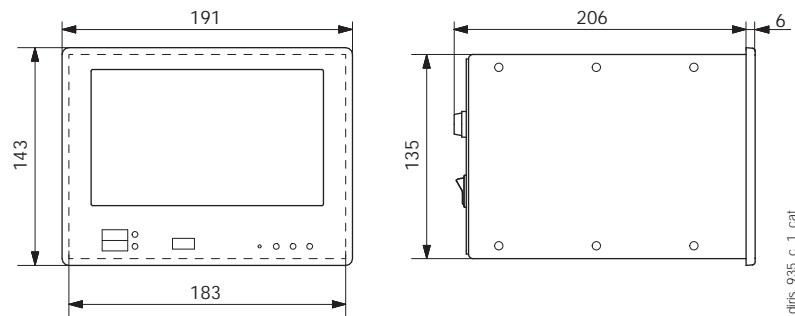

### Dimensions

Cutout	192 x 144 DIN / 186 x 138 mm
Front panel (W x H)	191 x 143 mm
Enclosures (W x H x D)	183 x 135 x 190 mm
Weight	1400 g

## Specifications

### Auxiliary power supply

Voltage range	100 ... 240 VAC / 65 ... 250 VDC
Frequency	50/60 Hz
Power consumption	Max. 15 VA
Backup battery	Li-ion 2500 mAh (>15 min autonomy)

### Measurement inputs

Direct voltage measurement input	P-N: max 580 V RMS CAT III L-L: max 1000 V RMS CAT III
U4 direct voltage measurement input	Max 580 V RMS CAT II
Voltage input crest factor	2
Current inputs	Max 7 A RMS
Current input consumption	0.04 VA
Current input crest factor	3
Voltage input impedance	> 6 MΩ
Frequency range	42.5 to 57.5 Hz/51 to 69 Hz
Voltage reference channel	U1N/U12
Sampling	51.2 kHz @50 Hz

### Accuracy

Three-phase voltage	± 0.1%
4 <sup>th</sup> voltage (neutral/earth)	± 0.2%
Currents	± 0.2%
Power	± 0.2%
Frequency	± 10 mHz
Harmonics	Class 1 IEC/EN 61000-4-7
Active energy	Class 0.2S IEC/EN 62053-22
Reactive energy	Class 1 IEC/EN 62053-24

### Communication

Ethernet ports	2 Auto MDIX RJ45 10/100 Base Ethernet
RS485 opto-insulated port (slave)	0.5 UL 4800 to 115200 bps
Passive WIFI antenna	RP-SMA female
Active GPS antenna	SMA female
Protocols	HTTP, HTTPS, FTP, SFTP, NTP, NMEA, Modbus RTU/TCP, SMTP
USB port	USB 2.0

### Environmental conditions

Operating temperature (max. range)	-25 ... +55°C
Storage temperature	-25 ... +75°C
Humidity	Max. 95 %
Max.altitude	2000 m

### Standards and safety

Product conformity	IEC/EN 62586-1, IEC/EN 62586-2
Safety	EN 61010-2-030
Degree of pollution	2 (EN 61010-1)
Degree of protection	IP40 front, IP20 rear
Directive	RED §3.1a Health EN 62311 :2008 RED § 3.1b EMC

## References

Designation	Reference
DIRIS Q800 100 ... 240 VAC / 65 ... 250 VDC	4826 0100 <sup>(1)</sup>


(1) Power supply 19 ... 60 VDC: please contact us.

# DIRIS Q800

Electrical network analyser

quality analysis of electrical energy and power grids


## Terminals

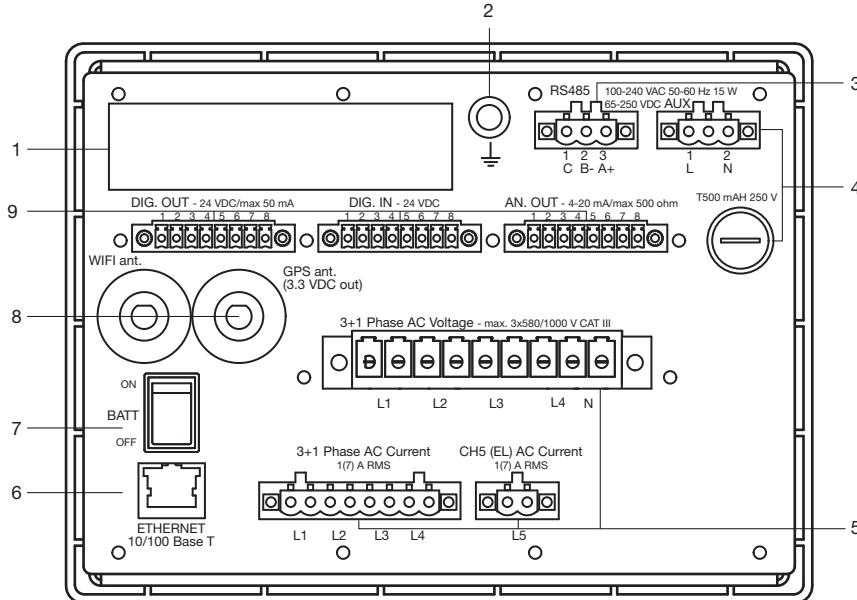


1. Product label
2. Earth connection
3. RS485 MODBUS RTU communication
4. Auxiliary power supply and fuse
5. Voltage and current inputs
6. Auto MDIX ETHERNET port
7. Battery switch
8. GPS and WiFi antenna
9. Logical outputs, analogue inputs/outputs

diris\_933\_a\_1\_x\_cat

Communication via RS485 link

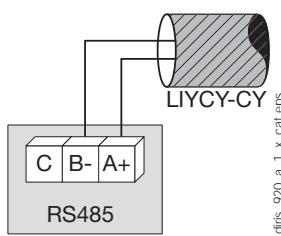


Digital outputs

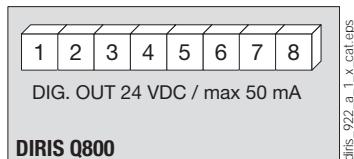


1-2: optocoupler output 1  
3-4: optocoupler output 2  
5-6: optocoupler output 3  
7-8: optocoupler output 4

AC and DC auxiliary power supply

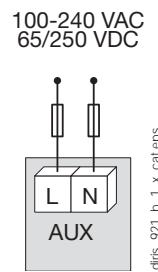


diris\_921\_b\_1\_x\_cat.eps

Ethernet communication




diris\_928\_a\_1\_x\_cat.eps

Analogue outputs

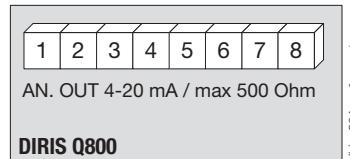


1-2: analogue output 1  
3-4: analogue output 2  
5-6: analogue output 3  
7-8: analogue output 4


Current and voltage inputs

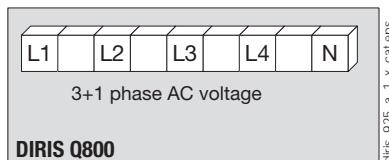

L1, L2, L3, L4, N: voltage inputs

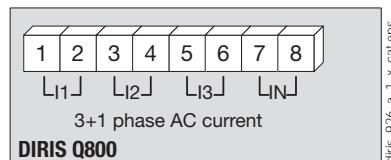

1-2: current input i1  
3-4: current input i2  
5-6: current input i3  
7-8: current input iN




diris\_927\_a\_1\_x\_cat.eps

1-2: differential core connections


## Connections

### Three-phase + neutral, 4 CT + differential measurements (1/5 A)

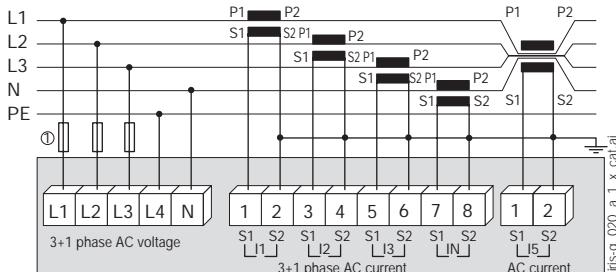


1. 0.5 A gG / 0.5 A class CC fuses.

### Three-phase + neutral, 3 CT + differential measurements (1/5 A)

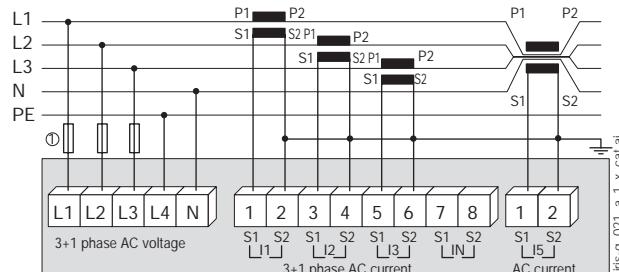


1. 0.5 A gG / 0.5 A class CC fuses.

### Three-phase, 3 CT + differential measurements (1/5 A)

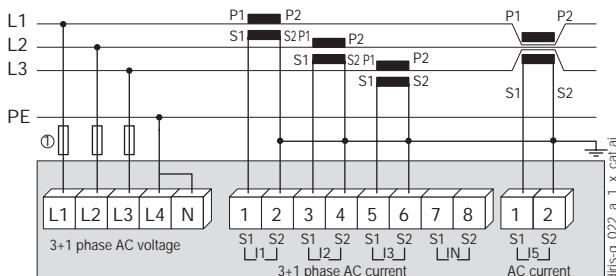


1. 0.5 A gG / 0.5 A class CC fuses.

### Three-phase, 2 CT + differential measurements (1/5 A)

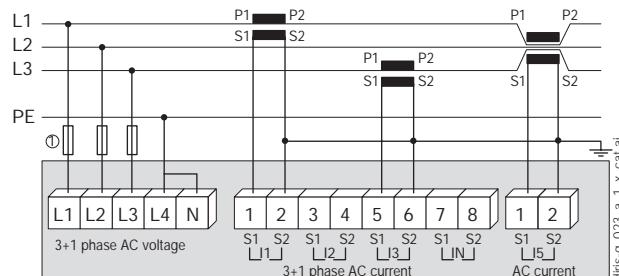


1. 0.5 A gG / 0.5 A class CC fuses.

### Two-phase + neutral, 3 CT + differential measurements (1/5 A)

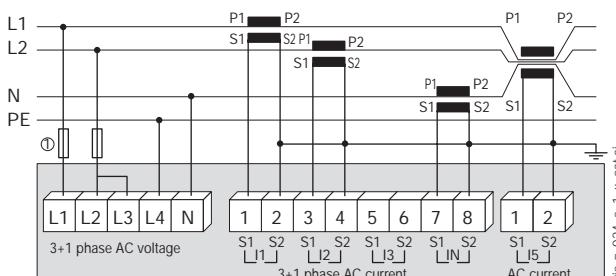

1. 0.5 A gG / 0.5 A class CC fuses.

### Single-phase, 1 CT + differential measurements (1/5 A)

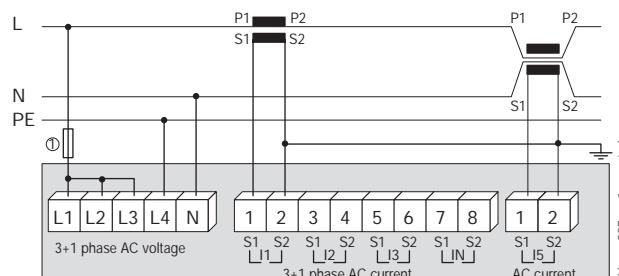

1. 0.5 A gG / 0.5 A class CC fuses.

## Expert Services

- > Study, definition, advice, implementation, maintenance and training... Our experts "Expert Services" offer complete support for the success of your project.



# Selection guide

## Current transformers

Type	TRB 60	TRB 70	TRB 135	TCA 14	TCA 21	TCA 22	TCB 17-20	TCB 26-30	TCB 28-30	TCB 26-40	TCB 32-40	TCB 44-50	
Format	Wound primary			Cable			Cable – busbar						
Class	0.5	0.5	0.5	1	0.5/1	1	1	0.5/1	0.5/1	1	0.5/1	0.5/1	
Version 0.2s			(1)			(2)		T2CB 26-30			T2CB 32-40		
<i>p. 331</i>			<i>p. 333</i>			<i>p. 334</i>							
Rating (A)	0.5												
5	5												
10	10												
15													
20													
25													
30													
40													
50													
60													
75													
80													
100													
125													
150													
160													
200													
250													
300													
400													
500													
600													
750													
800													
1000													
1200													
1250													
1500													
1600													
2000													
2500													
3000													
4000													
5000													

### Dimensions

Height	75.5	85.5	85	65	65	65	65	61	70	75.5	88.5	98.5	
Width	61	71	135	45	45	49.5	49.5	75.5	49.9	61	71	86	
Depth	35	45	60	30	30	35	50	48	68	48	58	58	
Cable (Ø mm)				14	21	22.5	17.5	26	28	26	32	44	
Busbar 1							20x5	30x10	30x10	32x18	40x10	50x12	
Busbar 2								20x10 (x2)		40x12	30x5 (x2)	40x10 (x2)	
Busbar 3													

\* Class 1.

(1) See T2RB 115 for a 0.2S wound primary version. Dimensions differ from TRB 135.

(2) See T2CA 225 for a 0.2S closed-loop cable version. Dimensions differ from TCA 22.


	TCB 44-63	TCB 55-80	TCD 85-100	TCB 100-125	TBA 60	TBA 80	TBA 100	TBA 103	TBA 127	T0 23	T0 58	T0 812	T0 816
	Cable - busbar				Busbar					Split-core			
0.5	0.5	0.5	0.5	0.5	0.5/1	0.5	0.5	0.5	0.5	1/3	0.5/1	0.5/1	0.5
T2CB 44-63							T2BA 100	T2BA 103	T2BA 127				
<i>p. 335</i>				<i>p. 338</i>					<i>p. 342</i>				
200	*	300	1600	1500	400	2000	750	1000	3000	200	300	400	100
...		...	...	...	...	...	...	...	...	...	...	...	400
1600					2000		3000			2000		250	250
1500							3000			1000		1000	1500
										400			
										1200			
										1500			
										2000			
													1000
													5000
105.5	123.5	184.8	184.8	129	117	167	150	175	106	158	198	243	
96	120	172	172	88	96	129	99	100	93	125	155	195	
58	58	52	52	48	68	78	58	55	58	58	58	79	
44	55	85	100										
63x10	80x10	100x10	123x30	60x30	84x34	100x55	103x41	128x38	33x23	85x55	125x85	165x85	
50x10 (x2)	60x30	80x10 (x3)	100x10 (x3)										
	60x10 (x2)												

# Current transformers


**Measurement devices**  
from 5 to 5000 A



Three-phase CT

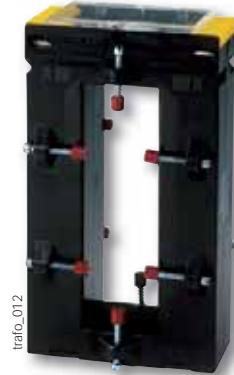

Bar-through CT

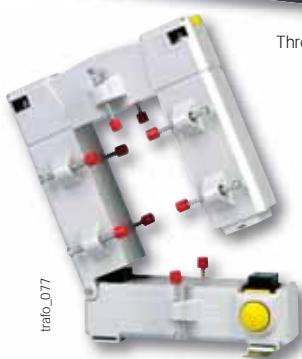

Split-core transformer



Cable-through CT

## Function

SOCOME current transformers deliver to the secondary a standard current proportional to the primary current and adapted to the rating of the associated device. They are equipped as standard with removable terminal covers and double terminals allowing the secondary to be short-circuited without any risk.

They are mounted using two screw-on metal brackets or, in certain cases, by a clip-on DIN-rail fastener. The connections are made by screws or by fast-on terminals.

- Accuracy class: 0.2s — 0.5 or 1.
- Dielectric quality: 3 kV — 50 Hz — 1 min.
- Operating frequency: 50 — 60 Hz.
- Permanent overload: 1.2 In.
- Insulation class: E (120 °C).

## Advantages

### An adapted accuracy class

In order to get the best of your DIRIS multifunction meters and COUNTIS energy meters, we can provide current transformers with the following accuracy classes: 0.2s; 0.5; 1 or 3.

### A wide range of ratings and dimensions

Your measurement process can be optimised whatever your needs in terms of ratings, space requirements, conductor sizing or accuracy class. A wide range of combinations are available in our standard range with specific versions available on request (other ratios, tropicalisation and specific frequency, class or burden).

### Quick and easy to mount

Our current transformers are adapted to any type of mounting: edgewise or flat mounting, DIN-rail or back-plate mounting. Implementation is easy and rapid.

## The solution for

- > Industry
- > Office buildings



## Strong points

- > An adapted accuracy class
- > A wide range of ratings and dimensions
- > Quick and easy to mount



## Conformity to standards


- > IEC 61869-2
- > IEC 61439-1

## Available on request


SOCOME also offer customised solutions:

- > 1 A secondary
- > Double or triple primary ratio
- > Voltage transformer
- > Summation CTs


## Composition of the range




Primary wound moulded case CT



Bar or cable-through CT



Bar or cable-through three-phase CT



Bar-through split-core CT

## Primary wound moulded case CT

## References

Primary	Secondary <sup>(1)</sup>	TRB 60		TRB 70		T2RB 115		TRB 135	
		Class 0.5	Reference	Class 0.5	Reference	Class 0.2s	Reference	Class 0.5	Reference
5 A	5 A	2.5 VA	192T 0505	10 VA	192T 0521				
10 A	5 A	2.5 VA	192T 0510	10 VA	192T 0522				
15 A	5 A			10 VA	192T 0523				
20 A	5 A			10 VA	192T 0524				
25 A	5 A			10 VA	192T 0525	7.5 VA	192U 0402	10 VA	192T 0603
30 A	5 A			5 VA	192T 0530	7.5 VA	192U 0403	10 VA	192T 0607
40 A	5 A			5 VA	192T 0541	7.5 VA	192U 0404	10 VA	192T 0604
50 A	5 A			5 VA	192T 0551	7.5 VA	192U 0405	10 VA	192T 0605
60 A	5 A					7.5 VA	192U 0406	10 VA	192T 0606
75 A	5 A					7.5 VA	192U 0407	10 VA	192T 0608
80 A	5 A					7.5 VA	192U 0408	10 VA	192T 0609
100 A	5 A							10 VA	192T 0610
125 A	5 A					7.5 VA	192U 0412	10 VA	192T 0612
150 A	5 A					7.5 VA	192U 0415	10 VA	192T 0615

(1) Secondary 1 A: on request.

## Accessories

Accessories	TRB 60 Reference	TRB 70 Reference	TRB 135 Reference
DIN-rail mounting	192T 0003	192T 0005 <sup>(1)</sup>	
Sealable cover	192T 0105	192T 0103	192T 0101 <sup>(2)</sup>

(1) For 40 and 50 A ratings, use reference 192T 0008.

(2) For 125 and 150 A ratings, use reference 192T 0103.

## CT Plug-in transducer (CEA-VA)

Power supply	Output	TRB 60 Reference	TRB 70 Reference
Self-supplied	0-20 mA / 0-10 VDC	192Y 0015	192Y 0025 <sup>(1)</sup>
230 VAC	0-20 mA / 0-10 VDC	192Y 0215	192Y 0225 <sup>(1)</sup>
24 VDC	0-20 mA / 0-10 VDC	192Y 0115	192Y 0125 <sup>(1)</sup>

(1) Not available for 40 and 50 A ratings.

## CT Plug-in transducer (CEA-VA4)

Power supply	Output	TRB 60 Reference	TRB 70 Reference
230 VAC	4-20 mA / 0-10 VDC	192T 0255	192Y 0265 <sup>(1)</sup>
24 VDC	4-20 mA / 0-10 VDC	192Y 0155	192Y 0165 <sup>(1)</sup>

(1) Not available for 40 and 50 A ratings.

## Certificate of performance

Each class 0.2s current transformer is supplied with an individual certificate of performance, attesting to its accuracy.


# Current transformers

## Measurement devices

from 5 to 5000 A

### Primary wound moulded case CT (continued)

#### Dimensions (mm)


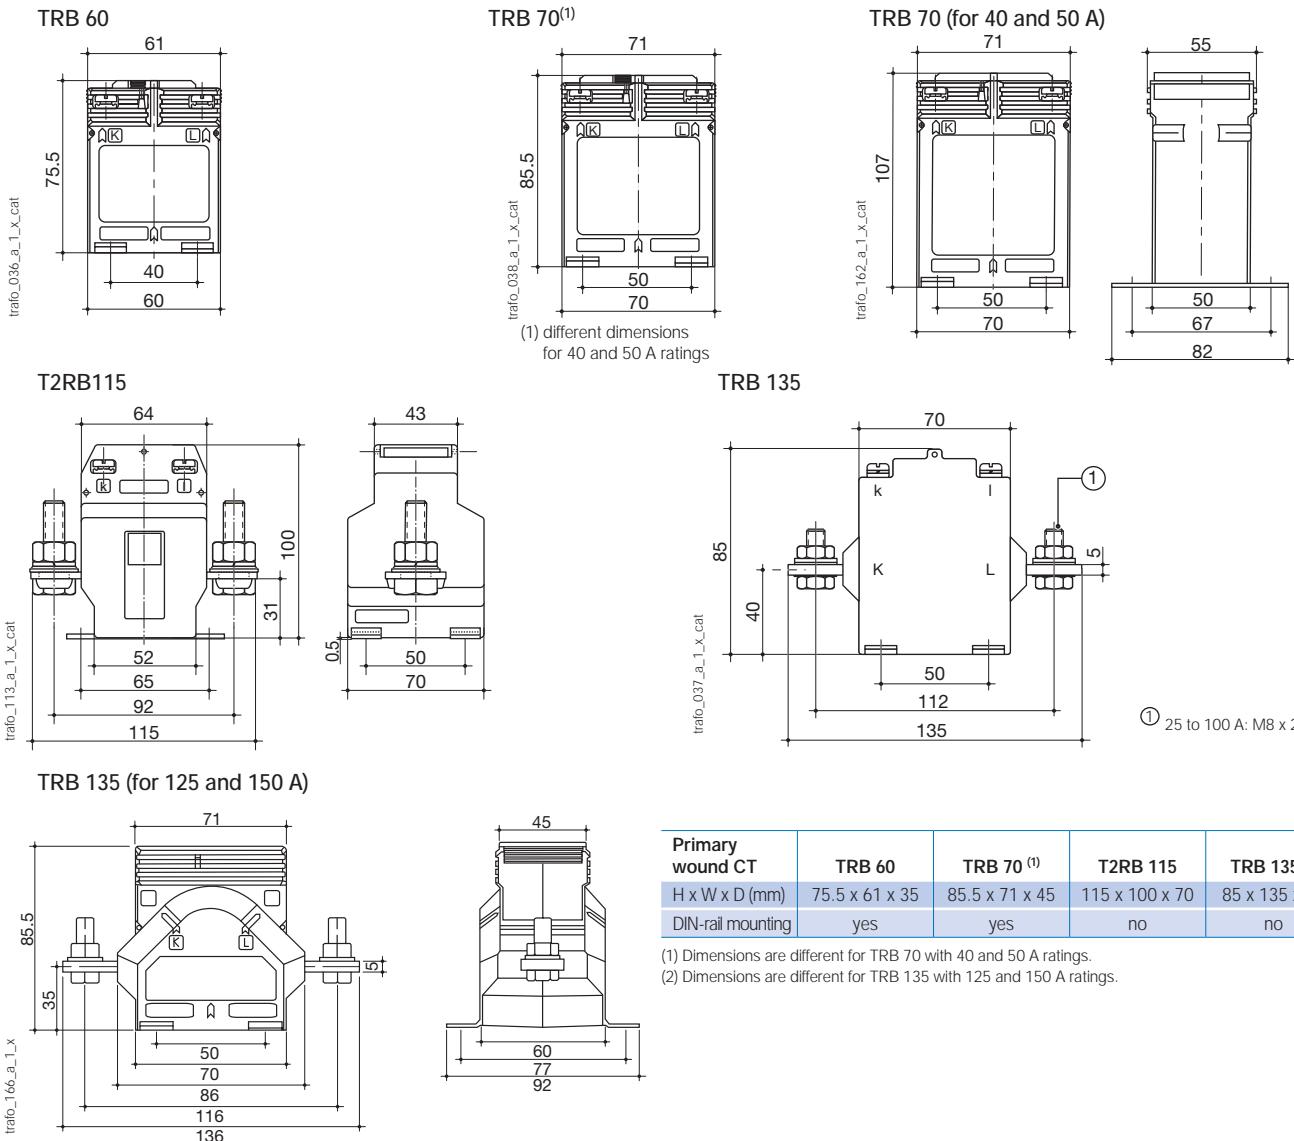


#### Associated transducers



Transducer to be associated with adapted current transformers:

- Class 0.5.
- Input: 1 or 5 A.
- Output:
  - 0-20 mA, 0-10 V (type CEA-VA)
  - 4-20 mA, 0-10 V (type CEA-VA4)
- Self-supplied or auxiliary power supply 24 VDC or 230 VAC.
- 3 sizes according to the CT: type 1, 2 or 3.

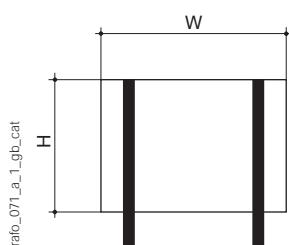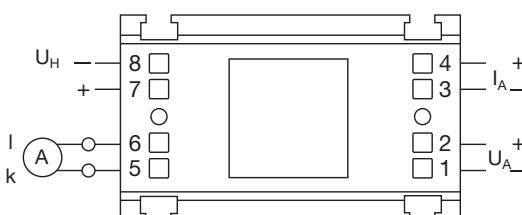

#### Dimensions (mm)

Converter	For CT	Height (mm)	Width (mm)	Depth (mm)
Type 1	TRB 60	50.5	60	32.5
Type 2	TRB 70	50	70	43

## Cable-through CT

### References

Primary	Secondary <sup>(1)</sup>	TCA 14		TCA 21			TCA 22		T2CA 225	
		Class 1	Reference	Class 1	Class 0.5	Reference	Class 1	Reference	Class 0.2s	Reference
40 A	5 A	1	192T 1404							
50 A	5 A	1	192T 1405							
60 A	5 A	1.5	192T 1406	1 VA		192T 2006				
75 A	5 A	1.5	192T 1407	1.5 VA		192T 2007				
80 A	5 A			1.5 VA		192T 2008				
100 A	5 A	2.5	192T 1410		1.5 VA	192T 2010	1 VA	192T 2022		
125 A	5 A	2.5	192T 1412		1.5 VA	192T 2012				
150 A	5 A	2.5	192T 1415		1.5 VA	192T 2015	1.5 VA	192T 2023	1.5 VA	192U 2215
200 A	5 A				2.5 VA	192T 2020	2.5 VA	192T 2024	2.5 VA	192U 2220
250 A	5 A				2.5 VA	192T 2016	3.75 VA	192T 2025	5 VA	192U 2225
300 A	5 A				2.5 VA	192T 2017	3.75 VA	192T 2030	5 VA	192U 2230
400 A	5 A						5 VA	192T 2034	5 VA	192U 2240
500 A	5 A						5 VA	192T 2035 <sup>(2)</sup>	10 VA	192U 2250
600 A	5 A						5 VA	192T 2036 <sup>(2)</sup>	10 VA	192U 2260

(1) Secondary 1 A: on request.


(2) Dimensions of T2CA 225

### Accessories

Accessories	TCA 14 Reference	TCA 21 Reference	TCA 22 Reference	T2CA 225 Reference
DIN-rail mounting	192T 0006	192T 0006	192T 0007	192T 0003
Guide tube Ø 8.5 mm <sup>(1)</sup>		192T 0020		
Guide tube Ø 12.5 mm <sup>(1)</sup>		192T 0021	192T 0023	
Guide tube Ø 16.5 mm <sup>(1)</sup>			192T 0024	
Sealable cover				192T 0105

(1) For centralising cables within the CT aperture.

### Dimensions (mm)

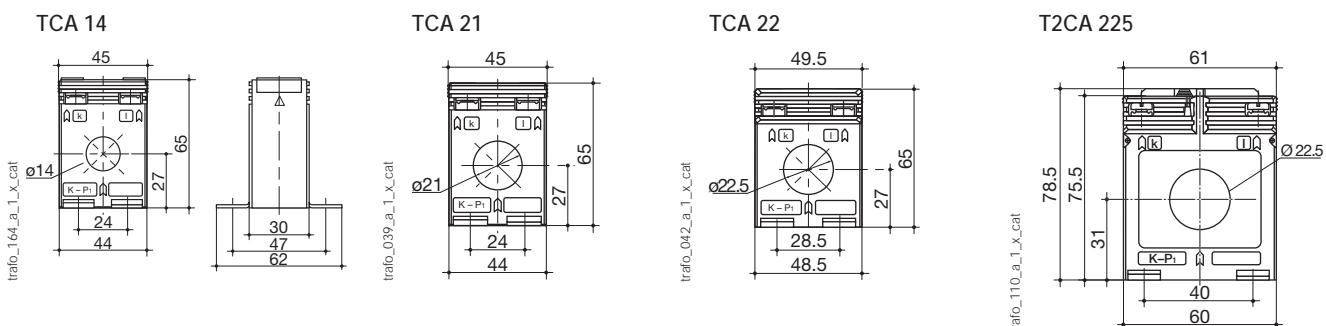

Cable-through CT	TCA 14	TCA 21	TCA 22 <sup>(1)</sup>	T2CA 225
Ø cable (mm)	14	21	22.5	22.5
H x W x D (mm)	65 x 45 x 30	65 x 45 x 30	65 x 49.5 x 35	78.5 x 61 x 35
DIN-rail mounting	yes	yes	yes	yes

(1) Dimensions are different for 600 A: 78.5x61x35.

# Current transformers

Measurement devices

from 5 to 5000 A

## Bar or cable-through CT

### References

Primary	Secondary <sup>(1)</sup>	TCB 17-20		TCB 26-30			T2CB 26-30		TCB 28-30		
		Class 1	Reference	Class 0.5	Class 1	Reference	Class 0.2s	Reference	Class 0.5	Class 1	Reference
50 A	5 A				1 VA	192T 2305					
60 A	5 A	1 VA	192T 2106		1 VA	192T 2306					
75 A	5 A	1 VA	192T 2107		1.5 VA	192T 2307					
80 A	5 A	1.25 VA	192T 2108		1.5 VA	192T 2308			1.25 VA	192T 2408	
100 A	5 A	1.5 VA	192T 2110	1.5 VA		192T 2310			1.5 VA	192T 2410	
125 A	5 A	1.5 VA	192T 2112	1.5 VA		192T 2312			2.5 VA	192T 2412	
150 A	5 A	2.5 VA	192T 2115	1.5 VA		192T 2315	1.5 VA	192U 2315	2.5 VA	192T 2415	
160 A	5 A	2.5 VA	192T 2116								
200 A	5 A	2.5 VA	192T 2120	2.5 VA		192T 2320	2.5 VA	192U 2320	2.5 VA		192T 2420
250 A	5 A	5 VA	192T 2125	5 VA		192T 2325	2.5 VA	192U 2325	2.5 VA		192T 2425
300 A	5 A	5 VA	192T 2130	5 VA		192T 2330	5 VA	192U 2330	2.5 VA		192T 2430
400 A	5 A	5 VA	192T 2140	5 VA		192T 2340	5 VA	192U 2340	5 VA		192T 2440
500 A	5 A			5 VA		192T 2350	5 VA	192U 2350	5 VA		192T 2450
600 A	5 A			5 VA		192T 2360	5 VA	192U 2360			
750 A	5 A			5 VA		192T 2375	5 VA	192U 2375			

(1) Secondary 1 A: on request.

Primary	Secondary <sup>(1)</sup>	TCB 26-40		TCB 32-40		T2CB 32-40	
		Class 1	Reference	Class 0.5	Class 1	Reference	Class 0.2s
75 A	5 A				1.5 VA	192T 4007	
100 A	5 A	1.5 VA	192T 3210	1.5 VA		192T 4010	
125 A	5 A	2.5 VA	192T 3212	1.5 VA		192T 4012	
150 A	5 A	2.5 VA	192T 3215	2.5 VA		192T 4015	
160 A	5 A	2.5 VA	192T 3216				
200 A	5 A	2.5 VA	192T 3220	5 VA		192T 4020	2.5 VA
250 A	5 A	2.5 VA	192T 3225	5 VA		192T 4025	5 VA
300 A	5 A	5 VA	192T 3230	10 VA		192T 4030	5 VA
400 A	5 A	5 VA	192T 3240	10 VA		192T 4040	5 VA
500 A	5 A	5 VA	192T 3250	10 VA		192T 4050	5 VA
600 A	5 A	5 VA	192T 3260	10 VA		192T 4060	5 VA
750 A	5 A	10 VA	192T 3275	10 VA		192T 4075	5 VA
800 A	5 A			10 VA		192T 4080	
1000 A	5 A			10 VA		192T 4090	

(1) Secondary 1 A: on request.

### Accessories

Accessories	TCB 17-20 Reference	TCB 26-30 Reference	TCB 26-40 Reference	TCB 32-40 Reference
DIN-rail mounting	192T 0007	192T 0003	192T 0003	192T 0005
Sealable cover		192T 0105	192T 0105	192T 0103

### CT Plug-in transducer (CEA-VA)

Power supply	Output	TCB 26-30 Reference	TCB 26-40 Reference	TCB 32-40 Reference
Self-supplied	0-20 mA / 0-10 VDC	192Y 0015	192Y 0015	192Y 0035
230 VAC	0-20 mA / 0-10 VDC	192Y 0215	192Y 0215	192Y 0235
24 VDC	0-20 mA / 0-10 VDC	192Y 0115	192Y 0115	192Y 0135

### CT Plug-in transducer (CEA-VA4)

Power supply	Output	TCB 26-30 Reference	TCB 26-40 Reference	TCB 32-40 Reference
230 VAC	4-20 mA / 0-10 VDC	192T 0255	192T 0255	192Y 0275
24 VDC	4-20 mA / 0-10 VDC	192Y 0155	192Y 0155	192Y 0175

# Current transformers

Measurement devices

from 5 to 5000 A

## References

Primary	Secondary <sup>(1)</sup>	TCB 44-50		TCB 44-63		T2CB 44-63	
		Class 0.5	Reference	Class 0.5	Reference	Class 0.2s	Reference
150 A	5 A	1.5 VA	192T 5015				
200 A	5 A	2.5 VA	192T 5020	1.5 VA	192T 6420		
250 A	5 A	5 VA	192T 5025	1.5 VA	192T 6425		
300 A	5 A	5 VA	192T 5030	2.5 VA	192T 6430	5 VA	192U 6430
400 A	5 A	10 VA	192T 5040	5 VA	192T 6440	5 VA	192U 6440
500 A	5 A	10 VA	192T 5050	10 VA	192T 6450	10 VA	192U 6450
600 A	5 A	10 VA	192T 5060	10 VA	192T 6460	10 VA	192U 6460
750 A	5 A	10 VA	192T 5075	10 VA	192T 6475	10 VA	192U 6475
800 A	5 A	15 VA	192T 5080	10 VA	192T 6480		
1000 A	5 A	15 VA	192T 5090	15 VA	192T 6490	10 VA	192U 6490
1200 A	5 A	15 VA	192T 5092	15 VA	192T 6492	10 VA	192U 6492
1250 A	5 A	15 VA	192T 5095	15 VA	192T 6493	10 VA	192U 6493
1500 A	5 A			15 VA	192T 6495	10 VA	192U 6495
1600 A	5 A			15 VA	192T 6494		

(1) Secondary 1 A: on request.

Primary	Secondary <sup>(1)</sup>	TCB 55-80		TCB 85-100		TCB 100-125	
		Class 0.5	Reference	Class 0.5	Reference	Class 0.5	Reference
400 A	5 A	2.5 VA	192T 8140				
500 A	5 A	5 VA	192T 8150				
600 A	5 A	5 VA	192T 8160				
750 A	5 A	10 VA	192T 8175	2.5 VA	192T 9675		
800 A	5 A	10 VA	192T 8180	5 VA	192T 9680		
1000 A	5 A	15 VA	192T 8190	10 VA	192T 9690	5 VA	192T 9590
1200 A	5 A	15 VA	192T 8192	10 VA	192T 9692		
1250 A	5 A	15 VA	192T 8193	15 VA	192T 9693	10 VA	192T 9593
1500 A	5 A	15 VA	192T 8195	15 VA	192T 9695	15 VA	192T 9595
1600 A	5 A	15 VA	192T 8194	15 VA	192T 9694		
2000 A	5 A	15 VA	192T 8196	30 VA	192T 9696	30 VA	192T 9596
2500 A	5 A			30 VA	192T 9697	30 VA	192T 9597
3000 A	5 A			30 VA	192T 9698	30 VA	192T 9598

(1) Secondary 1 A: on request.

## Accessories

Accessories	TCB 44-50 Reference	TCB 44-63 Reference	TCB 55-80 Reference	TCB 85-100 Reference	TCB 100-125 Reference
Sealable cover	192T 0102	192T 0102	192T 0102	192T 0106	192T 0106

### CT Plug-in transducer (CEA-VA)

Power supply	Output	TCB 44-50 Reference	TCB 44-63 Reference	TCB 55-80 Reference
Self-supplied	0-20 mA / 0-10 VDC		192Y 0045	192Y 0045
230 VAC	0-20 mA / 0-10 VDC		192Y 0245	192Y 0245
24 VDC	0-20 mA / 0-10 VDC		192Y 0145	192Y 0145

### CT Plug-in transducer (CEA-VA4)

Input	Output	TCB 44-50 Reference	TCB 44-63 Reference	TCB 55-80 Reference
230 VAC	4-20 mA / 0-10 VDC		192Y 0285	192Y 0285
24 VDC	4-20 mA / 0-10 VDC		192Y 0185	192Y 0185

# Current transformers


## Measurement devices

from 5 to 5000 A


### Bar or cable-through CT (continued)

#### Dimensions (mm)


TCB 17-20

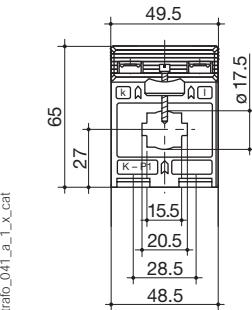


TCB 26-30 and T2CB 26-30

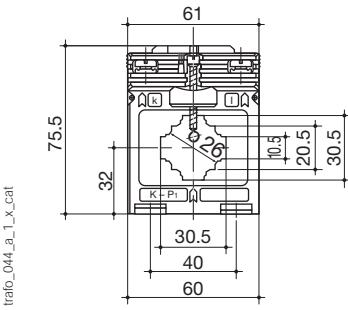


TCB 28-30

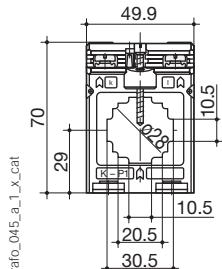


TCB 26-40

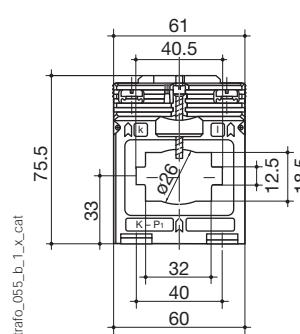


TCB 32-40 and T2CB 32-40

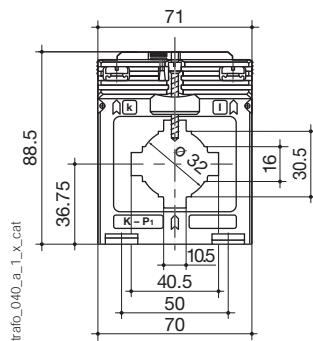


TCB 44-50

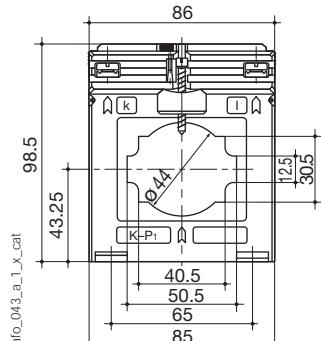


TCB 44-63 and T2CB 44-63

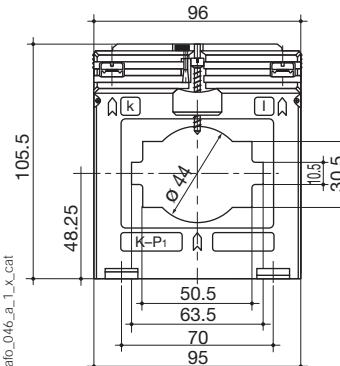


TCB 55-80

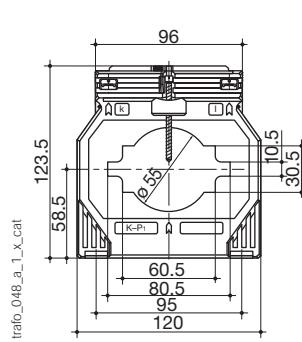

TCB 85-100

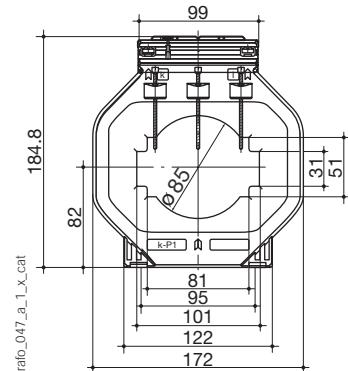

TCB 100-125

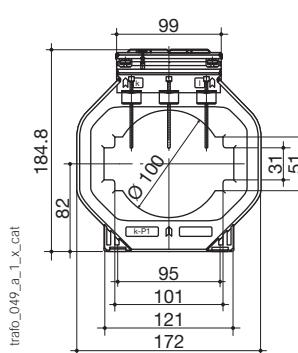

Bar or cable-through CT	TCB 17-20	TCB 26-30	T2CB 26-30	TCB 26-40	TCB 28-30	TCB 32-40	T2CB 32-40
Bar (mm)	20 x 5 (x 1)	30 x 10 (x 1) / 20 x 10 (x 1...2)	30 x 10 (x 1) / 20 x 10 (x 1...2)	40 x 12 (x 1) / 32 x 18 (x 1)	30 x 10 (x 1)	40 x 10 (x 1) / 30 x 5 (x 1...2)	40 x 10 (x 1) / 30 x 5 (x 1...2)
Ø cable (mm)	17.5	26	26	26	28	32	32
H x W x D (mm)	65 x 49.5 x 50	75.5 x 61 x 48	75.5 x 61 x 48	75.5 x 61 x 48	70 x 49.9 x 68	88.5 x 71 x 58	88.5 x 71 x 58
DIN-rail mounting	yes	yes	yes	yes		yes	yes

Bar or cable-through CT	TCB 44-50	TCB 44-63	T2CB 44-63	TCB 55-80	TCB 85-100	TCB 100-125
Bar (mm)	50 x 12 (x 1) / 40 x 10 (x 1...2)	63 x 10 (x 1) / 50 x 10 (x 1...2)	63 x 10 (x 1) / 50 x 10 (x 1...2)	80 x 10 (x 1) / 60 x 30 (x 1) / 60 x 10 (x 1...2)	100 x 10 (x 1...2) / 80 x 10 (x 1...3)	123 x 30 (x 1) / 100 x 10 (x 1...3)
Ø cable (mm)	44	44	44	55	85	100
H x W x D (mm)	98.5 x 86 x 58	105.5 x 96 x 58	105.5 x 96 x 58	123.5 x 120 x 58	184.5 x 172 x 52	184.5 x 172 x 52


### Associated transducers

trafo\_074




Transducer to be associated with adapted current transformers:

- Class 0.5.
- Input: 1 or 5 A
- Output:
  - 0-20 mA, 0-10 V (model CEA-VA),
  - 4-20 mA, 0-10 V (model CEA-VA4),
  - Self-supplied or auxiliary power supply 24 VDC or 230 VAC.
- 3 sizes according to the CT: type 1, 2 or 3.

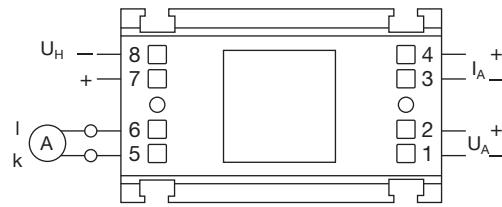

trafo\_060\_a\_1\_x\_cat

trafo\_071\_a\_1\_gb\_cat

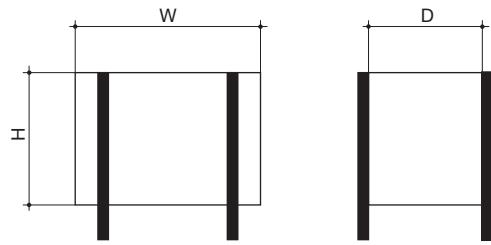

Dimensions (mm)

Converter	For CT	Height (mm)	Width (mm)	Depth (mm)
Type 1	TCB 26-30	50.5	60	32.5
Type 1	TCB 26-40	50.5	60	32.5
Type 2	TCB 32-40	50	70	43
Type 3	TCB 44-63	50.5	95	43
Type 3	TCB 55-80	50.5	95	43

# Current transformers

## Measurement devices

from 5 to 5000 A

### Bar-through CT

#### References

Primary	Secondary	TBA 60			TBA 80		TBA 100		T2BA 100	
		Class 0.5	Class 1	Reference	Class 0.5	Reference	Class 0.5	Reference	Class 0.2s	Reference
200 A	5 A		2.5 VA	192T 7020						
250 A	5 A	2.5 VA		192T 7025						
300 A	5 A	2.5 VA		192T 7030	2.5 VA	192T 7530				
400 A	5 A	5 VA		192T 7040	5 VA	192T 7540				
500 A	5 A	5 VA		192T 7050	5 VA	192T 7550				
600 A	5 A	10 VA		192T 7060	5 VA	192T 7560	5 VA	192T 8060		
750 A	5 A	10 VA		192T 7075	5 VA	192T 7575	5 VA	192T 8075		
800 A	5 A	10 VA		192T 7080	10 VA	192T 7580	5 VA	192T 8080		
1000 A	5 A	15 VA		192T 7090	15 VA	192T 7590	5 VA	192T 8090		
1200 A	5 A	15 VA		192T 7092	15 VA	192T 7592	10 VA	192T 8092	5 VA	192U 8092
1250 A	5 A	15 VA		192T 7093	15 VA	192T 7593	10 VA	192T 8093	5 VA	192U 8093
1500 A	5 A	15 VA		192T 7095	15 VA	192T 7595	15 VA	192T 8095	5 VA	192U 8095
1600 A	5 A	15 VA		192T 7094	15 VA	192T 7594	15 VA	192T 8094		
2000 A	5 A				15 VA	192T 7596	15 VA	192T 8096	5 VA	192U 8096
2500 A	5 A						30 VA	192T 8097	10 VA	192U 8097
3000 A	5 A						30 VA	192T 8098 <sup>(1)</sup>	10 VA	192U 8098
4000 A	5 A						30 VA	-		

(1) Dimensions are different for TBA 100 with 3000 and 4000 A primary.

Primary	Secondary	TBA 103		T2BA 103		TBA 127		T2BA 127	
		Class 0.5	Reference	Class 0.2s	Reference	Class 0.5	Reference	Class 0.2s	Reference
400 A	5 A	2.5 VA	192T 9340			2.5 VA	192T 9740		
500 A	5 A	2.5 VA	192T 9350			2.5 VA	192T 9750		
600 A	5 A	2.5 VA	192T 9360			2.5 VA	192T 9760		
750 A	5 A	2.5 VA	192T 9375			2.5 VA	192T 9775		
800 A	5 A	5 VA	192T 9380			5 VA	192T 9780		
1000 A	5 A	10 VA	192T 9390	5 VA	192U 9390	10 VA	192T 9790		
1200 A	5 A	10 VA	192T 9392	5 VA	192U 9392	10 VA	192T 9792	5 VA	192U 9792
1250 A	5 A	10 VA	192T 9393	5 VA	192U 9393	10 VA	192T 9793	5 VA	192U 9793
1500 A	5 A	15 VA	192T 9395	5 VA	192U 9395	15 VA	192T 9795	5 VA	192U 9795
1600 A	5 A	10 VA	192T 9394			15 VA	192T 9794		
2000 A	5 A	15 VA	192T 9396			15 VA	192T 9796	5 VA	192U 9796
2500 A	5 A					15 VA	192T 9797		
3000 A	5 A					25 VA	182T 9798 <sup>(1)</sup>		
4000 A	5 A					30 VA	182T 9799 <sup>(1)</sup>		

(1) Replacement model TRA 127 for this rating.

#### Accessories

Accessories	TBA 60 Reference	TBA 80 Reference	TBA 100 Reference	T2BA 100 Reference	TBA 103 Reference	T2BA 103 Reference	TBA 127 Reference	T2BA 127 Reference
Sealable cover	192T 0102		192T 0102	192T 0102			192T 0102	192T 0102

#### CT Plug-in transducer (CEA-VA)


Power supply	Output	TBA 100 Reference
Self-supplied	0-20 mA / 0-10 VDC	192Y 0045
230 VAC	0-20 mA / 0-10 VDC	192Y 0245
24 VDC	0-20 mA / 0-10 VDC	192Y 0145

#### CT Plug-in transducer (CEA-VA4)


Power supply	Output	TBA 100 Reference
230 VAC	4-20 mA / 0-10 VDC	192Y 0285
24 VDC	4-20 mA / 0-10 VDC	192Y 0185

### Dimensions (mm)


TBA 60

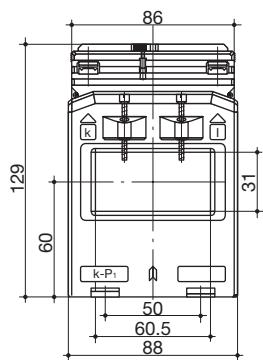

TBA 80  
300 to 2000 A

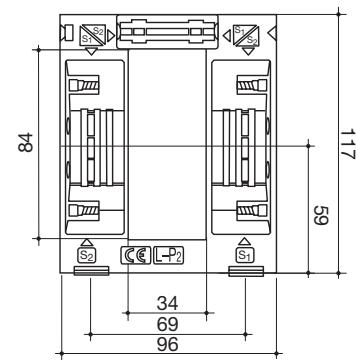


TBA 100 600 to 2500 A<sup>(1)</sup>  
T2BA 100 1200 to 3000 A

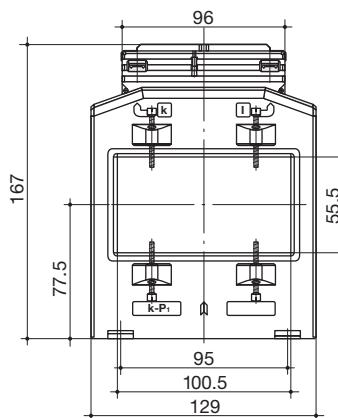


trafo\_059\_a\_1\_x\_cat

(1) TBA 100, 3000 and 4000 A: 214 x 129 x 78 mm.

TBA 103 and T2BA 103

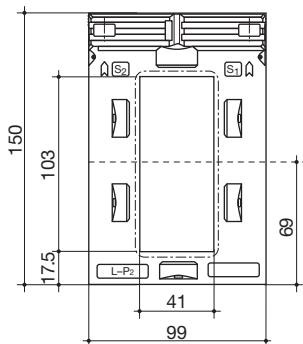

TBA 127 and T2BA 127

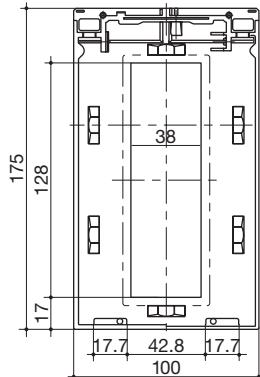

trafo\_052\_a\_1\_x\_cat

Bar-through CT	TBA 60	TBA 80	TBA 100	T2BA 100	TBA 103	T2BA 103	TBA 127	T2BA 127
Bar (mm)	60 x 30	84 x 34	100 x 55	100 x 55	103 x 41	103 x 41	128 x 38	128 x 38
H x W x D (mm)	129 x 88 x 78	117 x 96 x 68	167 x 129 x 78 <sup>(1)</sup>	167 x 129 x 78	150 x 99 x 58	150 x 99 x 58	175 x 100 x 55	175 x 100 x 55

(1) TBA 100, 3000 and 4000 A: 214 x 129 x 78 mm.

# Current transformers

## Measurement devices

from 5 to 5000 A

### Three-phase bar or cable-through CT

#### References


Primary	Secondary <sup>(1)</sup>	TCB3 18-20		TCB3 22-30	
		Class 1	Reference	Class 1	Reference
3 x 100 A	3 x 5 A	1 VA	192T 3310		
3 x 150 A	3 x 5 A	1.25 VA	192T 3315		
3 x 200 A	3 x 5 A	1.5 VA	192T 3320		
3 x 250 A	3 x 5 A	2.5 VA	192T 3325	2.5 VA	192T 3425
3 x 300 A	3 x 5 A			3.75 VA	192T 3430
3 x 400 A	3 x 5 A			5 VA	192T 3440
3 x 500 A	3 x 5 A			5 VA	192T 3450
3 x 600 A	3 x 5 A			5 VA	192T 3460

(1) Secondary 1 A: on request.

#### Dimensions (mm)


TCB3 18-20

trafo\_111\_a\_1\_x\_cat

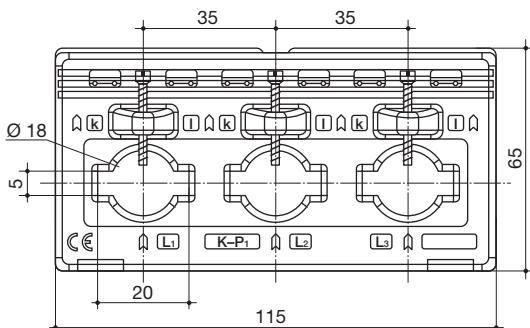

TCB3 22-30

trafo\_112\_a\_1\_x\_cat

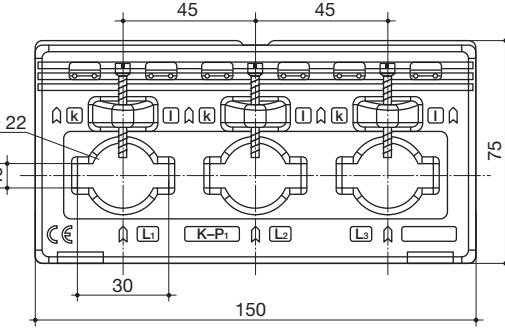

Three-phase bar or cable-through CT	TCB3 18-20	TCB3 22-30
Ø cable (mm)	18	22
Bar-through	20 x 5	30 x 10
H x W x D (mm)	115 x 65 x 37	150 x 75 x 37
DIN-rail mounting	no	no

### References


Primary	Secondary <sup>(1)</sup>	Class 1	TCA 13 — 3P
			Reference
3 x 50 A	5 A	1 VA	192T 1905
3 x 60 A	5 A	1.25 VA	192T 1906
3 x 75 A	5 A	1.5 VA	192T 1907
3 x 80 A	5 A	1.5 VA	192T 1908
3 x 100 A	5 A	2.5 VA	192T 1910
3 x 125 A	5 A	2.5 VA	192T 1912
3 x 150 A	5 A	2.5 VA	192T 1915
3 x 160 A	5 A	2.5 VA	192T 1916

(1) Secondary 1 A: on request.

### Dimensions (mm)

TCA 13 — 3P

trafo\_009\_a\_1\_x.cat

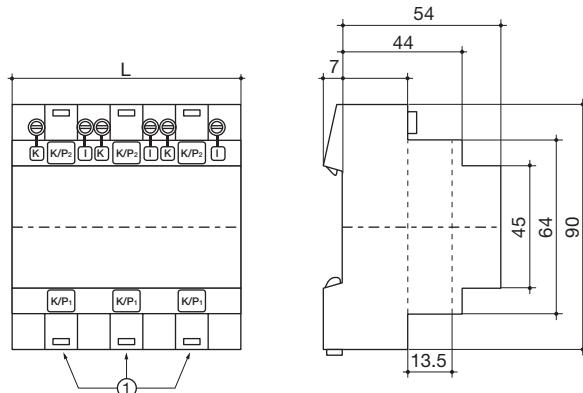

(1) Cable-through aperture Ø 13.5 mm.

Number of modules	Front degree of protection	Terminal degree of protection	L (mm)	Mounting
6	IP65	IP20	105	35 mm DIN-rail

# Current transformers

Measurement devices



from 5 to 5000 A

## Split-core CT

### References

Primary	Secondary	TO 23			TO 58			TO 812			TO 816	
		Class 1	Class 3	Reference	Class 0.5	Class 1	Reference	Class 0.5	Class 1	Reference	Class 0.5	Reference
100 A	5 A		1.25 VA	192T 4601								
150 A	5 A		1.5 VA	192T 4602								
200 A	5 A		2.5 VA	192T 4603								
250 A	5 A	1.5 VA		192T 4604	1.5 VA	192T 4625		1.5 VA	192T 4725			
300 A	5 A	3.75 VA		192T 4605	2.5 VA	192T 4630		2.5 VA	192T 4730			
400 A	5 A	5 VA		192T 4606	1 VA	192T 4640		2.5 VA	192T 4740			
500 A	5 A				2.5 VA	192T 4650	2.5 VA			192T 4750		
600 A	5 A				2.5 VA	192T 4660	2.5 VA			192T 4760		
750 A	5 A				2.5 VA	192T 4675	2.5 VA			192T 4775		
800 A	5 A				2.5 VA	192T 4680	2.5 VA			192T 4780		
1000 A	5 A				5 VA	192T 4610	5 VA			192T 4710	10 VA	192T 4810
1250 A	5 A							7.5 VA		192T 4712	10 VA	192T 4812
1500 A	5 A							7.5 VA		192T 4715	10 VA	192T 4815
1600 A	5 A										10 VA	192T 4814
2000 A	5 A										10 VA	192T 4820
2500 A	5 A										10 VA	192T 4825
3000 A	5 A										15 VA	192T 4830
4000 A	5 A										15 VA	192T 4840
5000 A	5 A										15 VA	192T 4850

### Dimensions (mm)

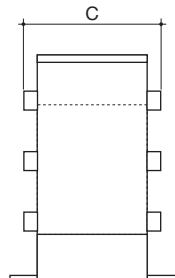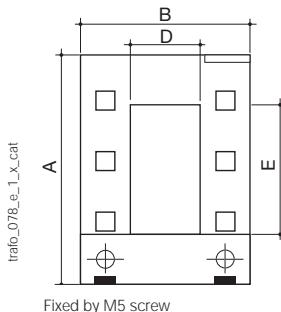

### Dimensions (mm)

Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
TO 23	106	93	58	23	33
TO 58	158	125	58	55	85
TO 812	198	155	58	85	125
TO 816	243	195	79	85	165

Split-core CT	TO 23	TO 58	TO 812	TO 816
H x W x D (mm)	106 x 93 x 58	158 x 125 x 58	198 x 155 x 58	243 x 195 x 75


### Summation CT

#### Reference


Primary	Secondary	BSA 02 Reference	BSA 03 Reference	BSA 04 Reference
5 + 5/5 A	5 A	192T 0802		
5A + 5+ 5/5	5 A		192T 0803	
5 + 5 + 5 + 5/5 A	5 A			192T 0904

#### Dimensions (mm)

BSA 02 and BSA 03

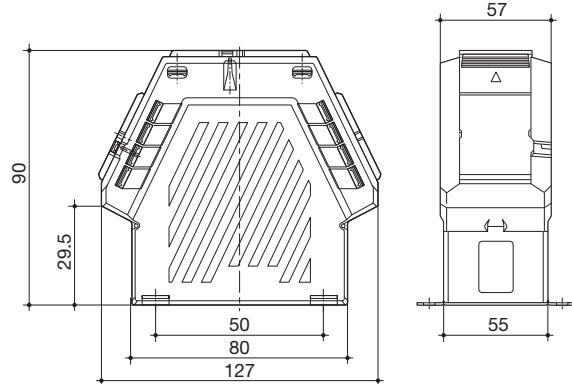

BSA 04

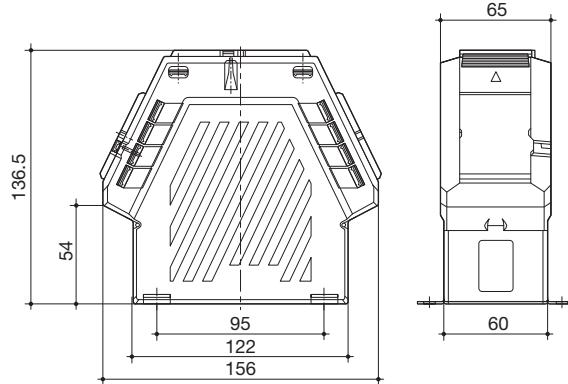

trafo\_073\_b\_1x\_cat

trafo\_069\_b\_1x\_cat

Summation CT	BSA 02	BSA 03	BSA 04
H x W x D (mm)	90 x 127 x 57	90 x 127 x 57	136.5 x 156 x 65
DIN-rail mounting	no	no	no

# Selection guide

Software solutions for energy monitoring and analysis

What are the features?

For what size of project?

Where is the data stored?

	<i>WEBVIEW-S</i>	<i>WEBVIEW-M</i>	<i>WEBVIEW-L</i>
<b>Hosting of the application<sup>(1)</sup></b>			
<b>Data collection</b>			
Maximum number of connected measurement devices	1	32	100 (WEBVIEW-L100) 200 (WEBVIEW-L200)
Interfacing to third-party applications			via connector
Export of data in CSV format	•	•	•
<b>Real time monitoring</b>			
U/V voltages and currents I	•	•	•
Powers P, Q, S, Power factor	•	•	•
Quality monitoring THDI, THDu, THDv, K factor, Harmonic analysis up to 63 <sup>rd</sup>	•	•	•
Energy metering Ea+, Ea-, Er+, Er-, Es	•	•	•
Pulse counting	•	•	•
Input/Output monitoring	•	•	•
Measurement history U, V, I, P, Q, S,	•	•	•
<b>Energy analysis</b>			
Energy consumption analysis	•	•	•
Multi-parameter analysis			•
<b>Alarm management</b>			
Product alarms	•	•	•
Alarms history	•	•	•
Transmission of alarms		e-mail	e-mail
<b>Reporting management</b>			
Customisable user interface		Photoview	Photoview
Hierarchy management		•	•
<b>Conformity to standards</b>			
Energy Server Standard - IEC 62974-1		•	•


(1) For more information on the hardware please refer to the appropriate catalogue pages.

(2) N'VIEW is a software solution intended for energy management purposes only.

## Architecture

Level 4

Cloud hosting

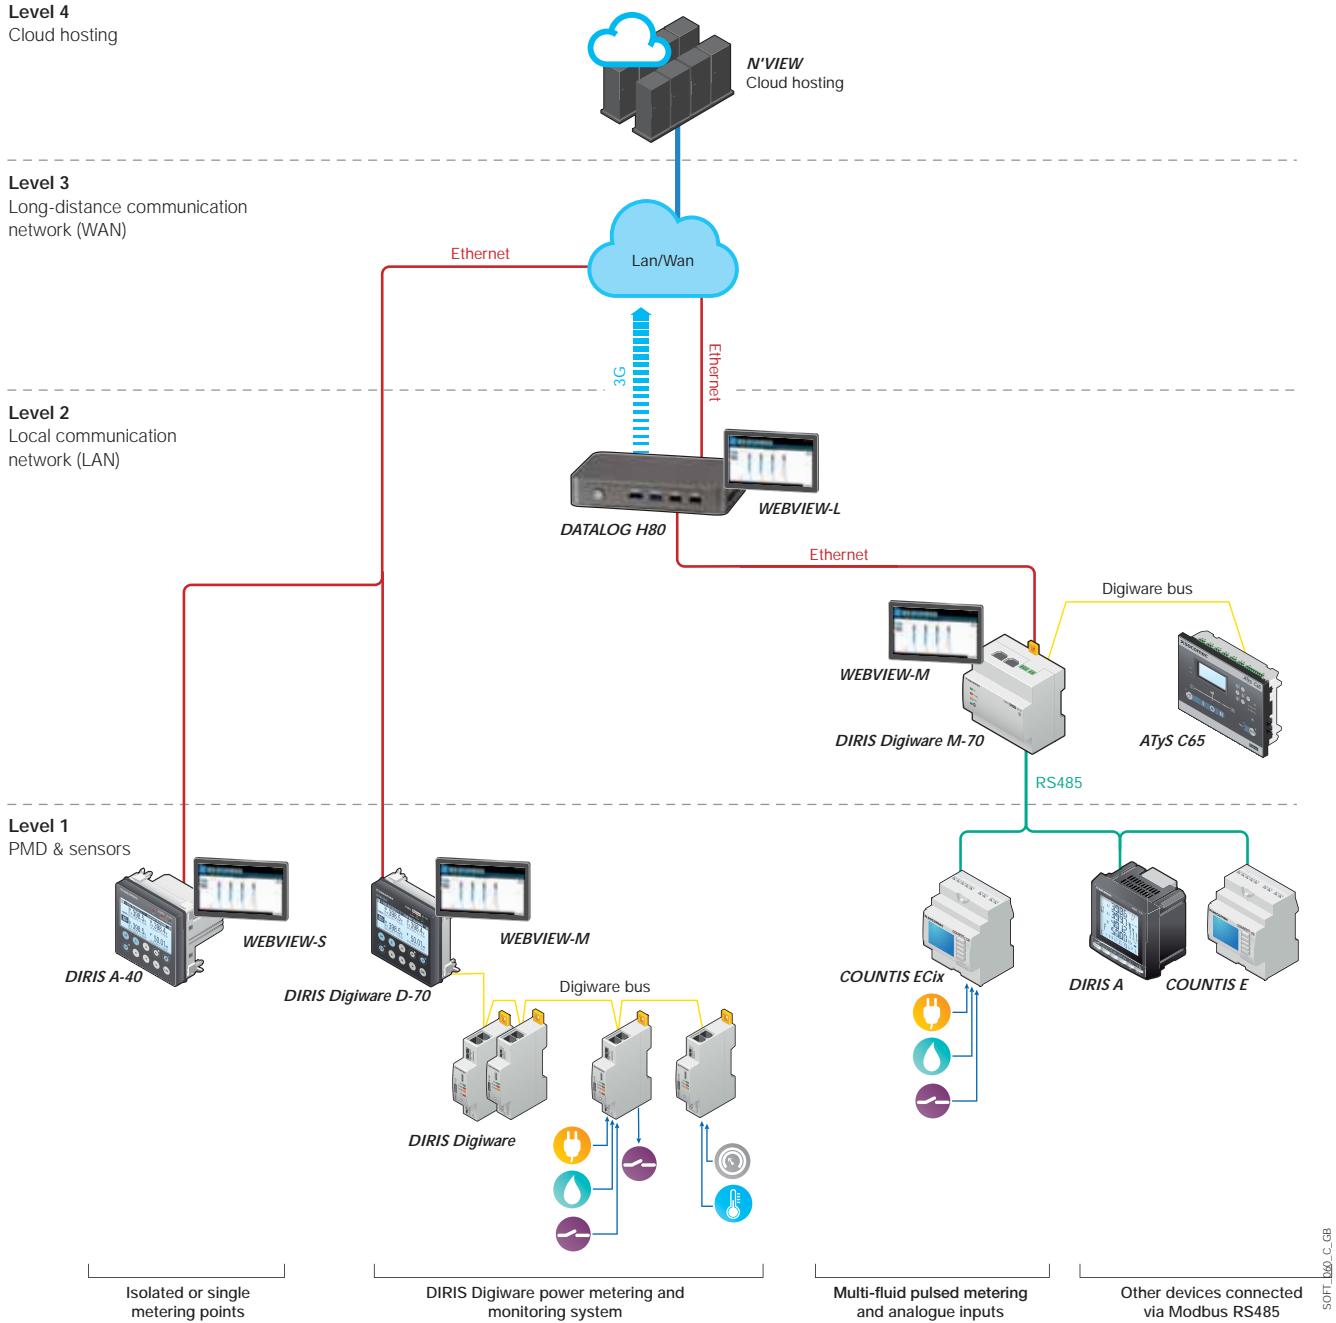

## Expert Services

Require integration onto your network?

No problem for our Expert Services team. They work out all the details of the measurement schedule, the complete integration of all devices in your energy management system, the configuration of your software application, the training of your teams and details of operational support. For further information, please contact your nearest Socomec office.

# WEBVIEW

Embedded software for power monitoring and energy management

Software suite



## Function

**WEBVIEW** is a web based software embedded in DIRIS A-40 power monitoring devices, DIRIS Digiware D-70 displays, DIRIS Digiware M-70 communication gateways and DATALOG H80/H81 dataloggers delivering real-time monitoring of all measurements from up to 200 devices and displaying the breakdown of energy consumptions.

Uncover the causes of electrical disturbances and anticipate maintenance requirements thanks to historical records of multiple electrical parameters.

Pre-set alarms defined by the user can be sent by e-mail. Users can access WEBVIEW via a web browser on a PC or a tablet.

## Strong points

### Plug & Play

Quickly configure WEBVIEW thanks to the automatic detection of Socomec devices. Create geographical and electrical hierarchies to reflect your installation and your processes.

### Easy to use

WEBVIEW centralises measurements from all downstream devices via a single clear and user friendly interface. The ergonomics of each screen allow users to easily and quickly analyse the parameters and the behaviour of the installation.

### Various functions

Very easy to configure and to use, WEBVIEW offers a wide range of features including real-time monitoring, alarm management and notification by e-mail, multi-utility analysis (electricity, water, gas), power parameter logging and allocation of consumption by end-use and location.

## Characteristics

Type	Hosting	Functions	Number of measurement devices
WEBVIEW-S	DIRIS A-40	Monitor, Alarm, Analyse	1
WEBVIEW-M	DIRIS Digiware M-70	Monitor, Alarm, Analyse, Photoview	32
	DIRIS Digiware D-70	Monitor, Alarm, Analyse, Photoviewww	32
WEBVIEW-L	DATALOG H80/H81	Monitor, Alarm, Analyse, Photoview	100/200

## The solution for

- > Industry
- > Building
- > Infrastructure
- > Local authority



## Strong points

- > Plug & Play
- > Easy to use
- > Various functions

## Compliance with standards

- > IEC 62974-1<sup>(1)</sup>



(1) Energy Server standard applicable to WEBVIEW-M and L versions embedded in DIRIS Digiware M-70/D-70 and DATALOG H80.

## Functions

### Monitor

- Automatic detection of connected devices.
- Summary of the parameters measured for the electrical network and loads.
- Display of voltage, current, power, power factor, total harmonic distortion (THD) and harmonics per rank.
- Display of average/instantaneous values with min/max limits depending on the devices.
- Total and partial energy consumption per load.
- Input/output status.
- Synchronisation of device clocks.
- Graphical or table representation.



### Alarm

- Alarms for overloads, events and input status changes.
- Display of alarms history.
- Sorting by type, nature, criticality or state.
- Alarms displayed on the main page.
- Alarm notification by e-mail (SMTP).



### Analyse

- Historical measurements and consumption.
- Historical records of multiple electrical parameters.
- Breakdown of consumption by location, by end-use and by utility type (water, gas, electricity...).
- Export of consumption data in a CSV format.



### Photoview

- Photoview: customised dashboard of the WEBVIEW environment via the upload of graphical files (building plans, electrical circuit diagrams, production processes...)
- Real time monitoring via drag and drop of parameters on the background pictures (measurement points, alarms, text...).
- Display of the mapping of the measurement plan by cascading of several images.



## References

Type	Host device	Reference
WEBVIEW-S	DIRIS A-40	4825 0501
WEBVIEW-M	DIRIS Digiware M-70	4829 0222
	DIRIS Digiware D-70	4829 0203
WEBVIEW-L 100	DATALOG H80	4854 0020
	DATALOG H81 (3G network)	4854 0021
WEBVIEW-L 200	DATALOG H80	4854 0030
	DATALOG H81 (3G network)	4854 0031

# Easy Config System

## Configuration software

Software suite



soft\_122\_a

### Function

With the **Easy Config System**, you can configure your Socomec power monitoring and load-breaking equipment while visualising all electrical measurements in real time.

Its speed and simplicity make the Easy Config System software an essential tool for:

- Panel builders and system integrators who want to provide correctly configured electrical panels for their customers
- Operators who want to configure their devices on their own or change specific settings

*The bonus:* you can easily save and modify your configurations and also duplicate them from one device to another or from one system to another.

### Advantages

#### Quick configuration

Easy Config System is a quick and easy way for system integrators and panel builders to configure their installations:

- Automatic discovery of connected devices
- Configuration of multiple devices at the same time
- Duplication of configurations between devices.

#### Local or remote access

You can access Easy Config System either locally by connecting it to devices via a USB cable, or remotely with an Ethernet connection. This system provides great flexibility taking into account the constraints of your facility. With the remote access option, you can change settings and correct any configuration or wiring errors, without having to physically return to site.

#### Reliable data

Easy Config System has a dynamic dashboard (see next page) which adapts to the type of device and can display the phasor diagram, the alarms in progress or detected sensors and their ratings. It also provides an overview of the topology, listing the connected devices, with their firmware versions and internal clock, and the quality of communication.

This ensures the user that the wiring and configuration are correct and, as a result, data is reliable.

### Strong points

- > Faster
- > More reliable
- > More flexible

### Compatible with



> DIRIS Digiware power monitoring system



> DIRIS A & B power monitoring devices



> ISOM insulation monitoring systems



> COUNTIS E energy meters



> ATyS C55/C65, ATyS p and ATyS pm transfer switches and controllers


### Free download Easy Config System




[https://www.socomec.com/easy-config-system\\_en.html](https://www.socomec.com/easy-config-system_en.html)

## Configuration options


Configure the entire system with an Ethernet connection to a DIRIS Digiware M-xx gateway

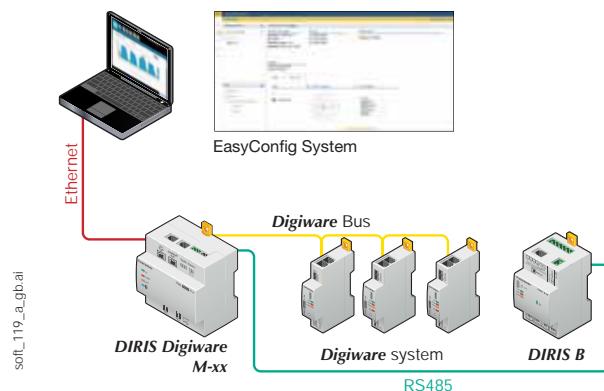


Configure the entire system with an Ethernet connection to a DIRIS Digiware D-xx display

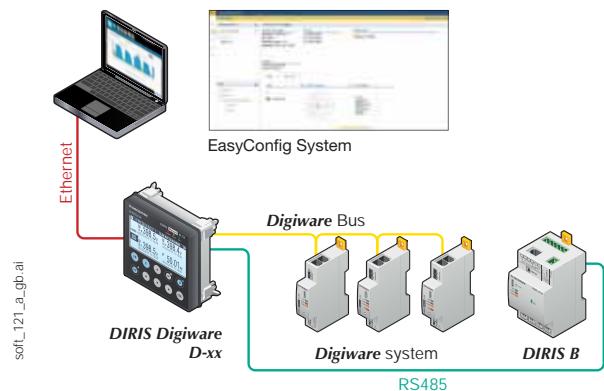

Configure the equipment via USB only

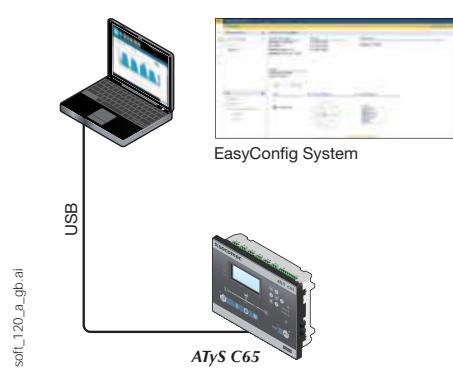

Configure the entire system with a USB connection to a DIRIS Digiware M-xx gateway

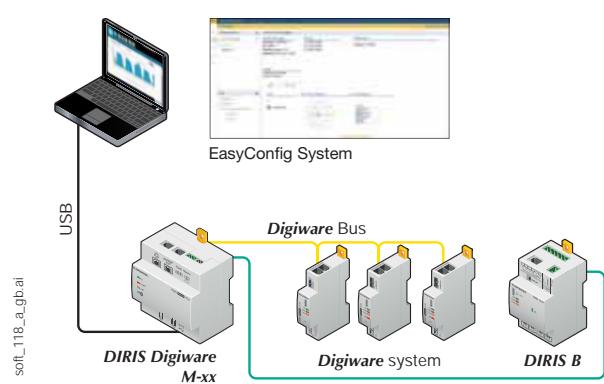

## A dashboard adapted to each type of device



### D-xx displays and M-xx gateways

- List of products in the topology
- Firmware versions of connected devices
- Internal clock for connected devices
- Enabled services
- Communication diagnostics

### Multifunction meters

- U/I phasor diagram
- Main electrical readings
- AutoCorrect wiring diagnostics
- Connected sensors and their ratings
- Alarms in progress

### Transfer switches

- Electrical data on each source
- Status of primary and secondary sources
- Input/output state
- Alarms in progress
- Operating modes (AUTO/MANU/TEST)
- Timers



# Insulation monitoring

Expert solutions for the availability and safety of your unearthed IT system .....	p. 352
Control principle for insulation and fault location.....	p. 353
Expert services for IT systems.....	p. 354
Insulation Monitoring Devices IMD ISOM selection guide.....	p. 356
Insulation Fault Location selection guide.....	p. 358

## Insulation monitoring for power networks and control circuits

### ISOM Digiware



**ISOM  
Digiware D**  
*Consult us*



**DIRIS  
Digiware U**  
*Consult us*

### ISOM

### ISOM



**ISOM  
K-20**  
*Consult us*



**ISOM  
K-40**  
*Consult us*

## Insulation monitoring solutions for medical locations

### ISOM Digiware



**ISOM  
Digiware D-55h**  
*Consult us*



**ISOM  
Digiware L-60h**  
*Consult us*

### ISOM



**ISOM  
D-15h**  
*Consult us*



**ISOM  
K-40h**  
*Consult us*

## Portable insulation fault location system



**ISOM PS-62**  
*Consult us*

## Core balance transformers and sensors

### ISOM Digiware



**ISOM T-15**  
*Consult us*



Locating  
core balance  
transformers  
*Consult us*



Current sensors  
**TE/TR/TF**  
*Consult us*

### ISOM



Locating  
core balance  
transformers  
*Consult us*



## Expert Services

Our experts are here for you to make your project a success.

# Availability and security for your IT network – leave it to the experts

Choose an IT network and make continuity of service a priority. You have constant control over the network and its insulation from the earth, no matter what happens. This gives you a secure, stable network adapted to your needs.



april 913.apd

## Ensures a continuous power supply

The IT system ensures you can continue to use your systems even if there's an insulation fault. This particular design makes it possible to limit the risks for operators and facilities.

## Guarantees the safety of personnel and property

To protect against indirect contact, the requirements (IEC 60364, NF C 15100, etc.) state that an insulation monitoring device (IMD) should be installed. The ISOM system also minimises the risk of fire and explosion in BE2 and BE3 premises.

## Make your network's maintenance budget go further

Complementing an ultra-preventative earthing system, the IT system requires continuous maintenance.

The ISOM IMD is suitable for all kinds of network. It is complemented by an Insulation Fault Location system (IFLs) allowing for an extended and more efficient location of earth leakage faults.

Pooling the consumption measuring and insulation infrastructure also reduces the overall cost of monitoring your electrical systems.

### The solution for



Naval and military facilities



Rail and aeronautical infrastructures



Process / manufacturing industries



Oil & gas industries




Energy production



Healthcare facilities

### ***ISOM Digiware*** for medical facilities

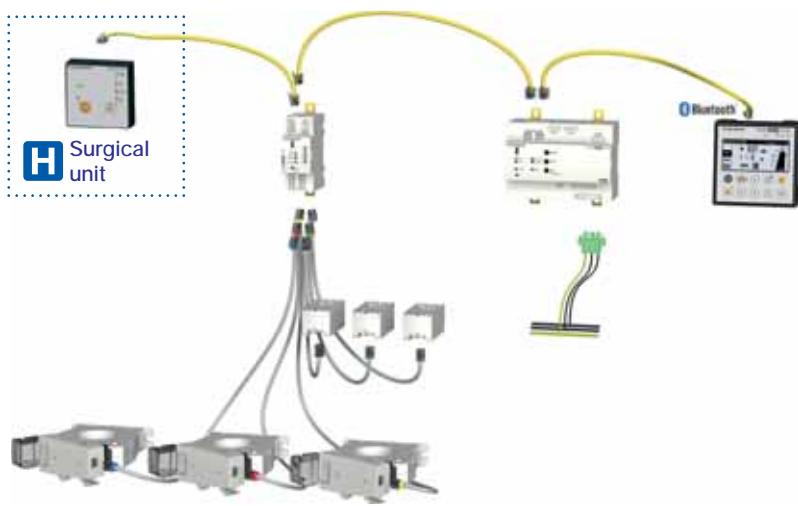


kom-dwv-065\_b.psd

# Control principle for insulation and fault location

The IT system ensures you can continue to use your systems even if there's an insulation fault. This means:

- A signal from the insulation monitoring device (IMD) that there has been an insulation change on the network
- Rapid fault location without interruption Insulation Fault Location system (IFLs) and elimination of insulation faults

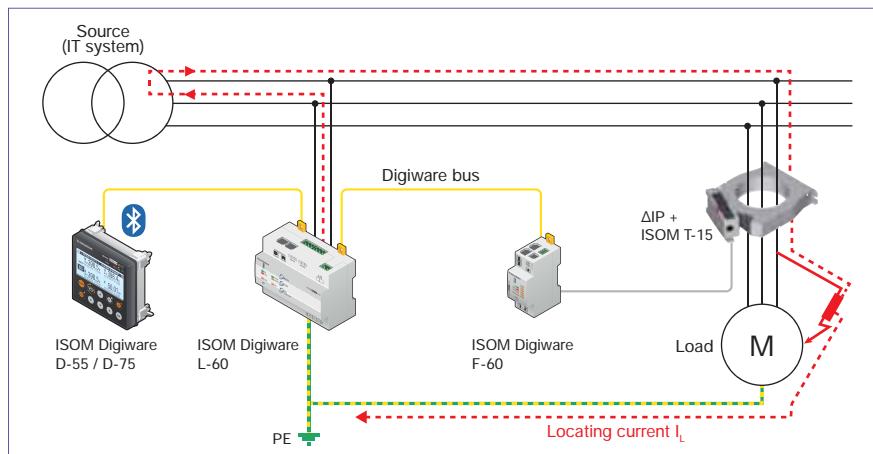

## Insulation monitoring device (IMD)

The IMD must be compatible firstly with the leakage capacity of the network and secondly with the type (AC or DC) of resistive earth fault current generated by the receptors. SOCOMEC IMDs with self-adaptive measurement signalling are compatible with highly capacitive networks. They cover every application and eliminate interruptions generated by power converters.

## Insulation Fault Location system (IFLs)

Faults can be detected in two ways:

- Automatically, with a fixed system.
  - Manually, with a portable system.
- An Insulation Fault Location system (IFLs) system comprises:
- A standalone Locating Current Injector (LCI) or one built onto the IMD.
  - One or multiple Insulation Fault Locator equipped with detecting core balance transformers.

The IMD detects an insulation fault and emits an alarm. This information automatically activates the Insulation Fault Location system.

Like the IMD, the injector generates a pulse signal according to the extent of the insulation fault and the mains voltage.

In case of a major insulation fault, the signal value is automatically limited by current. The fault is detected by core balance transformers when the insulation fault occurs. The pulse current is analysed so the fault can be assessed.

## ISOM Digiware

for power networks and control circuits



### Performance

- The first revolutionary system with multi-measurement and insulation monitoring.
- 100% compatible with Digiware systems.
- 100% customisable and scalable.
- Full Socomec solution.
- Option to combine Digiware ISOM and DIRIS modules within the same system.



### OhmScanner

- Precise and rapid location of insulation faults.
- Anticipates faults.
- Detailed insulation mapping (resistive and capacitive breakdown).
- Periodic monitoring of the degree of insulation on each circuit.

# Expert services for IT neutral arrangements

From commissioning to operating support and training, Socomec service experts help you in your energy efficiency improvement strategy.

With access to our multi-skilled service experts, you are guaranteed the best startup and use of your insulation monitoring solution.



SIE\_01\_AEPS

## Services

### Startup

We check the settings and the proper operation of the devices. Our services help you get the most out of your facility and improve its efficiency.

### Operation support

We offer support in the operation of your system, allowing you to benefit from either adhoc or regular site visits (application of IEC 60363-6) as part of a support contract.

From fault-finding to testing the insulation architecture, Socomec provides services that draw on our extensive expertise.

### Certified training

Take a personalised training course to understand the distribution of different neutral systems and to make full use of the functionality of our solutions.

We provide personalised monitoring and regular upgrading of your maintenance equipment.

#### The solution for

- > Process/manufacturing industries
- > Oil & gas industries
- > Energy production
- > Naval and military infrastructures
- > Transport
- > Healthcare facilities

#### What we do

- > Startup
- > Operation support
- > Fault-finding
- > Testing the insulation architecture
- > Certified training

#### Approvals and certifications

- > Socomec is registered as an ongoing professional training organisation.

## Startup

### What we do

- Check the correct hardware configuration.
- Operational tests using a simulated magnetic core fault current.
- Provide information on the main features of our products.
- Summary report containing test results, configurations and settings.

### Methods and hardware

- Measuring equipment and fault-locating system.
- Portable fault detection case for industrial and hospital environments.
- Locating core balance transformers (open, closed).

## Operating support – adhoc services or support contracts

### What we do

- Help set up and operate the system.
- Find faults on the system.
- Ensure an IMD is functioning properly.
- Help analyse the collected data.
- Save the various configurations.
- The support contract includes an annual onsite visit as well as exclusive access to our experts via a dedicated webline. As part of the support contract, we can provide regular services or keep you updated over time about how to use equipment such as in the case of PS-61/62.

### Methods and hardware

- Measuring equipment.
- Handheld fault locating system (tested and certified).
- Locating core balance transformers.

## Certified training

### What we do

The training is intended to be both theoretical and practical, concise and interactive. At the end of the training, you will be aware of the IT neutral system concept and the elements necessary for using the fault-detection and locating system.

By simulating and detecting system faults, you can consolidate what you learn during the training.

This training course is aimed at the people who will monitor and maintain the correct level of insulation in your electrical equipment.

### Agenda

- Theory module:
  - IT neutral system and layout.
  - Monitoring and protection hardware
  - Installation standards
- Practical module
  - Study of different configurations with ISOM products.
  - Handling and configuring the devices.
  - Practical exercises onsite.

## References

	Reference
Startup	9 231 012 200
Testing the Insulation Monitoring Device (adhoc)	9 234 022 200
Fault-finding (adhoc)	9 234 022 500
Support contract – annual testing of multi-brand IMD architecture	9 235 012 100
Support contract – annual testing of ISOM IMD architecture	9 235 012 200
Support contract – annual testing of ISOM DIGIWARE IMD architecture	9 235 022 200
Support contract – fault-finding	9 235 022 500
Training on using ISOM DIGIWARE at customer site	9 232 012 200
Training on the handheld fault location tool, PS-61/62	9 232 012 500

# Selection guide

## Insulation Monitoring Devices

### IMD ISOM

Which need?

Which application?

Type of network?

Application	Power networks		
Type of network	Isolated	Isolated / Large	Very large or disturbed
Load type	AC / DC		
<b>ISOM</b>	<i>K-20 Consult us</i>	<i>K-40 Consult us</i>	<i>D-x5 + L-60 Consult us</i>
Characteristics			
Maximum network voltage	480 VAC 240 VDC	480 VAC 240 VDC	480 VAC 480 VDC
Measuring principle	Auto-adaptive	Auto-adaptive	Auto-adaptive
Max leakage capacitance ( $\mu$ F)	30	150	300
Number of threshold	2	2	2
Value of the threshold (k $\Omega$ )	1-1000	1-1000	0.5 - 1000
Type of display	Graphical with backlight	Graphical with backlight	Graphical with backlight
Insulation cartography			•
Energy management (PMD)			•
Location current injection			•
Communication		MODBUS RTU	MODBUS TCP MODBUS RTU
Webserver			• (D-75)
Casing	Modular + panel mounted	Modular + panel mounted	Panel mounted (D-xx) Modular (L-60)
Dimensions (mm)	96	96	125 (L-60) 96 (D-x5)
Accessories IMD			
Overvoltage limitor	•	•	•
Alarm report			

Network size?

Type of loads?

Communication?

Control circuits			Medical locations	
Isolated	Large	Very large	Mono	Tri / Mono
AC / DC			AC	
<b>K-20</b> <a href="#">Consult us</a>	<b>K-40</b> <a href="#">Consult us</a>	<b>D-x5 + L-60</b> <a href="#">Consult us</a>	<b>K-40h</b> <a href="#">Consult us</a>	<b>D-55h + L-60h</b> <a href="#">Consult us</a>
480 VAC 240 VDC	480 VAC 240 VDC	480 VAC 480 VDC	250 VAC	250 VAC
Auto-adaptative	Auto-adaptative	Auto-adaptative	Auto-adaptative	Auto-adaptative
30	150	300	5	10
2	2	2	1	1
1-1000	1-1000	0.5-1000	50-500	50-500
Graphical with backlight	Graphical with backlight	Graphical with backlight	Graphical with backlight	Graphical with backlight
		•		•
		•		•
		•		•
	MODBUS RTU	MODBUS TCP MODBUS RTU	MODBUS RTU	MODBUS TCP MODBUS RTU
		• (D-75)		
Modular + panel mounted	Modular + panel mounted	Panel mounted (D-xx) Modular (L-60)	Modular + panel mounted	Panel mounted (D-55h) Modular (L-60h)
96	96	125 (L-60h) 96 (D-55h)	96	125 (L-60h) 96 (D-55h)
•			D-15h <a href="#">Consult us</a>	D-15h <a href="#">Consult us</a> D-55h <a href="#">Consult us</a>

# Selection guide

## Insulation Fault Location

### IFL ISOM

Which need?

Which application?

Type of network?

Application

Type of network

*ISOM*

#### Characteristics

Maximum network voltage

Number of monitored circuits

Portable insulation fault

Communication

Display

Insulation cartography

Energy management (PMD)

Location current injection

Webserver

Casing

Dimensions (mm)

#### Accessories

Clamp 115 mm

Connection adaptor T-15

Solid core balance transformers  $\Delta$ P

Split core balance transformers  $\Delta$ P/R

Rectangular core balance transformers WR/TOC


Current sensor TE

Current sensor TR

Current sensor TF

Voltage measurement module Digiware U-xx

Panel mounting frame

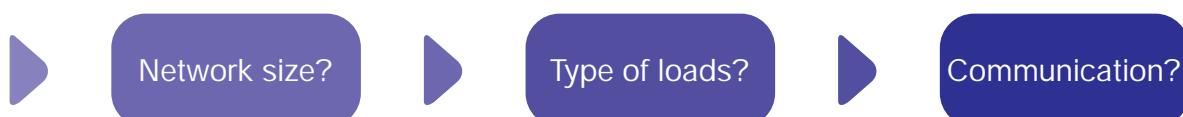

	Power networks Control circuits Medical locations	
	Very large or disturbed	
		
Digiware F-60 <a href="#">Consult us</a>		PS-62 <a href="#">Consult us</a>
	480 VAC / 480 VDC	
6 circuits	1 circuit	
	•	
With D-x5: MODBUS TCP, MODBUS RTU	MODBUS TCP SD-card for screenshots	
Leds	Graphical with backlight	
•	•	
•		
	•	
With D-x5	•	
Modular	Portable casing	
36	456 x 347 x 247	
	•	
•	•	
•		
•		
•		
•		
•		
•		
•		
•		



# Electronic protection

- Effective protection for your electrical installation ..... *p. 362*  
Differential protection selection guide ..... *p. 364*

## Differential protection



**RESYS M40**  
*p. 366*



**RESYS M40R**  
*p. 368*



**RESYS P40**  
*p. 370*

## Expert Services

Our experts are here for you to make your project a success.  
see page 8.



# Effective protection for your electrical installation

All electrical installations, particularly those which incorporate sensitive loads, must be appropriately monitored and/or protected against indirect contact, earth leakage currents, short circuits and voltage surges.

To secure your installation against these various risks, we offer a range of protection devices which have been grouped under the heading "Electronic protection":

- **RESYS earth leakage relays**

See our selection guide,  
"Differential protection".

With many years of experience in the industry and an extensive knowledge of installation standards, SOCOMEC delivers much more than high-performance products. Our services include:

- auditing your low-voltage installation
- defining protection requirements
- seamless product integration into your electrical distribution system
- system commissioning
- training on the use of, and the standards applicable to, the system
- turnkey monitoring solutions.

Contact us now and let us provide you with a solution for your installation.

## Important!

Sound knowledge of your electrical network is essential in ensuring the successful outcome of your project. Your choice of electronic protection devices and their location on your installation depends on:

- the type of supply source,
- the length of the conductors,
- the type and nature of the electrical loads connected to the network.

## Expert Services

We will help you design your protection solution, guaranteeing perfect integration of the products in your installation.

For further information, please contact your nearest SOCOMEC branch.

## Differential protection: a RESYS solution for each application



APPLI 268 A  
Motor feeder application.



SITE 588 A  
Industrial site application.



APPLI 146 A  
Local battery application.

Earth leakage relays fulfil two key functions:

- **Protection against indirect contact** in the following earthing schemes:
  - TT (mandatory)
  - TNS and IT on second fault (with long conductor lengths)
  - IT (with multiple earthing points in an LV network).
- **Prevention/signalling** for TNS or TT earthing arrangements.

In both cases, you need to identify the type of load present on your network to choose the most suitable differential relay.

There are three types of relay:

- **Type AC** for loads that may cause a pure sinusoidal AC earth leakage current
- **Type A** for loads that may generate an AC and/or a pulsing DC earth leakage current
- **Type B** for loads that may generate a DC earth leakage current (including protection types AC & A)

You can combine SOCOMECA toroids and earth leakage relays to suit the needs of each application:

- Interference from variable speed drives, dimmers, etc. through their TRMS measurement: RESYS relay type A or B
- Presence of pulsing components: RESYS relay type A
- Presence of DC circuits: RESYS relay type B.

Due to the mixture of components and loads in industrial applications type AC differential relays do not cover all the necessary requirements, therefore SOCOMECA proposes type A and B differential relays.

### What you need to know

To identify the different categories of load present in your installation, visit our website [www.socomec.com/en/resys](http://www.socomec.com/en/resys)

# Selection Guide

## Differential protection

Which requirement?

Which application?

Applications	Motor load break	
Model	RESYS M40 p. 366	RESYS P40 p. 368
<b>Characteristics</b>		
Type of protection DDR	A type	A type
Tripping threshold	30 mA ... 30 A	30 mA ... 30 A
Time setting	0 ... 10 s	0 ... 10 s
Automatic reclosing function		
Pre-alarm function	•	•
Output contact	2	2
Case	DIN modular	Panel mounting
Dimensions (mm)	44	48x48
<b>Accessories</b>		
Core balance transformers		
Circular closed toroids $\Delta$ I C	•	•
Split-core balance transformer $\Delta$ I P-R	•	•
Rectangular closed toroids WR	•	•

Which type of protection?

Isolated sites	
	
	<b>RESYS M40R</b> <i>p. 370</i>
A type	
30 mA ... 30 A	
0 ... 10s	
•	
2	
Modular	
44	
•	
•	
•	

# RESYS M40

## Type A differential relays for motor load break



### Function

RESYS M40 earth leakage relays associated with a remote trip breaking device (automatic power breaking), provide the following functions:

- protection against indirect contact,
- limitation of leakage currents.

They also preventively monitor electrical installations via their (configurable) pre-alarm function or when used as signalling relays.

### Advantages

#### Fully configurable

- 2 relays with configurable function (alarm or pre-alarm at 50%  $I\Delta n$ ).
- Adjustment of  $I\Delta n$  from 0.03 to 30 A.
- Time delay 0 to 10 s.
- Positive or negative security configurable by the user.
- Selection of toroid ratio.

**Tripping accuracy by TRMS measurement**  
Improves immunity to nuisance tripping.

#### Instantaneous display of permanent leakage currents.

The LED bargraph provides a real-time display of fluctuations in leakage currents.

#### Compact modular design

44 mm in width, the unit allows easy integration into dedicated enclosures. The adjustment buttons are protected by a sealable cover, while the display of available alarms is displayed directly on the front face of the device.

#### Improved immunity to EMC interferences


The device has new electronics which improve electromagnetic compatibility.

### Applications

Rapid recognition of an insulation fault increases the availability of the distribution network by preventing accidental power cuts and the resulting loss of production.

#### Protection against fire or explosion risks

The use of Residual Differential Devices (with adjustment  $I\Delta n \leq 300$  mA) provides protection against the risk of fire or explosion generated by tracking currents to earth, in areas classed as BE2 or BE3 respectively. This protection is mandatory in TT, TN and IT neutral systems.

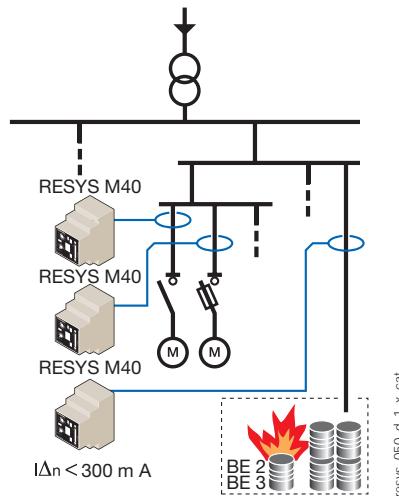

### The solution for

- > Processes
- > Manufacturing
- > Oil, gas and petrochemistry
- > Energy production

### Strong points

- > Fully configurable
- > Measurement accuracy by TRMS
- > Instantaneous display of permanent leakage currents
- > Compact and modular case with LED bargraph
- > Improved immunity to EMC interferences

### Conformity to standards

- > IEC 60755
- > IEC 60947-2
- > IEC 60664
- > IEC 61543 A1




### Approvals and certifications<sup>(1)</sup>



(1) Product reference on request.

## Front panel

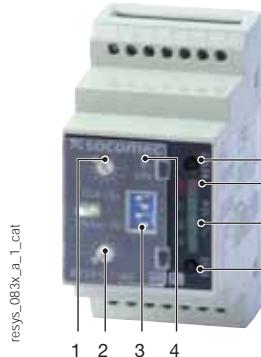


- resys\_083k\_a\_1\_cat
1.  $I\Delta n$  setting.
  2. Time delay setting.
  3. Configuration micro-switches (x4).
  4. "ON" LED.
  5. "RESET" pushbutton.
  6. "TRIP" alarm LED.
  7. LED bargraph (%  $\times I\Delta n$ ).
  8. "TEST" pushbutton.


## General characteristics

- RESYS M40 with 2 configurable relays:
  - either 2 alarm relays,
  - or 1 alarm relay and 1 pre-alarm relay (50 %  $I\Delta n$ ).
- Adjustment sensitivity from 0.03 mA to 30 A.
- Time delay 0 to 10 s.
- Tripping accuracy by TRMS measurement.
- Automatic instantaneous tripping at 30 mA.
- Positive or negative security configurable by the user.
- Selection of toroid ratio.
- Automatic permanent relay-toroid connection test.
- Sealable cover.

## Case

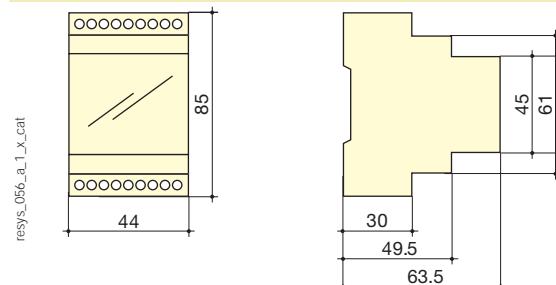

## Terminals and connections

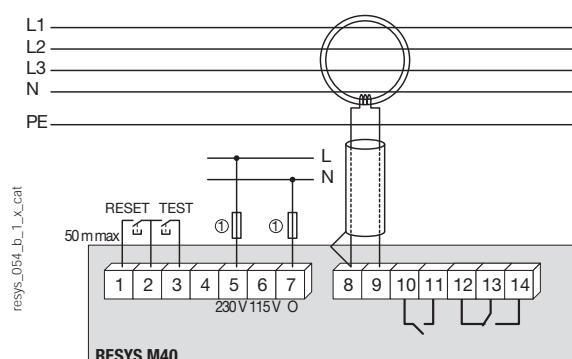

## References

Auxiliary power supply $U_s^{(1)}$	RESYS M40
115 / 230 VAC	Reference
400 VAC	4941 3723 <sup>(2)</sup>
12 ... 125 VDC	4941 3740 <sup>(2)</sup>
	4941 3602 <sup>(2)</sup>

(1) Other rating: Please consult us. (2) References and characteristics of closed, split core and rectangular toroids: see "Core balance transformers type A"

## Characteristics

Auxiliary power supply $U_s$	
Frequency	47 ... 63 Hz
AC operating zone	0.8 ... 1.15 $U_s$
DC operating zone	0.8 ... 1.05 $U_s$
Max. consumption	6 VA (AC) / 5 W (DC)
Insulation (according to IEC 60664-1 standard)	
Rated insulation voltage	250 VAC
Rated impulse voltage	2.5 kV (115 VAC) / 4 kV (230/400 VAC)
Degree of pollution	Class 3
Threshold values	
$I\Delta n$ setting	0.03 - 0.1 - 0.3 - 0.5 - 1 - 3 - 5 - 10 - 30 A
Accuracy of tripping	- 20 ... - 10 % $I\Delta n$
Domain of mains frequency	15 ... 400 Hz
Time delay setting	0 - 0.06 - 0.15 - 0.30 - 0.50 - 0.80 - 1 - 4 - 10 s
PRE-ALARM relay tripping	50 % $I\Delta n$
Hysteresis of the PRE-ALARM relay	20 % $I\Delta n$
Alarm	
Alarm configuration mode	storage / automatic reset
Alarm factory setting	storage
Reset	manual by pushbutton / using terminal
Output contacts	
Number of contacts	2
Type of ALARM 1 contact	250 VAC - 8 A - 2000 VA
Type of ALARM 2 or PRE-ALARM contact	250 VAC - 6 A - 1500 VA
ALARM 1 operating mode	positive / negative security <sup>(1)</sup>
ALARM 2 or PRE-ALARM operating mode	positive security <sup>(1)</sup>
Factory setting of ALARM 1 operating mode	negative security
Factory setting of ALARM 2 operating mode	positive security

(1) Negative security: relay activated in case of alarm / Positive security: relay not activated in case of alarm.

## Operating conditions

Operating temperature	- 20 ... + 55 °C
Storage temperature	- 30 ... + 70 °C

Type	modular
Number of modules	2.5
Dimensions W x H x D	44 x 85 x 63.5
Case protection index	IP40
Terminal protection index	IP20
Rigid cable cross-section	0.2 ... 4 mm <sup>2</sup>
Flexible cable cross-section	0.2 ... 2.5 mm <sup>2</sup>
Weight	190 g

- 1 - 2 - 3: external push buttons  
 5 - 6 - 7: auxiliary power supplies  $U_s$   
 8 - 9: SOCOMECH differential toroid connections  
 10 - 11: alarm relay 2 or pre-alarm outputs  
 12 - 13 - 14: alarm relay 1 output

Note: The earth conductor must not pass through the toroid.  
 For single phase applications, only the live and neutral need to be passed through the toroid.  
 Cabling: for distances > 1 m, use twisted pair cable between the unit and toroid.  
 Do not connect the shield to earth.

1. Fuses 2 A gG .

# RESYS M40R

## Type A earth leakage relays with automatic reclosing



### Function

**RESYS M40R** earth leakage relays associated with a remote trip breaking device (automatic power breaking and reclosing), provide the following functions:

- protection against indirect contact,
- limitation of leakage currents.
- reclosing of trip breaking device after earth leakage detection and power supply breaking.

The relay recloses the system up to six consecutive times after different time intervals. If the fault is still present after the sequence of six reclosing attempts, the relay is locked in alarm mode and a manual intervention will be required.

Rapid recognition of an insulation fault increases the availability of the distribution network by preventing accidental power cuts and the resulting loss of production. TRMS measurement avoids repeated random tripping and the bargraph allows the display of permanent leakage current.

### Advantages

#### Automatic reclosing

This function provides protection, particularly in isolated sites or for processes requiring a restart in the event of transient faults (continuity of service ensured in the absence of a maintenance team).

#### Fully configurable

- Adjustment of  $I\Delta n$  from 0.03 to 30 A.
- Time delay 0 to 10 s.

#### Ensures continuity of the power supply for strategic applications or in isolated sites

In the majority of cases, where the fault is not permanent, simply reclosing may resolve the situation.


#### Tripping accuracy by TRMS measurement

Improves immunity to nuisance tripping.

#### Instantaneous display of permanent leakage currents

The LED bargraph provides a real-time display of fluctuations in leakage currents.

### Applications

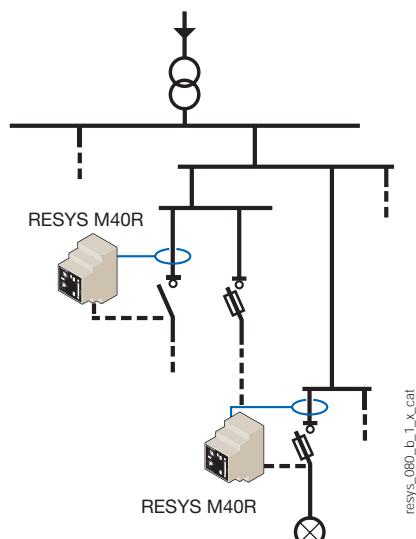

The RESYS M40R relay must be combined with an automatic tripping/reclosing breaking device:

- a motorised switch
- a device fitted with an undervoltage coil
- a contactor.

### The solution for

- > Power distribution (Public lighting)
- > Water treatment
- > Processes
- > Telecom, Datacom and broadcasting
- > Farm buildings

### Strong points


- > Automatic reclosing
- > Fully configurable
- > Continuity of the power supply for strategic applications
- > Tripping accuracy by TRMS measurement
- > Instantaneous display of permanent leakage currents

### Conformity to standards


- > IEC 60755
- > IEC 60947-2
- > IEC 60664
- > IEC 61543 A1



## Front panel

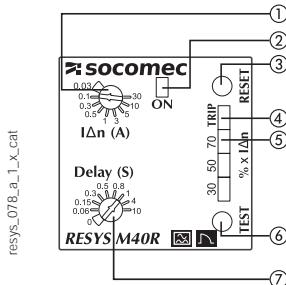

## Case

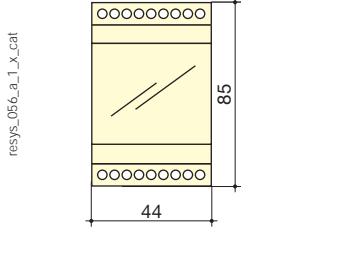

Type	modular
Number of modules	2.5
Dimensions W x H x D	44 x 85 x 63.5 mm
Case protection index	IP40
Terminal protection index	IP20
Rigid cable cross-section	0.2 ... 4 mm <sup>2</sup>
Flexible cable cross-section	0.2 ... 2.5 mm <sup>2</sup>
Weight	190 g

## Characteristics

### Auxiliary power supply U<sub>s</sub>

Frequency	47 ... 63 Hz
AC operating zone	0.8 ... 1.15 U <sub>s</sub>
DC operating zone	0.8 ... 1.05 U <sub>s</sub>
Max. consumption	6 VA (AC) / 5 W (DC)

### Insulation (according to IEC 60664-1 standard)

Rated insulation voltage	250 VAC
Rated impulse voltage	2.5 kV (115 VAC) / 4 kV (230/400 VAC)
Degree of pollution	Class 3

### Threshold values

IΔn setting	0.03 - 0.1 - 0.3 - 0.5 - 1 - 3 - 5 - 10 - 30 A
Accuracy of tripping	- 20 ... - 10 % IΔn
Domain of mains frequency	15 ... 400 Hz
Time delay setting	0 - 0.06 - 0.15 - 0.30 - 0.50 - 0.80 - 1 - 4 - 10 s

### Reclosing

Nb of automatic reclosing attempts	6 max
Time delay between two reclosing	7.5 - 15 - 30 - 60 - 120 - 240 s
Reset of automatic reclosing counter (t <sub>CR</sub> )	15 min

### Alarm

Alarm configuration mode	automatic reset (6x max, then recording)
Reset	manual by pushbutton / using terminal

### Output contacts


Number of contacts	2
Type of ALARM 1 contact	inverter
Type of ALARM 2 contact	simple
Characteristics contact ALARM 1	250 VAC - 8 A - 2000 VA
Characteristics contact ALARM 2	250 VAC - 6 A - 1500 VA
ALARM 1 operating mode	negative security <sup>(1)</sup>
ALARM 2 operating mode	positive security <sup>(1)</sup>

(1) Negative security: relay activated in case of alarm /  
Positive security: relay not activated in case of alarm.

### Operating conditions

Operating temperature	- 20 ... + 55 °C
Storage temperature	- 30 ... + 70 °C

## Terminals and connections

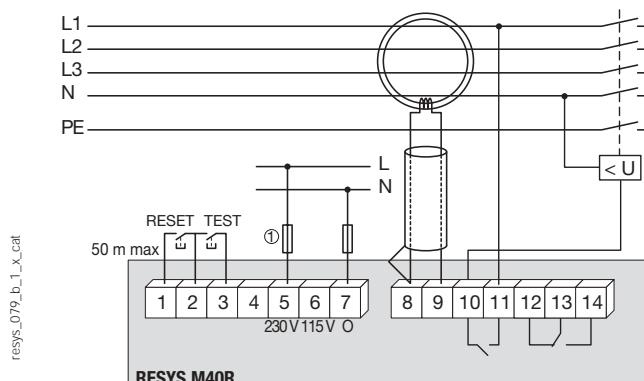

1. Fuses 2 A gG .

1 - 2 - 3: external push buttons

5 - 6 - 7: auxiliary power supplies U<sub>s</sub>

8 - 9: SOCOMECH differential toroid connections

10 - 11: alarm relay 2 output

12 - 13 - 14: alarm relay 1 output

Note: The earth conductor must not pass through the toroid.

For single phase applications, only the live and neutral need to be passed through the toroid.

Cabling: for distances > 1 m, use twisted pair cable between the unit and toroid.  
Do not connect the shield to earth.

## References

Auxiliary power supply U <sub>s</sub> <sup>(1)</sup>	RESYS M40R Reference
115/230 VAC	4941 3724
400 VAC	4941 3741

(1) Other rating: Please consult us.

# RESYS P40

## Type A earth leakage relays for motor load break



RESYS P40

### Function

RESYS P40 earth leakage relays associated with a remote trip breaking device (automatic power breaking), provide the following functions:

- protection against indirect contact,
- limitation of leakage currents.

They also preventively monitor electrical installations via their (configurable) pre-alarm function or when used as signalling relays.

### Advantages

#### Fully configurable

- 2 relays with configurable function (alarm or pre-alarm at 50%  $I_{\Delta n}$ ).
- Adjustment of  $I_{\Delta n}$  from 0.03 to 30 A.
- Time delay 0 to 10 s.
- Positive or negative security configurable by the user.
- Selection of toroid ratio.

#### Tripping accuracy by TRMS measurement

Improves immunity to nuisance tripping.

#### Instantaneous display of permanent leakage currents.

The LED bargraph provides a real-time display of fluctuations in leakage currents.

#### Compact sealed case

Compact 48 x 48 mm case is particularly well suited to integration in MCCs with high density withdrawable compartments.

#### Improved immunity to EMC interferences

The device has new electronics which improve electromagnetic compatibility.

### The solution for

- > Process
- > Manufacturing
- > Oil, gas and petrochemistry

### Strong points

- > Fully configurable
- > Tripping accuracy by TRMS measurement
- > Instantaneous display of permanent leakage currents
- > Compact sealed case
- > Improved immunity to EMC interferences



### Conformity to standards

- > IEC 60755
- > IEC 60947-2
- > IEC 60664
- > IEC 61543 A1

### Approvals and certifications<sup>(1)</sup>




<sup>(1)</sup> Product reference on request.


### Applications

Rapid recognition of an insulation fault increases the availability of the distribution network by preventing accidental power cuts and the resulting loss of production. RESYS P40 are particularly suitable for insertion in electricity control panels with withdrawable compartments.

**Protection against fire or explosion risks**  
The use of Residual Differential Devices (with adjustment  $I_{\Delta n} \leq 300$  mA) provides protection against the risk of fire or explosion generated by tracking currents to earth, in areas classed as BE2 or BE3 respectively. This protection is mandatory in TT, TN and IT neutral systems.

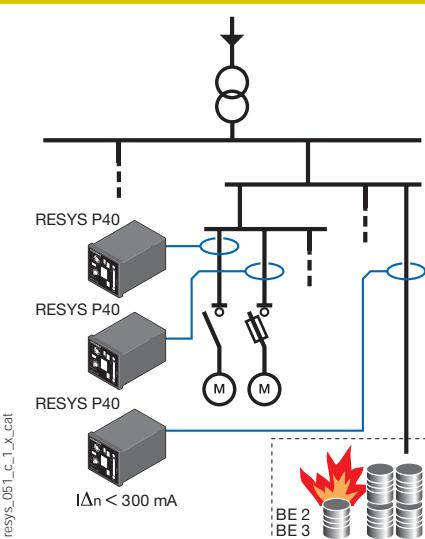

## Front panel

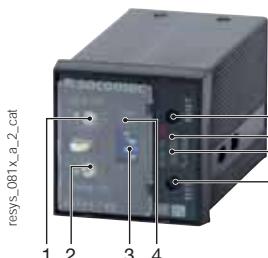

- resys\_081x.a.2.cat
1.  $I_{\Delta n}$  setting.
  2. Time delay setting.
  3. Configuration micro-switches (x4).
  4. "ON" LED.
  5. "RESET" pushbutton.
  6. "TRIP" alarm LED.
  7. LED bargraph (%  $\times I_{\Delta n}$ ).
  8. "TEST" pushbutton.


## Characteristics

Auxiliary power supply $U_s$		Alarm	
Frequency	47 ... 63 Hz	Alarm configuration mode	storage / automatic reset
AC operating zone	0.8 ... 1.15 $U_s$	Alarm factory setting	storage
DC operating zone	0.8 ... 1.05 $U_s$	Reset	manual by pushbutton / using terminal
Consumption	6 VA (AC) / 5 W (DC)		
Insulation (according to IEC 60664-1 standard)		Output contacts	
Rated insulation voltage	250 VAC	Number of contacts	2
Rated impulse voltage	2.5 kV (115 VAC) / 4 kV (230/400 VAC)	Type of ALARM 1 contact	250 VAC - 8 A - 2000 VA
Degree of pollution	Class 3	Type of ALARM 2 or PRE-ALARM contact	250 VAC - 6 A - 1500 VA
Threshold values		ALARM 1 operating mode	positive / negative security <sup>(1)</sup>
$I_{\Delta n}$ setting	0.03 - 0.1 - 0.3 - 0.5 - 1 - 3 - 5 - 10 - 30 A	ALARM 2 or PRE-ALARM operating mode	positive security <sup>(1)</sup>
Accuracy of tripping	- 20 ... - 10 % $I_{\Delta n}$	Factory setting of ALARM 1 operating mode	negative security
Domain of mains frequency	15 ... 400 Hz	Factory setting of ALARM 2 operating mode	positive security
Time delay setting	0 - 0.06 - 0.15 - 0.30 - 0.50 - 0.80 - 1 4 - 10 s	(1) Negative security: relay activated in case of alarm / Positive security: relay not activated in case of alarm.	
PRE-ALARM relay tripping	50 % $I_{\Delta n}$	Operating conditions	
Hysteresis of the PRE-ALARM relay	20 % $I_{\Delta n}$	Operating temperature	- 20 ... + 55 °C
		Storage temperature	- 30 ... + 70 °C

## Case

resys_057.b.1x.cat		<table border="1"> <tr> <td>Type</td><td>panel mounting</td></tr> <tr> <td>Dimensions W x H x D</td><td>48 x 48 x 107 mm</td></tr> <tr> <td>Case protection index</td><td>IP40</td></tr> <tr> <td>Terminal protection index</td><td>IP20</td></tr> <tr> <td>Rigid cable cross-section</td><td>0.2 ... 4 mm<sup>2</sup></td></tr> <tr> <td>Flexible cable cross-section</td><td>0.2 ... 2.5 mm<sup>2</sup></td></tr> <tr> <td>Weight</td><td>190 g</td></tr> <tr> <td>Cutout</td><td>45 x 45 mm</td></tr> </table>	Type	panel mounting	Dimensions W x H x D	48 x 48 x 107 mm	Case protection index	IP40	Terminal protection index	IP20	Rigid cable cross-section	0.2 ... 4 mm <sup>2</sup>	Flexible cable cross-section	0.2 ... 2.5 mm <sup>2</sup>	Weight	190 g	Cutout	45 x 45 mm
Type	panel mounting																	
Dimensions W x H x D	48 x 48 x 107 mm																	
Case protection index	IP40																	
Terminal protection index	IP20																	
Rigid cable cross-section	0.2 ... 4 mm <sup>2</sup>																	
Flexible cable cross-section	0.2 ... 2.5 mm <sup>2</sup>																	
Weight	190 g																	
Cutout	45 x 45 mm																	

## Terminals and connections

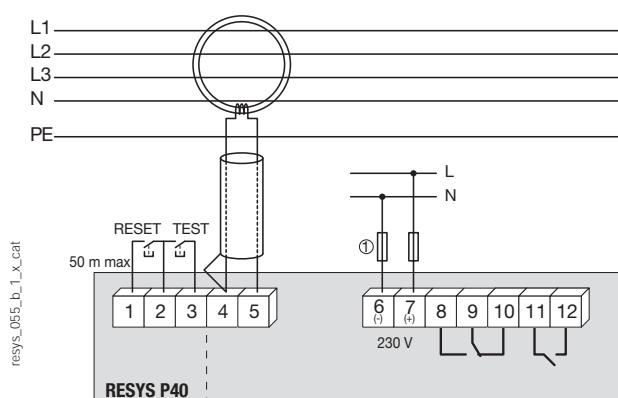

- 1 - 2 - 3: external push buttons  
4 - 5: SOCOMEC differential toroid connections  
6 - 7: Auxiliary power supply  $U_s$   
8 - 9 - 10: alarm relay 1 output  
11 - 12: alarm relay 2 or pre-alarm outputs

Note: The earth conductor must not pass through the toroid.  
For single phase applications, only the live and neutral need to be passed through the toroid.  
Cabling: for distances 1 m, use twisted pair cable between the unit and toroid.  
Do not connect the shield to earth.


1. Fuses 2 A gG.

## References

Auxiliary power supply $U_s$ <sup>(1)</sup>	RESYS P40
115 VAC	Reference
230 VAC	4942 3711 <sup>(2)</sup>
12 ... 125 VDC	4942 3723 <sup>(2)</sup>
12 ... 125 VDC	4942 3602 <sup>(2)</sup>

(1) Other rating: Please consult us. (2) References and characteristics of closed, split core and rectangular toroids: see "Core balance transformers type A"

Description of accessories	Reference
Soft protection cover IP65	4942 0000

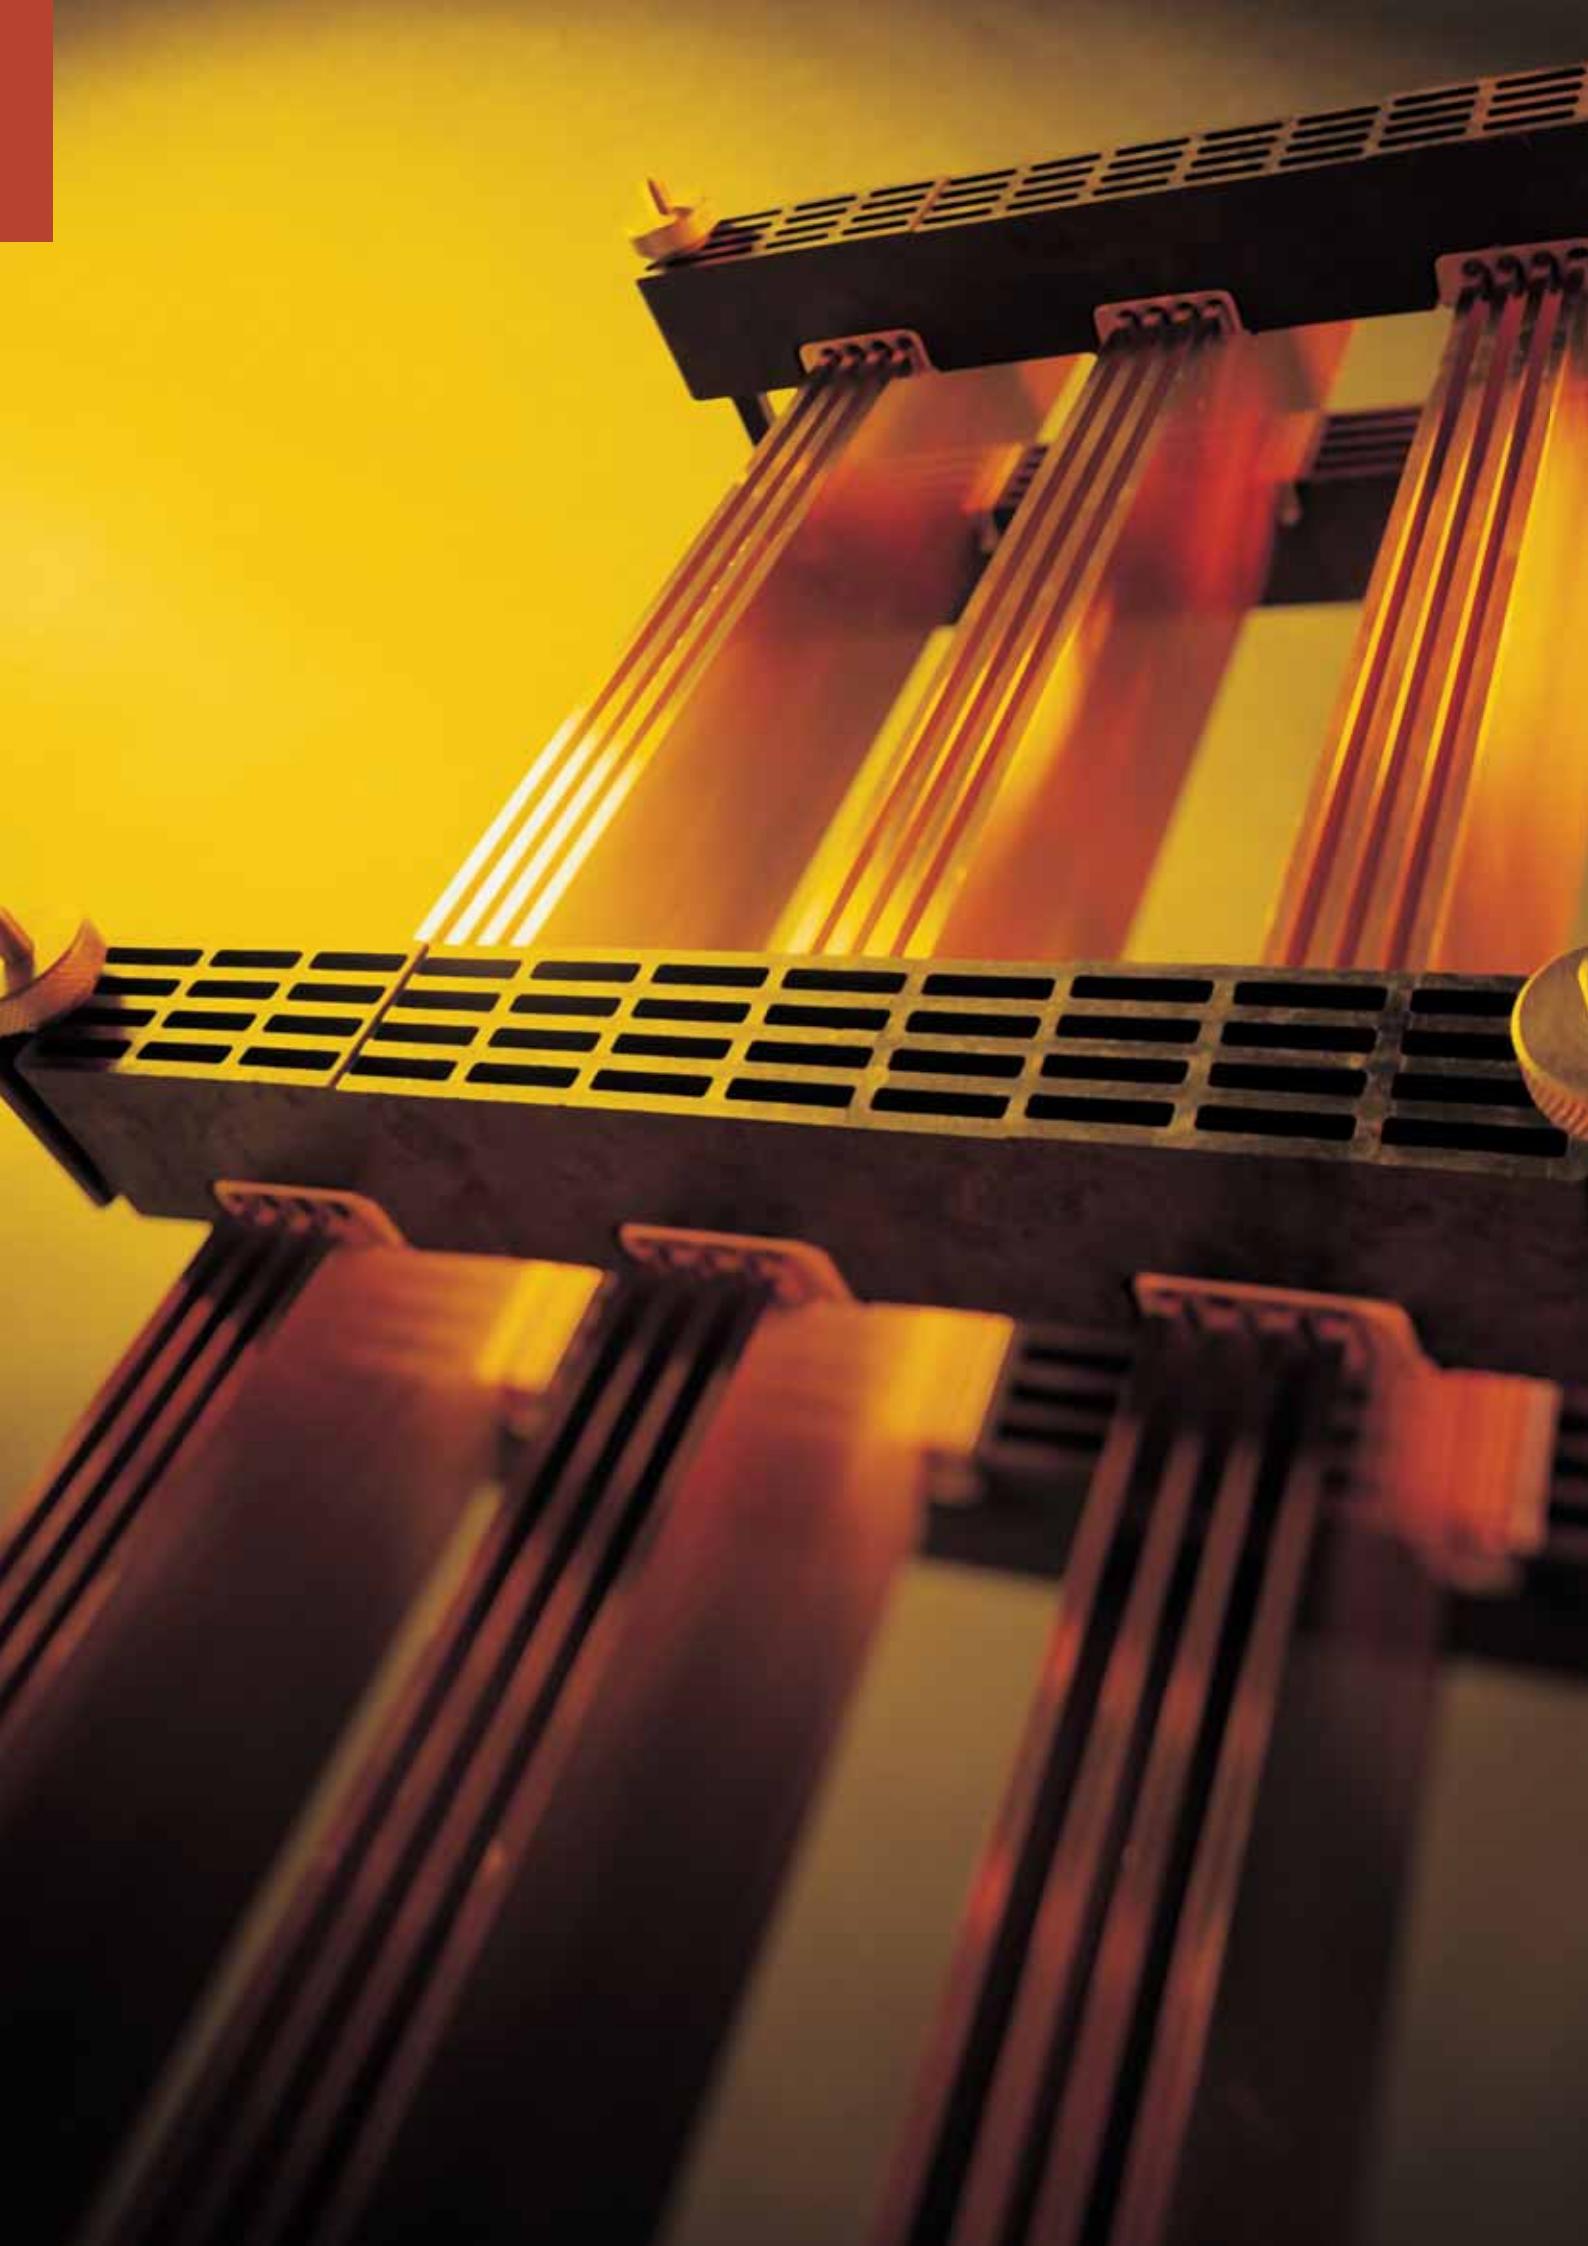

# Mounting and cabling accessories for electrical cabinets

## Distribution of electric energy

Busbars *p. 374*



Edgewise mounting  
with fixed interphase  
*p. 376*



Flat mounting  
with fixed interphase  
*p. 390*



Edgewise mounting  
with adjustable  
interphase  
*p. 386*



Unipolar  
flat-mounted  
*p. 396*



Other  
supports  
*p. 404*

## Power distribution

High power



Distribution  
blocks  
*p. 406*


Medium power



Distribution  
blocks  
*p. 406*

# Busbar supports

## Busbars

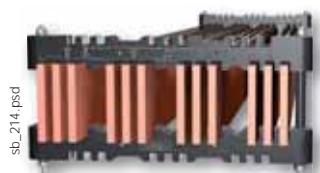

Fixed interphase, SB C 15



Insulators



Adjustable interphase



Stair type support

### Function

SOCOMECH insulating busbar supports enable the fixing and holding in place of copper or aluminium busbars or busbar systems during a short-circuit.

### Characteristics

#### Insulators

- Polyester without halogen.
- UL94 VO self-extinguishing.
- Colour red RAL 3002.
- Operating temperature from -40 °C to +130 °C.
- Deformation under load temperature (ASTM D643): > 200 °C.
- Dielectric constant (ASTM D150): 4/5.
- Arc resistance (ASTM D495): > 180 s.
- Water absorption (ASTM D570): < 0.3%.

#### Busbar supports

- High dielectric strength.
- High mechanical resistance.
- Amagnetism of assembly parts.
- High resistance to damp heat (supplied "tropicalised").

#### Stair type supports

- Thermoplastic material.
- VO self-extinguishing.
- Insulating voltage: 1000 V.

### The solution for

- > Electrical distribution



### Conformity with standards

- > IEC 61439-1
- > IEC 60865-1



### Approvals and certifications <sup>(1)</sup>

- > ASEFA/LCIE



<sup>(1)</sup> Product part numbers on request.

## Software tool for size selection



### Strong points

- > Easy to install and use
- > Manages changes depending on environmental conditions

## Function

**Mechanical System** is a multi-language software used for sizing busbar systems. It defines the configuration of the busbar system, including bar section and distance between supports, according to the required electrical characteristics of the panel in compliance with standard IEC 61439-1.

## Advantages

### Easy to install and use


The Mechanical System software is available for download from [www.socomec.com](http://www.socomec.com). Once installed, the software can be used offline. It runs on Windows.

### Manages changes depending on environmental conditions

Mechanical System allows you to perfectly adapt the copper section according to the environmental conditions of your panel and installation.

# Busbar supports


## Edgewise mounting with fixed interphase

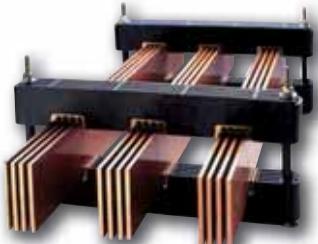


SB C 20



SB C 10

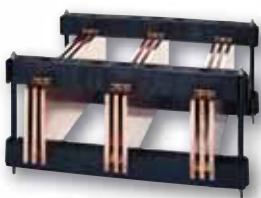

SB C 30

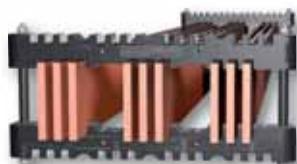

SB C 15

### Function

With SOCOME's insulating **bar supports** you can:

- mount and attach the busbars inside the electrical panel,
- cope with the forces experienced by the busbars during a short circuit.

### Advantages

#### Insulating materials

- Our range of SB C edgewise mounting bar supports is made using thermoplastic. This very resistant material (reinforced fibreglass) is insulating so there are no risks in terms of clearance and creepage distances.

#### Durability

- Most bar supports have an M8 screw connection which provides outstanding robustness to the entire busbar structure.

#### Easy to use

- Only one type of spacer kit is required for the whole range of edgewise mounting busbar supports (SB C) with fixed interphase.

#### Extensive range

- Our range of bar supports allows you to assemble busbars with up to 120 kA of short-circuit current.

### The solution for

- > Electrical distribution



### Conformity with standards

- > IEC 61439-1
- > IEC 60865-1




### Strong points

- > Insulating materials
- > Durability
- > Easy to use
- > Extensive range

## Selection guide

### Edgewise mounting


- Busbar supports with **fixed interphase**

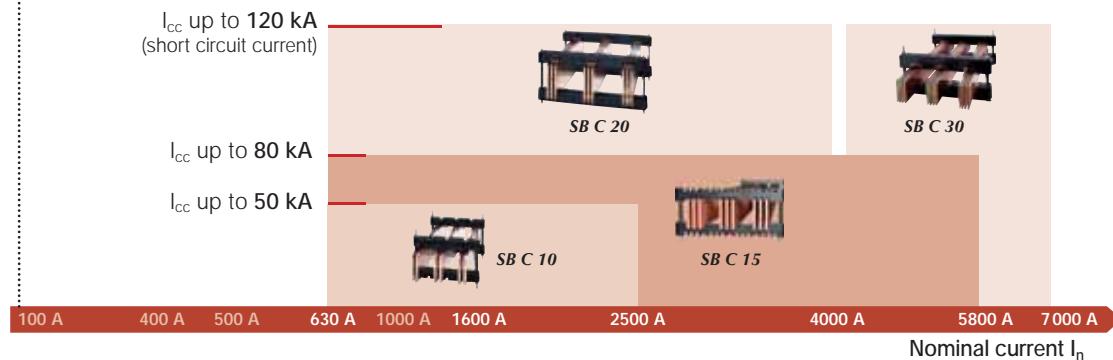


### What you need to know

Bars joined by reversing a support  
Compatible with SB C 10 and SB C 20

Respecting the maximum distance between two supports ensures that the busbar supports are able to withstand the given short circuit current values. At these limits, distortion of the copper bars may occur. These deformations are permitted by standard IEC 61439-1 so long as they adhere to the insulation distances.

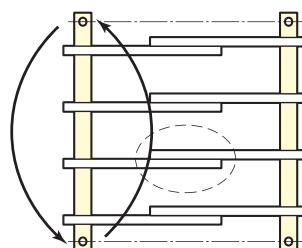

sb\_045\_b\_1X\_cat.eps

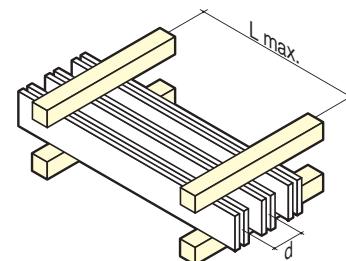

sb\_021\_b\_1X\_cat.eps

# Busbar supports

Edgewise mounting with fixed interphase

## References

### Support only

#### Use

To assemble a complete busbar support, please observe the multiple order quantity and order 1 spacer set

Type of busbar support	No. of poles	Number of busbars per phase	Thickness	Interphase	Interfixed	Available for order in multiples of	Support only Reference	
SB C 10	3 P	1 ... 2	5	75	250	2	5024 6300	
		1	10	60			5024 6500	
	4 P	1 ... 2	5	65			5024 6400	
		1	75	90			5024 6600	
	3 P	1	10	110			5024 4501	
		2		90			5024 8300	
	4 P	1 ... 2		110	350		5024 8400	
		1 ... 3		90			5024 7300	
	3 P	1 ... 4	5	110			5024 7400	
		1 ... 3	90	5024 5300				
SB C 20	4 P	1 ... 4	10	185	525		5024 5500	
		1 ... 3		130				
	3 P	1 ... 3		185				
		4 P		130				
SB C 30	3 P	1 ... 3	10	185	525	1	5024 5300	
	4 P	1 ... 3		130			5024 5500	

### Spacer kit for support

#### Use

The spacer kit comprises 2 threaded rods, 2 insulating spacers cut to length according to bar height and 4 nuts.

Bar height (mm)	Available for order in multiples of	Reference
25	1	5020 2025
30		5020 2030
32		5020 2032
40		5020 2040
50		5020 2050
60		5020 2060
63		5020 2063
80		5020 2080
100		5020 2100
125		5020 2125
160		5020 2160
200		5020 2200



access\_497.psd

## Accessories

### Adjustable interfixed profiles

#### Use

Adjustable interfixed profiles allow you to install the busbar supports at a variable depth. For high-load busbars, we recommend the use of adjustable reinforced floating profiles.

Type of busbar support	For depth Min./max. (mm)	Pack qty	Reference
SB C 10 2 x 5 / 1 x 10	575 / 675		5024 9050
SB C 10 1 x 10 / 2 x 10			5024 9051
SB C 15	575 / 775	1	5024 9052
SB C 20			5024 9053
SB C 30			5024 9054



sb\_215.psd

### Adjustable reinforced floating profiles

#### Use

With adjustable reinforced floating profiles, you can install busbar supports in varying depths in the case of high-load busbars (from 100 kg/ml).

Type of busbar support	For depth Min./max. (mm)	Available for order in multiples of	Reference
SB C 15	575 / 775		5024 9053
SB C 20			5024 9055
SB C 30			



sb\_218.psd

### Holding rod for SB C 15

#### Use

With the holding rods for SB C 15, you can install the support on a standard mounting profile in the case of high-load busbars (from 100 kg/ml).

Material: Stainless steel threaded rod.

Bar height (mm)	Available for order in multiples of	Reference
32		5020 1040
40		5020 1060
50		5020 1101
60		5020 1125
80		5020 1160
100		
125		
160		



acces\_496.apsd

# Busbar supports

Edgewise mounting with fixed interphase


## Accessories (continued)

### Bar holder

#### Use

The heels hold the busbars upright.

Type of busbar support	Number of bars	No. of poles	Available for order in multiples of	Reference
SB C 10	2 x 5 / 1 x 10	3	1	5024 9031
	2 x 5 / 1 x 10	4		5024 9041
	1 x 10 / 2 x 10	3		5024 9034
	1 x 10 / 2 x 10	4		5024 9044
SB C 15	1 to 3 x 10	3		5024 9032
	1 to 3 x 10	4		5024 9042
SB C 20	1 to 4 x 5 / 1 to 2 x 10	3		5024 9032
	1 to 4 x 5 / 1 to 2 x 10	4		5024 9042
SB C 30	1 to 3 x 10	3 / 4		5024 9033

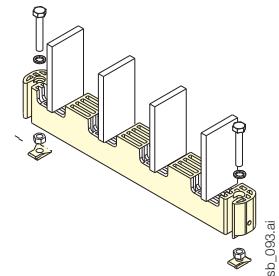


### Installation corner piece

#### Use

Allows the holding heel to be placed on a support.

For cabinet Depth (mm)	To be ordered in multiples of	Reference
Min. 400	1	5024 9000
Min. 600	1	5024 9001

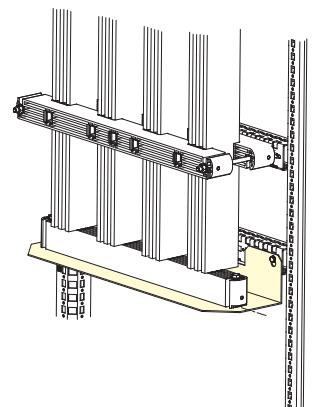

# Busbar supports


Edgewise mounting with fixed interphase

## Fast connection of flexible bar or cables

### Use

- Allows you to connect flexible bars or cables to busbars without having to drill the bars.
- Connect on 2 x 10 mm-thick bars placed side-by-side, 10 mm apart.
- For lug or flexible bar widths greater than 40 mm, use 2 connection accessories.
- Tightening with M10 screw, tightening torque 45Nm.
- For the connection, you will need:  
1 tightening head nut and 1 screw adapted to the height of the bars.

Type	Bar (mm)	Available for order in multiples of	Reference
M10 tightening head nut	All	12	5119 4423

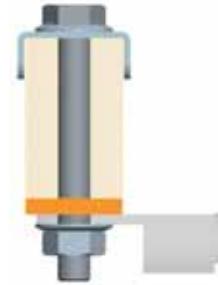


barre\_020\_a\_1\_X\_cat.eps

## Quick connection for busbars


### Use

- Lock and connect busbars without drilling.
- Connect on 2 x or 3 x 10 mm-thick bars placed side-by-side.
- M10 screw tightening, 45 Nm torque.  
(to be ordered separately).

Current (A)	Number of bars / poles	Available for order in multiples of	Horizontal connection Reference	Vertical connection Reference
1600	2		5119 4411	5119 4401
3200	3	1	5119 4412	5119 4402
5000	3		5119 4413	5119 4403

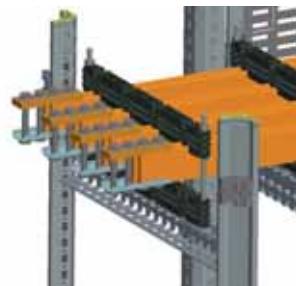

kdrys\_537.eps

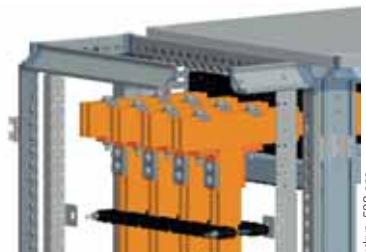

kdrys\_538.eps

## Screws for quick connection

Type	Bar (mm)	Available for order in multiples of	Reference
M10 screw	30	100	5119 4503
	50		5119 4505
	60		5119 4506
	80		5119 4508
	100		5119 4510
	125		5119 4512
	160		5119 4513

# Busbar supports

Edgewise mounting with fixed interphase

## Characteristics

### SB C 10

SB C 10 3 poles, distance between centres 75 mm, bar thickness 5 mm

	I <sub>cc</sub> peak kA	25	48	63	84	110
	I <sub>cc</sub> rms kA 1s	12.5	23	30	40	50
Bar width I	25	275	150	100	75	50
	32	300	150	125	75	75
	40	350	175	125	100	75
	50	400	200	150	125	75
	63	450	225	175	125	100
	80	500	250	200	150	125
	100	575	300	225	175	125
Bar width II	25	1000	650	500	375	300
	32	1000	750	575	425	350
	40	1000	850	650	475	375
	50	1000	950	725	550	350
	63	1000	1000	825	600	375
	80	1000	1000	950	625	400
	100	1000	1000	1000	650	425

SB C 10 3 poles, distance between centres 75 mm, bar thickness 10 mm

	I <sub>cc</sub> peak kA	25	48	63	84	110
	I <sub>cc</sub> rms kA 1s	12.5	23	30	40	50
Bar width I	30	800	425	325	225	175
	50	1000	550	425	300	225
	60	1000	600	450	325	275
	80	1000	700	550	400	325
	100	1000	800	600	450	350

SB C 10 3 poles, distance between centres 90 mm, bar thickness 10 mm

	I <sub>cc</sub> peak kA	25	48	63	84	110
	I <sub>cc</sub> rms kA 1s	12.5	23	30	40	50
Bar width I	30	825	425	325	250	200
	50	1000	550	425	300	250
	60	1000	625	475	350	275
	80	1000	1000	550	400	325
	100	1000	1000	625	450	375
Bar width II	30	1000	750	575	425	325
	50	1000	1000	750	550	375
	60	1000	1000	825	625	425
	80	1000	1000	975	725	450
	100	1000	1000	1000	825	450

SB C 10 4 poles, distance between centres 60 mm, bar thickness 5 mm

	I <sub>cc</sub> peak kA	25	48	63	84	110
	I <sub>cc</sub> rms kA 1s	12.5	23	30	40	50
Bar width I	25	275	150	100	75	50
	32	300	150	125	75	75
	40	350	175	125	100	75
	50	400	200	150	125	75
	63	450	225	175	125	100
	80	500	250	200	150	125
	100	575	300	225	175	125
Bar width II	25	1000	625	475	350	250
	32	1000	725	550	400	250
	40	1000	825	625	450	275
	50	1000	925	700	450	275
	63	1000	1000	800	475	300
	80	1000	1000	925	500	325
	100	1000	1000	1000	550	350

SB C 10 4 poles, distance between centres 65 mm, bar thickness 10 mm

	I <sub>cc</sub> peak kA	25	48	63	84	110
	I <sub>cc</sub> rms kA 1s	12.5	23	30	40	50
Bar width I	30	800	425	325	225	175
	50	1000	550	425	300	225
	60	1000	600	450	325	275
	80	1000	700	550	400	325
	100	1000	800	600	450	350

SB C 10 4 poles, distance between centres 90 mm, bar thickness 10 mm

	I <sub>cc</sub> peak kA	25	48	63	84	110
	I <sub>cc</sub> rms kA 1s	12.5	23	30	40	50
Bar width I	30	825	425	325	250	200
	50	1000	550	425	300	250
	60	1000	625	475	350	275
	80	1000	1000	550	400	325
	100	1000	1000	625	450	375
Bar width II	30	1000	750	575	425	325
	50	1000	1000	750	550	375
	60	1000	1000	825	625	425
	80	1000	1000	975	725	450
	100	1000	1000	1000	750	450

### SB C 15

SB C 15 3 poles, distance between centres 110 mm, bar thickness 10 mm

	I <sub>cc</sub> peak kA	84	110	154	165	176
	I <sub>cc</sub> rms kA 1s	40	50	70	75	80
Bar width I	30	325	200	125	125	100
	50	425	250	175	150	150
	60	475	275	200	175	175
	80	550	325	225	200	200
	100	625	375	250	225	225
	125	700	400	275	250	250
	160	825	475	325	300	275
Bar width II	30	450	350	225	275	200
	50	575	475	325	275	250
	60	650	500	375	300	250
	80	750	600	375	325	250
	100	850	675	375	325	275
	125	975	775	400	350	300
	160	1000	925	425	375	325
Bar width III	30	625	475	350	300	250
	50	775	625	350	300	250
	60	1000	750	350	300	250
	80	1000	775	375	325	250
	100	1000	800	375	325	275
	125	1000	925	425	350	300
	160	1000	950	450	375	325

SB C 15 4 poles, distance between centres 90 mm, bar thickness 10 mm

	I <sub>cc</sub> peak kA	84	110	154	165	176
	I <sub>cc</sub> rms kA 1s	40	50	70	75	80
Bar width I	30	275	225	125	125	100
	50	350	300	175	150	125
	60	375	350	175	175	150
	80	425	400	200	200	200
	100	475	450	250	225	225
	125	525	525	275	250	225
	160	625	600	325	300	275
Bar width II	30	425	350	225	225	175
	50	575	450	275	225	200
	60	625	500	275	225	200
	80	725	575	275	250	225
	100	825	675	300	275	225
	125	950	750	350	300	225
	160	1000	825	400	325	275
Bar width III	30	575	475	275	225	200
	50	775	600	275	225	200
	60	850	600	275	225	200
	80	1000	650	275	250	225
	100	1000	675	300	275	225
	125	1000	750	350	300	250
	160	1000	825	400	325	275

### SB C 20

SB C 20 3 poles, distance between centres 110 mm, thickness 10 mm

	I <sub>cc</sub> peak kA	63	84	110	154	165	187	220	264
	I <sub>cc</sub> rms kA 1s	30	40	50	70	75	85	100	120
Bar width I	50	775	575	475	325	300	250	225	175
	60	875	650	500	350	325	275	250	200
	80	1000	750	600	425	400	325	275	225
	100	1000	850	675	475	450	375	275	225
	125	1000	975	775	525	500	425	275	250
	160	1000	1000	875	600	575	500	300	250
	50	1000	575	475	325	300	250	225	175
Bar width II	60	1000	650	500	350	325	275	250	200
	80	1000	750	600	425	400	325	275	225
	100	1000	850	675	475	450	375	300	225
	125	1000	975	775	525	500	425	325	250
	160	1000	1000	875	600	575	500	350	250

SB C 20 4 poles, distance between centres 90 mm, thickness 10 mm

	I <sub>cc</sub> peak kA	63	84	110	154	165	187	220	264
	I <sub>cc</sub> rms kA 1s	30	40	50	70	75	85	100	120
Bar width I	50	750	550	450	300	275	225	225	150
	60	825	625	475	325	300	250	225	150
	80	975	725	575	400	375	300	250	175
	100	1000	825	650	450	425	350	275	175
	125	1000	950	750	500	475	400	300	200
	160	1000	1000	850	575	550	475	300	225
	50	750	550	450	300	275	225	225	150
Bar width II	60	825	625	475	325	300	250	225	150
	80	975	725	575	400	375	300	250	175
	100	1000	825	650	450	425	350	275	175
	125	1000	950	750	500	475	400	300	200
	160	1000	1000	850	575	550	475	300	225

# Busbar supports

## Edgewise mounting with fixed interphase

### Characteristics (continued)

#### SB C 30

SB C 30 3 poles, distance between centres 185 mm, thickness 10 mm

	Icc peak kA	63	84	110	154	165	187	220	264
	Icc rms kA 1s	30	40	50	70	75	85	100	120
Bar width I	50	450	350	275	200	200	175	150	100
	60	500	375	300	225	200	175	150	125
	80	600	450	350	225	225	200	175	150
	100	650	500	400	275	250	225	200	175
	125	750	550	450	300	275	250	225	175
	160	825	625	500	350	300	275	250	200
	200	950	700	575	400	350	300	275	225
Bar width II	50	850	625	500	350	325	275	225	200
	60	925	700	550	375	350	300	250	225
	80	1000	800	650	450	400	350	300	250
	100	1000	925	725	500	450	400	350	275
	125	1000	1000	825	550	500	450	400	325
	160	1000	1000	925	625	575	525	450	375
	200	1000	1000	1000	700	650	575	500	375
Bar width III	50	1000	900	725	475	450	400	350	275
	60	1000	975	775	525	500	425	375	300
	80	1000	1000	925	625	575	500	425	350
	100	1000	1000	1000	700	650	575	475	350
	125	1000	1000	1000	800	725	650	550	375
	160	1000	1000	1000	900	825	750	575	375
	200	1000	1000	1000	1000	925	825	575	400


SB C 30 4 poles, distance between centres 130 mm, thickness 10 mm

	Icc peak kA	63	84	110	154	165	187	220	264
	Icc rms kA 1s	30	40	50	70	75	85	100	120
Bar width I	50	425	325	250	175	175	150	125	100
	60	475	350	275	200	175	150	125	100
	80	575	425	325	225	200	175	150	125
	100	625	475	375	250	225	200	175	150
	125	725	525	425	275	250	225	200	150
	160	800	600	475	325	275	250	225	175
	200	925	675	550	375	325	275	250	200
Bar width II	50	800	600	475	325	300	250	200	175
	60	850	650	525	350	325	275	225	200
	80	1000	775	600	425	375	325	275	225
	100	1000	875	675	475	425	375	325	250
	125	1000	975	775	525	475	425	375	275
	160	1000	1000	875	600	550	500	425	275
	200	1000	1000	1000	675	625	550	450	300
Bar width III	50	1000	825	650	425	400	375	325	225
	60	1000	900	725	475	450	400	325	225
	80	1000	1000	825	575	525	475	350	225
	100	1000	1000	950	650	600	525	375	250
	125	1000	1000	1000	750	575	575	425	275
	160	1000	1000	1000	850	775	600	425	275
	200	1000	1000	1000	975	825	625	450	275

## Dimensions (mm)

### SB C 10


2x 5 mm bar or 1x 10 mm bars

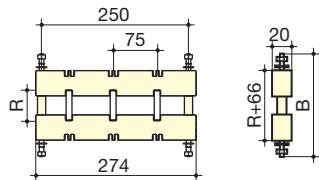

Fixed interphase:


- 3 poles 2 x 5 mm or 1 x 10 mm: 75 mm
- 4 poles bar thickness 5 mm: 60 mm,  
bar thickness 10 mm: 65 mm.

1 or 2 bars of 10 mm

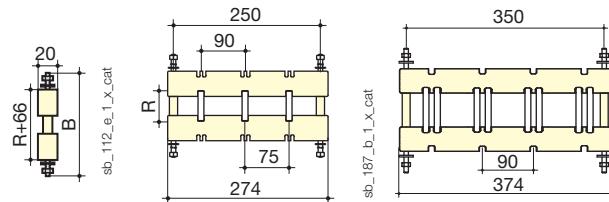


Fixed interphase:

- 3 poles 1 x 10 mm bar: 75 mm  
2 x 10 mm bars per pole: 90 mm
- 4 poles 1 x or 2 x 10 mm bars: 90 mm.




### SB C 15

3 poles 1 to 3x 10 mm bars

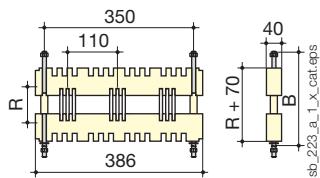

4 poles 1 to 3x 10 mm bars

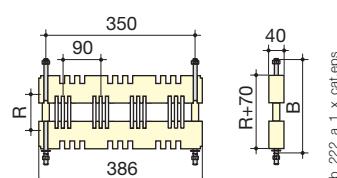


Fixed interphase:


- 3 poles: 110 mm
- 4 poles: 90 mm

### SB C 20

3 poles 1 to 4x 5 mm bars and  
1 to 2x 10 mm bars

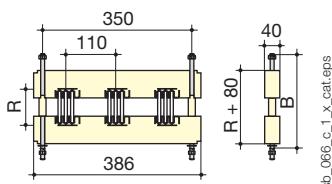



4 poles 1 to 4x 5 mm bars and  
1 to 2x 10 mm bars

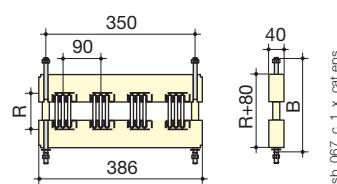

Fixed interphase:

- 3 poles: 110 mm
- 4 poles: 90 mm

### SB C 30

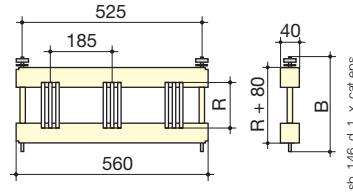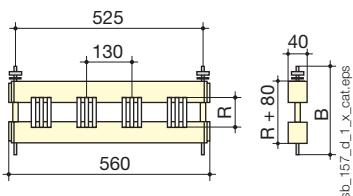


Fixed interphase:

- 3 poles: 185 mm
- 4 poles: 130 mm

# Busbar supports

Edgewise mounting with adjustable interphase

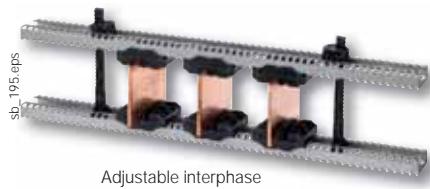

## The solution for

- > Electrical distribution



## Conformity with standards

- > IEC 61439-1
- > IEC 60865-1



## Strong points

- > Insulating materials
- > Durability
- > Adaptability

## Function

With SOCOMEĆ's insulating **bar supports** you can:

- mount and attach the busbars inside the electrical panel,
- cope with the forces experienced by the busbars during a short circuit.

## Advantages

### Insulating materials

Our range of SBC upright supports with adjustable interphase is made using thermoplastic. This very resistant material (reinforced fibreglass) is insulating so there are no risks in terms of clearance and creepage distances.

Amagnetism of assembly parts.

High resistance to damp heat (supplied "tropicalised").

### Durability

Standard spacers are made of high-strength insulating material. If used in extreme conditions or for greater robustness, metal rod kits are available.


### Adaptability

The studs are fixed onto profiles adapted to standard cabinet sizes.

## Selection guide


### Edgewise mounting

- Busbar supports with **adjustable interphase**

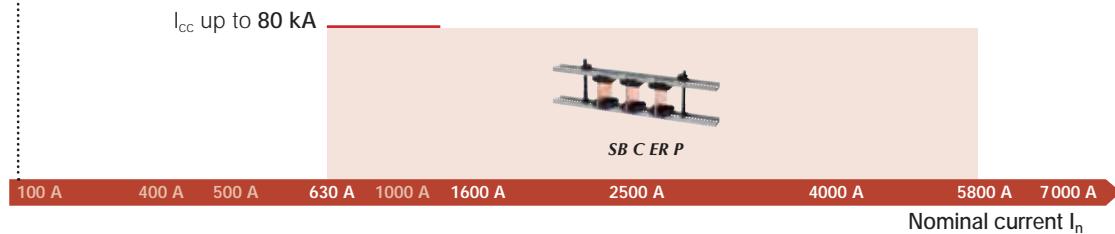

### What you need to know

Respecting the maximum distance between two supports ensures that the busbar supports are able to withstand the given short circuit current values. At these limits, distortion of the copper bars may occur. These deformations are permitted by standard IEC 61439-1 so long as they adhere to the insulation distances.

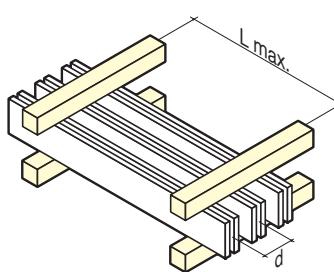

sb\_021.b\_1x.cat.eps

# Busbar supports

## Edgewise mounting with adjustable interphase

### References

#### Full support

Designation	Thickness of busbar (mm)	Busbar width (mm)	Number of bars	No. of poles	Reference
Complete busbar supports	10	480	1 ... 3	4	5025 5135

#### Slot

##### Ordering guide

- For three poles, order: 6 x studs, 2 x rods, 2 x profiles.
- For four poles, order: 8 x studs, 2 x rods, 2 x profiles.

Slot	Bar thickness (mm)	Number of bars	No. of poles	Quantity	Available for order in multiples of	Reference
Slot for 5 mm bars	5	3	3 P	6 (1)	8	5025 5205
Slot for 5 mm bars	5	3	4 P	8 (1)	8	5025 5205
Slot for 10 mm bars	10	2	3 P	6 (1)	4	5025 5210
Slot for 10 mm bars	10	2	4 P	8 (1)	4	5025 5210
Slot for 10 mm bars	10	3	3 P	6 (1)	1	5025 5111
Slot for 10 mm bars	10	3	4 P	8 (1)	1	5025 5111

(1) Quantity required for 1 busbar support

(2) Kit of 2 profiles and 4 brackets.

Mounting accessories	Length (mm)	Quantity	Available for order in multiples of	Reference
Stud kit (bar height 25 to 200 mm)		2 (1)	4	5025 5100
Stud kit metal (bar height 0 to 100 mm)		2	2	5025 5101
Stud kit metal (bar height 0 to 200 mm)		2	2	5025 5102
380 mm profile	380	2 (1)	4	5025 5124
480 mm profile	480	2 (1)	4	5025 5125
580 mm profile	580	2 (1)	4	5025 5126
780 mm profile	780	2 (1)	4	5025 5128
2 m profile	2000		4	5025 5120
Profile for Prisma enclosure (2)	525	1 (1)	1	5025 5130

### Characteristics

#### 5 mm slot / 3 bars and 10 mm slot / 2 bars

peak I <sub>sc</sub>	L max. (support bars in mm) for					d min. (mm)	Iz (A) (1)
	82 kA	114 kA	152 kA	165 kA	187 kA		
rms I <sub>sc</sub>	39 kA	52 kA	69 kA	75 kA	85 kA		
Bar x qty							
50 x 5 x 1	500	325	175	150		75	600
50 x 5 x 2	500	325	175	150	100	75	1050
50 x 5 x 3	500	325	175	150	100	75	1450
63 x 5 x 1	525	350	200	175		75	700
63 x 5 x 2	525	350	200	175	125	75	1250
63 x 5 x 3	525	350	200	175	125	75	1800
80 x 5 x 1	525	350	200	175	125	75	900
80 x 5 x 2	525	350	200	175	125	75	1550
80 x 5 x 3	525	350	200	175	125	75	2200
100 x 5 x 1	550	375	225	200	175	75	1100
100 x 5 x 2	550	375	225	200	175	75	1900
100 x 5 x 3	550	375	225	200	175	75	2650
125 x 5 x 1	575	400	250	225	200	75	1300
125 x 5 x 2	575	400	250	225	200	75	2350
125 x 5 x 3	575	400	250	225	200	75	3250
80 x 10 x 1	1000	750	350	300	200	75	1300
80 x 10 x 2	1000	750	350	300	200	75	2300
100 x 10 x 1	1000	750	375	325	225	75	1550
100 x 10 x 2	1000	775	375	325	225	75	2750
125 x 10 x 1	1000	775	375	325	225	75	1900
125 x 10 x 2	1000	775	375	325	225	75	3350
160 x 10 x 1	1000	775	400	350	250	75	2350
160 x 10 x 2	1000	800	400	350	250	75	4150

(1) Admissible busbar nominal current with a temperature inside the panel of between 45 °C and 80 °C.

For other mounting configurations, please contact us.

# Busbar supports

Edgewise mounting with adjustable interphase

## Characteristics (continued)

10 mm insert / 3 bars

	L max. (bar supports in mm)						d (mm)	Iz (A) <sup>(1)</sup>
	63 kA	82 kA	114 kA	152 kA	165 kA	187 kA		
peak I <sub>sc</sub>	30 kA	39 kA	52 kA	69 kA	75 kA	85 kA		
Bar x qty								
50 x 10 x 1	1000	1000	650	250	200	150	70	850
50 x 10 x 2	1000	1000	650	250	200	150	70	1550
50 x 10 x 3	1000	1000	650	250	200	150	70	2150
63 x 10 x 1	1000	1000	675	275	225	175	70	1050
63 x 10 x 2	1000	1000	675	275	225	175	70	1850
63 x 10 x 3	1000	1000	675	275	225	175	70	2600
80 x 10 x 1	1000	1000	700	300	250	175	70	1300
80 x 10 x 2	1000	1000	700	300	250	175	70	2300
80 x 10 x 3	1000	1000	700	300	250	175	70	3200
100 x 10 x 1	1000	1000	725	325	275	175	70	1550
100 x 10 x 2	1000	1000	725	325	275	175	70	2750
100 x 10 x 3	1000	1000	725	325	275	175	70	3250
125 x 10 x 1	1000	1000	725	350	275	200	70	1900
125 x 10 x 2	1000	1000	725	350	275	200	70	3350
125 x 10 x 3	1000	1000	725	350	275	200	70	4650
160 x 10 x 1	1000	1000	750	350	300	200	70	2350
160 x 10 x 2	1000	1000	750	350	300	200	70	4150
160 x 10 x 3	1000	1000	750	350	300	200	70	5800


(1) Admissible busbar nominal current with a temperature inside the panel of between 45 °C and 80 °C  
For other mounting configurations, please contact us.

## Dimensions (mm)


### Mounting

- 1 to 3 bars of 5 mm thickness, per pole.
- 1 to 3 bars of 10 mm thickness, per pole.
- Interphase distance: min. 70 mm and max. 200 mm.
- Use 2 studs positioned symmetrically on the extremity of the poles or between the outermost poles.


A (mm)	Cabinet (mm)
380	400
480	500
580	600
780	800

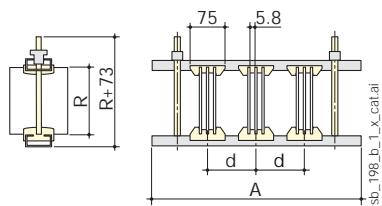

5 mm insert / 3 bars

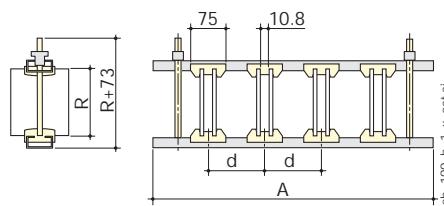


10 mm insert / 2 bars

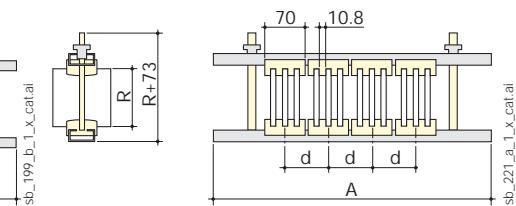

10 mm insert / 3 bars

# Busbar supports

Flat mounting with fixed interphase

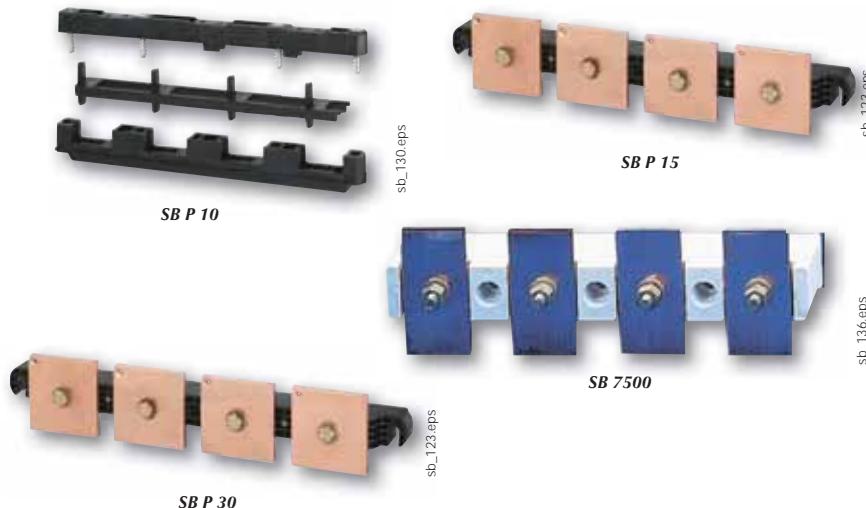

## Function

With SOCOME's insulating **bar supports** you can:

- mount and attach the busbars inside the electrical panel,
- cope with the forces experienced by the busbars during a short circuit.

## Advantages

### Insulating materials

Our range of SB P flat bar supports with fixed interphase is made using thermoplastic. This very resistant material (reinforced fibreglass) is insulating so there are no risks in terms of clearance and creepage distances.

### Durability

Most bar supports have an M8 screw connection which provides outstanding robustness to the entire busbar structure.

### Adaptability

The distance between the bar support attachment points is compatible with all commercially available enclosures.

### The solution for

- > Electrical distribution



### Conformity with standards

- > IEC 61439-1
- > IEC 60865-1




### Strong points

- > Insulating materials
- > Durability
- > Adaptability


## Selection guide

### Flat mounting

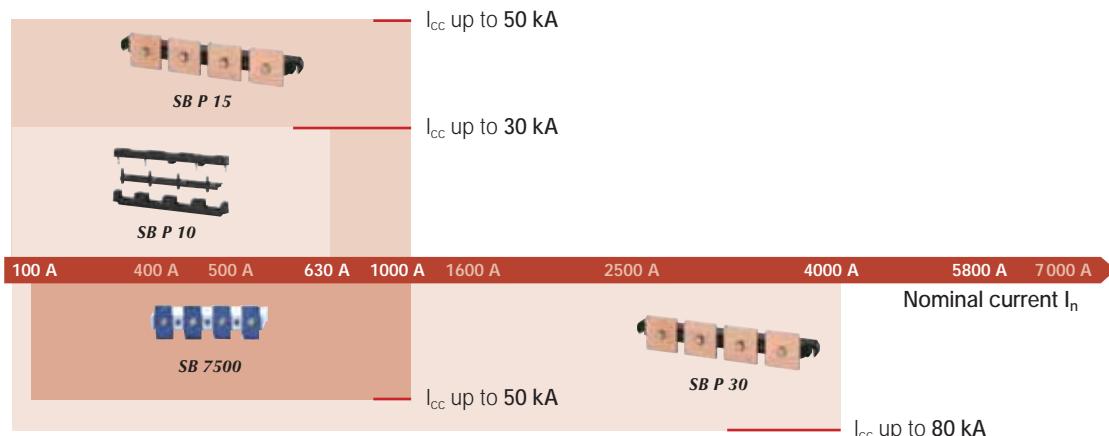

### What you need to know

Adhering to the maximum distance between two supports ensures that the busbar supports are able to withstand the given short circuit current values. At these limits, distortion of the copper bars may occur. These deformations are permitted by standard IEC 61439-1 so long as they adhere to the insulation distances.

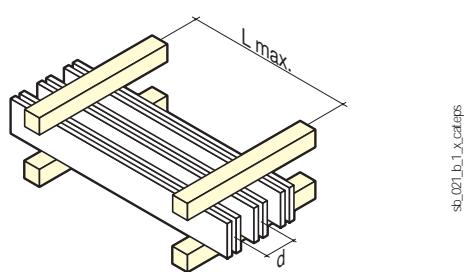

# Busbar supports

## Flat mounting with fixed interphase

### References

#### Support only

Bar support type	No. of poles	Insulation voltage (VAC)	Bar width (mm)	Pack qty	Reference
SB 7500	3 P	1000	40-50	1	5027 5310
SB 7500	4 P	1000	40-50	1	5027 5410
SB P 10	4 P	600	12-30	1	5026 0460
SB P 15	3 P / 4 P	1000	30 -80	1	5023 0150
SB P 30	3 P	1000	50-100	1	5023 0310
SB P 30	4 P	1000	50-80	1	5023 0410

### Accessories

#### For SB P 15

##### Use

Mount the support and the bars to the support.

Fixing screws for support and bars	Available for order in multiples of	Reference
Fixing set	1	5023 0159

#### For SB P 30

Mounting bracket	Available for order in multiples of	Reference
2 mounting brackets	1	5024 9002



sb\_210\_a\_1\_cat.eps

Bar fixing screws	Available for order in multiples of	Reference
Grub screws for mounting 1 bar	25	5119 4601
Headless screw for attaching 2 thicknesses of bar	25	5119 4602
Headless screw for attaching 3 thicknesses of bar	25	5119 4603



sb\_211\_psd


## Characteristics

### SB 7500

peak $I_{sc}$	L max. (support bars in mm) for					
	24 kA	48 kA	63 kA	82 kA	114 kA	152 kA
rms $I_{sc}$	12 kA	23 kA	30 kA	39 kA	52 kA	69 kA
<b>Bar x qty</b>						
50 x 5 x 1	1000	1000	950	725	525	450
50 x 5 x 2	1000	1000	1000	1000	975	850
					d (mm)	Iz (A)
					75	600
					75	1050

### SB P 10

peak $I_{sc}$	L max. (support bars in mm) for				
	10 kA	15 kA	24 kA	48 kA	63 kA
rms $I_{sc}$	6 kA	9 kA	12 kA	23 kA	30 kA
<b>Bar x qty</b>					
12 x 5 x 1	1000	475	175		
20 x 5 x 1	1000	1000	650	165	
25 x 5 x 1	1000	1000	650	160	
30 x 5 x 1	1000	1000	850	200	120
25 x 10 x 1	1000	1000	1000	250	150
30 x 10 x 1	1000	1000	1000	350	200
					d min. (mm)
					60
					Iz (A)
					180
					280
					338
					390
					508
					580

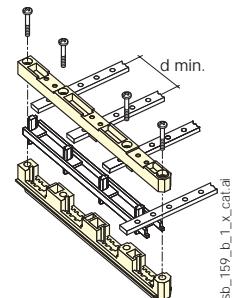

### SB P 15

#### 3 poles

peak $I_{sc}$	L max. (support bars in mm) for				
	24 kA	48 kA	63 kA	82 kA	114 kA
rms $I_{sc}$	12 kA	23 kA	30 kA	39 kA	50 kA
<b>Bar x qty</b>					
32 x 5 x 1	1000	1000	600	450	275
30 x 10 x 1	1000	1000	600	450	275
40 x 5 x 1	1000	1000	575	425	250
40 x 10 x 1	1000	1000	575	425	250
50 x 5 x 1	1000	1000	550	400	225
50 x 10 x 1	1000	1000	550	400	225
60 x 5 x 1	1000	1000	525	375	200
60 x 10 x 1	1000	1000	525	375	200
80 x 5 x 1	1000	1000	500	350	175
80 x 10 x 1	1000	1000	500	350	175
					d (mm)
					110
					Iz (A)
					410
					610
					500
					700
					600
					850
					700
					1000
					900
					1300

#### 4 poles

peak $I_{sc}$	L max. (support bars in mm) for				
	24 kA	48 kA	63 kA	82 kA	114 kA
rms $I_{sc}$	12 kA	23 kA	30 kA	39 kA	50 kA
<b>Bar x qty</b>					
32 x 5 x 1	1000	1000	550	400	225
30 x 10 x 1	1000	1000	550	400	225
40 x 5 x 1	1000	1000	525	375	200
40 x 10 x 1	1000	1000	525	375	200
50 x 5 x 1	1000	1000	500	350	175
50 x 10 x 1	1000	1000	500	350	175
60 x 5 x 1	1000	1000	475	325	150
60 x 10 x 1	1000	1000	475	325	150
					d (mm)
					90
					Iz (A)
					410
					610
					500
					700
					600
					850
					700
					1000

# Busbar supports

Flat mounting with fixed interphase

## Characteristics (continued)

SB P 30

3 poles

peak $I_{sc}$	L max. (support bars in mm) for										
	63 kA	84 kA	110 kA	143 kA	165 kA	176 kA	187 kA	220 kA			
	rms $I_{sc}$	30 kA	40 kA	50 kA	65 kA	75 kA	80 kA	85 kA	100 kA		
<b>Bar x qty</b>											
50 x 5 x 1	1000	950	525	300	225	200	175	130	123	600	
63 x 5 x 1	1000	925	525	300	225	200	175	130	123	700	
80 x 5 x 1	1000	900	500	300	225	175	175	125	123	900	
80 x 5 x 2	1000	900	500	300	225	175	175	125	123	1550	
50 x 10 x 1	1000	950	525	300	225	200	175	130	123	850	
50 x 10 x 2	1000	975	525	300	225	200	175	135	123	1550	
63 x 10 x 1	1000	925	525	300	225	200	175	130	123	1050	
63 x 10 x 2	1000	950	525	300	225	200	175	130	123	1850	
80 x 10 x 1	1000	900	500	300	225	175	175	125	123	1300	
80 x 10 x 2	1000	925	500	300	225	200	175	125	123	2300	
80 x 10 x 3	1000	950	525	300	225	200	175	130	123	3200	


4 poles

peak $I_{sc}$	L max. (support bars in mm) for										
	63 kA	84 kA	110 kA	143 kA	165 kA	176 kA	187 kA	220 kA			
	rms $I_{sc}$	30 kA	40 kA	50 kA	65 kA	75 kA	80 kA	85 kA	100 kA		
<b>Bar x qty</b>											
50 x 5 x 1	1000	1000	800	475	350	300	275	200	185		
63 x 5 x 1	1000	1000	800	475	350	300	275	200	185		
80 x 5 x 1	1000	1000	800	475	350	300	275	200	185		
80 x 5 x 2	1000	1000	800	475	350	300	275	200	185		
100 x 5 x 1	1000	1000	775	450	325	300	250	175	185	1100	
100 x 5 x 2	1000	1000	775	450	325	300	250	175	185	1900	
100 x 5 x 3	1000	1000	775	450	350	300	250	175	185	2650	
50 x 10 x 1	1000	1000	800	475	350	300	275	200	185		
50 x 10 x 2	1000	1000	800	475	350	300	275	200	185		
63 x 10 x 1	1000	1000	800	475	350	300	275	200	185		
63 x 10 x 2	1000	1000	800	475	350	300	275	200	185		
80 x 10 x 1	1000	1000	800	475	350	300	275	200	185		
80 x 10 x 2	1000	1000	800	475	350	300	275	200	185		
80 x 10 x 3	1000	1000	800	475	350	300	275	200	185		
100 x 10 x 1	1000	1000	775	450	325	300	250	175	185	1550	
100 x 10 x 2	1000	1000	775	450	350	300	250	175	185	2750	
100 x 10 x 3	1000	1000	775	450	350	300	275	175	185	3850	

## Dimensions


### SB 7500

No. of poles	A	B	C	J	R	T <sub>1</sub>	T <sub>2</sub>
3 P	220	38	35	75	52.5	11	6
4 P	295	38	35	75	52.5	11	6

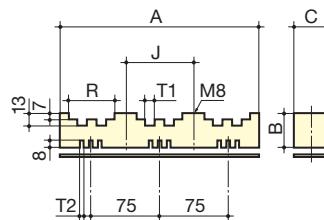


sb\_149\_a\_1\_x\_cat

### SB P 10

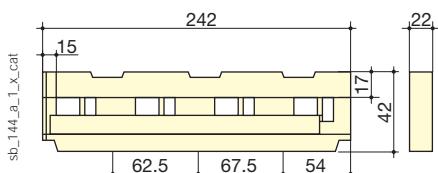


### SB P 15

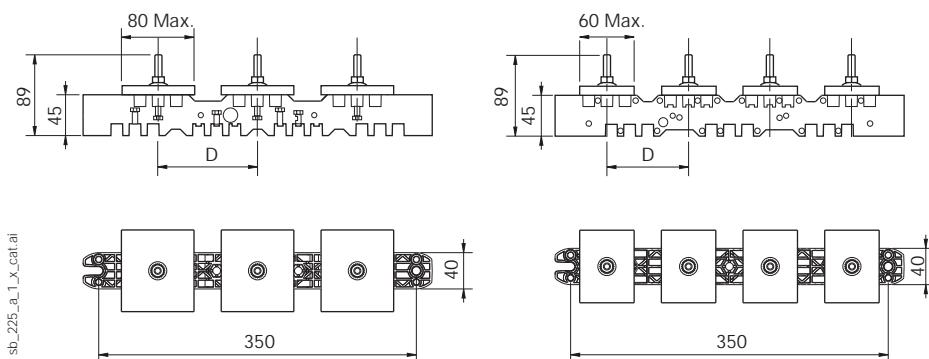

sb\_225\_a\_1\_x\_cat.ai

### SB P 30

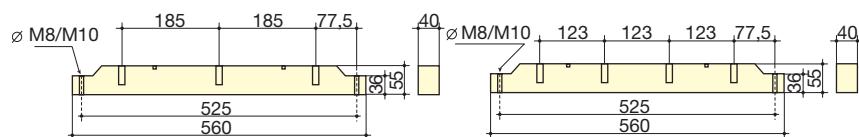

sb\_154\_c\_1\_x\_cat

# Busbar supports

## Unipolar flat-mounted



Hexagonal insulators

sb\_104.eps



SB 205-206

sb\_117.eps



SB 3

sb\_118.eps



SB 1 - SB 2

sb\_108.eps

### The solution for

- > Electrical distribution



sb\_136.eps

### Conformity with standards

- > IEC 61439-1
- > IEC 60865-1



### Strong points

- > Insulating materials
- > Durability
- > Adaptability

## Function

With SOCOME's insulating **bar supports** you can:

- mount and attach the busbars inside the electrical panel,
- cope with the forces experienced by the busbars during a short circuit.

## Advantages

### Insulating materials

Our range of SB P flat busbar supports with fixed interphase is made from insulating materials. This material poses no risks in terms of clearance and creepage distances.

### Durability


Most bar supports have an M8 screw connection which provides outstanding robustness to the entire busbar structure.

### Adaptability


The distance between the bar support attachment points is compatible with all commercially available enclosures.

## Selection guide

### Flat mounting

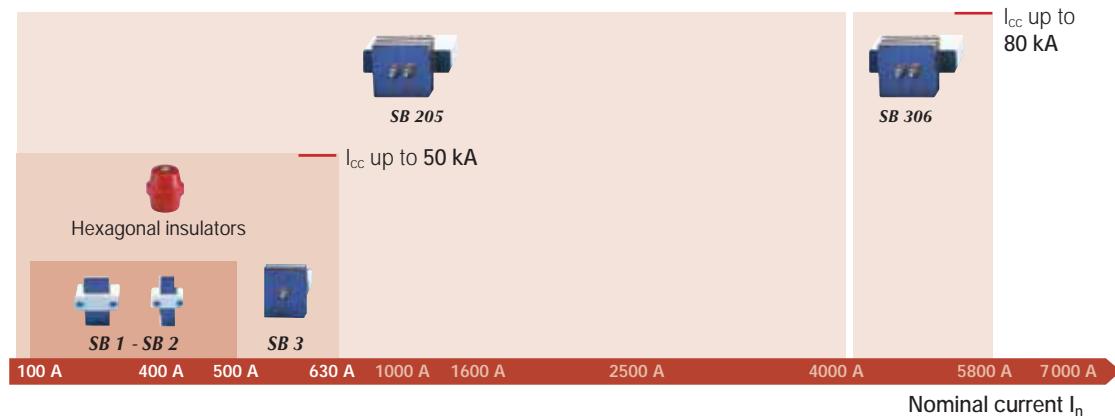

### What you need to know

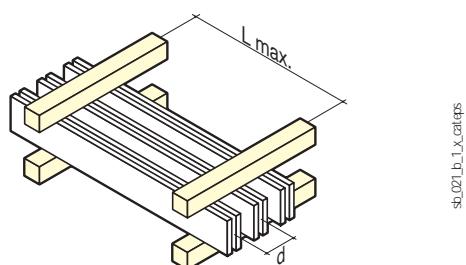

Adhering to the maximum distance between two supports ensures that the busbar supports are able to withstand the given short circuit current values. At these limits, distortion of the copper bars may occur. These deformations are permitted by standard IEC 61439-1 so long as they adhere to the insulation distances.

# Busbar supports

## Unipolar flat-mounted

### References

#### Hexagonal insulator

Height H (mm)	Thread M	Available for order in multiples of	Female-female Reference	Male-female Reference	Male-male Reference
16	M4	10	-	5038 1604	5039 1604
16	M5	10	-	5038 1605	5039 1605
20	M4	10	5031 2004	-	-
20	M6	10	5031 2006	-	-
25	M5	10	-	5038 2505	5039 2505
25	M6	10	5031 2506	5038 2506	5039 2506
30	M6	10	5031 3006	-	-
30	M8	10	5031 3008	-	-
35	M6	10	5031 3506	-	-
35	M8	10	5031 3508	5038 3508	5039 3508
35	M10	10	5031 3510	5038 3510	5039 3510
40	M8	10	5031 4008	-	-
40	M10	10	5031 4010	-	-
45	M8	10	5031 4508	-	-
45	M10	10	5031 4510	-	-
50	M8	10	5031 5008	5038 5008	5039 5008
50	M10	10	5031 5010	5038 5010	5039 5010
50	M12	10	5031 5012	-	-
60	M10	10	5031 6010	5038 6010	5039 6010
65	M10	10	5031 6510	-	-
70	M12	10	5031 7012	-	-

#### Support type SB

Support type	Insulation voltage (VAC)	Number of bars	Bar width (mm)	Available for order in multiples of	Reference
SB 1	690	1	20-25	6	5021 0110
SB 2	690	1	32-40	6	5022 0110
SB 3 without screws	690	1 ... 2	32-63	6	5023 0111
SB 3 pre-assembled	690	1 ... 2	32-63	6	5023 0110
SB 205	1000	1 ... 3	100	6	5022 5110
SB 306	1000	1 ... 3	160	6	5023 6110

### Accessories

#### Grub screw

Length (mm)	Thread	To be ordered in multiples of	Reference
20	M6	20	5032 2006
20	M8	20	5032 2008
25	M6	20	5032 2506
25	M8	20	5032 2508
30	M6	20	5032 3006
30	M8	20	5032 3008
40	M8	20	5032 4008
40	M10	20	5032 4010
50	M12	20	5032 5012



sb\_121.eps

## Characteristics

### Hexagonal insulator

Height <b>H (mm)</b>	Threading	Rated voltage (V) <b>AC/DC</b>	Insulation voltage (VAC)		Mechanical characteristics (daN)		Max. tightening torque (Nm)
16	M4	500	3000	5500	100	150	3
16	M5	500	3000	5500	100	150	6
20	M4	500	3000	5500	70	170	9
20	M6	500	3000	5500	100	190	8
25	M5	500	3000	5500	180	400	6
25	M6	500	3000	5500	170	370	12
30	M6	1000	6000	11000	200	650	22
30	M8	1000	6000	11000	360	800	40
35	M6	1400	9000	16000	230	720	25
35	M8	1400	9000	16000	380	900	42
35	M10	1400	9000	16000	320	800	44
40	M8	2000	12000	21500	620	1200	50
40	M10	2000	12000	21500	620	1100	60
45	M8	2000	12000	21500	550	1200	55
45	M10	2000	12000	21500	550	1100	65
50	M8	2000	12000	21500	650	1800	60
50	M10	2000	12000	21500	650	1700	70
50	M12	2000	12000	21500	660	1300	130
60	M10	2400	12000	27000	560	1600	85
65	M10	2400	12000	27000	750	1600	90
70	M12	2400	12000	27000	750	1500	135

# Busbar supports

## Unipolar flat-mounted

### Characteristics (continued)


#### Hexagonal insulator

##### General characteristics

Height H (mm)	Threading	L max. (support bars in mm) for					d min. (mm)	Iz (A) <sup>(1)</sup>	
		peak I <sub>sc</sub>	24 kA	48 kA	63 kA	82 kA			
		rms I <sub>sc</sub>	12 kA	23 kA	30 kA	39 kA			
20	M4	15 x 5 x 1	400	100			45	220	
20	M4	20 x 5 x 1	400	100			45	280	
25	M6	15 x 5 x 1	550	135			45	220	
25	M6	20 x 5 x 1	525	135			45	280	
25	M6	25 x 5 x 1	575	145			50	330	
30	M6	15 x 5 x 1	675	165			45	220	
30	M6	20 x 5 x 1	650	165			45	280	
30	M6	25 x 5 x 1	725	175	105		50	330	
30	M8	15 x 5 x 1	850	250	155		45	220	
30	M8	20 x 5 x 1	1000	250	155		45	280	
30	M8	25 x 5 x 1	1000	275	170	100	50	330	
35	M6	15 x 5 x 1	700	175	100		45	220	
35	M6	20 x 5 x 1	675	170	100		45	280	
35	M6	25 x 5 x 1	750	175	110		50	330	
35	M8	15 x 5 x 1	850	275	160		45	220	
35	M8	20 x 5 x 1	1000	275	160		45	280	
35	M8	25 x 5 x 1	1000	300	175	105	50	330	
35	M8	32 x 5 x 1	1000	325	175	110	55	410	
35	M10	20 x 5 x 1	850	200	125		45	280	
35	M10	25 x 5 x 1	950	225	135		50	330	
35	M10	32 x 5 x 1	1000	250	150		55	410	
40	M8	20 x 5 x 1	1000	325	175	110	45	280	
40	M8	25 x 5 x 1	1000	350	200	125	50	330	
40	M8	32 x 5 x 1	1000	375	225	135	55	410	
40	M10	20 x 5 x 1	1000	325	175	110	45	280	
40	M10	25 x 5 x 1	1000	350	200	125	50	330	
40	M10	32 x 5 x 1	1000	375	225	135	55	410	
45	M8	25 x 5 x 1	1000	425	250	150	50	330	
45	M8	32 x 5 x 1	1000	475	175	160	55	410	
45	M8	50 x 5 x 1	1000	625	350	200	110	75	600
45	M10	25 x 5 x 1	1000	425	250	145		50	330
45	M10	32 x 5 x 1	1000	450	250	160		55	410
45	M10	50 x 5 x 1	1000	600	350	200	110	75	600
50	M8	25 x 5 x 1	1000	450	250	155		50	330
50	M8	32 x 5 x 1	1000	475	275	170		55	410
50	M8	50 x 5 x 1	1000	650	375	225	115	75	600
50	M10	32 x 5 x 1	1000	525	300	175		55	410
50	M10	50 x 5 x 1	1000	700	400	225	125	75	600
60	M10	50 x 5 x 1	1000	700	400	225	125	75	600
65	M10	50 x 5 x 1	1000	775	450	250	135	75	600

(1) Admissible busbar nominal current with a temperature inside the panel of between 45°C and 80°C.

For other mounting configurations, please contact us.

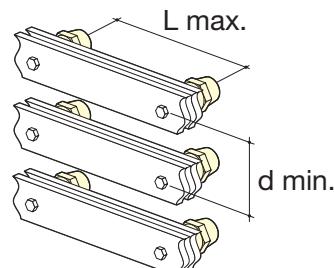


sb\_164\_a\_1\_X.cat

## SB 1 - SB 2

Support	peak $I_{sc}$	L max. (support bars in mm) for					d min. (mm)	Iz (A) <sup>(1)</sup>
		24 kA	48 kA	63 kA	82 kA	114 kA		
	rms $I_{sc}$	12 kA	23 kA	30 kA	39 kA	52 kA		
Bar x qty							d min. (mm)	Iz (A) <sup>(1)</sup>
SB 1	20 x 3 x 1	650	325	250	175	135	50	210
SB 1	20 x 5 x 1	850	425	325	250	175	50	280
SB 1	25 x 5 x 1	1000	525	400	300	200	50	330
SB 2	32 x 5 x 1	1000	750	575	450	300	70	410
SB 2	40 x 5 x 1	1000	950	700	550	400	70	500

(1) Admissible busbar nominal current with a temperature inside the panel of between 45°C and 80°C.

For other mounting configurations, please contact us.

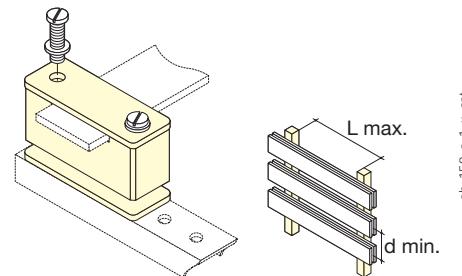


sb\_150\_a\_1\_x\_cat

## SB 3

Support	peak $I_{sc}$	L max. (support bars in mm) for					d min. (mm)	Iz (A) <sup>(1)</sup>
		24 kA	48 kA	63 kA	82 kA	114 kA		
	rms $I_{sc}$	12 kA	23 kA	30 kA	39 kA	52 kA		
Bar x qty							d min. (mm)	Iz (A) <sup>(1)</sup>
32 x 5 x 2	1000	1000	925	700	500	70	70	580
40 x 5 x 2	1000	1000	1000	1000	1000	70	70	700
50 x 5 x 2	1000	1000	1000	925	675	75	850	
63 x 5 x 2	1000	1000	1000	1000	1000	85	85	1000

(1) Admissible busbar nominal current with a temperature inside the panel of between 45°C and 80°C.


For other mounting configurations, please contact us.

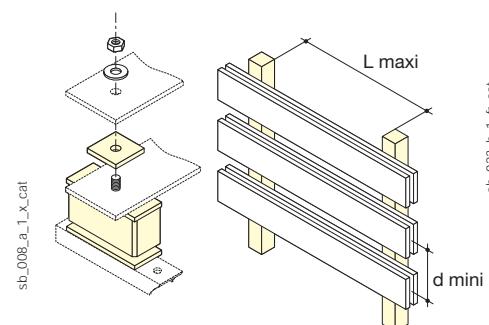

sb\_008\_a\_1\_x\_cat

## SB 205 - SB 206

Support	peak $I_{sc}$	L max. (support bars in mm) for						d min. (mm)	Iz (A)
		48 kA	63 kA	82 kA	114 kA	152 kA	165 kA		
	rms $I_{sc}$	12.5 kA	23 kA	30 kA	40 kA	50 kA	75 kA		
Bar x qty									d min. (mm)
SB 205	100 x 10 x 1	1000	800	475	250	150	125	125	1550
SB 205	100 x 10 x 2	1000	800	475	250	150	125	125	2750
SB 205	100 x 10 x 3	1000	800	475	250	150	125	125	3850
SB 306	160 x 10 x 1	1000	1000	625	350	200	150	175	2350
SB 306	160 x 10 x 2	1000	1000	625	350	200	150	175	4150
SB 306	160 x 10 x 3	1000	1000	625	350	200	150	175	5800

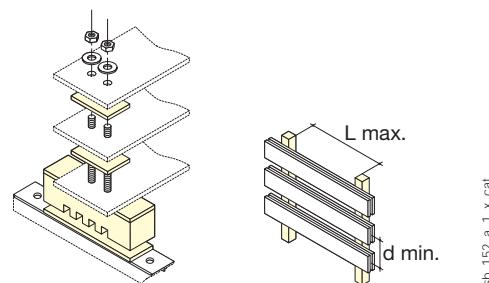

sb\_152\_a\_1\_x\_cat



# Busbar supports

## Unipolar flat-mounted

### Dimensions

#### Hexagonal insulator



Height H (mm)	Threading M	Depth		Diameter E (mm)	Length	
		D (mm)	Pu (mm)		W (mm)	L1 (mm)
16	M4	6	5	14	26	36
16	M5	6	5	14	26	36
20	M4	8	5.5	19	-	-
20	M6	8	5.5	19	-	-
25	M5				35	45
25	M6	10	7	25	35	45
30	M6	10	7	33	-	-
30	M8	12	9	33	-	-
35	M6	12	9	33	-	-
35	M8	12	9	33	50	65
35	M10	12	9	33	65	95
40	M8	15	12	40	-	-
40	M10	15	12	40	-	-
45	M8	15	12	41	-	-
45	M10	15	12	41	-	-
50	M8	20	17	46	75	100
50	M10	20	17	46	80	110
50	M12	20	17	46	-	-
60	M10	20	17	50	85	110
65	M10	20	17	55	-	-
70	M12	25	21	55	-	-

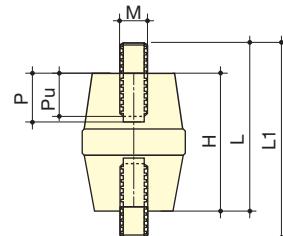

sb\_224\_a\_1\_fr\_cat.eps

#### SB 1 – SB 2



Support	A	B	C	J
SB 1	50	23	20	34
SB 2	68	23	23.5	50



sb\_014\_c\_1\_x\_cat




### SB 3

Support	A	B	C	J
SB 3 without screws	65	32	28	36
SB 3 with screws	65	32	28	36

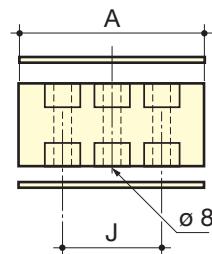


sb\_089\_b\_1\_x\_cat

### Dimensions

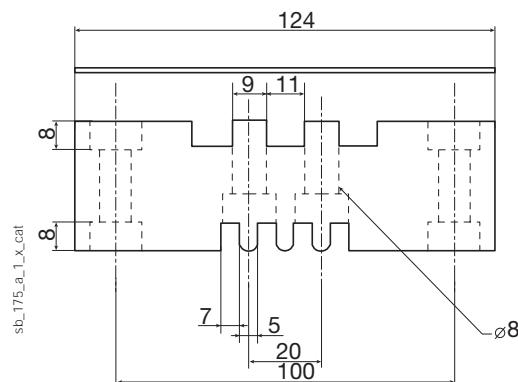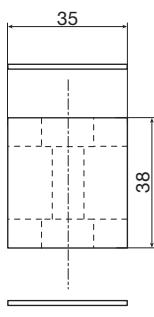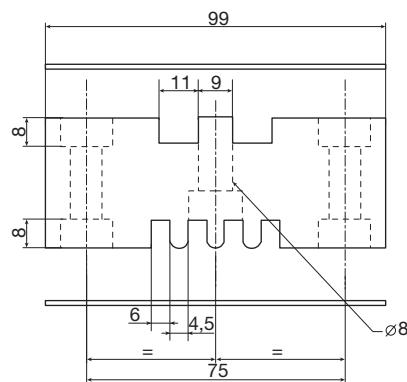


sb\_175\_a\_1\_x\_cat

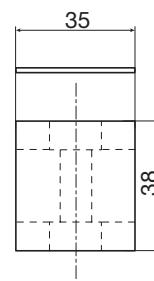

sb\_176\_a\_1\_x\_cat

# Busbar supports

## Other supports

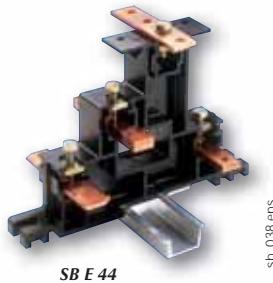

SB E 44

sb\_038.eps



SB P 44

sb\_170.eps

### The solution for

- > Electrical distribution



### Conformity with standards

- > IEC 61439-1
- > IEC 60865-1



### Strong points

- > Insulating materials
- > Durability
- > Adaptability

## Function

With SOCOME's insulating **bar supports** you can:

- mount and attach the busbars inside the electrical panel,
- cope with the forces experienced by the busbars during a short circuit.

## Advantages

### Insulating materials

Our range of busbar supports is made using thermoplastic. This very resistant material (reinforced fibreglass) is insulating so there are no risks in terms of clearance and creepage distances.

### Durability

Most bar supports have an M8 screw connection which provides outstanding robustness to the entire busbar structure.


### Adaptability

The distance between the bar support attachment points is compatible with all commercially available enclosures.

## References

### SB E 44 and SB P 44

Type of busbar support	Insulation voltage (VAC)	No. of poles	Bar width (mm)	Pack qty	Reference
SB E 44	690	4 P	15-32	1	5028 0410
SB P 44	690	4 P	20-32	1	5026 0450
<b>Designation of SBE 44 accessories</b>					
270 mm long cap protection kit				1	5028 0411
420 mm long cap protection kit				1	5026 0412
620 mm long cap protection kit				1	5028 0413
Set of 20 protection screen adaption spacers				1	5026 0415

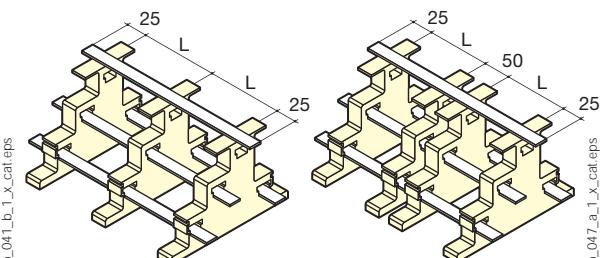

Type 1: Busbars including 3 (or more) equally spaced SB E 44 supports.

Type 2: Busbars including 3 (or more) SB E 44 supports with doubled intermediary supports.


## Characteristics

### SB E 44

Support	L max. (support bars in mm) for							Iz (A) <sup>(1)</sup>
	peak I <sub>sc</sub>	10 kA	15 kA	24 kA	38 kA	48 kA	63 kA	
	rms I <sub>sc</sub>	6 kA	9 kA	12 kA	19 kA	23 kA	30 kA	
Type 1	Bar x qty							Iz (A) <sup>(1)</sup>
Type 1	15 x 3 x 1	950	625	400	250	175		160
Type 1	15 x 5 x 1	1000	825	500	300	175		220
Type 1	15 x 6 x 1	1000	900	550	300	200		250
Type 1	15 x 8 x 1	1000	1000	650	300	200		290
Type 1	20 x 3 x 1	1000	825	525	300	175		210
Type 1	20 x 5 x 1	1000	1000	675	300	175		280
Type 1	20 x 6 x 1	1000	1000	750	300	175		310
Type 1	20 x 8 x 1	1000	1000	775	300	175		370
Type 1	32 x 5 x 1	1000	1000	675	250	170		410
Type 1	32 x 6 x 1	1000	1000	675	250	170		460
Type 2	15 x 3 x 1	950	625	400	250	200	150	160
Type 2	15 x 5 x 1	1000	825	500	325	250	175	220
Type 2	15 x 6 x 1	1000	900	550	350	275	200	250
Type 2	15 x 8 x 1	1000	1000	650	400	325	225	290
Type 2	20 x 3 x 1	1000	825	525	325	250	200	210
Type 2	20 x 5 x 1	1000	1000	675	425	325	225	280
Type 2	20 x 6 x 1	1000	1000	750	450	375	225	310
Type 2	20 x 8 x 1	1000	1000	850	525	375	225	370
Type 2	32 x 5 x 1	1000	1000	1000	525	325	175	410
Type 2	32 x 6 x 1	1000	1000	1000	525	325	175	460

### SB P 44


peak I <sub>sc</sub>	L max. (support bars in mm) for						d min. (mm)	Iz (A)
	10 kA	15 kA	24 kA	48 kA	63 kA	82 kA		
rms I <sub>sc</sub>	6 kA	9 kA	12 kA	23 kA	30 kA	39 kA		
Bar x qty							d min. (mm)	Iz (A)
20 x 5 x 1	1000	1000	800	350	200	125	50	280
25 x 5 x 1	1000	1000	1000	350	200	125	50	330
32 x 5 x 1	1000	1000	1000	350	200	120	50	390
25 x 10 x 1	1000	1000	1000	350	200	125	50	500
30 x 10 x 1	1000	1000	1000	350	200	120	50	580
32 x 10 x 1	1000	1000	1000	350	200	120	50	610

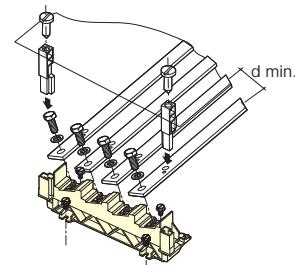


sb\_165\_c\_1x.cat

## Dimensions (mm)

### SB E 44

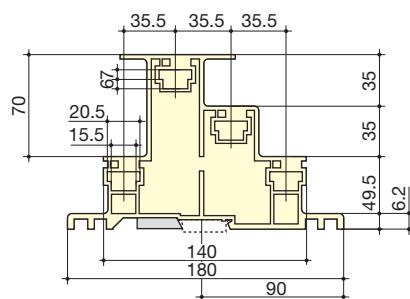

sb\_036\_e\_1x.cat

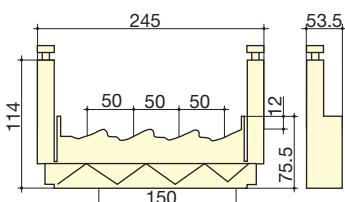

sb\_147\_b\_1x.cat

# Distribution blocks

## Distribution system



Single-pole distribution blocks

repar\_043.eps



Multi-pole distribution bar

repar\_044.eps



Distribution blocks for SOCOMECH power-switching devices

repar\_020.psd



Row distribution blocks

repar\_028.eps

### Function

SOCOMECH **distribution blocks** make it easy to connect conductors. They are mounted downstream of a load break switch, a changeover switch, a fuse switch or any protection device on the market.

### Advantages

#### Extensive range

This extensive range has the right distribution system for every need:

- 13 single-pole models, 4 multi-pole models and 2 single-block models for copper and aluminium cables for either direct or plug connection
- 1 IP20 row distribution block
- 4 distribution block models for lug connection.


#### IEC and UL range

Our range of single-pole distribution blocks conforms to IEC and UL standards.

#### Easy integration

The compact size of the single-pole and multi-pole distributors for direct or plug connection ensures easy integration into the equipment.

### Application

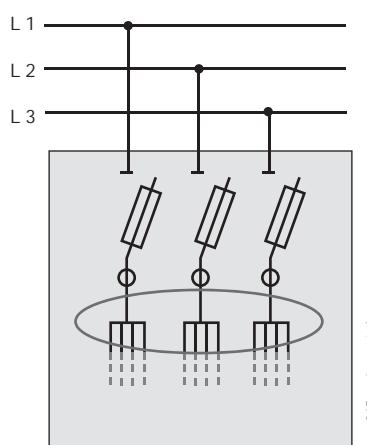

repar\_045\_a\_1\_x\_cat.ai

### The solution for

- > Electrical distribution



### Strong points

- > Extensive range
- > Easy integration
- > IEC and UL range

### Compliance with standards

- > IEC 61439-1
- > IEC 60947-7-1



- > UL 1953
- > UL 1059



## IEC / UL single-pole distribution blocks

### General features




repas\_043.eps

- Material: tin-plated aluminium.
- For conductors: aluminium or copper.
- IP20 connection.
- L1, L2, L3, and N markings set by Allen key.
- DIN rail mounted.
- DIN rail attachment clip.
- Backplate mounted.
- Assembly clip for multiple distribution blocks.

### References

Type	Rating (A)				References
	IEC		UL		
	Cu cable	Al cable	Cu cable	Al cable	
Type 1	80	63	85	65	54UL 1008
Type 2	125	100	115	90	54UL 1012
Type 3	175	135	175	135	54UL 1017
Type 4	250	200	255	205	54UL 1025
Type 5	415	36	380	310	54UL 1040

### Dimensions

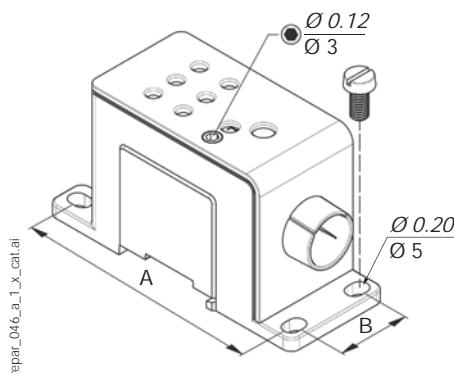

repas\_046\_a\_1\_x\_cat.ai

Type	Units	H x W x D		Mounting		
		A	B	A	B	
Type 1	in	1.93	x 1.417	3.524	3.118	0.914
	mm	49	x 36	89.5	79.2	23.2
Type 2	in	1.93	x 1.417	3.524	3.118	0.914
	mm	49	x 36	89.5	79.2	23.2
Type 3	in	2.09	x 1.417	3.898	3.492	0.914
	mm	53	x 36	99	88.7	23.2
Type 4	in	2.39	x 2.126	4.488	4.063	1.622
	mm	60.7	x 54	114	103.7	41.2
Type 5	in	2.39	x 2.126	4.488	4.063	1.622
	mm	60.7	x 54	114	103.7	41.2

### Electrical wiring and characteristics

Type	Solid/multi-core cables		Flexible/crimped-plug cables		Voltage according to IEC 60947-7-1		Voltage according to UL 1953		Short-circuit withstand		
	IEC connection	UL connection	IEC connection	UL connection	AC (V)	DC (V)	AC (V)	DC (V)	$I_{cw}$ (kA)	$I_{pk}$ (kA)	SCCR (kA)
Type 1	1 x 2.5 - 25 mm <sup>2</sup>	14 - 3 AWG	1 x 2.5 - 25 mm <sup>2</sup>	14 - 3 AWG	1000	1500	1000	1000	3	35	100
	6 x 2.5 - 10 mm <sup>2</sup>	14 - 8 AWG	6 x 2.5 - 6 mm <sup>2</sup>	14 - 10 AWG					6	36.1	
Type 2	1 x 2.5 - 50 mm <sup>2</sup>	14 - 1 AWG	1 x 2.5 - 35 mm <sup>2</sup>	14 - 2 AWG	1000	1500	1000	1000	8.4	40.8	100
	6 x 2.5 - 25 mm <sup>2</sup>	14 - 4 AWG	6 x 2.5 - 16 mm <sup>2</sup>	14 - 6 AWG					14.4	47.7	
Type 3	1 x 2.5 - 70 mm <sup>2</sup>	14 - 2/0 AWG	1 x 2.5 - 50 mm <sup>2</sup>	14 - 1/0 AWG	1000	1500	1000	1000	28.8	57.2	100
	6 x 2.5 - 25 mm <sup>2</sup>	14 - 4 AWG	6 x 2.5 - 16 mm <sup>2</sup>	14 - 6 AWG							
Type 4	1 x 35 - 120 mm <sup>2</sup>	2 - 250 kcmil	1 x 35 - 95 mm <sup>2</sup>	2 - 4/0 AWG	1000	1500	1000	1000			100
	6 x 2.5 - 35 mm <sup>2</sup>	14 - 2 AWG	6 x 2.5 - 25 mm <sup>2</sup>	14 - 4 AWG							
Type 5	1 x 70 - 240 mm <sup>2</sup>	2/0 - 500 kcmil	1 x 70 - 185 mm <sup>2</sup>	2/0 - 400 kcmil	1000	1500	1000	1000			100
	6 x 2.5 - 35 mm <sup>2</sup>	14 - 8 AWG	6 x 2.5 - 25 mm <sup>2</sup>	14 - 4 AWG							

# Distribution blocks

## Distribution system

### Single-pole IEC/UR distribution blocks

#### General features




Type 1 to 5



Type 6 to 8

- Material: coated aluminium type 1 to type 5, copper for type 6 to type 8.
- For conductors: Aluminium or copper type 1 to type 5, copper for type 6 to type 8.
- IP20 connection.
- DIN rail mounted.
- Backplate mounted.

#### Dimensions

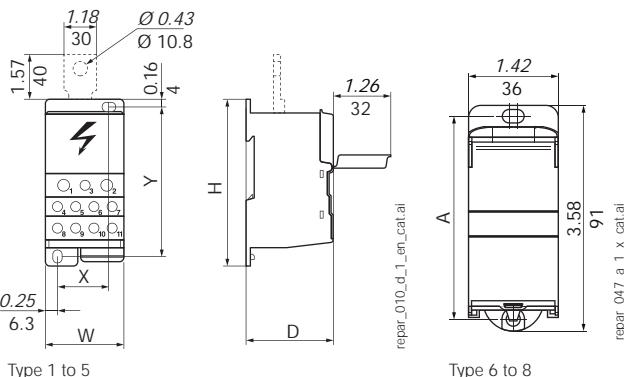

Distribution blocks with direct connection or IP20 jacks that plug into symmetrical DIN rail.

#### References

Type	Rating (A)				References
	IEC Cu cable	IEC Al cable	UR Cu cable	UR Al cable	
Type 1	125	100	115	90	5411 1012
Type 2	125	100	115	90	5411 1013
Type 3	175	135	175	135	5411 1017
Type 4	250	200	255	-	5411 1025
Type 5	400	300	-	-	5411 1040
Type 6	125	-	-	-	5411 1011
Type 7	175	-	-	-	5411 1016
Type 8	250	-	-	-	5411 0124

Accessories	References
Connection for type 4	5410 0025
Connection for type 5	5410 0040

Attachments for mounting directly to load break switching device terminal

Type	Units	Dimensions H x W x D		Mounting	
		A	B	A	B
Type 1	in	2.91 x 1.06 x 1.81		2.44	0.157
	mm	74 x 27 x 46		62	4
Type 2	in	2.80 x 1.77 x 1.69		2.386	0.685
	mm	71 x 45 x 43		60.6	17.4
Type 3	in	2.80 x 1.77 x 1.69		2.386	0.685
	mm	71 x 45 x 43		60.6	17.4
Type 4	in	3.74 x 1.75 x 1.93		3.836	1.165
	mm	95 x 44.5 x 49		86	29.6
Type 5	in	3.74 x 1.75 x 1.93		3.836	1.165
	mm	95 x 44.5 x 49		86	29.6
Type 6	in	3.58 x 1.06 x 2.01		3.22	-
	mm	91 x 27 x 51		81.7	-
Type 7	in	3.58 x 1.42 x 2.01		3.22	-
	mm	91 x 36 x 51		81.7	-
Type 8	in	3.58 x 1.77 x 2.01		3.22	-
	mm	91 x 45 x 51		81.7	-

#### Electrical wiring and characteristics

Type	Solid/multi-core cables		Flexible/crimped-plug cables		Voltage according to IEC 60947-7-1 AC (V)	Voltage according to UL 1059 AC (V)	Short-circuit withstand $I_{cw}$ (kA)	Short-circuit withstand $I_{pk}$ (kA)
	IEC connection	UL connection	IEC connection	UL connection				
Type 1	1 x 10 - 35 mm <sup>2</sup>	1 x 8 - 2 AWG	1 x 10 - 35 mm <sup>2</sup>	1 x 8 - 2 AWG		600	4.2	30
	1 x 2.5 - 25 mm <sup>2</sup>	1 x 14 - 4 AWG	1 x 2.5 - 16 mm <sup>2</sup>	1 x 14 - 6 AWG				
	6 x 2.5 - 25 mm <sup>2</sup>	6 x 14 - 4 AWG	6 x 2.5 - 16 mm <sup>2</sup>	6 x 14 - 6 AWG				
Type 2	1 x 10 - 35 mm <sup>2</sup>	1 x 8 - 2 AWG	1 x 10 - 35 mm <sup>2</sup>	1 x 8 - 2 AWG		600	4.2	30
	10 x 2.5 - 16 mm <sup>2</sup>	10 x 14 - 4 AWG	10 x 2.5 - 10 mm <sup>2</sup>	10 x 14 - 6 AWG				
Type 3	1 x 10 - 70 mm <sup>2</sup>	1 x 8 - 2/0 AWG	1 x 10 - 50 mm <sup>2</sup>	1 x 8 - 1/0 AWG		600	11	30
	10 x 2.5 - 16 mm <sup>2</sup>	10 x 14 - 4 AWG	10 x 2.5 - 10 mm <sup>2</sup>	10 x 14 - 6 AWG				
Type 4	1 x 35 - 120 mm <sup>2</sup>	1 x 2 - 250 kcmil	1 x 35 - 95 mm <sup>2</sup>	1 x 2 - 4/0 AWG		1000	21	51
	2 x 2.5 - 35 mm <sup>2</sup>	2 x 14/2 AWG	2 x 2.5 - 25 mm <sup>2</sup>	2 x 14 - 4 AWG				
	5 x 2.5 - 16 mm <sup>2</sup>	5 x 14 - 6 AWG	5 x 2.5 - 16 mm <sup>2</sup>	5 x 14 - 6 AWG				
	4 x 2.5 - 10 mm <sup>2</sup>	4 x 14 - 8 AWG	4 x 2.5 - 10 mm <sup>2</sup>	4 x 14 - 8 AWG				
Type 5	1 x 95 - 185 mm <sup>2</sup>		1 x 95 - 150 mm <sup>2</sup>			1500	21	51
	2 x 2.5 - 35 mm <sup>2</sup>		2 x 2.5 - 25 mm <sup>2</sup>					
	5 x 2.5 - 16 mm <sup>2</sup>		5 x 2.5 - 16 mm <sup>2</sup>					
	4 x 2.5 - 10 mm <sup>2</sup>		4 x 2.5 - 10 mm <sup>2</sup>					
Type 6	2 x 10 - 35 mm <sup>2</sup>		2 x 6 - 25 mm <sup>2</sup>			-	4.2	25
	2 x 2.5 - 25 mm <sup>2</sup>		2 x 1.5 - 16 mm <sup>2</sup>					
	6 x 1.5 - 16 mm <sup>2</sup>		6 x 1.5 - 10 mm <sup>2</sup>					
Type 7	2 x 25 - 70 mm <sup>2</sup>		2 x 16 - 50 mm <sup>2</sup>			-	8.4	36
	3 x 2.5 - 25 mm <sup>2</sup>		3 x 1.5 - 16 mm <sup>2</sup>					
	8 x 1.5 - 16 mm <sup>2</sup>		8 x 1.5 - 10 mm <sup>2</sup>					
Type 8	1 x 35 - 120 mm <sup>2</sup>		1 x 25 - 95 mm <sup>2</sup>			14.4	60	
	1 x 1.5 - 50 mm <sup>2</sup>		1 x 1.5 - 35 mm <sup>2</sup>					
	4 x 1.5 - 16 mm <sup>2</sup>		4 x 1.5 - 10 mm <sup>2</sup>					
	8 x 2.5 - 25 mm <sup>2</sup>		8 x 2.5 - 16 mm <sup>2</sup>					

## Multi-pole distribution blocks with IEC bars

### General features




Additional lugs

- Material: uncoated brass.
- For conductors: copper.
- DIN rail mounted.
- DIN rail attachment clip.
- Backplate mounted.
- Additional insulated bars.
- Reversible cap.

### References

Type	Rating (A)	N° of poles	N° of connections	References	
Type 1	100	3/4	7	5421 4010	
Type 2	125		12	5421 4011	
Type 3	125		15	5421 4012	
Type 4	160		12	5421 4016	
<b>Additional lugs</b>				References	
7 connections				5421 1010	
12 connections				5421 1012	
15 connections				5421 1013	

### Dimensions

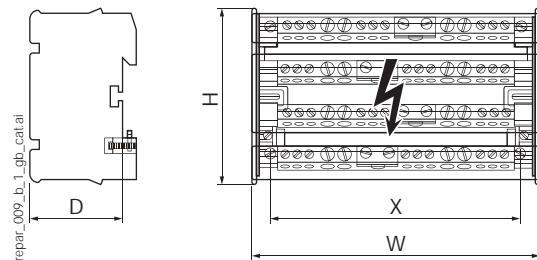

Type	Units	H x W x D	Mounting X
Type 1	in	4.11 x 2.84 x 1.96	2.126
	mm	104.5 x 72.2 x 49.7	54
Type 2	in	4.11 x 5.01 x 1.96	4.291
	mm	104.5 x 127.2 x 49.7	109
Type 3	in	4.11 x 6.90 x 1.96	4.646
	mm	104.5 x 175.2 x 49.7	118
Type 4	in	4.11 x 6.43 x 1.96	4.055
	mm	104.5 x 163.2 x 49.7	103

### Electrical wiring and characteristics

Type	Solid/multi-core cables	Flexible/crimped-plug cables	Voltage according to IEC 60947-7-1		Short-circuit withstand	
			AC (V)	DC (V)	I <sub>cw</sub> (kA)	I <sub>pk</sub> (kA)
Type 1	2 x 2.5 / 25 mm <sup>2</sup>	2 x 1.5 / 16 mm <sup>2</sup>	690	1000	3	24
	5 x 1.5 / 16 mm <sup>2</sup>	5 x 1.5 / 10 mm <sup>2</sup>				
Type 2	1 x 10 / 35 mm <sup>2</sup>	1 x 4 / 25 mm <sup>2</sup>			4.2	26
	7 x 2.5 / 25 mm <sup>2</sup>	7 x 1.5 / 16 mm <sup>2</sup>				
Type 3	4 x 1.5 / 16 mm <sup>2</sup>	4 x 1.5 / 10 mm <sup>2</sup>			4.2	28
	1 x 10 / 35 mm <sup>2</sup>	1 x 6 / 35 mm <sup>2</sup>				
	3 x 6 / 35 mm <sup>2</sup>	3 x 4 / 25 mm <sup>2</sup>				
Type 4	11 x 1.5 / 16 mm <sup>2</sup>	11 x 1.5 / 10 mm <sup>2</sup>			8.4	36
	1 x 25 / 70 mm <sup>2</sup>	1 x 16 / 50 mm <sup>2</sup>				
	3 x 10 / 35 mm <sup>2</sup>	3 x 4 / 25 mm <sup>2</sup>				
	8 x 2.5 / 25 mm <sup>2</sup>	8 x 1.5 / 16 mm <sup>2</sup>				

### Earthing lug

### References

Mounting by	N° of outgoing circuits per section (mm <sup>2</sup> )	Material	L (mm)	To be ordered in multiples	Reference
2x M4 screws	10 x 16 + 2 x 35	Brass	120	10	5414 0120
2x M6 screws	41 x 16 + 2 x 35	Brass	470	10	5414 0470



# Distribution blocks

## Distribution system

### IEC / UR single-block multi-pole distribution blocks

#### General features



Single-block multi-pole distribution block  
175 A 3 P

- Material: uncoated brass for 125 A, tin-plated copper for 175 A.
- For conductors: aluminium or copper (175 only).
- IP20 connection.
- DIN rail mounted.

#### References

Rating (A)	N° of poles	Rating (A)					
		IEC		UL		References	
Cu cable	Al cable	Cu cable	Al cable				
125	4	125	-	-	-	5411 4112	
175	3	175	135	175	135	5411 3017	

#### Dimensions

Rating (A)	Units	H x W x D		Mounting	
		A	B	A	B
125	in	2.93	x 3.86 x 1.93	2.48	2.323 - 2.795
	mm	74.5	x 98 x 49	63	59 - 71
175	in	2.8	x 3.15 x 1.69	2.382	2.07
	mm	71	x 80 x 43	60.6	52.5

#### Electrical wiring and characteristics

Rating (A)	Solid/multi-core cables		Flexible/crimped-plug cables		Voltage according to IEC 60947-7-1 AC (V)	DC (V)	Voltage according to UL 1059 AC (V)	DC (V)	Short-circuit withstand	
	IEC connection	UL connection	IEC connection	UL connection					I <sub>cw</sub> (kA)	I <sub>pk</sub> (kA)
125	1 x 6 - 35 mm <sup>2</sup>		1 x 6 - 25 mm <sup>2</sup>		690	1000	600	600	4.2	25
	2 x 4 - 16 mm <sup>2</sup>	-	2 x 4 - 10 mm <sup>2</sup>	-						
	5 x 1.5 - 6 mm <sup>2</sup>		5 x 1.5 - 6 mm <sup>2</sup>							
175	1 x 10 - 70 mm <sup>2</sup>	1 x 8 - 2/0 AWG	1 x 10 - 50 mm <sup>2</sup>	1 x 8 - 1/0 AWG	1000	1500			11	30
	6 x 2.5 - 16 mm <sup>2</sup>	6 x 14 - 4 AWG	6 x 2.5 - 10 mm <sup>2</sup>	6 x 14 - 6 AWG						

#### Distribution row with IP20 connectors



#### References

Rating (A)	Length	With connecting cords <sup>(1)</sup>	I <sub>cc</sub> (kA rms)	Reference
250 <sup>(2)</sup>	1 row	Yes	10	5420 2426
250 <sup>(2)</sup>	1 row	No	10	5421 2426

(1) Supplied with 6 mm<sup>2</sup> connecting cords, L = 120 mm, 12 black connectors, 12 blue connectors.  
(2) Outgoing circuits should be split across the full number of outputs


#### Accessories

##### Cables

Rating (A)	Cable type	Length (mm)	Colour	To be ordered in multiples	Reference
40	6 mm <sup>2</sup>	120	Blue	10	5421 1006
40	6 mm <sup>2</sup>	120	Black	10	5421 1016
40	6 mm <sup>2</sup>	320	Blue	10	5421 1106
40	6 mm <sup>2</sup>	320	Black	10	5421 1116
63	10 mm <sup>2</sup>	320	Blue	10	5421 1101
63	10 mm <sup>2</sup>	320	Black	10	5421 1111

##### Plug-in connectors

Connector type	To be ordered in multiples	Reference
1.5 - 2.5 mm <sup>2</sup>	20	5421 0025
4 - 6 mm <sup>2</sup>	20	5421 0125

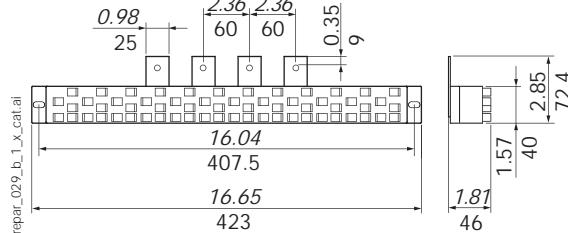


## Lug connection

### Multi-pole distribution block

#### References

Rating (A)	N° of poles	I <sub>cc</sub> (kA rms)	N° of outgoing circuits per section (mm <sup>2</sup> )	Reference
160	3 P	10	2 x 95 + 8 x 25	5412 3016
160	4 P	10	2 x 95 + 8 x 25	5412 4016
250	3 P	15	2 x 150 + 8 x 50	5412 3025
250	4 P	15	2 x 150 + 8 x 50	5412 4025
400	3 P	21	2 x 240 + 8 x 95	5412 3040
400	4 P	21	2 x 240 + 8 x 95	5412 4040
630	3 P	21	2 x 300 + 8 x 150	5412 3063
630	4 P	21	2 x 300 + 8 x 150	5412 4063

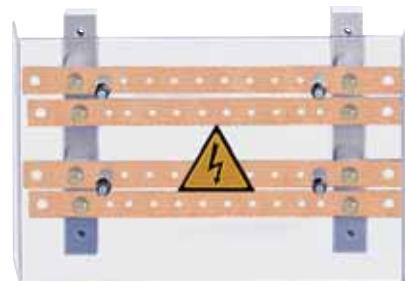


repac\_007.eps

#### Dimensions (mm)

Rating (A)	N° of poles	Units	A	B	E	H	J	K	Ø L	P	R	T	Ø X	Ø X1	Y
160	3 P	in	6.06	11.26	2.87	1.83	4.80	8.15	0.26	1.42	0.79	0.16	0.35	0.24	2.13
		mm	154	286	73	46.5	122	207	6.5	36	20	4	9	6	54
	4 P	in	7.48	11.26	2.87	1.83	6.22	8.15	0.26	1.42	0.79	0.16	0.35	0.24	2.13
		mm	190	286	73	46.5	158	207	6.5	36	20	4	9	6	54
250	3 P	in	8.27	12.09	3.27	2.26	1.97	8.7	0.28	1.97	0.98	0.16	0.43	0.31	2.20
		mm	210	307	83	57.5	50	222	7	50	25	4	11	8	56
	4 P	in	8.27	12.09	3.27	2.26	1.97	8.7	0.28	1.97	0.98	0.16	0.43	0.31	2.20
		mm	260	307	83	57.5	100	222	7	50	25	4	11	8	56
400	3 P	in	11.06	14.76	4.57	3.25	2.56	10.63	0.31	2.56	1.26	0.20	0.57	0.33	3.23
		mm	281	375	116	82.5	65	270	8	65	32	5	14.5	8.5	82
	4 P	in	13.62	14.76	4.57	3.25	5.12	10.63	0.31	2.56	1.26	0.20	0.57	0.33	3.23
		mm	346	375	116	82.5	130	270	8	65	32	5	14.5	8.5	82
630	3 P	in	10.67	17.24	4.61	3.56	2.56	13.11	0.31	2.56	1.57	0.24	0.57	0.41	3.27
		mm	271	438	117	90.5	65	333	8	65	40	6	14.5	10.5	83
	4 P	in	13.62	17.24	4.61	3.56	5.12	13.11	0.31	2.56	1.57	0.24	0.57	0.41	3.27
		mm	346	438	117	90.5	130	333	8	65	40	6	14.5	10.5	83

Distribution block with lug connection, frontal protection against indirect contact.

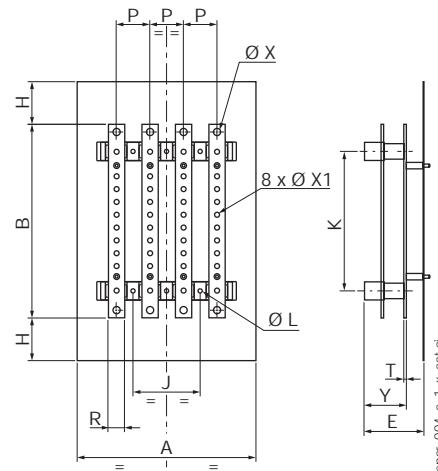

repac\_004\_c\_1\_x\_cat.ai


### Plug-in for 5 to 6.3 mm bars

#### References

Rating (A)	N° of poles		Reference
125/160		3 P	3699 3P16
		4 P	3699 6P16
250/400		3 P	3699 3P39
		4 P	3699 6P39
630/800		3 P	3699 3P80
		4 P	3699 6P80

#### Dimensions (mm)

Rating (A)	N° of poles	Units	A	B	C	D	E	F	G
125/160	3 P	in	3.90	0.79	M8	0.12	0.91	0.39	7.32
		mm	99	20		3	23	10	186
	4 P	in	3.90	0.79		0.12	0.91	0.39	9.76
		mm	99	20		3	23	10	248
250/400	3 P	in	4	0.79	M10	0.16	1.10	0.49	7.32
		mm	101.5	25		4	28	12.5	186
	4 P	in	4	0.98		0.16	1.10	0.49	9.76
		mm	101.5	25		4	28	12.5	248
630/800	3 P	in	4	0.98	M10	0.16	1.10	0.49	7.32
		mm	101.5	25		4	28	12.5	186
	4 P	in	4	0.98		0.16	1.10	0.49	9.76
		mm	101.5	25		4	28	12.5	248

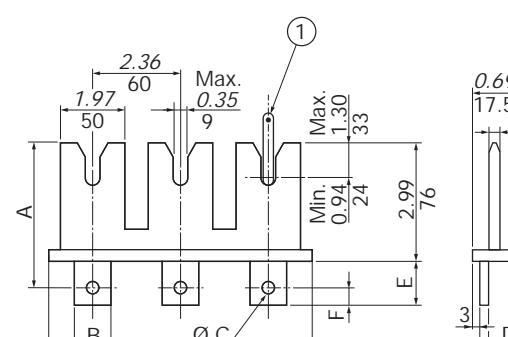

1. Bar thickness 5 to 6.3 mm.

sb\_186\_b\_1\_x\_cat.ai

# Distribution blocks

## Distribution system

### Lug connection (cont.)

#### Split throw multi-pole distribution block


##### References

Rating (A)	L (mm)	N° of poles	$I_{cc}$ (kA rms)	No of brackets	Distribution block		Protective cover
					Reference	Reference	
160	270	4 P	25	2	5028 0421	5028 0411	
160	420	4 P	17	2	5028 0451	5028 0412	
160	620	4 P	20	3	5028 0471	5028 0413	
250	270	4 P	30	2	5028 0423	5028 0411	
250	420	4 P	22	2	5028 0453	5028 0412	
250	620	4 P	18	3	5028 0473	5028 0413	
400	270	4 P	24	2	5028 0425	5028 0411	
400	420	4 P	21	2	5028 0455	5028 0412	
400	620	4 P	13	3	5028 0475	5028 0413	


Type	Cond.	Reference
Spacer adaptor for protection covers	1	5028 0415

##### Dimensions (mm)

Rating (A)	N° of feeders	Units	A	$\varnothing D$	E	L	P	R
160	9	in	9.84	0.31	5.91	10.63	0.20	0.59
		mm	250	8	150	270	5	15
	15	in	15.75	0.31	11.81	16.54	0.20	0.59
		mm	400	8	300	420	5	15
	21	in	23.62	0.31	9.84	24.41	0.20	0.59
		mm	600	8	250	620	5	15
250	9	in	9.84	0.39	5.91	10.63	0.20	0.79
		mm	250	10	150	270	5	20
	15	in	15.75	0.39	11.81	16.54	0.20	0.79
		mm	400	10	300	420	5	20
	21	in	23.62	0.39	9.84	24.41	0.20	0.79
		mm	600	10	250	620	5	20
400	8	in	8.86	0.47	5.91	10.63	0.20	1.26
		mm	225	12	150	270	5	32
	14	in	14.76	0.47	11.81	16.54	0.20	1.26
		mm	375	12	300	420	5	32
	20	in	24.41	0.47	9.84	24.41	0.20	1.26
		mm	620	12	250	620	5	32

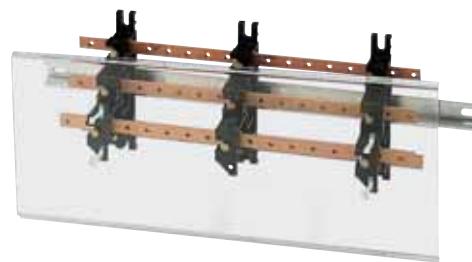

repar\_012.eps

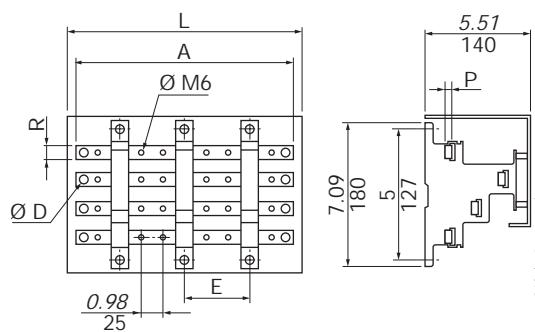

repar\_040\_b\_1\_x\_cat.ai

Split throw distribution block, with threaded holes, plugs into symmetrical DIN rail. Comes pre-mounted and without protective cap.



repar\_030.eps


### Disconnectable neutral

##### References

Rating (A)		Connection type	Reference
160		Lug connection	NB16 0000
250		Lug connection	NB25 0000
400		Lug connection	NB40 0000
630		Lug connection	NB63 0000

##### Dimensions (mm)

Rating (A)	Units	A	B	C	D	E	Max. width
160	in	3.94	0.98	3.35	4.61	1.77	1.26
	mm	100	25	85	117	45	32
250	in	5.91	0.98	4.72	6.81	1.77	1.26
	mm	150	25	120	173	45	32
400	in	6.93	0.98	5.91	7.87	2.56	2.17
	mm	176	25	150	200	65	55
630	in	8.27	0.98	6.30	9.45	2.56	2.95
	mm	210	25	160	240	65	75

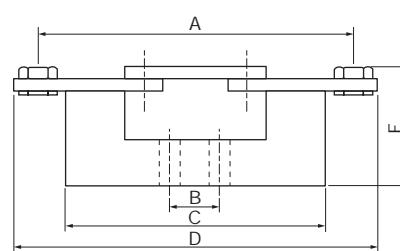

shunt\_012\_b\_1\_x\_cat.ai

## Multi-pole distribution block for SIRCO

### References


Rating (A)	N° of poles	I <sub>cc</sub> (kA rms)	N° of outgoing circuits per section (mm <sup>2</sup> )	Reference
160	3 P	10	1 x 95 + 8 x 25	5411 3016
	4 P	10	1 x 95 + 8 x 25	5411 4016
250	3 P	15	1 x 150 + 8 x 50	5411 3025
	4 P	15	1 x 150 + 8 x 50	5411 4025
400	3 P	21	1 x 240 + 8 x 95	5411 3040
	4 P	21	1 x 240 + 8 x 95	5411 4040
630	3 P	21	1 x 300 + 8 x 150	5411 3063
	4 P	21	1 x 300 + 8 x 150	5411 4063

### Dimensions (mm)

Rating (A)	N° of poles	Units	A	B	E	H	K	P	R	T	Y
160	3 P	in	6.06	11.26	2.87	1.83	10.30	1.42	0.79	0.16	2.13
		mm	154	286	73	46.5	261.5	36	20	4	54
	4 P	in	7.48	11.26	2.87	1.83	10.30	1.42	0.79	0.16	2.13
		mm	190	286	73	46.5	261.4	36	20	4	54
250	3 P	in	8.27	12.09	3.27	2.26	10.98	1.97	0.98	0.16	2.20
		mm	210	307	83	57.5	279	50	25	4	56
	4 P	in	10.24	12.09	3.27	2.26	10.98	1.97	0.98	0.16	2.20
		mm	260	307	83	57.5	279	50	25	4	56
400	3 P	in	11.06	14.76	4.57	3.25	13.39	2.56	1.26	0.20	3.23
		mm	281	375	116	82.5	340	65	32	5	82
	4 P	in	13.62	14.76	4.57	3.25	13.39	2.56	1.26	0.20	3.23
		mm	346	375	116	82.5	340	65	32	5	82
630	3 P	in	10.67	17.24	4.61	3.56	16.16	2.56	1.57	0.24	3.27
		mm	271	438	117	90.5	410.5	65	40	6	83
	4 P	in	13.62	17.24	4.61	3.56	16.16	2.56	1.57	0.24	3.27
		mm	346	438	117	90.5	410.5	65	40	6	83



repar\_020.psdc

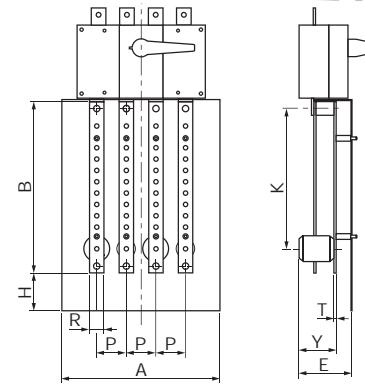

repar\_003\_d\_1\_X\_cat.ai

Distribution block with lug connection, frontal protection against non-intentional contact (load break switching device not included).

## Multi-pole distribution block for FUSERBLOC and SIRCO VM2

### References

Rating (A)	Fuse size	N° of poles	Device	N° of outgoing circuits per section (mm <sup>2</sup> )	Reference
100/125/160	22x58 / 00	3 P	FUSERBLOC	10x16 + 2x35 + 3xM6	5413 3016
		4 P		10x16 + 2x35 + 3xM6	5413 4016
160	0	3 P		10x16 + 2x35 + 3xM6	5413 3017
	0	4 P		10x16 + 2x35 + 3xM6	5413 4017
250	1	3 P	SIRCO VM2	11 x M8	5413 3025
	1	4 P		11 x M8	5413 4025
400	2	3 P		11 x M8	5413 3040 <sup>(1)</sup>
	2	4 P		11 x M8	5413 4040 <sup>(1)</sup>
160 / 200		3 P		10x16 + 2x35 + 3xM6	5413 3020
		4 P		10x16 + 2x35 + 3xM6	5413 4020


(1) \*Distribution block compatible only with 400A Fuserbloc fuse reference 3xxx xx39

### Dimensions (mm)

Rating (A)	N° of poles	Device	Units	A	B	E	H	K	P	R	T	Y	
100 / 125 / 160	3 P	FUSERBLOC	in	4.33	10.24	2.40	0.79	9.17	1.42	0.79	0.16	1.54	
			mm	110	260	61	20	233	36	20	4	39	
	4 P		in	5.71	10.24	2.40	0.79	9.17	1.42	0.79	0.16	1.54	
			mm	145	260	61	20	233	36	20	4	39	
160	3 P	FUSERBLOC	in	5.91	10.24	2.40	0.79	9.17	1.97	0.79	0.16	1.54	
			mm	150	260	61	20	233	50	20	4	39	
	4 P		in	7.87	10.24	2.40	0.79	9.17	1.97	0.79	0.16	1.54	
			mm	200	260	61	20	233	50	20	4	39	
250	3 P	SIRCO VM2	in	7.68	13.39	2.64	0.59	11.81	2.36	1.26	0.20	1.77	
			mm	185	340	67	15	300	60	32	5	45	
	4 P		in	9.65	13.39	2.64	0.59	11.81	2.36	1.26	0.20	1.77	
			mm	245	340	67	15	300	60	32	5	45	
400	3 P	SIRCO VM2	in	8.27	13.39	2.64	0.59	11.81	2.60	1.26	0.20	1.77	
			mm	210	340	67	15	300	66	32	5	45	
	4 P		in	10.83	13.39	2.64	0.59	11.81	2.60	1.26	0.20	1.77	
			mm	275	340	67	15	300	66	32	5	45	
160 / 200	3 P	SIRCO VM2	in	5.59	10.24	2.40	0.79	9.17	1.08	0.79	0.16	1.54	
			mm	142	260	61	20	233	27.5	20	4	39	
	4 P		in	5.59	10.24	2.40	0.79	9.17	1.08	0.79	0.16	1.54	
			mm	142	260	61	20	233	27.5	20	4	39	



repar\_013.eps

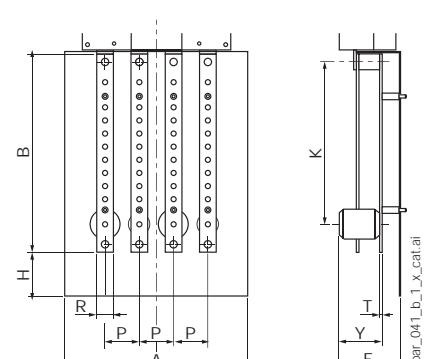

repar\_041\_b1\_X\_cat.ai

# By-Pass Double Line



**SOC**  
innovative power solutions

# Integrated products & solutions

- Equipped enclosures and cabinets to suit all your applications ..... p. 416  
Enclosed switches selection guide ..... p. 420

## Enclosed switches

### Enclosed switches p. 418

Load break switches in insulated enclosures



**COMO**  
Polycarbonate  
20 to 125 A  
p. 423



**SIRCO**  
Polyester  
160 to 630 A  
p. 424

Load break switches in metallic enclosures



**SIRCO M**  
Painted steel  
20 to 100 A  
p. 425



**SIRCO**  
Painted steel  
160 to 1600 A  
p. 424



**SIRCO M**  
Stainless steel  
32 to 100 A  
p. 426

Fuse combination load break switches in insulated enclosures



**FUSERBLOC**  
Polyester  
50 to 160 A  
p. 431



**FUSERBLOC**  
Painted steel  
32 to 800 A  
p. 431

In metallic enclosures

## Specific applications



Solutions for medical locations

p. 440

## Safety enclosures

### Safety enclosures p. 434

## Enclosed transfer switches

For critical applications



**ATyS Bypass**  
Steel  
40 to 3200 A  
p. 436

## Specific requirements

Socomec offers customisation and development of products to meet your every requirement. Contact your sales branch for more information.

# Enclosed Products and Equipment to suit all your applications

The specialist in load breaking, switching, protection, metering and measurement, SOCOMEC designs and produces standard and tailored integrated solutions.

With our dual expertise (in products and solutions) we can offer you the electrical equipment you need for your systems, all under a manufacturer's guarantee.



The result of the long accumulation of extensive experience, our standard integrated solutions bring you:

- Fast implementation backed up by a review of system limitations
  - Ease-of-use, without any risk of non-compliance errors
- Our solutions guarantee:
- The safety and protection of people and goods
  - Continuity of use
  - Compliance with standards on products, assemblies and installations

## What you need to know!

SOCOMEC has an entire department at your service, dedicated to the design and production of specialist equipment.

This department is here to support you throughout your projects, including:

- Building specifications
- Budgets
- Planning
- Design and production
- Qualification and certification
- Support during installation and startup
- Training

Draw on our expertise and contact your local SOCOMEC branch.

## Enclosed switches



SITE 301 A

Enclosed switches incorporate load-break switches with or without fuses, developed, qualified and certified for industrial electrical distribution and service sector networks.

They support the load-breaking, isolation and lockout of the mains power for all types of loads and can also be used as a general switch for equipment in various applications.

## Safety enclosures



SITE 558 A

Safety enclosures are designed to be installed near a motor or a machine to **separate them from the power supply**. This includes manually operated, **padlockable load-break switches**, in the OFF position with a **visible and reliable display** of the switchgear's open position.

During preventive maintenance or inspection work, these enclosures ensure operator **safety against the accidental startup of electrical machines**.

For use in an explosive atmosphere (dust), use our ATEX model to prevent any explosion during the unit's opening/closing phases, which generate electrical arcs.

# Enclosed Products and Equipment to suit all your applications

## Enclosed Transfer Switch



SITE 375 A

Switching enclosures ensure the availability of electrical power in critical facilities (high-rises, public buildings, hospitals, IT or telecommunications centres, airports, industrial sites, etc.), operated manually or automatically to switch between a normal power source and a backup source (genset or auxiliary transformer) to cover in the event of failure.

For sites that require a power availability rate close to 100%, our **ATyS Bypass** solution offers dual redundancy during normal operation, service and maintenance work. With its capacity to resume Normal/Bypass channels, the ATyS Bypass solution allows the continued, seamless and safe use of your systems.

## Solutions for medical premises



SITE 629 A

The availability of a reliable electrical power supply is vital to ensure continuity of care. There is no excuse today for power failures that can lead to life-or-death situations. Medical IT unearthing system cabinets ensure the availability of electrical power in medical centres (in accordance with standard IEC 60364-7-710).


The SOCOMEc medical IT cabinet range comes in three models and provides the solution for all your medical centre needs, with manufacturer's guarantee.

# Enclosed switches

## Enclosed load break switches and fuse combination load break switches

Switchgear systems are an essential part of your electrical system. Installed at every level of the distribution, they allow you to secure and isolate parts of the network or electrical equipment.

### SOCOMECH load break switches in power distribution and machine control applications

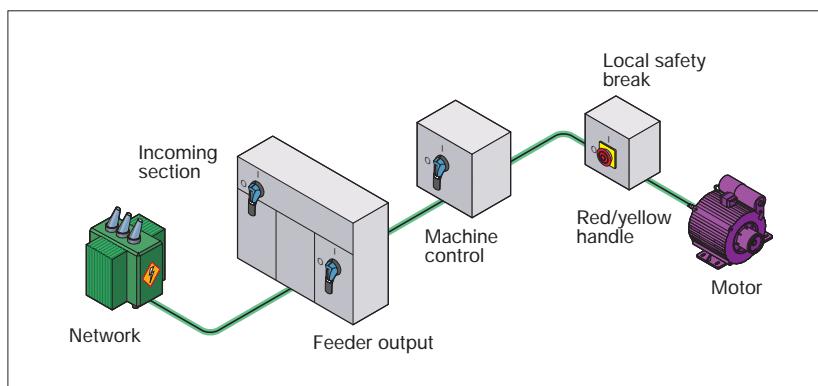

### The solution for

- > Processing industry
- > Infrastructure
- > OEM

### The advantages

- > Increased flexibility
- > Maintenance safety
- > Adaptable to every environment

### A manufacturer's expertise

- > Active in the electrical switchgear market since 1922, Socomec is both a global leader and an undisputed benchmark reference.
- > Our enclosed solutions, with or without fuse protection, are suitable for a wide variety of commercial and industrial power distribution operating environments and applications. From 20 to 1600 A, to IEC or UL standards, we now have one of the widest ranges on the market.

conf\_611\_a\_1\_gb\_catal

## Business sectors



### Processing industry

- Cement plant - Quarries
- Steel plant
- Food processing industries



### OEM

- HVAC - heating, ventilation and air-conditioning
- Lifting



### Infrastructure

- Airports - Tunnels - Motorways
- Water treatment

## Which product for which business?

Enclosure	Insulated		Metallic	
	Polycarbonate	Polyester	Painted sheet metal	Stainless steel
Rating	20 to 125 A	160 to 630 A	20 to 1600 A	32 to 100 A
<b>Application</b>				
Cement plant		++	+++	
Steel plant		++	+++	
Food processing	+	++		+++
Tunnels	+++	++	+	
Water treatment	++	+++		
HVAC	+++	++		
Lifting	+	++	+++	

## The benefits of our range

Enclosed switches equipped with Socomec load break switches or fuse combination load break switches provide emergency breaking, breaking for mechanical maintenance, local safety isolation and fuse protection for any low voltage circuit.



### Increased flexibility for more productivity

Controlling the power as close as possible to consumers makes operation and maintenance easy, autonomous and safe. This allows you to optimise the equipment's operating times.



### Maintenance safety

Breaking close to the load means the system can reliably identify which circuits need to be disconnected. On-load breaking and isolating, as well as the clear indication of the load break switch's position and the triple lock of the operating handle (in the open position) allows non-qualified persons to reliably and easily shutdown and isolate a supply circuit. The locking of access (live or non current-carrying) to the enclosure's internal equipment can be managed to suit all kinds of safety procedures.



### A solution to suit any environment

Available in 4 materials, the Socomec enclosed switch range can withstand most environmental constraints; protection against water and dust (IP), mechanical impact (IK) or corrosion.

# Selection guide

## Enclosed switches

Which application?

In which operating environment?

Electrical feature		Load break switches				
Enclosure		Insulated		Metallic		
Model		<b>COMO</b> 20 to 125 A <i>p. 423</i>	<b>SIRCO</b> 160 to 630 A <i>p. 424</i>	<b>SIRCO M</b> 20 to 100 A <i>p. 424</i>	<b>SIRCO</b> 160 to 1600 A <i>p. 425</i>	<b>SIRCO M</b> 32 to 100 A <i>p. 426</i>
<b>Application</b>						
Local breaking	•	•	•	•	•	•
Circuit protection						
<b>Environmental risks</b>						
Corrosion	+++	+++	+	+	+++	
Chemical	++	++	+	+	+++	
Mechanical impact	+	++	+++	+++	+++	
<b>Electrical characteristics</b>						
Rated current: AC-22A, 400 V	20 ... 125 A	160 ... 630 A	20 ... 100 A	160 ... 1600 A	32 ... 100 A	
Motor power AC-22A, 400 VAC (kW)	7.5 ... 45	80 ... 280	9 ... 45	80 ... 710	15 ... 45	
Number of poles	3/4/6/8P	3/4P	3/4P	3/4P	3/4P	
<b>Enclosure characteristics</b>						
Material						
Polycarbonate	•					
Polyester		•				
Painted sheet metal			•	•		
Stainless steel					•	
Protection degree	IP 65	IP 65	IP 65	IP 65	IP 65	IP 65
<b>Connection characteristics</b>						
High-Low	•	•	•	•		
Low-Low	•	•	•	< 630 A		•
Minimum recommended connection section (mm <sup>2</sup> )	1.5	50	1.5	50	1.5	
Max. connection cross section (mm <sup>2</sup> )	50	2 x 300	70	6 x 185	70	

Which electrical feature ?

Which connection?

Fuse combination load break switches	
Insulated	Metallic
	
<b>FUSERBLOC</b> 50 to 160 A <i>p. 431</i>	<b>FUSERBLOC</b> 32 to 800 A <i>p. 431</i>
•	•
•	•
+++	+
++	+
++	+++
50 ... 160 A	32 ... 800 A
25 ... 80	15 ... 450
3 / 4 P	3 / 4 P
•	•
IP 55	IP 65
•	•
•	< 630 A
6	2.5
2 x 300	4 x 185

# Enclosed switches

## Load break switches

20 to 1600 A



**COMO** enclosure 20 to 125 A  
Polycarbonate - IP65



**SIRCO** enclosure 160 to 630 A  
Polyester - IP65



**SIRCO M** enclosure 32 to 100 A  
Stainless steel - IP65



**SIRCO M** enclosure 20 to 100 A  
Painted steel - IP65



**SIRCO** enclosure 160 to 1600 A  
Painted steel - IP65

### Function

**Enclosed load break switches** ensure the on-load breaking and making of circuits and safely isolate all low-voltage electrical circuits by providing protection against contact with live parts and environmental elements, such as dust, water and other hazards.

They enable the shutdown and isolation of the power supply as close to the equipment as possible.

### Advantages

#### Safe operation

- Reliable lockout for safe maintenance procedures.
- On-load breaking.
- Ergonomic operating handle, available in red/yellow or black.
- Triple lock in OFF position.

#### Easy setup

- Cable access top and/or bottom.
- Cable gland knockouts ( $\leq 125$  A).
- Removable gland plates at top and bottom for steel enclosures  $\geq 160$  A.
- Plenty of room for cabling.

#### Extensive range

- Standard range
- Customised on request.

### Suitable for all kinds of environment

- Insulated enclosure for chemical and food processing applications, indoor or outdoor installation.
- Painted steel enclosure for areas at risk of mechanical impact.
- Stainless enclosure for food processing and pharmaceutical applications.



### The solution for

- OEM
- Industries
- Commercial buildings
- Electrical distribution



### Strong points

- Safe operation
- Suitable for all kinds of environment
- Easy setup
- Extensive range



### Compliance with standards

- IEC 60947-3
- IEC 60364
- EN 60947-3
- EN 61439
- EN 60204-1

### Other products

- Customised solutions available on request.

## Load break switch in insulated enclosure

■ **COMO** in polycarbonate enclosure

como-enc\_002 - 032 - 026 - 036



## General characteristics

- From 20 to 125 A.
- 3, 4, 6, 8 poles.
- Yellow/red or grey/blue version.
- Triple lock in OFF position.
- Polycarbonate enclosure.
- Screw-on front.
- Degree of protection: IP65.
- Cable gland knock-outs at top, bottom and sides.
- Door interlocking when switch is ON.

## Accessories

- Solid neutral pole (max. 1).
- NO+NC or 2 NO auxiliary contact module for pre-break and signalling of positions 0 and I.
- Up to 2 auxiliary contact modules can be fitted to each product, one on each side of the switch.

## References

Rating (A)	N° of poles			Solid neutral pole <sup>(1)</sup>	Auxiliary contacts <sup>(1)</sup>	Enclosure		
		With blue handle	With red handle			Size	H x W x D (mm)	Cable-in top and bottom (mm)
20	3 P	2115 3301	2115 3401			CPC 0	92 x 64 x 83	2 x Ø 25
	4 P	2115 4301	2115 4401			CPC 1	163 x 100 x 115	2 x Ø 25 <sup>(2)</sup>
25	3 P	2115 3302	2115 3402	2115 5005	1 AC NO+NC 2113 4001	CPC 2	200 x 146 x 150	2 x Ø 32 / 40 <sup>(2)</sup>
	4 P	2115 4302	2115 4402			CPC 1	163 x 100 x 115	2 x Ø 25 <sup>(2)</sup>
32	3 P	2115 3303	2115 3403			CPC 2	200 x 146 x 150	2 x Ø 32 / 40 <sup>(2)</sup>
	4 P	2115 4303	2115 4403			CPC 3	304 x 214 x 182	2 x Ø 50 / 63 <sup>(2)</sup>
	6 P	2115 6303	2115 6403			CPC 2	200 x 146 x 150	2 x Ø 32 / 40 <sup>(2)</sup>
	8 P	2115 8303	2115 8403			CPC 3	304 x 214 x 182	2 x Ø 50 / 63 <sup>(2)</sup>
40	3 P	2115 3304	2115 3404	2115 5007	1 AC 2 NO 2113 4002	CPC 1	163 x 100 x 115	2 x Ø 25 <sup>(2)</sup>
	4 P	2115 4304	2115 4404			CPC 2	200 x 146 x 150	2 x Ø 32 / 40 <sup>(2)</sup>
63	3 P	2115 3306	2115 3406			CPC 3	304 x 214 x 182	2 x Ø 50 / 63 <sup>(2)</sup>
	4 P	2115 4306	2115 4406			CPC 2	200 x 146 x 150	2 x Ø 32 / 40 <sup>(2)</sup>
	6 P	2115 6306	2115 6406			CPC 3	304 x 214 x 182	2 x Ø 50 / 63 <sup>(2)</sup>
	8 P	2115 8306	2115 8406			CPC 1	163 x 100 x 115	2 x Ø 25 <sup>(2)</sup>
80	3 P	2115 3308	2115 3408	2115 5009		CPC 2	200 x 146 x 150	2 x Ø 32 / 40 <sup>(2)</sup>
	4 P	2115 4308	2115 4408			CPC 3	304 x 214 x 182	2 x Ø 50 / 63 <sup>(2)</sup>
100	3 P	2115 3309	2115 3409	2115 5011		CPC 1	163 x 100 x 115	2 x Ø 25 <sup>(2)</sup>
	4 P	2115 4309	2115 4409			CPC 2	200 x 146 x 150	2 x Ø 32 / 40 <sup>(2)</sup>
125	3 P	2115 3312	2115 3412			CPC 3	304 x 214 x 182	2 x Ø 50 / 63 <sup>(2)</sup>
	4 P	2115 4312	2115 4412			CPC 1	163 x 100 x 115	2 x Ø 25 <sup>(2)</sup>

(1) Max. configuration capacity: 1 solid neutral pole + 1 aux contact, or 2 aux contacts.


(2) In addition to top and bottom gland knock-outs, 2 x M20 knock-outs are included on each side of the enclosure for CPC 1 thru CPC 3.

## Configurations

## Possible configurations

Solid neutral pole and auxiliary contact accessories can be fitted to the left and/or right side of the COMO switch. Note that only one neutral pole can be fitted. See the below table for details.

Accessory 1 (left)	COMO switch	Accessory 2 (right)
Aux. contact	3/4/6/8P	Aux. contact
Solid neutral	3/4/6/8P	Aux. contact
Aux. contact	3/4/6/8P	Solid neutral

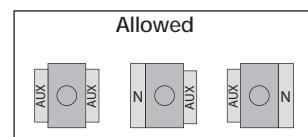

coffret\_087\_a\_en.ai

# Enclosed switches

## Load break switches

20 to 1600 A

### Load break switch in insulated enclosure

#### ■ **SIRCO** in polyester enclosure



##### General characteristics

- From 160 to 630 A.
- 3 poles + unswitched neutral, 4 poles.
- Black handle (red/yellow on request).
- Triple lock in OFF position.
- Polyester enclosure.
- Screw-on front.
- Colour: RAL 7035.
- Degree of protection: IP65.
- Wall-mounted, 4 brackets included.

##### Accessories

- NO/NC auxiliary contact.
- Terminal screen.

### References

Rating (A)	N° of poles	With black handle	Auxiliary contacts	Protective screen
160	3 P + N	3116 5016	1 <sup>st</sup> AC NO/NC 2699 0031	2698 3012
	4 P	3116 4016		2698 4012
250	3 P + N	3116 5025	2 <sup>nd</sup> AC 2 NO/NC 2699 0032	2698 3020
	4 P	3116 4025		2698 4020
400	3 P + N	3116 5040	2 <sup>nd</sup> AC 2 NO/NC 2699 0032	2698 3050
	4 P	3116 4040		2698 4050
630	3 P + N	3116 5063		2698 3050
	4 P	3116 4063		2698 4050

Enclosure	
Size	H x W x D (mm)
CP 32	360 x 270 x 171
CP 53	540 x 360 x 171
CP 75	720 x 540 x 201

### Load break switch in metallic enclosure

#### ■ **SIRCO M** in painted steel enclosure



##### General characteristics

- From 20 to 100 A.
- 3 poles + solid neutral.
- Red/yellow or black handle.
- Triple lock in OFF position.
- Painted steel enclosure.
- Hinged door or screw-on cover.
- Colour: RAL 7035.

- Pre-punched cable gland knockouts at top and bottom.
- Degree of protection: IP65.

##### Accessories

- Switched 4<sup>th</sup> pole (max. 1).
- NO+NC or 2 NO auxiliary contact (max. 2).
- Terminal shrouds.
- Wall mounting brackets.

### References

Rating (A)	N° of poles	With black handle	With red/yellow handle	Switched 4 <sup>th</sup> pole	Auxiliary contacts	Terminal shroud	Wall brackets	Enclosure		
								Size	H x W x D (mm)	Cable-in top and bottom (mm)
20	3 P + N	3032 5002 <sup>(1)</sup>	3032 5102 <sup>(1)</sup>	2200 1001	1 AC NO + NC 2299 0001	2294 3005 (3 P) 2294 1005 (1 P)	3031 0011	CT 21 CT 21a CT 21 CT 21a CT 21 CT 21a	200 x 150 x 120	2 x Ø 25 + 2 x Ø 32 + Ø 16
	3 P + N	3032 5202 <sup>(2)</sup>	3032 5302 <sup>(2)</sup>							
32	3 P + N	3032 5003 <sup>(1)</sup>	3032 5103 <sup>(1)</sup>	2200 1003	1 AC NO + NC 2299 0001	2294 3009 (3 P) 2294 1009 (1 P)	3031 0011	CT 32 CT 32a	300 x 200 x 120	Ø 32 + 2 x Ø 50 + Ø 16
	3 P + N	3032 5203 <sup>(2)</sup>	3032 5303 <sup>(2)</sup>							
63	3 P + N	3032 5006 <sup>(1)</sup>	3032 5106 <sup>(1)</sup>	2200 1006	1 AC 2 NO 2299 0011	2294 3016 (3 P) 2294 1011 (1 P)	3031 0011	CT 32 CT 32a	300 x 200 x 120	Ø 32 + 2 x Ø 50 + Ø 16
	3 P + N	3032 5206 <sup>(2)</sup>	3032 5306 <sup>(2)</sup>							
100	3 P + N	3032 5010 <sup>(1)</sup>	3032 5110 <sup>(1)</sup>	2200 1010		2294 3016 (3 P) 2294 1011 (1 P)	3031 0011	CT 32 CT 32a	300 x 200 x 120	Ø 32 + 2 x Ø 50 + Ø 16
	3 P + N	3032 5210 <sup>(2)</sup>	3032 5310 <sup>(2)</sup>							

(1) Hinged door closed with double bar locks.

(2) Front panel screw-on.

## Load break switch in metallic enclosure (continued)

■ **SIRCO** in painted steel enclosure

## General characteristics

- From 160 to 1600 A.
- 3 poles + solid neutral , 4 poles.
- Black handle (red/yellow on request).
- Triple lock in OFF position.
- Painted steel enclosure.
- Hinged door with double bar locking.
- Colour: RAL 7035.
- Cable gland plates: top and bottom.
- Degree of protection: IP65.
- Wall-mounted, 4 brackets included.

## Accessories

- NO/NC auxiliary contact.
- Terminal screen.

## References

Rating (A)	N° of poles	Handle Black Reference	Auxiliary contacts	Protective screen (top or bottom)	Enclosure		
					Size	H x W x D (mm)	Cable-in top and bottom (mm)
160	3 P + N	3032 5016	1 <sup>st</sup> AC NO/NC 2699 0031	2698 3012	CT 43	400 x 300 x 210	180 x 100
	4 P	3032 4016		2698 4012			
250	3 P + N	3032 5025		2698 3020			
	4 P	3032 4025		2698 4020			
400	3 P + N	3032 5040		2698 3050	CT 66	600 x 600 x 300	380 x 100
	4 P	3032 4040		2698 4050			
630	3 P + N	3032 5063	2 <sup>nd</sup> AC 2 NO/NC 2699 0032	2698 3050			
	4 P	3032 4063		2698 4050			
800	3 P + N	3032 5080		2698 3080	CT 86	800 x 600 x 350	560 x 100
	4 P	3032 4080		2698 4080			
1250	3 P + N	3032 5084		2698 3120			
	4 P	3032 4084		2698 4120			
1600	3 P + N	3032 5088		2698 3120	CT 128	1200 x 800 x 300	660 x 100
	4 P	3032 4088		2698 4120			

# Enclosed switches

## Load break switches

20 to 1600 A

### Load break switch in metallic enclosure (continued)

#### ■ **SIRCO M** in stainless steel enclosure



##### General characteristics

- 32 to 100 A.
- 3 poles + solid neutral.
- Black or red/yellow handle.
- Triple lock in OFF position.
- Brushed stainless steel enclosure 304 (please ask for other options).
- Degree of protection: IP65.
- Pre-punched cable gland knockouts at bottom.
- Hinged door with double bar locking.

##### Accessories

- Switched 4<sup>th</sup> pole (max. 1).
- NO+NC or 2 NO auxiliary contact (max. 2).
- Wall mounting brackets.

### References

Rating (A)	Nº of poles	With black handle	With red/yellow handle	Switched 4 <sup>th</sup> pole	Auxiliary contacts	Terminal shroud	Set of stainless steel brackets	Enclosure		
								Size	H x W x D (mm)	Cable-in bottom (mm)
32	3 P + N	3032 8003	3032 8103	2200 1003	1 AC NO + NC 2299 0001	2294 3005 (3 P) 2294 1005 (1 P)	3031 0012	CI 21	200 x 150 x 120	2 x Ø 25 + 2x Ø 32 + Ø 16
						2294 3009 (3 P) 2294 1009 (1 P)				
63	3 P + N	3032 8006	3032 8106	2200 1006	1 AC 2 NO 2299 0011	2294 3016 (3 P) 2294 1011 (1 P)		CI 32	300 x 200 x 120	Ø 32 + 2 x Ø 50 + Ø 16
100	3 P + N	3032 8010	3032 8110	2200 1010				CI 32	300 x 200 x 120	Ø 32 + 2 x Ø 50 + Ø 16

## Characteristics

## Electrical features according to IEC 60947-3

		COMO							
<b>Thermal current <math>I_{th}</math> (40°C)</b>		<b>20 A</b>	<b>25 A</b>	<b>32 A</b>	<b>40 A</b>	<b>63 A</b>	<b>80 A</b>	<b>100 A</b>	<b>125 A</b>
Enclosed thermal current $I_{th}$ (35°C) (A)		20	25	32	40	63	80	100	125
Enclosed thermal current $I_{th}$ (50°C) (A)		17	22	28	35	54	69	86	108
Rated insulation voltage $U_i$ (V)		690	690	690	690	690	690	690	690
Rated impulse withstand voltage $U_{imp}$ (kV)		4	6	6	6	6	6	6	6
<b>Rated operational currents <math>I_e</math> (A)</b>									
<b>Rated voltage</b>	<b>Utilisation category</b>								
400 VAC	AC-22 A / AC-22 B	20	25	32	40	63	80	100	125
400 VAC	AC-23 A / AC-23 B	15	20	22	40	44	53	70	84
690 VAC	AC-22 A / AC-22 B		12	13	18	22	23.5	34	41
690 VAC	AC-23 A / AC-23 B		9.5	11.5	13	17.5	22	25.5	35
<b>Operational power in AC-23 (kW) without pre-break auxiliary contact</b>									
400 VAC without pre-break AC (kW) <sup>(1)</sup>		7.5	9.5	11.5	20	22	30	37	45
690 VAC without pre-break AC (kW) <sup>(1)</sup>			12	13	18	22	25.5	34	41
<b>gG DIN<sup>(2)</sup> fuse protected short-circuit withstand</b>									
Prospective short-circuit current (kA rms)		1	8	8	8	8	10	20	20
Associated fuse rating (A)		20	25	32	40	63	80	100	125
<b>Circuit breaker protected short-circuit withstand with any circuit breaker that ensures tripping in less than 0.3s</b>									
Current rated as short-time withstand $I_{cw}$ 0.3s (kA rms)		0.68	0.68	1.28	1.28	2.52	2.52	4	4
<b>Short-circuit operation (switch only)</b>									
Current rated as short-time withstand $I_{cw}$ 1s (kA rms)		0.34	0.34	0.64	0.64	1.26	1.26	2	2
<b>Connection</b>									
Minimum Cu cable cross-section (mm <sup>2</sup> )		1.5	2.5	2.5	2.5	2.5	2.5	4	4
Maximum Cu cable cross-section (mm <sup>2</sup> )		4	10	10	10	16	25	35	50

(1) The power value is given for information only, the current values vary from one manufacturer to another. (2) For a rated operational voltage  $U_e = 415$  VAC.

		SIRCO M / SIRCO									
<b>Thermal current <math>I_{th}</math> (40°C)</b>		<b>20 A</b>	<b>32 A</b>	<b>63 A</b>	<b>100 A</b>	<b>160 A</b>	<b>250 A</b>	<b>400 A</b>	<b>630 A</b>	<b>800 A</b>	<b>1250 A</b>
<b>Frame size</b>		<b>M1</b>	<b>M1</b>	<b>M2</b>	<b>M3</b>	<b>B3</b>	<b>B4</b>	<b>B5</b>	<b>B5</b>	<b>B6</b>	<b>B7</b>
Enclosed thermal current $I_{th}$ (35°C) (A)		20	32	63	100	160	250	400	630	770	1000
Enclosed thermal current $I_{th}$ (50°C) (A)		17	28	54	86	138	216	345	544	665	863
Rated insulation voltage $U_i$ (V)		800	800	800	800	800	1000	1000	1000	1000	1000
Rated impulse withstand voltage $U_{imp}$ (kV)		8	8	8	8	8	12	12	12	12	12
<b>Rated operational currents <math>I_e</math> (A)</b>											
<b>Rated voltage</b>	<b>Utilisation category</b>										
415 VAC	AC-22 A / AC-22 B	20	32	63	100	160	250	400	630	800	1250
415 VAC	AC-23 A / AC-23 B	20	32	63	100	160	250	400	500	800	1250
500 VAC	AC-22 A / AC-22 B	20	32	63	100						
500 VAC	AC-23 A / AC-23 B	20	25	63	80						
690 VAC	AC-22 A / AC-22 B	20	32	40/63	80/100						
690 VAC	AC-23 A / AC-23 B	20	25	40	63						
<b>Operational power in AC-23 (kW)</b>											
400 VAC without pre-break AC (kW) <sup>(1)</sup>		9	15	30	45	80	132	220	280	450	710
500 VAC without pre-break AC (kW) <sup>(1)</sup>		9	15	30	45						
690 VAC without pre-break AC (kW) <sup>(1)</sup>		11	15	30	45						
<b>gG DIN<sup>(2)</sup> fuse protected short-circuit withstand</b>											
Prospective short-circuit current (kA rms)		50	50	50	25	100	50	100	70	50	100
Associated fuse rating (A)		20	32	63	100	160	250	400	630	800	1250
<b>Circuit breaker protected short-circuit withstand with any circuit breaker that ensures tripping in less than 0.3s</b>											
Current rated as short-time withstand $I_{cw}$ 0.3s (kA rms)		2.5	2.5	3	5	15	17	25	25	50	100
<b>Short-circuit operation (switch only)</b>											
Current rated as short-time withstand $I_{cw}$ 1s (kA rms)		1.26	1.26	1.5	2.75	7	9	13	13	35	50
Dynamic withstand current in $I_{cc}$ (kA peak) (6)		6	6	9	12	20	30	45	45	55	110
<b>Connection</b>											
Minimum Cu cable cross-section (mm <sup>2</sup> )		1.5	1.5	2.5	10	50	95	185	2x150	2x185	
Maximum Cu cable cross-section (mm <sup>2</sup> )		16	16	35	70	95	150	240	2x300	2x300	4x185

(1) The power value is given for information only, the current values vary from one manufacturer to another. (2) For a rated operational voltage  $U_e = 415$  VAC.


# Enclosed switches

## Load break switches

20 to 1600 A


### COMO dimensions

#### Size CPC 0

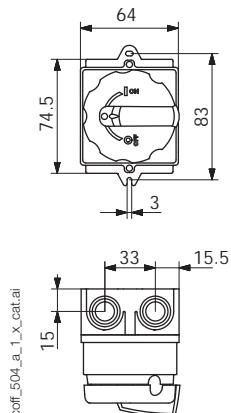



- 2x M25 cable knockouts (top and bottom)

#### Size CPC 1

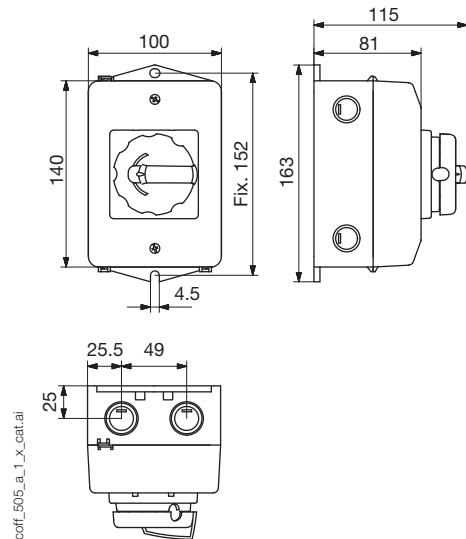



- 2x M20 cable knockouts (on each side)
- 2x M25 cable knockouts (top and bottom)
- 2 pre-drilled holes to expel water

#### Size CPC 2

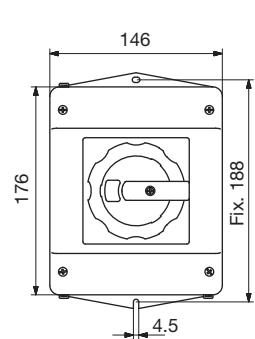

- 2x M20 cable knockouts (on each side)
- 2x M32/M40 cable knockouts (top and bottom)
- 2 pre-drilled holes to expel water


#### Size CPC 3

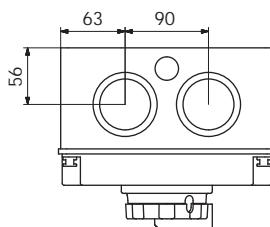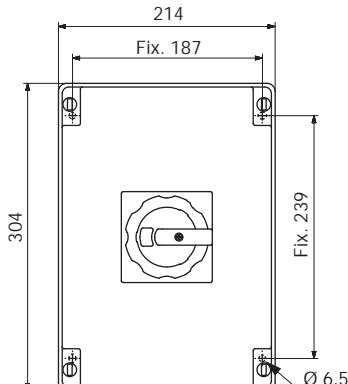

- 2x M20 cable knockouts (on each side)
- 2x M50/M63 cable knockouts (top and bottom)
- 2 pre-drilled holes to expel water


## SIRCO M and SIRCO dimensions

## Enclosures

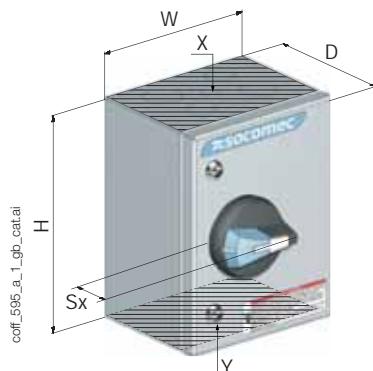


Size	Type	H x W x D (mm)	Sx (mm)	A (mm)	B (mm)	$\emptyset C$ (mm)	X - Y Cable-in top and bottom <sup>(1)</sup>
CT 21, CI21, CT 21a	1	200 x 150 x 120	36	135	85	6.5	2 x $\emptyset 25$ + 2 x $\emptyset 32$ + $\emptyset 16$
CT 32, CI32, CT 32a		300 x 200 x 120		235	135		1 x $\emptyset 32$ + 2 x $\emptyset 50$ + $\emptyset 16$
CP 32	3	360 x 270 x 171	45	337	247	12.5	-
CP 53		540 x 360 x 171		516	337		
CP 75	3	720 x 540 x 201	45	696	516	12.5	
CT 43		400 x 300 x 210		362	262		180 x 100
CT 66	2	600 x 600 x 300	60	562	562	12.5	
CT 86		800 x 600 x 350		762	562		380 x 100
CT 128	2	1200 x 800 x 300		1162	762		660 x 100

(1) For stainless steel enclosure, cable-in at bottom only

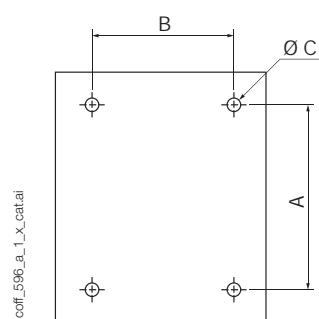


Type 1

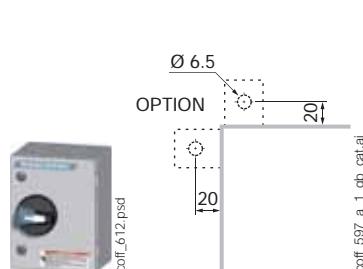

Type 2



Type 3

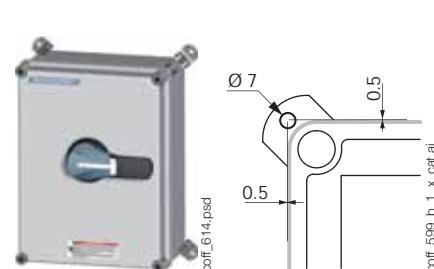

# Enclosed switches

## Fuse combination switches

32 to 800 A



**FUSERBLOC** enclosure 32 to 63A  
Painted steel - IP65



**FUSERBLOC** enclosure 50 to 160A  
Polyester - IP55



**FUSERBLOC** enclosure 100 to 800A  
Painted steel - IP65

### Function

**Enclosed fuse combination load break switches** ensure on-load breaking and making of circuits, protect against overcurrents, and safely isolate all low-voltage electrical circuits by providing protection against contact with live parts and environmental elements, such as dust, water and other hazards.

They enable the shutdown and isolation of the power supply as close to the equipment as possible.

### Advantages

#### Safe operation

- Reliable lockout for safe maintenance procedures.
- On-load breaking.
- Ergonomic operating handle, available in red/yellow or black.
- Triple lock in OFF position.

#### Suitable for all kinds of environment

- Insulated enclosure for chemical and food processing applications, indoor or outdoor installation.
- Painted steel for areas at risk of impact.

#### Easy setup

- Cable access top and/or bottom.
- Cable gland knockouts ( $\leq 100$  A).
- Removable gland plates at top and bottom for steel enclosures  $\geq 160$  A.
- Plenty of room for cabling.

#### Extensive range

- Standard range.
- Customised products on request.

### The solution for

- OEM
- Industries
- Commercial buildings
- Electrical distribution



### Strong points

- Safe operation
- Suitable for all kinds of environment
- Easy setup
- Extensive range



### Compliance with standards

- IEC 60947-3
- IEC 60364
- EN 60947-3
- EN 61439
- EN 60204-1

### Other products

- Customised solutions available on request.

Fuse combination load break switch in insulated enclosure

## ■ **FUSERBLOC** in polyester enclosure



coff\_584\_front.psd

### General characteristics

- From 50 to 160 A.
- 3 poles, 4 poles.
- DIN fuse protection (for BS, please contact us).
- Black handle (red/yellow on request).
- Triple lock in OFF position.
- Polyester enclosure.
- Screw-on front.
- Colour: RAL 7035.
- Degree of protection: IP55.
- Wall-mounted, 4 brackets included.

### Accessories

- Aux contact open (NO) or closed (NC).
- Blown fuse NO/NC auxiliary contact.
- Terminal shroud.

## References

Rating (A)	Case	No. of poles	With black handle	Fuse size (NF, NH)	Auxiliary contacts	Terminal shroud	Blown fuse NO/NC auxiliary contact	Enclosure	
								Size	H x W x D (mm)
50	11	3 P	3117 3005	14 x 51	1 NO AC 3999 0701	-	3994 0405	CP 22	270 X 270 X 171
		4 P	3117 4005						
100	13	3 P	3117 3010	22 x 58	1 NC AC 3999 0702	3998 3016	3994 0310	CP 32	360 X 270 X 171
		4 P	3117 4010			3998 4016	3994 0410		
160	14	3 P	3117 3016	0	3999 0702	3998 3016	3994 0316	CP 52	540 X 270 X 171
		4 P	3117 4016			3998 4016	3994 0416		
								CP 53	

## ■ **FUSERBLOC** in metallic enclosure



coff\_606\_front.psd

### General characteristics

- From 32 to 800 A.
- 3 poles + solid neutral, 4 poles.
- DIN fuse protection (for BS, please contact us).
- Black handle (red/yellow on request).
- Triple lock in OFF position.
- Painted steel enclosure.
- Hinged door with double bar locking.
- Colour: RAL 7035.

- Cable gland knockouts ( $\leq$  63 A) or removable gland plates ( $\geq$  100A) at top and bottom.
- Degree of protection: IP65.
- Wall mounting brackets included (not available for 32 and 63 A).

### Accessories

- Aux contact open (NO) or closed (NC).
- Blown fuse NO/NC auxiliary contact.
- Terminal shrouds.

## References

Rating (A)	Case	No. of poles	With black handle	Fuse size (NF, NH)	Auxiliary contacts	Terminal shroud	Blown fuse NO/NC auxiliary contact	Bracket kit	Enclosure		
									Size	H x W x D (mm)	Cable-in top and bottom (mm)
32	0	3 P + N	3035 5003	14 x 51	-	-	3994 0411	3031 0011	CT 32a	300 x 250 x 150	$\varnothing$ 32 + 2 x $\varnothing$ 50 + $\varnothing$ 16
		4 P	3035 4003								
63	12	3 P + N	3035 5006	00C	-	-	3994 0411	3031 0011	CT 33	300 x 300 x 150	4 x $\varnothing$ 32 + $\varnothing$ 16
		4 P	3035 4006								
100	13	3 P + N	3035 5010	22 x 58	1 NO AC 3999 0701	3998 3016	3994 0410	3031 0011	CT 43	400 x 300 x 210	180 x 100
		4 P	3035 4010			3998 4016	3994 0410				
160	13	3 P + N	3035 5016	00	1 NC AC 3999 0702	3998 3016	3899 3380	3031 0011	CT 44	400 x 400 x 210	280 x 100
		4 P	3035 4016			3998 4016	3899 3380				
250	15	3 P + N	3035 5025	1	1 NC AC 3999 0702	3998 3025	3994 0425	3031 0011	CT 64	600 x 400 x 250	280 x 100
		4 P	3035 4025			3998 4025	3994 0425				
400	16	3 P + N	3035 5040	2	-	3898 3040	3994 0440	3031 0011	CT 66	600 x 600 x 300	380 x 100
		4 P	3035 4040			3898 4040	3994 0440				
630	17	3 P + N	3035 5063	3	-	3898 3080	3994 1406	3031 0011	CT 108	1000 x 800 x 400	660 x 100
		4 P	3035 4063			3898 4080	3994 1406				
800	18	3 P + N	3035 5080	4	-	3898 3120	3994 1412	3031 0011	CT 108	1000 x 800 x 400	660 x 100
		4 P	3035 4080			3898 4120	3994 1412				

# Enclosed switches

Fuse combination switches

32 to 800 A

## Characteristics

Electrical features according to IEC 60947-3

	FUSERBLOC									
Thermal current $I_{th}$ (40 °C)	CD 32 A	50 A	63 A	100 A	160 A	160 A	250 A	400 A	630 A	800 A
NFC/DIN fuse size	14 x 51	14 x 51	00C	22 x 58	00	0	1	2	3	4
Switch body size for front and side operation	0	11	12	13	13	14	15	16	17	18
Enclosed thermal current $I_{th}$ (35 °C) (A)	32	50	57	100	160	160	240	400	630	800
Enclosed thermal current $I_{th}$ (50 °C) (A)	29	48	52	86	138	138	207	345	544	691
Rated insulation voltage $U_i$ (V)	800	800	800	800	800	800	800	1000	1000	1000
Rated impulse withstand voltage $U_{imp}$ (kV)	8	8	8	8	8	8	8	12	12	12

### Rated operational currents $I_e$ (A)

Rated voltage	Utilisation category	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	A/B <sup>(1)</sup>	
400 VAC	AC-22 A / AC-22 B	32/32	50/50	63/63	100/100	160/160	160/160	250/250	400/400	630/630	800/800
400 VAC	AC-23 A / AC-23 B	32/32	50/50	63/63	100/100	160/160	160/160	250/250	400/400	630/630	800/800
690 VAC	AC-22 A / AC-22 B	32/32	50/50	63/63	100 <sup>(2)</sup> /100 <sup>(2)</sup>	160 <sup>(2)</sup> /160 <sup>(2)</sup>	160 <sup>(2)</sup> /160 <sup>(2)</sup>	250 <sup>(2)</sup> /250 <sup>(2)</sup>	400/400	500/630	800/800
690 VAC	AC-23 A / AC-23 B	32/32	50/50	63/63	100 <sup>(2)</sup> /100 <sup>(2)</sup>	125 <sup>(2)</sup> /125 <sup>(2)</sup>	125 <sup>(2)</sup> /125 <sup>(2)</sup>	250 <sup>(2)</sup> /250 <sup>(2)</sup>	315/400	315/400	800/800

### Operational power in AC-23 (kW)

At 400 VAC without pre-break in AC <sup>(1)(3)</sup>	15/15	25/25	30/30	51/51	80/80	80/80	132/132	220/220	355/355	450/450
At 690 VAC without pre-break in AC <sup>(1)(3)</sup>	25/25	45/45	55/55	90/90	110/110	110/110	220/220	220/295	295/400	400/400

### Reactive power (kvar)

At 400 VAC <sup>(3)</sup>	15	23	28	45	75	75	115	185	290	355
---------------------------	----	----	----	----	----	----	-----	-----	-----	-----

### gG DIN fuse protected short-circuit withstand current

Prospective short-circuit current (kA rms) <sup>(4)</sup>	100	100	100	100	50	100	100	100	100	100
Associated fuse rating (A) <sup>(4)</sup>	32	50	63	100	160	160	250	400	630	800

### Short-circuit operation (switch only)

Rated peak withstand current (kA peak) <sup>(4)</sup>	5.5	7.6	10.6	20	20	22.7	32.5	40	70	80
---	-----	-----	------	----	----	------	------	----	----	----

### Connection

Minimum Cu cable cross-section (mm <sup>2</sup> )	2.5	6	10	25	35	50	95	185	2 x 150	-
Maximum Cu cable cross-section (mm <sup>2</sup> )	16	25	25	95	95	95	240	240	2 x 300	4 x 185

(1) Category with index A = frequent operation / Category with index B = infrequent operation.


(2) With terminal shrouds or phase barrier.

(3) The power value is given for information only; the current values vary from one manufacturer to another.

(4) For a rated operational voltage  $U_o = 400$  VAC

## Dimensions


## Enclosures

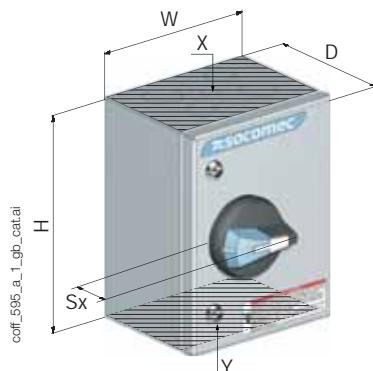


Size	Type	H x W x D (mm)	Sx (mm)	A (mm)	B (mm)	$\emptyset C$ (mm)	X - Y Cable-in top and bottom <sup>(1)</sup>
CP 22	3	270 x 270 x 171	45	247	247	6.5	-
CP 32		360 x 270 x 171		337	247		
CP 52		540 x 270 x 171		516	247		
CP 53		540 x 360 x 171		516	337		
CT 32a	1	300 x 250 x 150	45	262	212	12.5	$\emptyset 32 + 2 \times \emptyset 50 + \emptyset 16$
CT 33		300 x 300 x 150		262	262		4 x $\emptyset 32 + \emptyset 16$
CT 43	2	400 x 300 x 210		362	262	12.5	180 x 100
CT 44		400 x 400 x 210		362	362		280 x 100
CT 64		600 x 400 x 250		562	362		380 x 100
CT 66		600 x 600 x 300		562	562		660 x 100
CT 108		1000 x 800 x 400	60	962	762		




Type 1

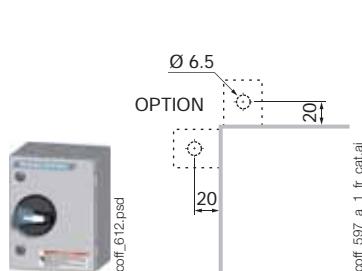

Type 2

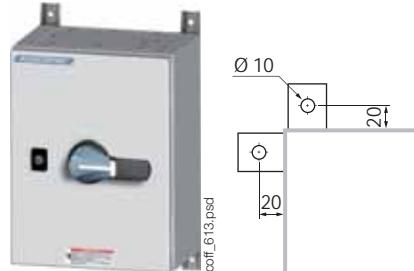

Type 3

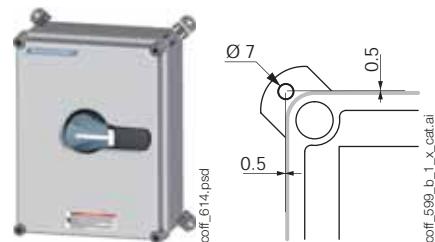

# Safety enclosures

Socomec safety enclosures are designed for installation near a motor or a machine in order to **isolate it from the power supply**.

All the safety enclosures are equipped with **load break switches** with front or side operating handles which are **lockable** in the open position, and with **visible, reliable indication** of the contacts' open position. They make and break under load conditions and provide safety isolation for any low voltage circuit.

During maintenance or inspection operations, the safety enclosures guarantee the operator's **protection against the accidental startup of electrical machines**.


For use in explosive atmospheres, **ATEX dust** enclosures are available to prevent explosions caused by electrical arcs generated when opening or closing the circuits protected by the device.



SITE 258 A

## Which ambient atmosphere?

The operating environment is an essential parameter when choosing an enclosure. Our range of enclosures offers you solutions for the most varied of atmospheres, including the most severe.

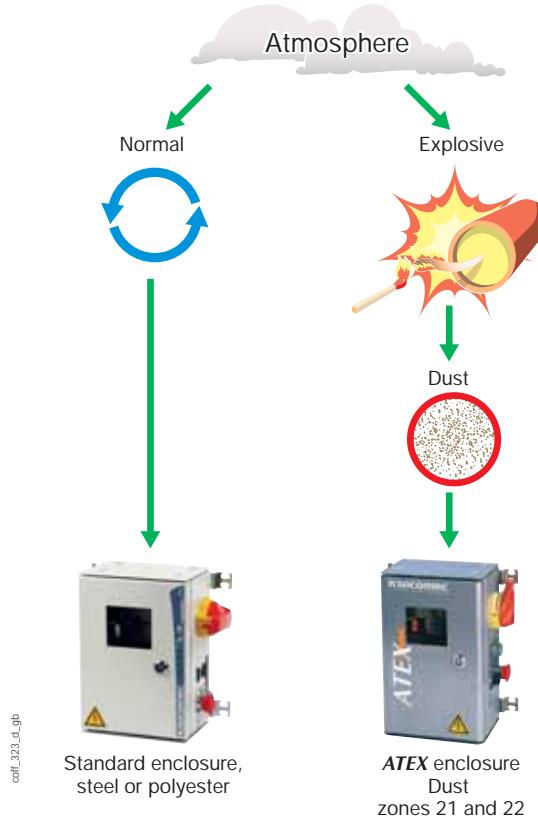

Environment	Steel enclosure	Polyester enclosure	Stainless steel enclosures <sup>(1)</sup>	ATEX enclosures
Chemical aggression		•	•	
Mechanical risks	•		•	•
Dust risks	•			•
Contamination risks		•	•	
Atmospheric corrosion		•	•	
Risk of explosion				•

(1) Made to order.


## Safety functions

### Positive break indication



Clear indication of the open or closed position of the switch via the handle and its clear marking.

### Visible breaking

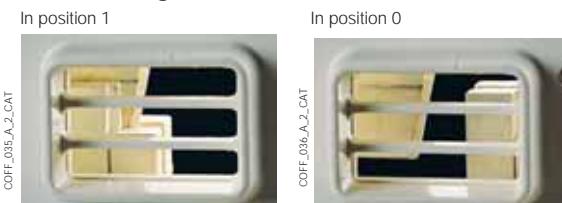

In accordance with IEC 60364, "an isolating device is considered as having visible breaking if the separation of the contacts is directly visible". All the devices used in the safety enclosures have visible breaking.

### Padlocking



When working on the machine during the lockout phase, qualified personnel may perform triple handle padlocking in the open position. The ergonomic handle can accommodate up to three locks.

### Mechanical flag indicator (optional)




Flush with the viewing window and directly linked to the operating mechanism, this gives clear, at-a-glance indication of contact position, providing easier visualisation of the breaking (standard with steel safety enclosures, optional for polyester).

### Double locking



In accordance with standard 60204-1, devices located outside a closed electrical service area must be equipped with the means to allow them to be secured in the OFF position (disconnected state). Qualified personnel may use the ergonomic handle to perform triple handle padlocking.



It is possible to close the breaking device when the enclosure door is open by using a tool to inhibit the double lock, thus allowing tests to be carried out by qualified staff.

## Overview of our range

### For normal atmospheres

Polyester



Steel



### For explosive atmospheres

Steel



# Enclosed Transfer Switches

## ATyS Bypass

40 to 3200 A



table.036



table.035

### Function

- Automatically transfers to the available source to ensure continuity of the supply to life safety and critical loads such as sprinklers, firefighting/evacuation lifts, water pumps, etc.
- Assures continuity of service during preventative, maintenance and testing.
- Full isolation of the Automatic Transfer Switch ensures that maintenance work can be carried out safely without interruption to the load.

### General features

- 40 to 3200 A, 4-pole.
- 230/400 VAC ± 20%, 50/60 Hz (ATS is self-powered from incoming sources).
- Class PC Automatic Transfer Switch.
- No-break bypass solution.
- Voltage and frequency monitoring of both sources.
- Phase rotation and neutral position control.
- Bi-stable output relay for genset start/stop command (NO/NC).
- Remote position control (I, 0, II) with dry contact.
- Manual emergency operation.
- Volt-free programmable outputs for BMS/remote indication.
- ATS and bypass switch auxiliary contacts.

- Source availability, ATS position & status, and source measurements are displayed on the door-mounted D20 interface. Access to configuration parameters, test and control functions (password protected) is also available via the D20.
- ATS Bypass are required for compliance with installation standards **BS 9999:2017** and **BS 8519:2020**, where occupation of the building is conditional upon the availability of the life safety and fire-fighting equipment.

- RS485 JBus/Modbus communication (as standard).
- ATS Auto/Manual selector.
- Degree of protection: IP41 as standard (others available on request).
- Hinged door with 3 mm double bar locking.
- Mounting: ≤160A wall-mounted (brackets supplied loose), ≥250A floor-mounted on feet.
- D20 remote interface (door-mounted).
- Mimic panel (3 LEDs for live voltage on source 1, source 2, and load; optional 15/17-LED mimic panel).
- Protection against direct contact from each functional unit.
- Enclosure material: Steel.
- Colour: RAL 7035 epoxy powder coating.

### The solution for

- Data centres
- Energy generation
- Healthcare buildings
- High-rise buildings
- Banks and insurance companies
- Transport



### Strong points

- No-break bypass solution prevents interruption to the load when switching to bypass.
- IEC 61439-2 type tested solution
- Continuity of service for critical and life safety applications

### Compliance with standards

- IEC 61439-2
- IEC 60947-6-1
- IEC 60947-3
- BS 60947-6-1



### Expert Services

Technical site audit, solution specification, advice, commissioning, maintenance, training, etc.  
Our Expert Services extend to a complete offer of customised services to make your project a success.



## 2 model versions

### ATyS Single Line Bypass

- Comprises an Automatic Transfer Switch and a priority source bypass line. Bypass and isolation of the ATSE can be performed without interruption to the load.


### ATyS Double Line Bypass

- Comprises an Automatic Transfer Switch, a priority source bypass


line and an alternative source bypass line. Priority source bypass, and isolation of the ATS, can be performed without interruption to the load.

- The addition of the alternative bypass line allows the backup source to be selected during maintenance work, should the priority source fail. ATyS Double Line Bypass provide an extra layer of power availability for the most critical applications.

ATyS Bypass - SINGLE LINE

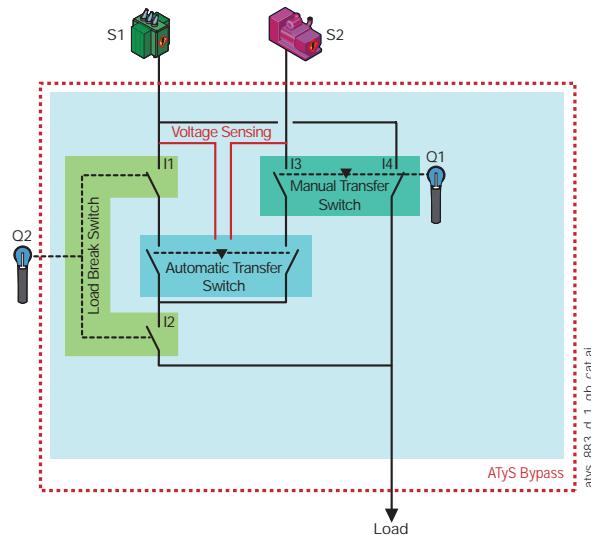

ATyS Bypass - DOUBLE LINE

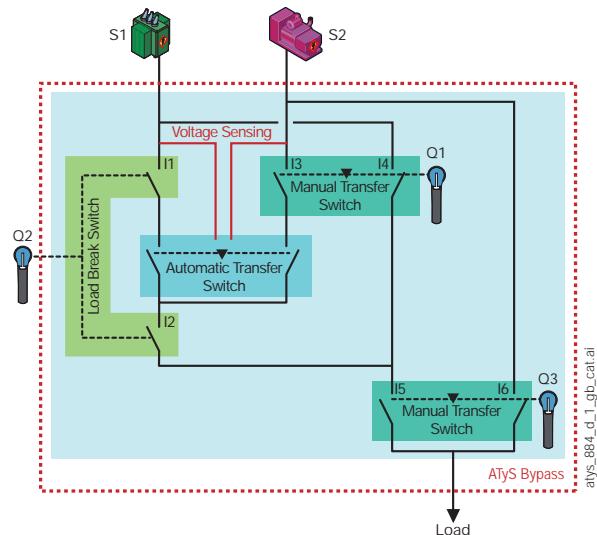

## Functions

### Normal position:

- The load is supplied by the priority source (S1). In the event of priority source failure, the ATS will automatically transfer to the alternative source (S2) when it is available.

### Bypass position:

- Operating Q1 to Bypass creates a direct connection between the priority source (S1) and the load, without causing interruption. Opening switch Q2 provides complete isolation of the ATS from the sources and the load, thereby ensuring maintenance safety.
- Operating Q3 (Double Line only) to Bypass creates a direct connection between the alternative source (S2) and the load.
- While in bypass, tests can be performed ( $\geq 160A$ ) without interruption to the load.

## References

### Standard device - 230 VAC for ATyS p M

Rating (A)	No. of poles <sup>(1)</sup>	Single line Reference	Double line Reference
40	4 P	1785 4004	1786 4004
63	4 P	1785 4006	1786 4006
80	4 P	1785 4008	1786 4008
100	4 P	1785 4010	1786 4010
125	4 P	1785 4012	1786 4012

(1) Standard ATyS Bypass require a distributed neutral to power the ATS and other components (230 VAC). If no neutral is available, please contact us for a solution.

### Standard device - 230 VAC for ATyS p

Rating (A)	No. of poles <sup>(1)</sup>	Single line Reference	Double line Reference
160	4 P	1785 4016	1786 4016
250	4 P	1785 4025	1786 4025
400	4 P	1785 4040	1786 4040
630	4 P	1785 4063	1786 4063
800	4 P	1785 4080	1786 4080
1000	4 P	1785 4100	1786 4100
1250	4 P	1785 4120	1786 4120
1600	4 P	1785 4160	1786 4160
2000	4 P	1785 4200	1786 4200
2500	4 P	1785 4250	1786 4250
3200	4 P	1785 4320	1786 4320

(1) Standard ATyS Bypass require a distributed neutral to power the ATS and other components (230 VAC). If no neutral is available, please contact us for a solution.

# Enclosed Transfer Switches

## ATyS Bypass

40 to 3200 A

## Accessories

### Customer fit

Designation	Reference
2 input/2 output plug-in programmable output module (ATyS p only)	1599 2001 <sup>(1)</sup>

<sup>(1)</sup> Maximum 3 modules can be installed.

## Factory-fitted

### Cable entry/exit configuration

#### Use

To permit any cable entry and exit configuration (e.g. top/top), specific mounting brackets ( $\leq 160$  A) or a factory-fitted side extension cabinet ( $\geq 250$  A) can be provided. For  $\geq 250$  A solutions, power terminals can be factory-mounted within the extension cabinet to facilitate connection. Please contact us for more information.



kdys\_504

### Surge protection

#### Use

Factory-fitted surge protection for either or both incoming sources is available on request.



sgys\_069

### Load measurement

#### Use

$\geq 160$ A: Factory-fit installation of current transformers on the outgoing side of the ATyS Bypass provides current, power and energy load measurements. Available on request.

### Tin-plated bars


#### Use

$\geq 250$ A: For harsh environments, tinned copper can be factory-fitted in place of the standard copper bars. Please contact us for details.

### Signalling

#### Use

For a full overview of the system's state, opt for a 17-LED (15 for single line bypass) mimic panel (live voltage LED per phase and switch positions). Available on request.

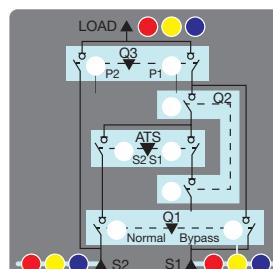

acces\_275\_b\_1x\_cat

## Factory-fitted (continued)

### Connectivity

#### Use

≤125A: DIRIS Digiware M-70 gateway with WEBVIEW-M (Webserver) can be factory-fitted.

≥160A: Ethernet plug-in module (4825 0203) can be customer-fitted in place of the standard RS485 MODBUS module (plug-in Ethernet module populates 2 of the 4 ATyS p slots).

The above options provide the following:


- Remote Ethernet connectivity with real-time monitoring via a Web browser
- ATS status (position, mode, fault)
- Availability of sources (including measurements)
- Access to ATS parameters (viewing)
- ATS input and output status
- Event history

Easy Config System Software (free download)

allows the following to be performed via Ethernet connectivity:

- ATS parameter configuration<sup>(1)</sup>
- Controls (remote transfers, auto inhibit, test ON/OFF load)<sup>(1)</sup>


<sup>(1)</sup> Password required.

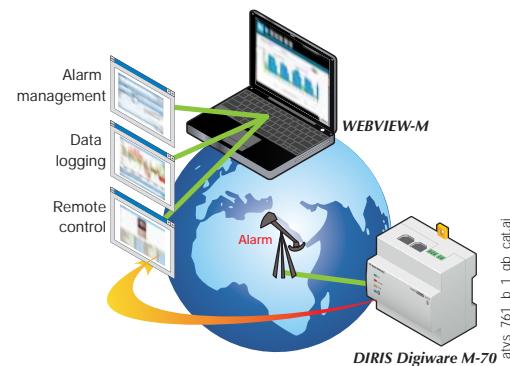


## Dimensions

40 to 160 A

≥ 250 A

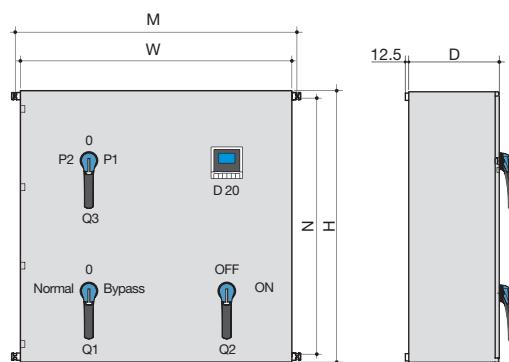

atys\_749\_d1\_gb\_cat

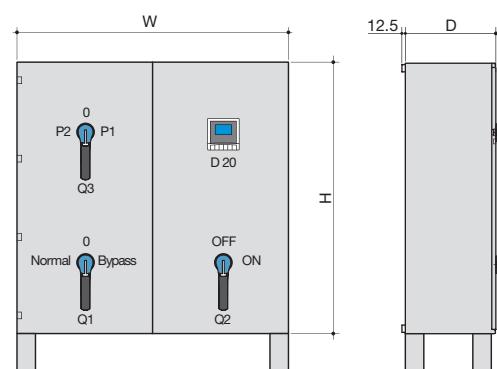

atys\_759\_d1\_gb\_cat

#### Wall-mounted

Rating (A)	Recommended cross-section (mm²)	H (mm)	W (mm)	D (mm)	M (mm)	N (mm)	Weight (kg)
40	10	800	800	300	840	758	80
63	16	800	800	300	840	758	80
80	25	800	800	300	840	758	80
100	35	1000	800	300	840	958	80
125	50	1000	800	300	840	958	80
160	70	1000	800	400	840	958	160

#### Floor-mounted

Rating (A)	Recommended cross-section (mm²)	H (mm)	W (mm)	D (mm)	Weight (kg)
250	120	1200 <sup>(1)</sup>	1000	520	180
400	240	1200 <sup>(1)</sup>	1000	520	200
630	2 x 185	1600 <sup>(2)</sup>	1200	600	600
800	2 x 240	1800 <sup>(2)</sup>	1600	800	1000
1000	4 x 150	1800 <sup>(2)</sup>	1600	800	1000
1250	4 x 185	2000 <sup>(3)</sup>	2000	1000	2000
1600	4 x 240	2000 <sup>(3)</sup>	2000	1000	2000
2000	8 x 150	2000 <sup>(4)</sup>	2200	1000	2500
2500	8 x 185	2000 <sup>(4)</sup>	2200	1000	2500
3 200	8 x 240	2000 <sup>(4)</sup>	2200	1000	2500

<sup>(1)</sup> Add 200 mm for the base feet.

<sup>(2)</sup> Add 100 mm for the base feet.

<sup>(3)</sup> Add 125 mm for the base feet.

<sup>(4)</sup> Add 120 mm for the base feet (allow for an additional 160 mm for roof fan).

### Connection (input/output)

- Standard cable entry and exit is at the bottom. Other configurations may, according to cable size, require specific mounting brackets (≤160A) or a factory-fitted side extension cabinet (≥250A). Please contact us for more information.

# Solutions for medical locations

## Solution for the continuity and availability of the power supply in Group 2 medical facilities

Standard IEC 60364-7-710 categorises medical facilities into the three following groups, according to the risk of electric shock:

### Group 0



Medical facilities which do not have any 'applied parts' intended for use.

### What is an 'applied part'?

Standard IEC 60364-7-710 defines an "applied part" as being part of the medical electrical equipment which in normal use

- necessarily comes into physical contact with the patient for the equipment to perform its function, or
- can be brought into contact with the patient, or
- needs to be touched by the patient.

### Group 1



Medical facilities in which 'applied parts' are intended for use, as follows:

- externally, or
- invasively across every part of the body, except where Group 2 applies.

### Group 2



Medical facilities in which 'applied parts' are intended for use in applications such as medical procedures, surgical procedures and life-saving treatments.

Standard IEC 60364-7-710 also defines the precise continuity of service requirements for the power supply, depending on the type of care being given.


- Class 0: power supply without switching,
- Class 0.5: power available in max. 0.5 s
- Class 15: power available in max. 15 s
- Class >15: power supply available in 15 s or longer

## The MEDSYS range

The MEDSYS range meets Class 0, 0.5 or  $\leq$  15 levels for Groups 0, 1 and 2, as defined in standard IEC 60364-7-710. It is the only IEC 61439-certified and accredited manufacturer solution. MEDSYS also meets European standard HD60364-7-710 and local requirements such as NFC15-211 for France and other countries (please contact us for more information).

### From design to maintenance

In addition to its standard products, Socomec has a department dedicated to designing customised systems and meeting the requirements of your project. We support you through the various stages of your project.

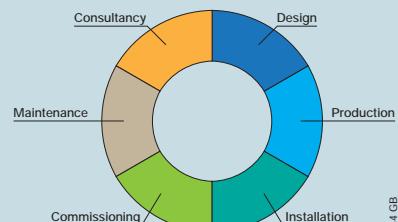

MEDSY 034 GB



#### Continuity of service

- Service continuity even in single fault conditions.
- Insulation fault detected in less than 6 seconds even with high-interference equipment present.
- Power availability guaranteed by automatic, static and/or continuous power transfer systems.



#### Guaranteed safety

- Personal protection against indirect contact (IT system, insulation) and direct contact (IP2X, segregation).
- All device signalling contacts are built-in, to back up data to a BMS/CTM.



#### Improved implementation

- The cabinets are fitted with a pivoting body, for rapid access to all functional units.
- Visual identification of the various compartments.



#### Technological performance

- Predictive maintenance across your entire IT system (OhmScanner technology integrated into ISOM Digiware).



#### IoT Ready

- Embedded web technology.
- Remote control/consultation.
- Alarm control and data analytics.



#### Complete range

- Four versions and eight configurations.
- Solution adapts to the usage conditions and structural properties of Group 2 locations.
- Insulation fault detection and overvoltage protection available for all configurations.



#### Easy maintenance

- All connections are grouped in a separate compartment.
- Some critical components can be removed (transformer, UPS, static transfer system).

### Range of services

To ensure your MEDSYS bay works at its best, Socomec offers expert services including commissioning, troubleshooting and training. Contact your sales branch for more information.

# Solutions for medical locations

## Selection guide

	Basic configuration	Advanced configuration	
	Includes all the equipment required to protect against indirect contact, with <b>a single normal or safety incomer</b>	Includes all the equipment required to protect against indirect contact for <b>2 normal and safety incomers</b> or <b>2 safety incomers</b>	
	 <b>MEDSYS 20</b> A      B	 <b>MEDSYS 30 Slim</b> A	
<b>Inputs</b>			
1 inverter/normal input	•	•	
1 inverter input and 1 spare input			•
2 inverter inputs			•
1 normal input			
2 normal/standby inputs			
<b>Insulation transformer</b>			
Power (kVA)	4	6.3	10
Switched	•	•	
Integrated			•
<b>Headgear</b>			
Load-break switch	•	•	
STATYS Static Transfer System			
ATyS M transfer switch			•
Integrated UPS			
MODULYS or NETYS RT			
Uninterrupted Power Supply (UPS)			
<b>Distribution</b>			
TN-S		•	•
IT-M (ISOM K-40h)	•	•	•
<b>Alarm report</b>			
ISOM D-15h Alarm notification	•	•	•
<b>Options</b>			
Surge protection device (SURGYS D40)	•	•	•
ISOM Digiware insulation fault detection		Contact us	•
<b>Dimensions</b>			
H x W x D (mm)		630 x 403 x 129	1800 x 600 x 220

# Solutions for medical locations

	Advanced configuration	Full configuration		
	Includes all the equipment required to protect against indirect contact for <b>2 normal and safety incomers</b> or <b>2 safety incomers</b>	Includes all the equipment required to protect against indirect contact, with <b>2 safety incomers</b>		Includes all the equipment required to protect against indirect contacts, with <b>1 single normal incomer</b> or <b>2 normal/standby incomer</b>
				
	<b>MEDSYS 30 CD</b> A	<b>MEDSYS 40 CD</b> A   B	<b>MEDSYS 60</b> A   B   C	
	.	.	.	
	.	.	.	
	10	10	2 x 5	10
	.	.	.	.
	.	.	.	.
	.	.	.	.
	.	.	.	.
	.	.	.	.
	.	.	.	.
	.	.	.	.
	.	.	.	.
	.	.	.	.
	.	.	.	.
	1800 x 400 x 400	2000 x 600 x 450	2200 x 800 x 800	

# Solutions for medical locations

Configuration that adapts as your needs change



Standard IEC 60364-7-710 requires a medical IT system for Group 2 locations and at least one transformer for each operating room or each medical site.

## Transformer for the medical IT system

Socomec dry TRM transformers are LV/LV transformers that separate the general distribution network from the medical facility's power supply provided in an IT system. As such, they can isolate and compartmentalise the electrical disturbances across the entire installation.




AND

## Insulation Monitoring Device and alarm report

The ISOM K-40h insulation monitoring device is a combined unit for monitoring:

- The level of insulation of a medical IT system
- The charging current of single-phase transformers for medical IT systems (up to 50 A)
- The temperature of the medical IT transformer

The D-15h alarm report summarises the alarms from insulation monitoring, overheating and overloads of the medical IT transformer measured by the ISOM K-40h IMD.

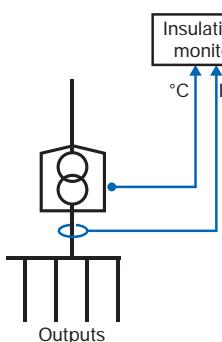

COFF 480 C

Standard IEC 60364-7-710 stipulates that Group 2 medical facilities be powered by 2 separate sources.

## Automatic Transfer Switch (ATS)

ATyS M devices are switching systems that provide automatic transfer between 2 power sources. They have been developed, tested and approved according to criteria defined by the international product standards IEC 60947-3 and IEC 60947-6-1.




OR

## Static Transfer System (STS)

STATYS static transfer systems ensure power supply redundancy between two independent sources while ensuring power continuity to critical applications by choosing the most reliable source. Loads are transferred without interruption in accordance with IEC 62310.



Safety Source 1 Safety Source 2

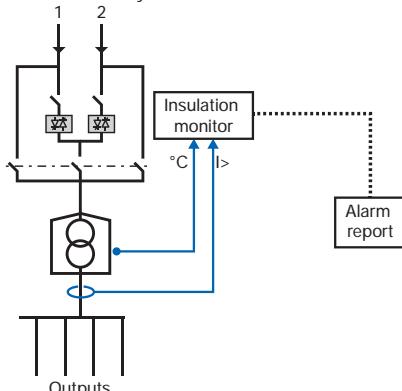

COFF 481 C

Standard IEC 60364-7 stipulates that Group 2 locations must be powered continuously.

## Uninterrupted Power Supply (UPS)

The uninterrupted power supply (UPS) NETYS RT ensures continuity of power supply. Double conversion technology ensures the ultimate protection for loads.

The rack design means power and/or redundancy can be upgraded as your requirements evolve.



GAMME 854 A

The document HD 60364-7-710 stipulates the use of a fault location device.

## Insulation and multi-measurement monitoring

ISOM Digiware is a 2-in-1 system that combines insulation and multi-measurement monitoring for IT systems. This interconnected system instantly detects and pinpoints any insulation fault. It guarantees continuity of service even for single fault conditions, while protecting people and property.




GAMME 723 A




### OhmScanner solution

The OhmScanner detects an insulation fault before it happens. Mapping the insulation of each circuit in detail helps the user to perform predictive maintenance work (available with the ISOM Digiware system).

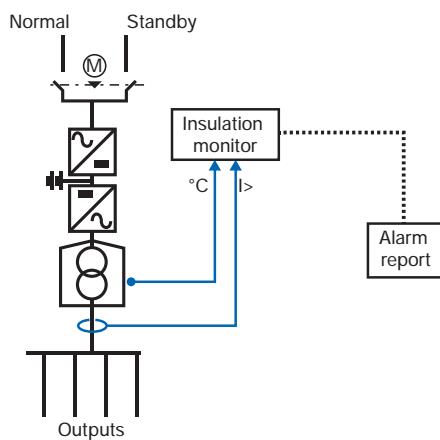

COFF 482 C

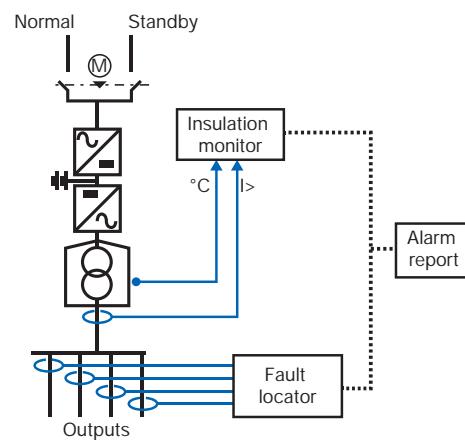

COFF 667 A

# References list

References	Pages	References	Pages	References	Pages	References	Pages
110x xxxx	40, 43	1429 0000	26, 45, 64, 88, 112, 153	155x xxxx	191, 194, 198	192Y 0175	334
111x xxxx	40, 41, 43, 62, 63	1429 7xxx	113	1599 0xxx	189, 191, 194, 200	192Y 0185	335, 338
112x xxxx	42, 43, 62, 63, 148 to 152	142D xxxx	111	1599 2001	194, 201, 438	192Y 0215	331, 334
1132 1111	42, 43, 148 to 152	142E xxxx	111	1599 2009	174, 195, 202	192Y 0225	331
1133 1111	42, 43	1433 3111	109, 110	1599 4001	173, 202, 216, 218	192Y 0235	334
1141 3011	109, 110	1433 3113	150, 152	1599 4064	189, 198	192Y 0245	335, 338
1142 1111	40 to 43, 62, 63, 150 to 152	1433 3114	151	1599 4121	174	192Y 0265	331
1143 1111	40 to 43, 62, 63	1434 3111	109, 110	1599 5xxx	195, 198	192Y 0275	334
1309 1xxx	167, 169, 171, 172	1437 3111	111	1600 0025	212	192Y 0285	335, 338
1309 2xxx	167, 169, 172	1437 7911	109	1600 0035	214	21xx xxxx	423
1309 4xxx	167, 169, 171, 172	1438 xxxx	111	1600 0055	210, 216	2200 1000	22, 27
1309 9xxx	173	143D xxxx	111	1600 0065	210, 218	2200 1001	22, 27, 424
135x xxxx	169, 172	143E xxxx	111	1609 0001	216	2200 1002	22, 27
1399 4006	29, 167, 169, 171, 172	1443 3111	40 to 43, 62, 63, 109, 110	17xx xxxx	437	2200 1003	22, 27, 424, 426
1399 4017	174	1443 3113	148, 152	18xx xxxx	342	2200 1004	22, 27
1400 1020	40 to 42, 44, 62, 64, 88, 108, 109, 112, 148 to 151, 154	1443 3114	149, 152	192J 8015	279, 283, 287	2200 1006	22, 27, 424, 426
1400 1025	44	1444 3111	40 to 43, 62, 63, 109, 110	192T 0003	331, 333, 334	2200 1008	22, 27
1400 1032	40 to 42, 44, 62, 64, 87, 88, 108, 109, 112, 148 to 151, 154	144D xxxx	111	192T 0005	331, 334	2200 1010	22, 27, 424, 426
1400 1040	62, 64, 88	144E xxxx	111	192T 0006	333	2200 1011	22, 27
1400 1050	40, 41, 44, 108, 109, 112	1453 8111	41, 43	192T 0007	333, 334	2200 300x	22, 23
1400 1075	44	1453 8113	148, 152	192T 002x	333	2200 3010	22, 23
1400 12xx	109, 112	1454 8111	41, 43	192T 0101	331	2200 3011	22, 23
1401 00xx	44, 111, 153	146x xxxx	24	192T 0102	335, 338	2200 3012	23
1401 052x	108, 112	1471 0xxx	24	192T 0103	331, 334	2200 3016	23
1401 053x	108, 112	1471 1111	22, 24	192T 0105	331, 333, 334	2200 31xx	23
1401 0540	112	1473 0111	24	192T 0106	335	2200 4xxx	23
1401 06xx	26	1473 0113	22, 24	192T 0255	331, 334	2200 5xxx	23, 27
1401 152x	40 to 42, 44, 62, 64, 148 to 151, 154	1473 0114	22, 24	192T 05xx	331	2200 9xxx	23, 27
1401 153x	40 to 42, 44, 62, 64, 148 to 151, 154	1473 1xxx	22, 24	192T 06xx	331	2205 xxxx	22, 23
1401 1540	40, 41, 44, 64	1474 0111	24	192T 08xx	343	2209 xxxx	28
1403 xxxx	25	1474 1xxx	22, 24	192T 09xx	343	226x xxxx	28
1404 0xxx	26	147A xxxx	22, 24	192T 14xx	333	2294 1005	23, 27, 424, 426
1404 2111	25	147B xxxx	22, 24	192T 19xx	341	2294 1009	23, 27, 426
1407 xxxx	22, 26	148x xxxx	22, 25	192T 20xx	333	2294 101x	23, 27, 424, 426
1409 xxxx	22, 23, 26	1491 0111	23, 25	192T 21xx	334	2294 3xxx	23, 27, 424, 426
1411 2111	25, 108, 110, 113	1493 0000	44, 64, 111, 153	192T 23xx	334	2294 4016	23, 27, 167, 169, 171, 172
1413 2111	25, 108, 110	1493 01xx	23, 25	192T 24xx	334	2299 0xxx	23, 28, 424, 426
1413 2115	108, 110	1494 xxxx	23, 25	192T 32xx	334	2299 3xxx	23, 29
1414 2111	25, 108, 110, 113	1499 7701	49, 113, 157	192T 33xx	340	2299 501x	22, 24
1414 2115	108, 110	1499 7702	49, 113, 157	192T 34xx	340	2299 5022	23, 24
1415 xxxx	25, 108, 111	1499 7703	49, 113	192T 40xx	334	2299 5032	22, 24
1417 xxxx	25, 108, 111	149A xxxx	23, 25	192T 46xx	342	2299 5042	23, 24
1418 xxxx	25, 108, 111	149B xxxx	23, 25	192T 47xx	342	2299 6xxx	28
1419 0000	26	14AA xxxx	88	192T 48xx	342	2299 9xxx	29
141A xxxx	25	14AE xxxx	88	192T 5xxx	335	2600 xxxx	40
141B xxxx	25	14AF 2111	87, 88	192T 6xxx	335	2601 xxxx	42
141D xxxx	111	14YA 2111	88	192T 7xxx	338	2609 0025	62, 66
141E xxxx	111	1509 3012	42, 47, 148 to 151, 156, 189, 191, 194, 196	192T 80xx	338	2609 0026	62, 67
1421 2111	40 to 43, 62, 63, 108 to 110, 113	1509 302x	42, 47, 65, 148 to 151,	192T 81xx	335	2609 004x	62, 67
1421 2113	148, 150, 152	1509 306x	156, 189, 191, 194, 196	192T 93xx	338	2609 1xxx	62, 66, 68
1423 2111	40, 41, 43, 62, 63, 108 to 110	1509 308x	42, 47, 65, 148 to 151, 156, 189, 191, 194, 196	192T 95xx	335	261x xxxx	48, 155, 197
1423 2113	148, 150, 152	1509 31xx	42, 47, 148 to 151, 156, 189, 191, 194, 196	192T 96xx	335	262x xxxx	48, 155, 197
1424 2111	40 to 43, 62, 63, 108 to 110, 113	1509 3200	189, 191, 194, 196	192T 97xx	338	263x xxxx	48, 155, 197
1424 2113	148, 150, 152	1509 401x	42, 47, 148 to 151, 156, 189, 191, 194, 196	192U 0xxx	331	2694 3014	40, 42, 46, 148 to 151, 156, 189, 191, 194, 196
1425 xxxx	108, 109, 111	1509 402x	42, 47, 148 to 151, 156, 189, 191, 194, 196	192U 22xx	333	2694 302x	40 to 42, 46, 148 to 151, 156, 189, 191, 194, 196
1427 xxxx	108, 109, 111	1509 406x	42, 47, 65, 148 to 151,	192U 23xx	334	2694 305x	40 to 42, 46, 148 to 151, 156, 189, 191, 194, 196
1428 xxxx	108, 109, 111	1509 408x	156, 189, 191, 194, 196	192U 4xxx	334	2694 4014	40, 42, 46, 148 to 151, 156, 189, 191, 194, 196
1429 2115	108 to 110	1509 4160	42, 47, 148 to 151, 156, 189, 191, 194, 196	192U 8xxx	338	2694 402x	40 to 42, 46, 148 to 151, 156, 189, 191, 194, 196
1430 2115	108 to 110	1509 4200	41, 47, 189, 191, 194, 196	192U 9xxx	338	2694 405x	40 to 42, 46, 148 to 151, 156, 189, 191, 194, 196
1431 2115	108 to 110	152x xxxx	200	192X 0056	200	2698 3012	40, 47, 424, 425
1432 2115	108 to 110	153x xxxx	195, 200	192Y 0015	331, 334	2698 302x	40, 41, 47, 65, 424, 425
1433 2115	108 to 110	153x xxxx	195, 200	192Y 0025	331	2698 305x	40, 41, 47, 65, 424, 425
1434 2115	108 to 110	153x xxxx	195, 200	192Y 0035	334	2698 308x	40, 41, 47, 425
1435 2115	108 to 110	153x xxxx	195, 200	192Y 0045	335, 338	2698 311x	40, 41, 47, 425
1436 2115	108 to 110	153x xxxx	195, 200	192Y 0115	331, 334	2698 3200	40, 41, 47, 425
1437 2115	108 to 110	153x xxxx	195, 200	192Y 0125	331		
1438 2115	108 to 110	153x xxxx	195, 200	192Y 0135	334		
1439 2115	108 to 110	153x xxxx	195, 200	192Y 0145	335, 338		
1440 2115	108 to 110	153x xxxx	195, 200	192Y 0155	331, 334		
1441 2115	108 to 110	153x xxxx	195, 200	192Y 0165	331		

References	Pages	References	Pages	References	Pages	References	Pages
2698 4012	40, 47, 424, 425	3116 xxxx	424	4109 005x	189, 191, 194, 197	4829 0050	237, 243, 245, 249,
2698 402x	40, 41, 47, 65, 424, 425	3117 xxxx	431	4109 006x	189, 191, 194, 197		253, 267, 319
2698 405x	40, 41, 47, 65, 424, 425	3629 4012	108, 110	4109 008x	189, 191, 194, 197	4829 0101	237
2698 408x	40, 41, 47, 65, 425	3629 4013	110	4109 01xx	189, 191, 194, 197	4829 0102	245
2698 41xx	40, 41, 47, 65, 425	3629 9xxxx	114	4109 0320	155, 197	4829 0103	237
2698 4200	40, 41, 47, 65	363x xxxx	108	4109 1xxx	157	4829 0105	245
2699 003x	40, 41, 45, 65, 424, 425	369x xxxx	411	4109 2xxx	157	4829 0106	245
2699 006x	42, 45, 65	3811 xxxx	109	4109 301x	148 to 151, 154	4829 0110	253
2699 01xx	45	3819 xxxx	116	4109 302x	148 to 151, 154	4829 0111	253
2699 03xx	45, 65	3829 91xx	116	4109 303x	148 to 151, 154	4829 0112	253
2699 1200	48, 155, 197	3829 93xx	114	4109 3050	148, 154	4829 0113	253
2699 1201	155, 197	3831 200x	108	4109 306x	148 to 151, 154	4829 0114	265
2699 5xxx	63	3831 2010	108	4109 308x	148 to 151, 154	4829 0120	237, 243
2699 6xxx	49	3831 2011	108	4109 31xx	148 to 151, 154	4829 0128	253
2699 9xxx	49	3831 2012	108	4109 401x	148 to 151, 154	4829 0129	253
26Axx xxxx	41	3831 2015	109	4109 402x	148 to 151, 154	4829 013x	253
26PV 201x	62, 69	3831 2016	109	4109 403x	148 to 151, 154	4829 014x	267
26PV 202x	62, 69	3831 202x	109	4109 4050	148, 154	4829 016x	249
26PV 2031	62, 70	3831 203x	109	4109 406x	148 to 151, 154	4829 018x	237, 243, 245, 249, 253, 267
26PV 301x	62, 67, 69	3831 300x	108	4109 408x	148 to 151, 154	4829 0190	237, 243, 245, 249, 253, 267
26PV 302x	62, 67, 69	3831 3010	108	4109 41xx	148 to 151, 154	4829 0195	249
26PV 3030	62, 67, 70	3831 3011	108	4109 8507	49	4829 0196	249
26PV 3039	62, 67, 71	3831 3012	108	4190 xxxx	149	4829 0200	237, 319
26PV 404x	62, 66, 71	3831 3015	109	4199 3018	62, 64	4829 0203	216, 218, 237, 347
26PV 405x	62, 66, 71	3831 3016	109	4199 3019	64	4829 0204	216, 218, 237
26PV 406x	62, 66, 72	3831 302x	109	4199 7146	150 to 152	4829 021x	243
26PV 408x	62, 66, 72	3831 303x	109	41AC 3xxx	148	4829 0220	243
26PV 41xx	62, 66, 73	3831 600x	108	41AC 4xxx	148	4829 0221	216, 218, 243
26PV 42xx	62, 66, 73	3831 6010	108	41AC 7xxx	150	4829 0222	216, 218, 243, 347
26PV 43xx	62, 66, 73	3831 6011	108	41AC 9xxx	150	4829 0230	237
26PV 501x	62, 69	3831 6012	108	4320 xxxx	141	4829 028x	319
26PV 502x	62, 69	3831 6015	109	4321 xxxx	142	4829 050x	257
26PV 5031	62, 70	3831 6016	109	4330 xxxx	141	4829 055x	259
26PV 8063	62, 66, 72	3831 602x	109	4331 xxxx	142	4829 057x	261
26PV 8080	62, 66, 68, 72	3831 603x	109	435x xxxx	141	4829 058x	257, 259, 261, 265
26PV 81xx	62, 66, 68, 73	3894 xxxx	116	46xx xxxx	151	4829 0590	257, 259, 261, 265
26PV 82xx	62, 66, 68, 73	3898 2xxx	109, 114	4729 02xx	237	4829 0591	257, 259, 261, 265
2709 0027	62, 66	3898 3xxx	109, 114, 431	4729 0603	237, 243	4829 0592	257, 259, 261, 265
2799 3015	40, 41, 44, 148, 150, 151, 154	3898 4xxx	109, 114, 431	4825 002x	297	4829 0593	257, 259, 261, 265
2799 3018	40 to 42, 44, 62, 64, 148, 150, 151, 154	3899 0400	113	4825 0080	301	4829 0594	257, 259, 261, 265
2799 3019	41, 44, 62, 64, 148, 150, 151, 154	3899 3120	108, 109, 116	4825 0082	301	4829 0595	257, 259, 261, 265
2799 700x	49, 157	3899 3380	108, 109, 116, 431	4825 0083	301	4829 0596	257, 259, 261, 265
2799 7042	40, 41, 43, 148, 152	3899 6011	109, 110	4825 0088	293, 301, 307	4829 0597	257, 259, 261, 265
2799 7043	40, 41, 43	3994 02xx	116	4825 0089	301, 307	4829 0598	257
2799 707x	40, 41, 43	3994 030x	116	4825 0090	194, 201, 307	4829 0599	257
2799 713x	40, 43	3994 031x	116, 431	4825 0092	194, 201, 307	4829 0600	257
2799 7145	42, 43, 62, 63	3994 0325	116	4825 0093	194, 201, 307	4829 0601	257, 259, 261, 265
2799 7155	40, 41, 43	3994 040x	116, 431	4825 0094	307	4829 0602	257, 259, 261, 265
2998 0013	45, 156, 196	3994 041x	116, 431	4825 0097	307	4829 0603	257, 259, 261, 265
2998 0014	45, 65, 156, 196	3994 042x	116, 431	4825 0203	194, 201, 307	4829 0605	253
2998 002x	45, 65, 156, 196	3994 044x	431	4825 0204	194, 201, 307	4829 0606	257, 259, 261, 265
2998 003x	45, 156, 196	3994 14xx	431	4825 0205	307	4829 0620	265
2998 0707	49	3994 19xx	116	4825 0206	307	4829 065x	259
3031 0011	424, 431	3998 2016	108, 109, 114	4825 0208	307	4829 0670	261
3031 0012	426	3998 2025	109, 114	4825 0209	307	4850 300x	277
3032 4xxx	425	3998 3016	108, 109, 114, 431	4825 0400	293	4850 3010	281
3032 500x	424	3998 3025	109, 114, 431	4825 0401	293	4850 3011	281
3032 5010	424	3998 4016	108, 109, 114, 431	4825 0402	301	4850 3012	277
3032 5016	425	3999 0425	109, 114, 431	4825 0403	307	4850 3013	277
3032 502x	425	3999 00xx	115	4825 0404	307	4850 302x	277
3032 504x	425	3999 01xx	115	4825 0405	307	4850 303x	271
3032 506x	425	3999 02xx	115	4825 0406	307	4850 3040	271
3032 508x	425	3999 06xx	115	4825 0500	311	4850 3041	271
3032 51xx	424	3999 070x	23, 28, 108, 109, 115, 431	4825 0501	311, 347	4850 3042	271
3032 52xx	424	3999 5020	108 to 110	4825 0502	311	4850 3043	273
3032 53xx	424	3999 5021	109, 110	4826 0100	321	4850 3044	273
3032 8xxx	426	4109 0019	189, 191, 194, 197	4829 000x	319	4850 3045	273
3035 xxxx	431	4109 0021	148 to 151, 155	4829 001x	319	4850 3046	273
		4109 0025	189, 191, 194, 197	4829 003x	319	4850 3047	273
		4109 003x	189, 191, 194, 197	4829 004x	319	4850 3048	273
						4850 3049	275

# References list

References	Pages	References	Pages	References	Pages	References	Pages
4850 3050	275	5024 5xxx	378	5411 40xx	46, 413	8499 9xxx	91
4850 3051	275	5024 6xxx	378	5411 4112	410	86xx xxxx	87
4850 3052	275	5024 7xxx	378	5412 xxxx	411	932x xxxx	167
4850 3053	275	5024 8xxx	378	5413 xxxx	413	934x xxxx	169
4850 3054	275	5024 9000	380	5414 xxxx	409	935x xxxx	169
4850 3055	275	5024 9001	380	5420 xxxx	410	936x xxxx	171
4850 3056	279	5024 9002	392	5421 0xxx	410	938x xxxx	171
4850 3057	279	5024 903x	380	5421 100x	410	9503 xxxx	181
4850 3058	271	5024 904x	380	5421 1010	409	9505 xxxx	181
4850 3059	271	5024 905x	379	5421 1012	409	9506 xxxx	181
4850 305U	271	5025 xxxx	388	5421 1013	409	9509 0002	182
4850 3060	273	5026 041x	404	5421 1016	410	9509 4013	181
4850 3061	273	5026 045x	404	5421 11xx	410	9509 5xxx	203
4850 3062	275	5026 046x	392	5421 2xxx	410	951x xxxx	181
4850 3063	279	5027 xxxx	392	5421 4xxx	409	9523 xxxx	189
4850 3064	279	5028 0410	404	544u xxxx	407	9529 xxxx	199
4850 3065	279	5028 0411	404, 412	56xx xxxx	297, 301	9533 xxxx	210
4850 3066	279	5028 0412	412	5701 0017	237, 243, 281, 283, 293, 307, 311, 319	9539 2001	202
4850 3067	279	5028 0413	404, 412	5701 0018	279, 281, 293, 307, 311, 319	9553 xxxx	191
4850 3068	279	5028 0415	412	5701 0019	245	9559 2001	203
4850 306U	273	5028 042x	412	5702 5001	271	9573 xxxx	194, 195
4850 307U	277	5028 045x	412	5703 5001	273	9579 2001	203
4850 309U	275, 279	5028 047x	412	5703 5003	275, 277	9594 xxxx	181, 182
4853 xxxx	283	503x xxxx	398	6012 0000	237, 243, 245, 279, 281, 283, 293, 297, 301, 307, 311, 319	9599 0000	202
4854 xxxx	347	5119 44xx	381	6022 0040	271	9599 0003	189, 195, 200
4899 0011	301, 307	5119 45xx	381	6029 0000	114	9599 0004	189, 195, 200
4941 36xx	367	5119 46xx	392	6032 0080	273, 275	9599 1004	195, 200
4941 3723	367	5400 301x	47, 117	6032 0100	277	9599 1006	195, 200
4941 3724	369	5400 302x	47, 117	6039 xxxx	114	9599 1007	202
4941 3740	367	5400 304x	47, 117	64xx xxxx	114	9599 1008	203
4941 3741	369	5400 3063	47	742F 2111	87, 88	9599 2010	171, 174, 202
4942 xxxx	371	5400 401x	47, 117	7769 9999	117	9599 2020	171, 174, 195, 202
500x xxxx	29	5400 402x	47, 117	840x xxxx	89	9599 4001	181
5020 1xxx	379	5400 404x	47, 117	8499 0001	87, 89	9599 4002	181, 182
5020 2xxx	378	5400 4063	47	8499 0002	89	9599 4003	181
5021 xxxx	398	5410 xxxx	408	8499 0002	89	9599 4004	182
5022 xxxx	398	5411 0xxx	408	8499 2xxx	90	9599 402x	199
5023 011x	398	5411 1xxx	408	8499 3xxx	90	9599 404x	199
5023 015x	392	5411 3016	46, 413	8499 4xxx	90	9599 406x	199
5023 03xx	392	5411 3017	410	8499 5xxx	88	9599 5012	182
5023 04xx	392	5411 302x	46, 413	8499 6xxx	91	99xx xxxx	97
5023 6110	398	5411 304x	46, 413			NBxx xxxx	412
5024 4xxx	378	5411 306x	46, 413				

## Note

## Note

Model: SOCOME  
Production: SOCOME  
Photography: Martin Bernhart et Studio Objectif  
Printing: BDZ - Centre d'impression - Buchdruck Zentrum  
1, Hauptstrooss  
9753 Heinerscheid  
Luxembourg



# Socomec: our innovations supporting your energy performance

1 independent manufacturer

3,600 employees worldwide

10 % of sales revenue dedicated to R&D

400 experts dedicated to service provision

## Your power management expert



POWER SWITCHING



POWER MONITORING



POWER CONVERSION



ENERGY STORAGE



EXPERT SERVICES

## The specialist for critical applications

- Control, command of LV facilities
- Safety of persons and assets
- Measurement of electrical parameters
- Energy management
- Energy quality
- Energy availability
- Energy storage
- Prevention and repairs
- Measurement and analysis
- Optimisation
- Consultancy, commissioning and training

## A worldwide presence

12 production sites

- France (x3)
- Italy (x2)
- Tunisia
- India
- China (x2)
- USA (x3)

28 subsidiaries and commercial locations

- Algeria • Australia • Belgium • China • Canada
- Dubai (United Arab Emirates) • France • Germany
- India • Indonesia • Italy • Ivory Coast • Netherlands
- Poland • Portugal • Romania • Serbia • Singapore
- Slovenia • South Africa • Spain • Switzerland
- Thailand • Tunisia • Turkey • UK • USA

80 countries

where our brand is distributed

## HEAD OFFICE

### SOCOMECA GROUP

SAS SOCOMECA capital 10 646 360 €  
R.C.S. Strasbourg B 548 500 149  
B.P. 60010 - 1, rue de Westhouse  
F-67235 Benfeld Cedex  
Tel. +33 3 88 57 41 41 - Fax +33 3 88 57 78 78  
info.scp.isd@socomec.com

[www.socomec.com](http://www.socomec.com)



## YOUR DISTRIBUTOR / PARTNER

