



# DIRIS Digiware Uac

Voltage acquisition module

Multi-circuit metering  
& measurement



*DIRIS Digiware U-10ac/U-20ac/U-30ac*



Configuration  
with Easy Config System.

## Function

The **DIRIS Digiware Uac** module measures voltage for the entire system. This pools together all voltage measurements.

The Digiware RJ45 Bus allows you to pass voltage measurements as well as power supply and communication to all connected products.

## Advantages

- 1 single voltage measurement point for the entire system.
- Single point of protection for voltage measuring.
- A complete, dedicated solution:
  - metering,
  - monitoring voltage,
  - quality analysis of the supplied voltage.
- No hazardous voltage on cabinet doors.
- Adapted to all types of network: single-phase, three-phase.

## The solution for

- Industry
- Building
- Infrastructure
- Data center



## Strong points

- 1 single voltage measurement point for the entire system
- Plug & Play
- Compact



RJ45 (Digiware Bus) cables are available.

## Conformity to standards

- IEC 61557-12



- ISO 14025



- UL



## Create your project


- Find the best DIRIS Digiware configuration:  
[www.meter-selector.com](http://www.meter-selector.com)



Application	Voltage measurement module		
	Metering	Monitoring	Analysis
<b>DIRIS Digiware Uac</b>			
<b>Multi-measurement</b>	<b>U-10ac</b>	<b>U-20ac</b>	<b>U-30ac</b>
U12, U23, U31, V1, V2, V3, f	•	•	•
U system, V system			•
Ph/N unbalance			•
Ph/Ph unbalance			•
<b>Quality analysis</b>		•	•
THDv1, THDv2, THDv3, THDu12, THDu23, THDu31			
Individual harmonics U & V (up to 63rd)			•
Voltage dips, swells and interruptions (EN 50160)			•
<b>Alarms</b>			•
On threshold			•
<b>History of average values</b>			
45 days (max)			•
<b>Format</b>			
Width/number of modules	18 mm / 1	18 mm / 1	18 mm / 1

## Dimensions (mm)

### DIRIS Digiware Uac

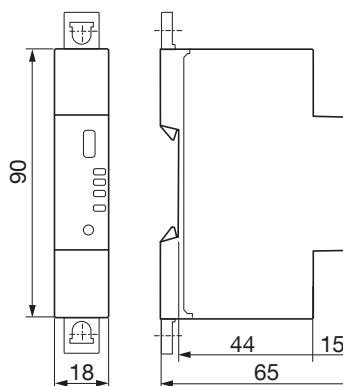

## Specifications

### Measuring characteristics

#### Voltage measurement - DIRIS Digiware Uac

Characteristics of the network measured	50-300 VAC (Ph/N) - 87-520 VAC (Ph/Ph) - CAT III
Frequency range	45 ... 65 Hz
Frequency accuracy	Class 0.02
Network type	Single-phase/ Two-phase / Two-phase with neutral / Three-phase / Three-phase with neutral
Measurement by voltage transformer	Primary: 400 000 VAC Secondary: 60, 100, 110, 173, 190 VAC
Input consumption	≤ 0.1 VA
Permanent overload	300 VAC Ph/N
Accuracy of voltage measurement	Class 0.2
Connection	Removable screw terminal block, 4 positions, stranded or solid 0.2 ... 2.5 mm² cable

### Communication specifications

#### USB

Protocol	Modbus RTU on USB
Function	Configuration of DIRIS Digiware U and I modules
Location	On each DIRIS Digiware U and I measurement module
Connection	Type B micro USB connector

## References

Digiware connection cables		Reference	DIRIS Digiware		Reference
RJ45 cables for Digiware Bus	Length 0.06 m	4829 0189	U-10ac	Metering	4829 0105
	Length 0.10 m	4829 0181	U-20ac	Monitoring	4829 0106
	Length 0.20 m	4829 0188	U-30ac	Analysis	4829 0102
	Length 0.50 m	4829 0182			
	Length 1 m	4829 0183	Accessories		Reference
	Length 2 m	4829 0184	Fuse holder to protect voltage inputs (type RM) 3 pole + neutral	3	5701 0019
	Length 3 m	4829 0190	gG 10x38 0.5 A fuses	10	6012 0000
	Length 5 m	4829 0186			
	Length 10 m	4829 0187			
	Reel 50 m + 100 connectors	4829 0185			
Replacement reference: Digiware bus terminating resistor (supplied with C and D devices)		4829 0180			
USB configuration cable		4829 0050			